



US 20040139680A1

(19) **United States**

(12) **Patent Application Publication**
Hambright

(10) **Pub. No.: US 2004/0139680 A1**

(43) **Pub. Date: Jul. 22, 2004**

(54) **EPS FOAM MODULAR CONSTRUCTION SYSTEM AND METHOD**

Publication Classification

(76) Inventor: **Gary W. Hambright**, Whittier, CA (US)

(51) **Int. Cl.⁷** E04C 3/00; E04C 3/30; E04B 2/00

(52) **U.S. Cl.** 52/578; 52/582.1

Correspondence Address:

John W. Eldredge
Myers Dawes Andras & Sherman LLP
Suite 1150
19900 MacArthur Blvd.
Irvine, CA 92612 (US)

(57) **ABSTRACT**


A modular foam construction system utilizes polystyrene materials and consists of a set of building panels, of predetermined shape, which are configured to define a structure when the panels are arranged and aligned together in accord with a plan or set of instructions. Panels are locked together by coupling together a set of predefined interlock slots, formed into each panel at particular locations, with a set of corresponding interlock keys configured for friction fit insertion into the juxtaposed interlock slots. The keys are oversized to promote a binding surface friction fit between slot and key and both keys and slots are formed with angled sides to promote a pulling force directed towards the bottom of a slot to promote and increase a surface friction fit between slot and key along the slot bottom surface.

(21) Appl. No.: **10/761,971**

(22) Filed: **Jan. 20, 2004**

Related U.S. Application Data

(60) Provisional application No. 60/441,035, filed on Jan. 18, 2003. Provisional application No. 60/452,025, filed on Mar. 5, 2003.

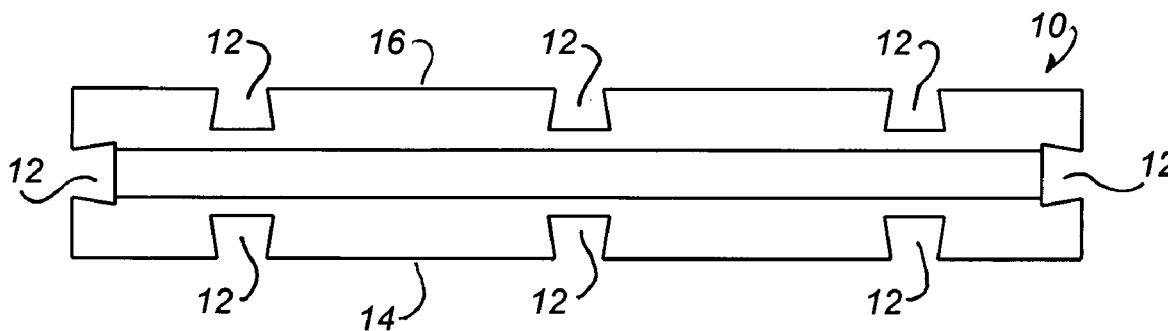

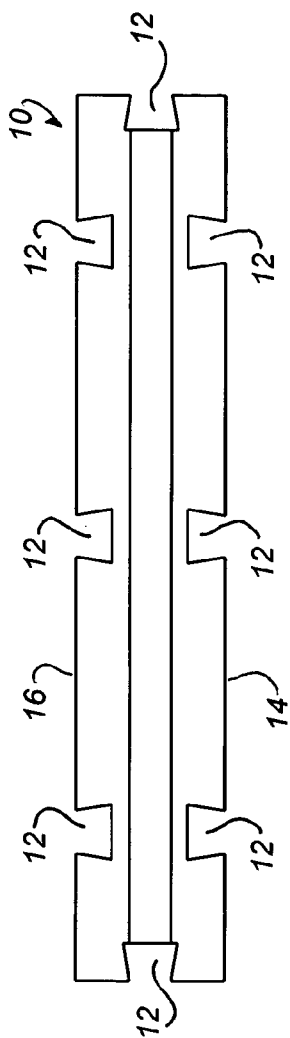


FIG. 1b

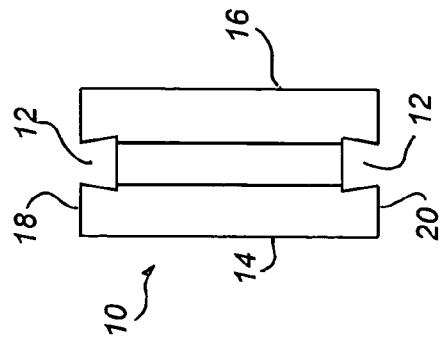


FIG. 1c

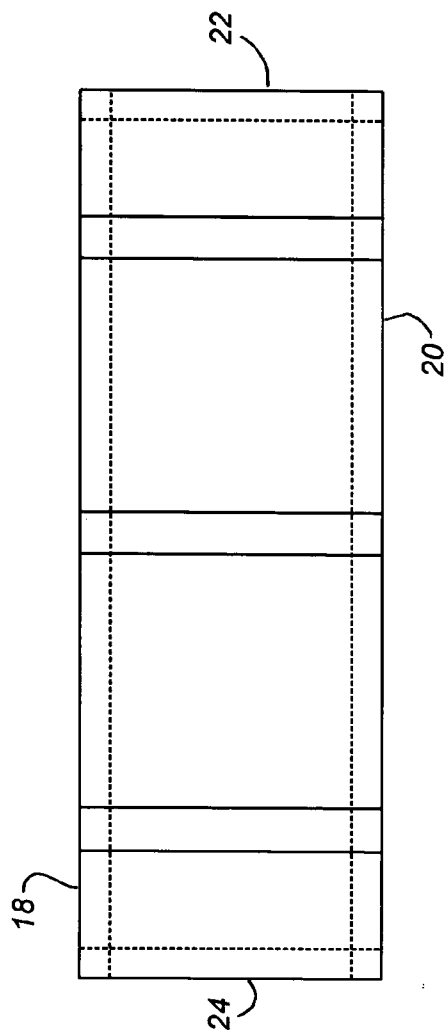


FIG. 1a

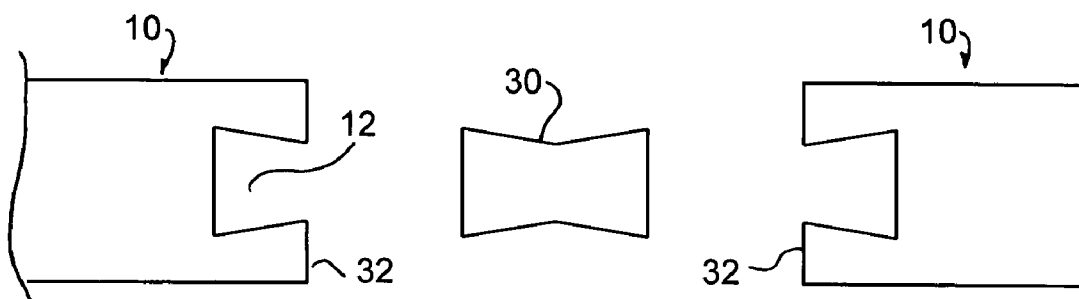


FIG. 2a

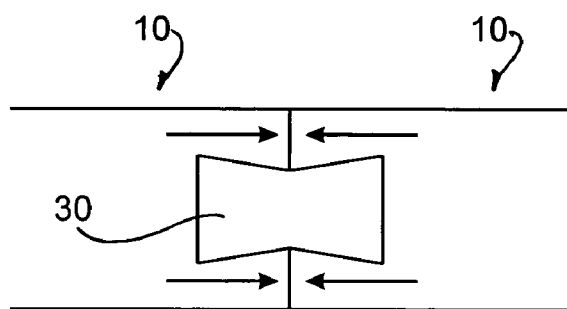


FIG. 2c




FIG. 2b

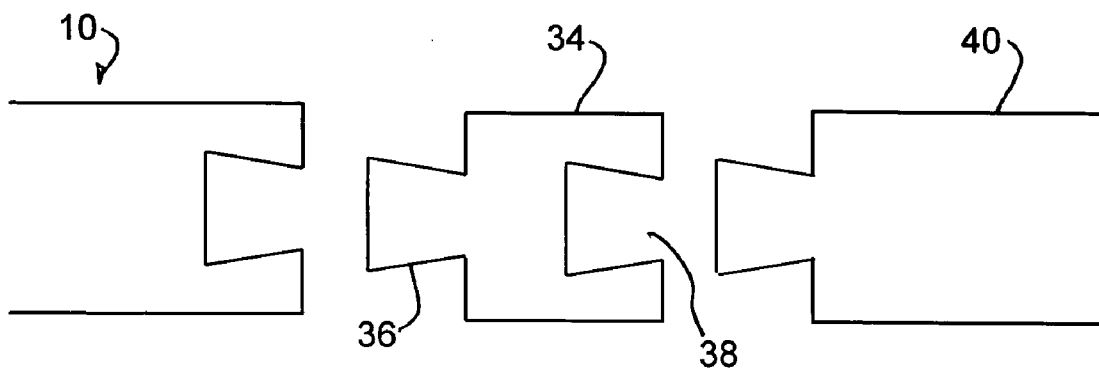


FIG. 3a

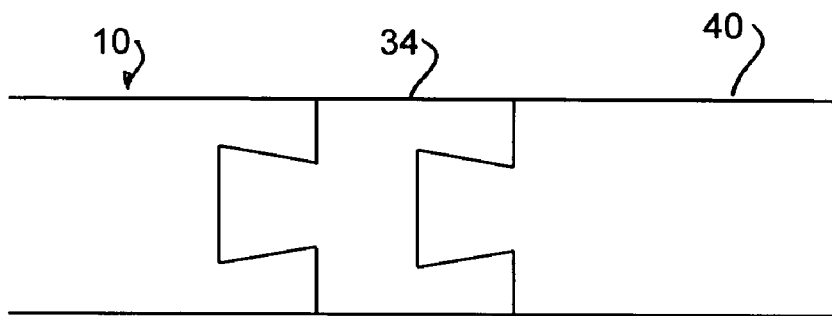


FIG. 3b

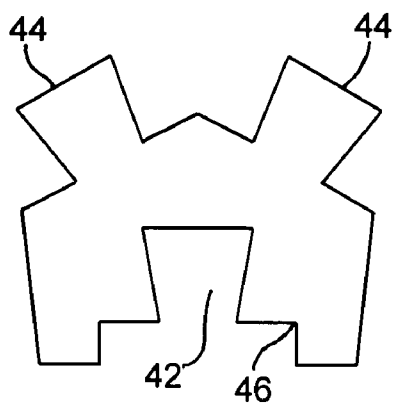


FIG. 4a

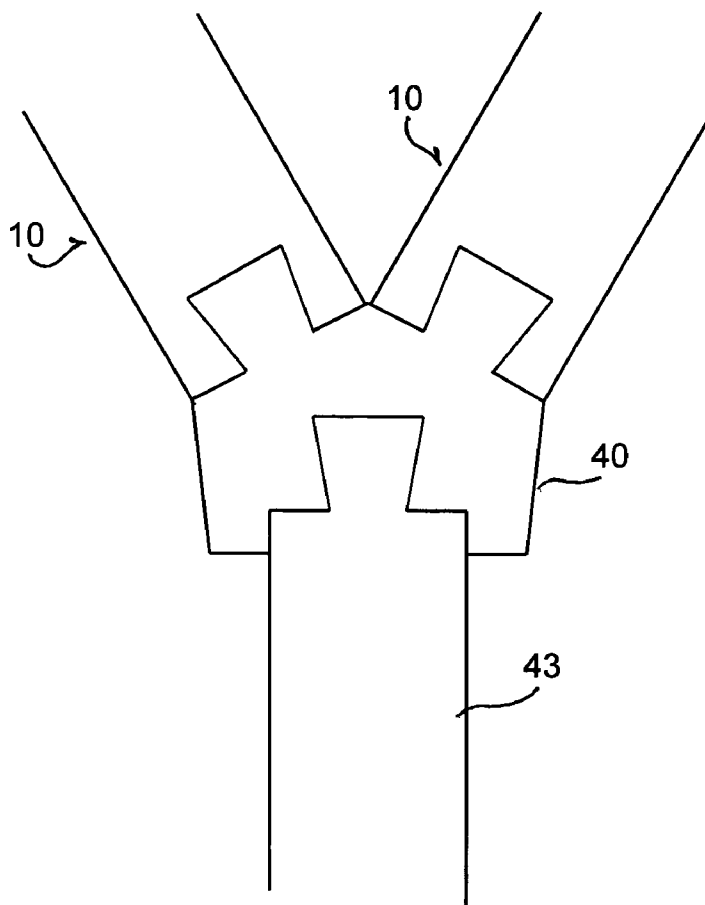


FIG. 4b

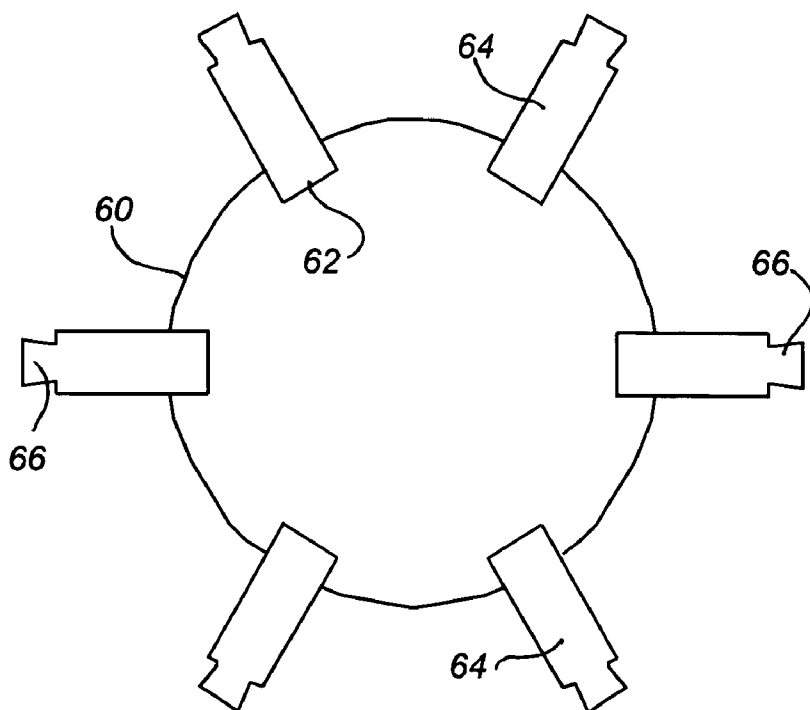


FIG. 6a

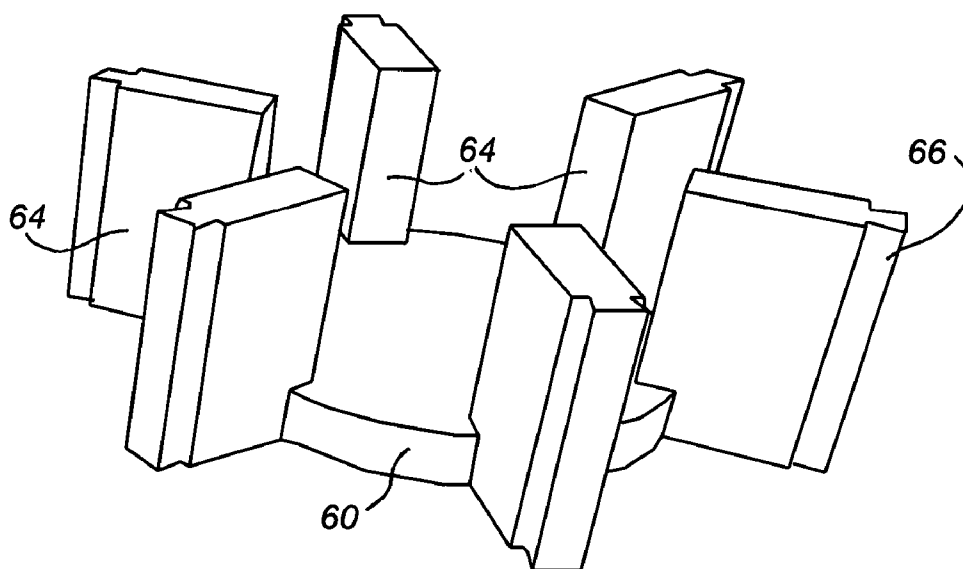


FIG. 6b

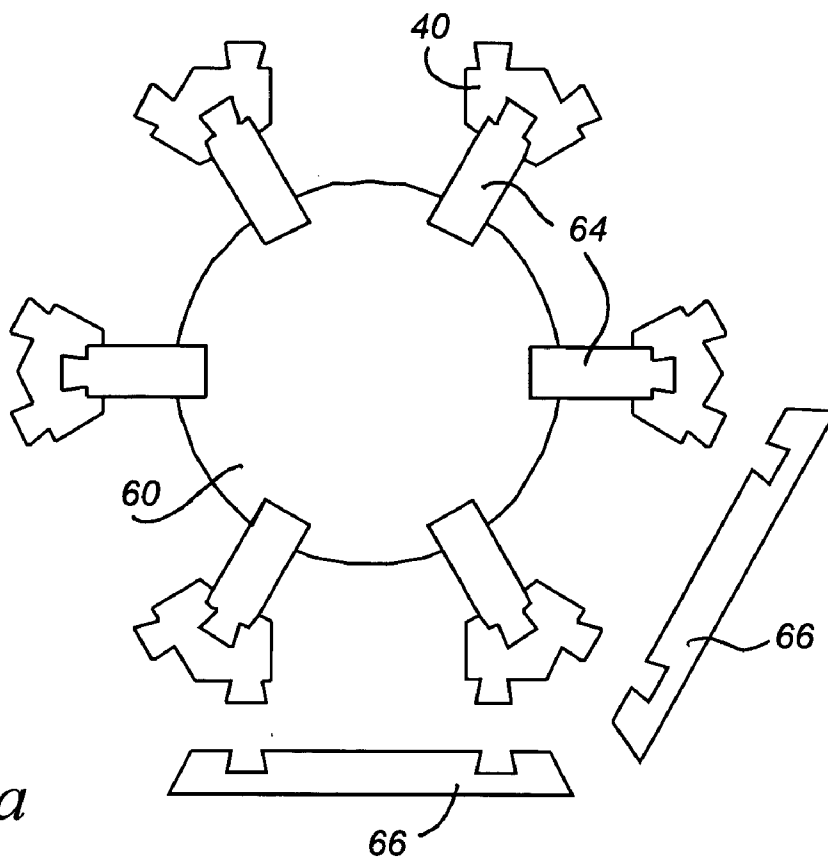


FIG. 7a

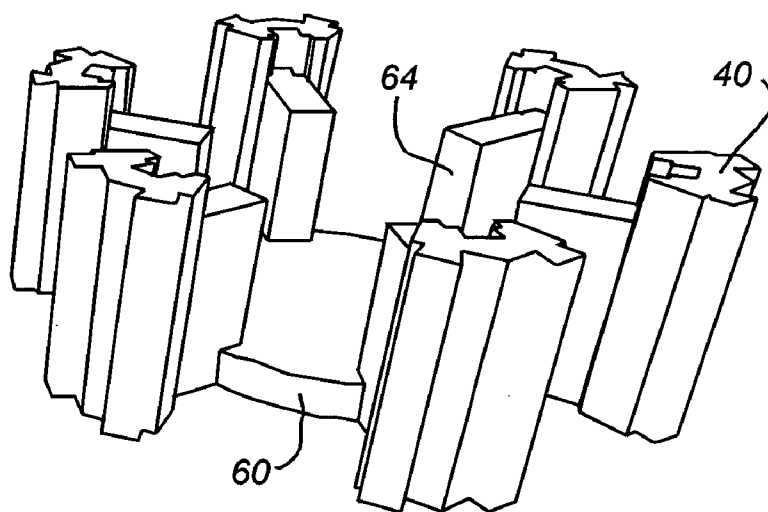


FIG. 7b

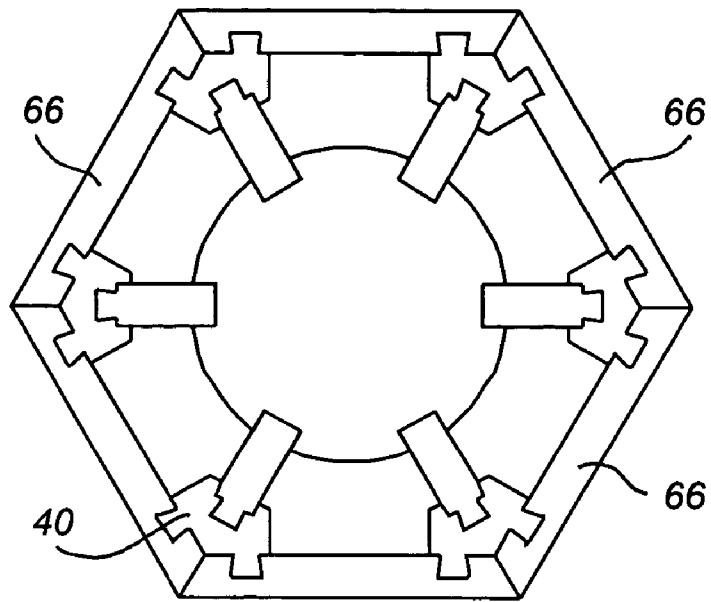


FIG. 8a

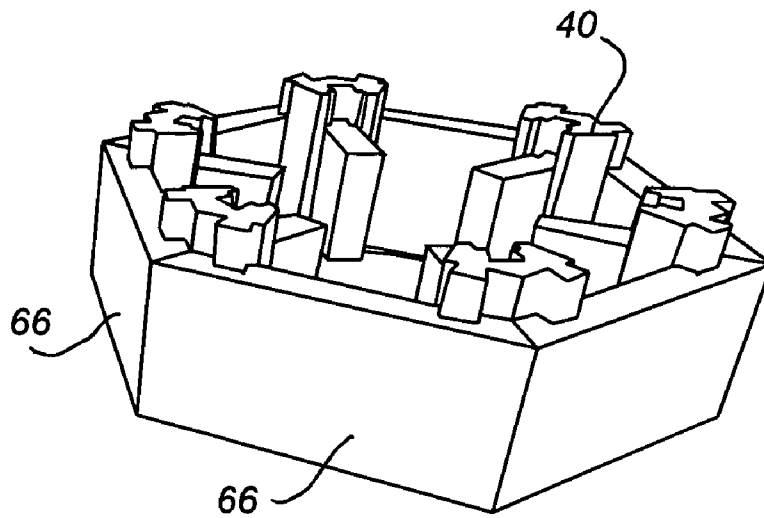


FIG. 8b

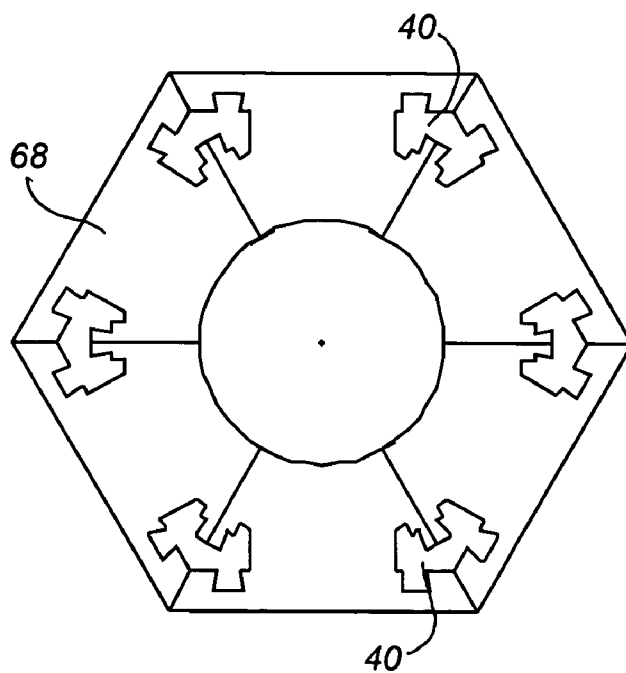


FIG. 9a

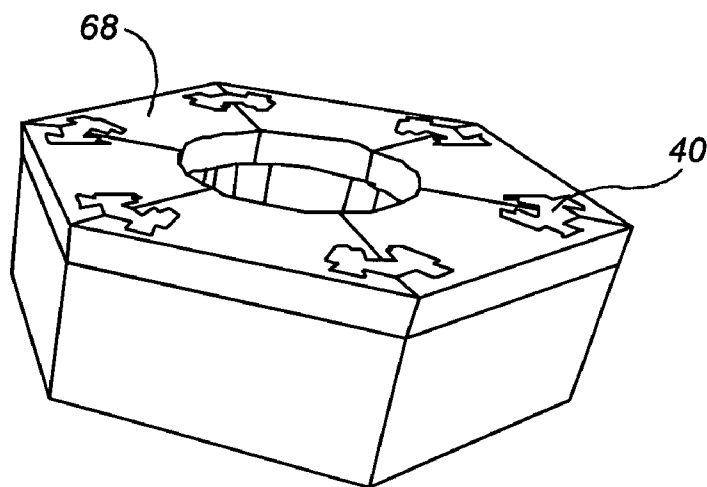


FIG. 9b

EPS FOAM MODULAR CONSTRUCTION SYSTEM AND METHOD

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The present application is related to and takes priority from U.S. Provisional Patent Applications Serial Nos. 60/441,035, filed Jan. 18, 2003 and 60/452,025, filed Mar. 5, 2003, the entire contents of which are expressly incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention is related to modular EPS foam building materials and, more particularly, to standardized foam building blocks assembled for rigid single piece performance without using tools or adhesives.

BACKGROUND OF THE INVENTION

[0003] Modular building panels have a rather broad utility in the construction industry and are used to form a number of prefabricated structures, such as sheds, warehouses, and the like. However, there are a number of structures that do not require fabrication from conventional materials. These structures are generally erected outdoors and are not required to conform to construction building codes.

[0004] In particular, such structures may comprise a child's playhouse, for example, a basis for a decorative exterior wall or fence, a tool storage shed, pool house, or even a non-code living enclosure such as a gazebo, breezeway, or porch enclosure or sunroom.

[0005] Fabricating these structures from conventional materials such as metal or wood framing and plywood facing is costly and typically requires the services of experienced construction contractors. The materials used in these construction projects are bulky and rather heavy, making them difficult to purchase and transport in a normal consumer's vehicle and are further relatively unwieldy for a casual consumer to manipulate.

[0006] Although foam materials have been frequently incorporated into various construction techniques, foam has not been previously used for structural aspects of a structure. Foam materials have been used to define alignment tools for cinderblock structures, for example, but have not been used in place of the cinderblocks themselves.

[0007] Since many structures are not required to conform to building code requirements, it would be useful if foam materials could be incorporated into the structural and load bearing aspects of such structures in place of the more bulky conventional materials. In order to have such structures be easily designed and assembled, foam structural materials should be provided in standardized shapes and sizes, such that they need only be assembled in accordance with simple printed instructions and affixed together utilizing a standardized interlock member.

[0008] Given such a standardized shape and size, such foam materials can be combined together in order to form structures in a manner similar to the well known LEGGO™ building block system.

[0009] Thus, it will be seen that there is a need for a simple, inexpensive and lightweight construction element

set that can be assembled into a structure without the use of adhesives or fasteners but nevertheless provide a rigid and structurally sound final product. Because the pieces are generally standardized, a structure of any size or shape may be implemented from standard pieces by merely adding or deleting a course from the length or height of a particular structural dimension. Such a system should also incorporate non-linear construction elements, such as rounded corner panels, angled abutments, and the like.

SUMMARY OF THE INVENTION

[0010] Such a modular foam construction system is described below. In a first aspect, the invention is characterized in terms of a modular system for constructing substantially rigid structures from polystyrene materials and suitably comprises a set of building panels, of predetermined shape, which are configured to define a structure when the panels are arranged and aligned together in accord with a plan or set of instructions.

[0011] a plurality of predefined interlock slots is formed into each panel and disposed at panel locations at which panels are to be aligned in order to define a structure. For example, an interlock slot of an edge portion of a first panel is juxtaposed, in face-to-face manner, with an interlock slot of an edge portion of a second panel when the panels are arranged and aligned together. A plurality of interlock keys are configured for friction fit insertion into the juxtaposed interlock slots. An interlock key spans the interlock slots of two panels so as to further align the panels and substantially locks the panels together at the key/slot joint. Specifically, the building panels, interlock slots and interlock keys are formed from EPS polystyrene foam material and are affixed together in order to define a structure without use of adhesives or conventional fasteners.

[0012] In a further aspect of the invention, interlock slots are formed as female-type, dove-tail slots having predefined lateral dimensions, and interlock keys are formed as male-type dove-tail, members having predefined lateral dimensions oversized from the predefined lateral dimensions of the interlock slots. Specifically, the predefined lateral dimensions of the slots and keys comprise the spacing between opposing angled sidewalls. The spacing between opposing angled sidewalls of an interlock key is oversized to the spacing between opposing angled sidewalls of an interlock slot by an amount ranging from about 0.005 inches to about 0.007 inches.

[0013] One of the advantageous features of the invention is the ability to join panels together along abutting edges and along contiguous faces. Two building panels are joined together at abutting edges by an interlock key having two adjoining joint members, disposed in opposing relationship, each joint member insertable in a respective panel's interlock slot, so as to lock the panels together in an edge-to-edge relationship. Two building panels are joined together along contiguous faces by an interlock key defining a single joint member, the joint member insertable in a respective panel's interlock slot and spanning a contiguous slot defined by adjoining panels, so as to lock the panels together along their faces.

[0014] In a further feature, an interlock key comprises a multiplicity of joint members, disposed at angles with respect to one another such that panels are joined together in

accord with the angles of the joint members in order to form structures having other than right angles at particular joints.

[0015] A method for fitting together building elements formed from polystyrene foam in a manner providing structural rigidity sufficient for light duty structures or enclosures comprises defining a set of building panels, of predetermined shape, the panels configured to define a structure when the panels are arranged and aligned together and forming a plurality of predefined interlock slots into each panel at particular panel locations at which panels are to be joined together in order to define a structure.

[0016] At least a first and second panel are aligned together so as to juxtapose respective interlock slots with one another and the juxtaposed interlock slots of two panels are spanned with at least one interlock key, the key configured for friction fit insertion into the juxtaposed interlock slots, the interlock key further aligning the panels and substantially locking said panels together at the key/slot joint. An interlock slot comprises a trapezoidal channel having a floor or bottom, an opening or throat and two opposing angled sides such that the width dimension of the channel floor is larger than the width dimension of the channel throat. An interlock key comprises a trapezoidal member having a shape conforming to the shape of the channel, and wherein the interlock key has width dimensions at its respective angled sides oversized from the width dimensions of a respective slot's angled sides, such that insertion of a key into a corresponding slot defines a surface friction force at adjoining angled side surface interfaces.

[0017] Advantageously, insertion of a key into a corresponding slot defines a surface friction force at adjoining angled side surface interfaces thereby keeping two joined panels in relatively rigid alignment. The angled sides of the interlock slots and keys cooperate to define a locking force along the length of adjoining angled sides as the key is inserted into a corresponding slot, the locking force directed towards an interlock channel floor, thereby exerting a pulling force on an interlock key and encouraging a further frictional fit bond between a slot and a key along the channel floor.

DESCRIPTION OF THE DRAWINGS

[0018] These and other features, aspects and advantages of the present invention will be more completely understood when considered in connection with the following specification, appended claims and accompanying drawings, wherein:

[0019] **FIG. 1a** is a plan view of an exemplary standard building panel, constructed in accordance with the practice of the present invention;

[0020] **FIG. 1b** is a top view of the exemplary building panel of **FIG. 1a**;

[0021] **FIG. 1c** is an end view of the exemplary building panel of **FIG. 1a**;

[0022] **FIG. 2a** is a semi-schematic cross-sectional view of a dual interlock key and two building panels incorporating interlock slots;

[0023] **FIG. 2b** is semi-schematic cross-sectional view of a single sided interlock key in accordance with the invention;

[0024] **FIG. 2c** is a semi-schematic cross-sectional view of two building panels joined and locked together by an interlock key;

[0025] **FIG. 3a** is a cross-sectional view of two building panels and an additional embodiment of an interlock member in accordance with the invention;

[0026] **FIG. 3b** is a cross-sectional view of two building panels joined together by the interlock member of **FIG. 2a**;

[0027] **FIG. 4a** is a cross-sectional view of an additional embodiment of an interlock member for joining angled panels;

[0028] **FIG. 4b** is a cross-sectional view of multiple building panels joined at angles to one another by the interlock member of **FIG. 4a**;

[0029] **FIG. 5a** is a top view of a wall structure constructed in accordance with principals of the invention;

[0030] **FIG. 5b** is a front plan view of the wall of **FIG. 5a**;

[0031] **FIG. 5c** is an end view of the wall of **FIG. 5a**;

[0032] **FIG. 6a** is a top plan view of the initial construction stage of a hexagonal structure utilizing principals of the present invention;

[0033] **FIG. 6b** is a semi-perspective view of the structure of **FIG. 6a**;

[0034] **FIG. 7a** is a plan view of a next stage of construction of a hexagonal structure;

[0035] **FIG. 7b** is a semi-perspective view of the structure of **FIG. 7a**;

[0036] **FIG. 8a** is a top view of a third stage of construction of a hexagonal structure;

[0037] **FIG. 8b** is a semi-perspective view of the structure of **FIG. 8a**;

[0038] **FIG. 9a** is a top view of a fourth stage in the construction of a hexagonal structure; and

[0039] **FIG. 9b** is a semi-perspective view of a completed hexagonal structure constructed in accordance with principal to the present invention.

DESCRIPTION OF THE INVENTION

[0040] Briefly, the invention is characterized as a set of modular building components that fit together in order to form "constructs" for other structures, in a manner similar to the well known LEGGO™ building block system. In the context of the specification, a "construct" may be any structure or structural portion that is comprised of multiple pieces that are affixed together. For example, a storage shed is considered a "construct" in that it is comprised, in its simplest form, of four walls, a roof (flat or peaked), a door and perhaps other elements such as a window, dormer, or the like.

[0041] The system of the present invention comprises a number of standardized pieces utilizing molded or custom cut expanded polystyrene (EPS) foam shapes having standardized sizes and particular densities for the particular "construct" desired. The standardized pieces are fit together utilizing an "interlock slot and key" system which, while superficially similar to a dove-tail joint utilized in wood-

working, is particularly sized and shaped to provide structural rigidity to coupled blocks.

[0042] While the building blocks of the present invention are characterized as standardized in size and shape, this is more for the sake of ease of description than a limitation on the practice of the invention. Indeed, the building blocks (also termed building panels, or simply panels) of the present invention may be provided in a set of universal sizes, for creative building purposes, or might be provided in custom or unique shapes for specific building projects. Particularly, the use of EPS foam allows for the building blocks to be simply and easily cut, whether by wire, hot wire, laser, or router, into any desired shape and having any desired surface texture. Specifically, the type of EPS foam contemplated for use with the present invention is Type-IX expanded polystyrene having a nominal density of 2.0 pounds per cubic foot (lb/ft³). This is also commonly known as 2 pound foam to those having skill in the art.

[0043] Common 2 pound foam exhibits a compressive strength of 25.0 psi at 10% deflection and a flexural strength of 50.0 psi. EPS foam is inert, highly stable, contains no formaldehyde and is not manufactured with CFCs. EPS foam is particularly suitable for construction applications since it is extremely light in weight, versatile, sanitary, energy efficient and most of all cost effective.

[0044] Turning now to FIGS. 1a, 1b, and 1c, there is depicted in plan, top and side view, respectively, a standard building block or panel 10 constructed of EPS foam, in accordance with the present invention. It can be seen from the exemplary embodiment of FIG. 1a that the standardized building panel 10 is formed from a generally rectangular slab of 2 pound EPS foam. The panel 10 is provided in a number of configurations, 24 inch lengths, 36 inch lengths, 48 inch lengths, and the like, and correspondingly graded heights, in order to define a set of uniformly increasing panel sizes. Depending on the "construct" desired to be built, each of the blocks or panels 10 are provided in standard thicknesses of 4 inches, 5 inches, 6 inches, and the like. For purposes of discussion, the particular exemplary embodiment of FIGS. 1a, 1b, and 1c, will be described in terms of a standard panel block having a length of 36 inches, a height of 12 inches and a thickness of 6 inches.

[0045] A series of female dove-tail "interlock slots" 12 are formed in the front face 14 of each block, as well as the back face 16, the top surface 18, bottom surface 20, right hand 22 and left hand 24 edges. The interlock slots 12 may be formed by routing the slot cutouts from a uniform 6 inch thick panel of EPS foam which has been cut to the desired standard size (12x36, for example). In a 36 inch long foam panel, it is contemplated that the interlock slots are disposed approximately 12 inches apart on centers, with the first slot on either face being provided about 6 inches from either end. The interlock slots on the top and bottom edges, as well as the two ends, are centered along the edge dimension.

[0046] In accordance with the invention, the interlock slots are configured as female-type dove-tail joints and are shaped such that the widest portion of the dove-tail (i.e., at the bottom of the cutout) has a linear dimension approximately 1/3 that of the thickness of the EPS panel into which it is routed or cut. In effect, a female interlock slot would exhibit a maximum width, at the bottom of the channel, of approximately 2 inches, were the EPS panel to be a 6 inch

thick panel. Necessarily, the interlock slot will decrease in size as the panel thickness decreases.

[0047] Additionally, although the interlock slot is described as exhibiting a width of about 1/3 the thickness of a panel, this is not intended to represent a limitation on the configuration of a slot. The size of a slot depends on the corresponding size of an inserted "key", as will be described further below. Key and slot widths may be allowed to vary as a function of the panel width and as a function of the surface contact area as well as the amount of bulk material defining the thickness of a key. A thicker key will result in a greater degree of material resistance to lateral and bending forces, with a correspondingly greater degree of joint rigidity. Thus, interlock slot and key dimensions may be varied to conform to structural design considerations and are not limited to specific and fixed thicknesses, depths, and the like.

[0048] The slot aspect ratio is preferably less than 1:1, for reasons which will be developed further below, but may, indeed, be provided at a 1:1 aspect ratio without violating the scope and spirit of the present invention. A suitable aspect ratio for practice of the invention might be 0.8:1, with 0.8 referring to the depth of the slot as a function of the width at the bottom of the channel.

[0049] Similarly, the sides of the interlock slot are angled inwardly at the mouth of the opening, so as to define a smaller linear width dimension at the opening throat than at the bottom of the slot. In particular, a suitable angle for each of the opening sides is from about 6° to about 7.5°. Although these angles appear to be most suitable for practice of the invention, the actual values are not critical. A certain degree of variation is allowable, so long as the system's structural integrity and rigidity is not compromised, as will be explained in greater detail below.

[0050] The particular form and location of the interlock slots 12 on a standardized block 10 allows for positioning and location of other standardized blocks with respect to the first block. The interlock slots define locations at which "interlock keys" are inserted so as to tie multiple blocks together in a manner that locks one block to another, provides structural rigidity to the resulting "construct" in a manner heretofore unrealizable in EPS foam materials.

[0051] Turning now to FIGS. 2a, 2b, and 2c, there is depicted a male-type "interlock key" 30 which functions to join and lock together two standardized building blocks (indicated at 10) in a manner that insures structural integrity and rigidity of the pieces. From the exemplary embodiment of FIG. 2a, it will be understood that an "interlock key" 30 is configured as a male-type dove-tail key that is shaped so as to slide into the female-type dove-tail "interlock slot" 12 in secure fashion. The interlock key 30 is also formed from 2 pound EPS foam and is contemplated, in one aspect, as comprising two superposed male-type dove-tail joints on an elongate member. The interlock key is typically provided in uniform lengths which equal the uniform length dimensions of a standard-building panel such as described in the exemplary embodiments of FIGS. 1a, 1b, and 1c. Where a building block is 36 inches long and 12 inches high, interlock keys will necessarily be provided in both 36 inch and 12 inch lengths.

[0052] It should be understood that the interlock key 30 (more correctly 1/2 of the interlock key) has depth corre-

sponding to the depth of an associated interlock slot **12**. However, the width or thickness of the engaging sides of the interlock key are dimensioned to be approximately 0.005 inches oversized to the corresponding dimension of the interlock slot. Suitable oversize dimensions range from about 0.004 inches to about 0.007 inches. Accordingly, as the interlock key member is slid into the interlock slot, the sides of the key engage the sides of the slot in a substantial friction fit and, because of the joint angle, serves to pull the slot into tight engagement with the key. It could also be said that the key **30** is pulled into tight engagement with the slot **12** by virtue of the dimensional oversize and the action of the sidewall angles.

[0053] It should also be understood that the friction fit is further dependant on the surface contact area between the slot and key as well as the surface texture of the mating surfaces. Where the respective surfaces are “rough cut” there will necessarily be a greater surface friction resistance to both insertion and extraction forces. Surface preparation can thus be varied in order to give a range of friction fit characteristics, with smooth surface preparation allowing for a smoother insertion and easier extraction, but with a slightly reduced joint strength.

[0054] Insertion may be performed in a number of ways, with the key **30** being inserted into one slot **12** of one panel **10** and then another panel having its interlock slot slid over the exposed surface of the other half of the key **30** until it is positioned correctly. Alternatively, two panels may be butted together at their respective edges and the interlock key engaged to both interlock slots simultaneously. In this case, the key dove-tail angle and dimensional oversize functions to pull the two panels together until their edge faces **32** are butted tightly together. The compression forces along the panel edges give rigidity to two panels joined together in this fashion making, in effect, a composite piece having substantially the same rigidity and integrity as a single panel. In order to ensure that adjoining edges of butting panels are rigidly and securely compressed together, it may be desirable to form the interlock key **30** such that its bottom surface is approximately 0.005 inches from the bottom channel surface of the interlock slot **12**. This will increase the “pulling” forces on each of the panels and further ensure that maximum compression is developed along the respective edge faces **32**.

[0055] Notably, panels are secured together through the friction fit of a slightly oversized interlocked key **30** being disposed within an interlock slot **12**. Having an interlock key formed with substantially the same depth as the interlock slot allows the bottom faces of the key and the slot to engage, thereby increasing contact surface area and maximizing bit friction. In this particular case, structural rigidity is a function of how tightly the key **30** is bound to the slot **12**. Even though there is no gap developed between the bottom of the key and the bottom of the slot, sufficient compressive force is still developed between two panels so as to lock the panels together into a rigid composite unit.

[0056] Although the exemplary embodiment of **FIG. 2a** depicts an interlock key **30** as comprising two juxtaposed dove-tail key members, it will be understood that interlock keys may be defined as a single male-type dove-tail shape as depicted in the exemplary embodiment of **FIG. 2c**. The juxtaposed shape of **FIG. 2a** is particularly suitable when it

is desired to marry two panels together at their edges. The single key of **FIG. 2c** is particularly suited for aligning and binding the edges of two panels together when one panel is placed lengthwise atop another panel. In this particular case, where each panel is 12 inches tall, the single joint key might be 24 inches long and slid into each of the panels end slots.

[0057] Further, and as will be described in greater detail below, similar alignment and security may be had by inserting a single joint key into the interlock slots disposed on the front and back faces of two blocks if one block were to be disposed lengthwise atop another. Thus, given the exemplary standardized panel of **FIGS. 1**, a single joint key would be inserted into each of the right hand and left hand edge slots and the three slots on each panel’s front face, as well as the three slots on each panel’s back face. For additional rigidity and security, a dual joint key (**FIG. 2a**) may be inserted into the “butterfly” openings defined by the lower panel’s top edge slot and the upper panel’s bottom edge slot.

[0058] An additional embodiment of how an interlock key may be formed is depicted in the additional exemplary embodiment of **FIGS. 3a** and **3b**. In particular, an interlock key **34** may be provided with a male-type dove-tail key **36** disposed at one end and a female-type dove-tail interlock slot **38** disposed at the other end. Each of the respective keys and slots are formed in a member manufactured of 2 pound EPS foam having substantially the same thickness dimension as the panels which are desired to be joined. In this particular case, one of the panels **40** is manufactured with a male-type dove-tail interlock key formed along one edge and having the same oversize characteristics as a separately provided interlock key. The male key block may also be inserted directly into a standard block with an interlock key as well as secured to a standard block through a male/female interlock **34** as depicted in **FIGS. 3a** and **3b**.

[0059] An additional configuration is depicted in **FIGS. 4a** and **4b**, where it might be found desirable to join together several building panels at angles to one another. In the particular configuration of **FIG. 4a**, an interlock member **40** is depicted as comprising a female-type dove-tail interlock slot **42** on one side of a generally pentagonal bulk shape, and two male-type dove-tail interlock keys **44** angled approximately 30° apart from one another on the bulk member’s opposite side. As shown in **FIG. 4b**, a building panel **43** has a male-type interlock key disposed along one edge, with the interlock member being slid over the interlock key of the panel **43**. Two standard panels **10** have interlock slots disposed along their edges and the slots are engaged with the angled interlock keys **44** defined by the interlock member **40**. In this manner, complex building shapes may be defined that include panels that are disposed at angle with respect to one another. This is particularly suitable in the case of a child’s playhouse where it is desirable to provide a peaked roof for aesthetic purposes. Although, hexagonal gazebos can be simply and easily constructed utilizing this principal.

[0060] It should further be noted that although the interlock member **40** of **FIG. 4a** is depicted with two male-type interlock keys and one female-type interlock slot, it may just as easily have an interlock key defined on the bottom face in place of the interlock slot **42**. Depending on the application, it might be desirable to define an interlock slot in the pentagonal member **40** for purposes of rigidity. If this is the

case, the bottom surface of the pentagonal member might also define a rectilinear cutout **46** into which the interlock slot **42** is defined. The cutout **46** would serve to define interior shoulders that receive the edge surface and edge shoulders of a building panel **43** that is engaged to the interlock slot **42**. This particular configuration allows for maximum rigidity against sideways deflection forces as might be the case where the weight on one of the angularly displaced panels was greater than the weight supported by the other angularly displaced panel.

[0061] The use of standard EPS foam building panels and standard EPS foam interlock keys in constructing a structure will now be discussed in connection with the exemplary embodiment depicted in **FIGS. 5a, 5b** and **5c** which show the top, plan and end view, respectively, of a wall constructed in accordance with the present invention. The wall might be a simple free standing wall or, alternatively, it could form a wall portion of an easily assembled tool shed, child's playhouse, backyard gazebo, pool house or any other structure, housing or "construct" which does not have to meet dwelling building codes.

[0062] In the exemplary embodiments of **FIGS. 5a, 5b**, and **5c**, building panels of three separate standardized sizes are depicted as being joined together to form the wall. A 24 inch panel **50** will be understood as comprising two interlock slots **12** disposed on each of its front and back surfaces, as indicated in **FIGS. 5a** and **5b**. A 36 inch long panel **52** is substantially similar to the exemplary embodiment of **FIGS. 1** and has three interlock slots disposed on each of its front and back surfaces. A 48 inch panel **54** will necessarily have four interlock slots disposed on each of its front and back surfaces, in accordance with the general rule of slots being disposed on 12 inch centers and 6 inches from the left and right edge of each panel.

[0063] It will also be noted in the exemplary embodiment of **FIGS. 5**, that the panels are stacked, bottom edge to top edge, atop one another such that their facial interlock slots line up vertically. As shown in the exemplary embodiment of **FIG. 5c**, a dual interlock key **30** (**FIG. 2a**) is inserted into the juxtaposed interlock slots of the panel top and bottom edges. Likewise, and as shown in **FIG. 5a**, the building panel's left and right edges are locked together by sliding a dual interlock key (**FIG. 2a**) into the juxtaposed left and right interlock slots. The various panels are now locked together horizontally and vertically, but to maximize structural rigidity and integrity of the completed structure, single sided interlock keys **31** (**FIG. 2b**) are engaged to the vertically aligned facial interlock slots of the various panels.

[0064] As shown in the exemplary embodiment of **FIG. 5b**, the single sided keys **31** are provided in two separate lengths, one length equal to the height of the panel (approximately 12 inches) while another length is one half height of a panel (approximately 6 inches). This is to allow the foam material of the key to span the butt joint between two blocks' top and bottom edges. The joint between two consecutive single sided (or double sided) keys falls in the center of a panel's material bulk, thereby minimizing superposed joints and potential areas of weakness.

[0065] From the foregoing, it can be understood by those having skill in the art, that a multi-angled interlock member (such as member **40** of **FIG. 4a**) can be inserted in any one of the facially disposed or end disposed slots so as to define

the starting point of an additional all structure or structures positioned at an angle the first. Any number of panels can be fit together at any angle with respect to one another and to any desired surface area, by merely providing an appropriate interlock slot in an appropriate location for receiving and interlock key once two shapes or structures have their respective slots aligned.

[0066] A further exemplar of how the modular EPS foam construction system and method in accordance with the invention might be utilized to realize a complex structure is shown in the exemplary embodiments of **FIGS. 6, 7, 8** and **9**. Specifically, the referenced figures depict the construction of a hexagonal structure that is sufficiently rigid to function as the structural support for a stone or brick bench that might be constructed to surround a favorite tree, for example or to surround a fire pit, or the like.

[0067] Specifically, and with respect to the exemplary embodiments of **FIGS. 6a** and **6b**, the structure begins with a generally circular piece of 2 pound EPS foam **60** which may or may not have a central cut-out, depending on desired application. The circular base **60** includes socket cut-outs **62** into which vertical panel blocks **64** are inserted. The cut-outs **62** may be formed slightly undersized to the thickness dimension of the vertical panels **64**, such that the vertical panels friction fit into the cut-outs **62**. Each of the vertical support panels **64** terminates in a male-type dove-tail interlock key **66** on its outward facing edge. The vertical supports disposed about the circumference of the base **60**.

[0068] Turning now to **FIGS. 7a** and **7b**, an angled interlock member **40** (**FIG. 4a**) is secured to the outer edge of each of the vertical support panels **64**. Each angled member **40** receives the panel's interlock key in an associated interlock slot and functions to transform the single interlock key of each vertical panel **64** into two angled interlock keys.

[0069] Suitably, two adjacent vertical panels may be locked together by a linear EPS foam panel **66** having interlock slots cut into one surface so as to join adjacent interlock keys. Once all of the interlock keys join together by circumferentially disposed exterior panels **66**, the entire structure is now substantially locked together and rigid, as depicted in the exemplary embodiment of **FIGS. 8a** and **8b**.

[0070] It will also be noted that the angled interlock members **40** are slightly longer than the height dimension of both the vertical panels **64** and the exterior panels **66**. The top edges of both the vertical panels **64** and exterior panels **66** lie in the same plane, with the top ends of the angled members **40** projecting beyond that plane by a certain distance. This is to allow a set of cover panels to be pressed over the surface of the underlying hexagonal support with the extended portions of the angled interlock members **40** fitting within corresponding shaped receptacles cut into the surface panels **68**. It should further be noted that the receptacles cut into the surface panels also incorporate interlock slots which receive interlock key portions of the each of the angled interlock members. This functions to provide compression forces to the surface panels and to further lock the structure together and make it rigid. The bottom surfaces of the surface panels **68** rest on the top edges of the vertical support panels **64** and the top edges of the exterior panels **66**. When constructed in this fashion, the resulting EPS foam

article is capable of supporting the weight of several persons, making it an ideal construct for outdoor, backyard seating.

[0071] It should also be understood that once any of the above-mentioned foam structures have been completed, they may be finished with any form of surface texture that is desired. Faux brick, rock, stucco or even stone or marble slabs can be affixed to the exterior exposed surfaces of the completed foam article in conventional fashion. Thus, even though constructed of and structurally dependant on EPS foam, the article may be finished-off to look as though it were made of stone. In the case where the desired construct is a child's playhouse or a tool or pool shed, the construct might be finished off with an exterior siding applique to make it appear as though it were a frame-and-board construction.

[0072] It should also be noted that although various interlock keys have been described and depicted as made from 2 pound EPS foam, other materials are also suitable for forming the keying function. Interlock keys may be cut or milled from wood, for example, where it is desired to provide a natural wood accent in an otherwise all foam structure. In this particular case, a wooden key will also allow for conventional fasteners to be utilized where conventional materials must be added to or incorporated into a foam construct. Wooden keys allow for incorporation of screws and nails into the construction, as well as adding a "natural" accent to a finished product.

[0073] For certain other construction applications, it might be desirable to provide the edge keys in metal, for example, if it is desired to screw or bolt an EPS foam structure to a metal or wooden wall. Similarly, a metal interlock key disposed along the bottom edge of a foam structure can be milled with an internal "T" slot such that bolt or pins might be extended from particular locations along the length of the key so as to be countersunk into concrete, for example.

[0074] Although the foregoing exemplary embodiments have been characterized in terms of the exemplars of the figures, it will be understood by those having skill in the art that building panels need not be uniformly rectangular in shape nor need the interlock slots (or interlock keys) be disposed in specific locations thereon. Indeed, building panels might be curved so as to allow construction of completely circular shapes or shapes with certain amount of desired curvature such as a child's playground slide, for example.

[0075] Building panels may be cut in custom shapes depending upon the desired structure, such that one is not limited to the particular dimensions imposed by 24, 36 or 48 inch panels. As discussed, panels can be hexagonal, pentagonal, triangular or any other shape as required. EPS foam is so simple to cut that no shape can reasonably be excluded from contemplation of the present invention. Indeed, all that is required is that panels constructed of EPS foam be rigidly locked and joined together by inserting an interlock key into an interlock slot as discussed above.

[0076] Those having skill in the art will recognize that a multitude of other shapes and configurations are equally suitable for practice to the present invention. Accordingly, the invention is not intended to be limited to the particular embodiments discussed and depicted above, but rather defined by the scope of the appended claims.

1. A modular system for constructing substantially rigid structures from polystyrene materials comprising:

- a set of building panels, of predetermined shape, the panels configured to define a structure when the panels are arranged and aligned together in accord with an instruction;
- a plurality of predefined interlock slots formed into each panel and disposed at panel locations at which panels are to be aligned in order to define a structure, an interlock slot of a first panel being juxtaposed, in face-to-face manner, with an interlock slot of a second panel when the panels are arranged and aligned together in accord with the instruction;
- a plurality of interlock keys, configured for friction fit insertion into the juxtaposed interlock slots, the interlock keys spanning the interlock slots of two panels so as to further align the panels and substantially lock said panels together at the key/slot joint; and

wherein the building panels, interlock slots and interlock keys are formed from polystyrene foam material so as to define a structure with use of adhesives or conventional fasteners.

2. The modular construction system according to claim 1, wherein interlock slots are formed as female-type, dove-tail slots having predefined lateral dimensions.

3. The modular construction system according to claim 2, wherein interlock keys are formed as male-type dove-tail, members having predefined lateral dimensions oversized from the predefined lateral dimensions of the interlock slots.

4. The modular construction system according to claim 3, wherein the predefined lateral dimensions of the slots and keys comprise the spacing between opposing angled sidewalls.

5. The modular construction system according to claim 4, wherein the spacing between opposing angled sidewalls of an interlock key is oversized to the spacing between opposing angled sidewalls of an interlock slot by an amount ranging from about 0.005 inches to about 0.007 inches.

6. The modular construction system according to claim 5, wherein two building panels are joined together at abutting edges by an interlock key having two adjoining joint members, disposed in opposing relationship, each joint member insertable in a respective panel's interlock slot, so as to lock the panels together in an edge-to-edge relationship.

7. The modular construction system according to claim 5, wherein two building panels are joined together along contiguous faces by an interlock key defining a single joint member, the joint member insertable in a respective panel's interlock slot and spanning a contiguous slot defined by adjoining panels, so as to lock the panels together along their faces.

8. The modular construction system according to claim 5, wherein an interlock key comprises a multiplicity of joint members, disposed at angles with respect to one another such that panels are joined together in accord with the angles of the joint members.

9. In a modular construction system, a method for fitting together building elements formed from polystyrene foam in a manner providing structural rigidity sufficient for light duty structures or enclosures, the method comprising:

defining a set of building panels, of predetermined shape, the panels configured to define a structure when the panels are arranged and aligned together;

forming a plurality of predefined interlock slots into each panel at particular panel locations at which panels are to be joined together in order to define a structure;

aligning at least a first and second panel together so as to juxtapose respective interlock slots with one another; and

spanning the juxtaposed interlock slots of two panels with at least one interlock key, the key configured for friction fit insertion into the juxtaposed interlock slots, the interlock key further aligning the panels and substantially locking said panels together at the key/slot joint.

10. The method according to claim 9, wherein two building panels are joined together at abutting edges by an interlock key having two adjoining joint members, disposed in a "butterfly" relationship, each joint member insertable in a respective panel's interlock slot, so as to lock the panels together in an edge-to-edge relationship.

11. The method according to claim 9, wherein two building panels are joined together along contiguous faces by an interlock key defining a single joint member, the joint member insertable in each respective panel's interlock slot and spanning a contiguous slot defined by adjoining panels, so as to lock the panels together along their faces.

12. The method according to claim 9, wherein an interlock slot further comprises a trapezoidal channel having a floor or bottom, an opening or throat and two opposing angled sides such that the width dimension of the channel floor is larger than the width dimension of the channel throat.

13. The method according to claim 12, wherein an interlock key comprises a trapezoidal member having a shape conforming to the shape of the channel, and wherein the interlock key has width dimensions at its respective angled sides oversized from the width dimensions of a respective slot's angled sides, such that insertion of a key into a corresponding slot defines a surface friction force at adjoining angled side surface interfaces.

14. The method according to claim 13, wherein the angled sides of the interlock slots and keys cooperate to define a locking force along the length of adjoining angled sides as the key is inserted into a corresponding slot, the locking force directed towards an interlock channel floor, thereby exerting a pulling force on an interlock key and encouraging a further frictional fit bond between a slot and a key along the channel floor.

15. The method according to claim 14, wherein two building panels are joined together at abutting edges by an interlock key having two opposed joint members, configured in a "butterfly" relationship, each joint member insertable in a respective panel's interlock slot, so as to lock the panels together in an edge-to-edge relationship.

16. A modular building system for constructing substantially rigid structures from polystyrene elements without use of adhesives or fasteners, the system comprising:

a set of building panel components, the panel components sized and shaped to define a structure when arranged and aligned together, horizontally and vertically;

a plurality of interlock joints of a first type formed into each panel and disposed at panel locations at which particular panels are to be joined together in order to define a structure; and

a plurality of interlock joints of a second type, configured for friction fit insertion with respect to the interlock joints of the first type, the first and second interlock joint types cooperating to substantially lock said panels together at the joint.

17. The building system according to claim 16, wherein the interlock joints of a first type comprise a regular trapezoidal channel including a floor having a first width, a throat opening having a second, smaller, width, and two angled sides.

18. The building system according to claim 17, wherein the interlock joints of a second type comprise a regular trapezoidal member configured for insertion into the regular trapezoidal channel, the member including a side corresponding to the channel floor having a first width, a side corresponding to the channel throat opening having a second, smaller, width, and two angled sides, the widths of the trapezoidal member being larger than the corresponding widths of the trapezoidal channel by from about 0.005 inches to about 0.007 inches.

19. The building system according to claim 18, wherein insertion of a key into a corresponding slot defines a surface friction force at adjoining angled side surface interfaces.

20. The building system according to claim 19, wherein the angled sides of the interlock slots and keys cooperate to define a locking force along the length of adjoining angled sides as the key is inserted into a corresponding slot, the locking force directed towards an interlock channel floor, thereby exerting a pulling force on an interlock key and encouraging a further frictional fit bond between a slot and a key along the channel floor.

* * * * *