




(86) Date de dépôt PCT/PCT Filing Date: 1998/07/20
(87) Date publication PCT/PCT Publication Date: 1999/01/28
(45) Date de délivrance/Issue Date: 2007/05/01
(85) Entrée phase nationale/National Entry: 2000/01/18
(86) N° demande PCT/PCT Application No.: NZ 1998/000107
(87) N° publication PCT/PCT Publication No.: 1999/003799
(30) Priorité/Priority: 1997/07/18 (NZ328373)

(51) Cl.Int./Int.Cl. *C05F 17/02* (2006.01),
C05F 9/02 (2006.01)
(72) Inventeurs/Inventors:
BROWN, PAUL, NZ;
WILLSON, GRAHAM FAIRLIE, NZ
(73) Propriétaire/Owner:
VCU TECHNOLOGY LIMITED, NZ
(74) Agent: BERESKIN & PARR

(54) Titre : AMELIORATION CONCERNANT LA PRODUCTION MECANIQUE DE COMPOST
(54) Title: VERTICAL INSULATED COMPOSTING APPARATUS AND METHOD

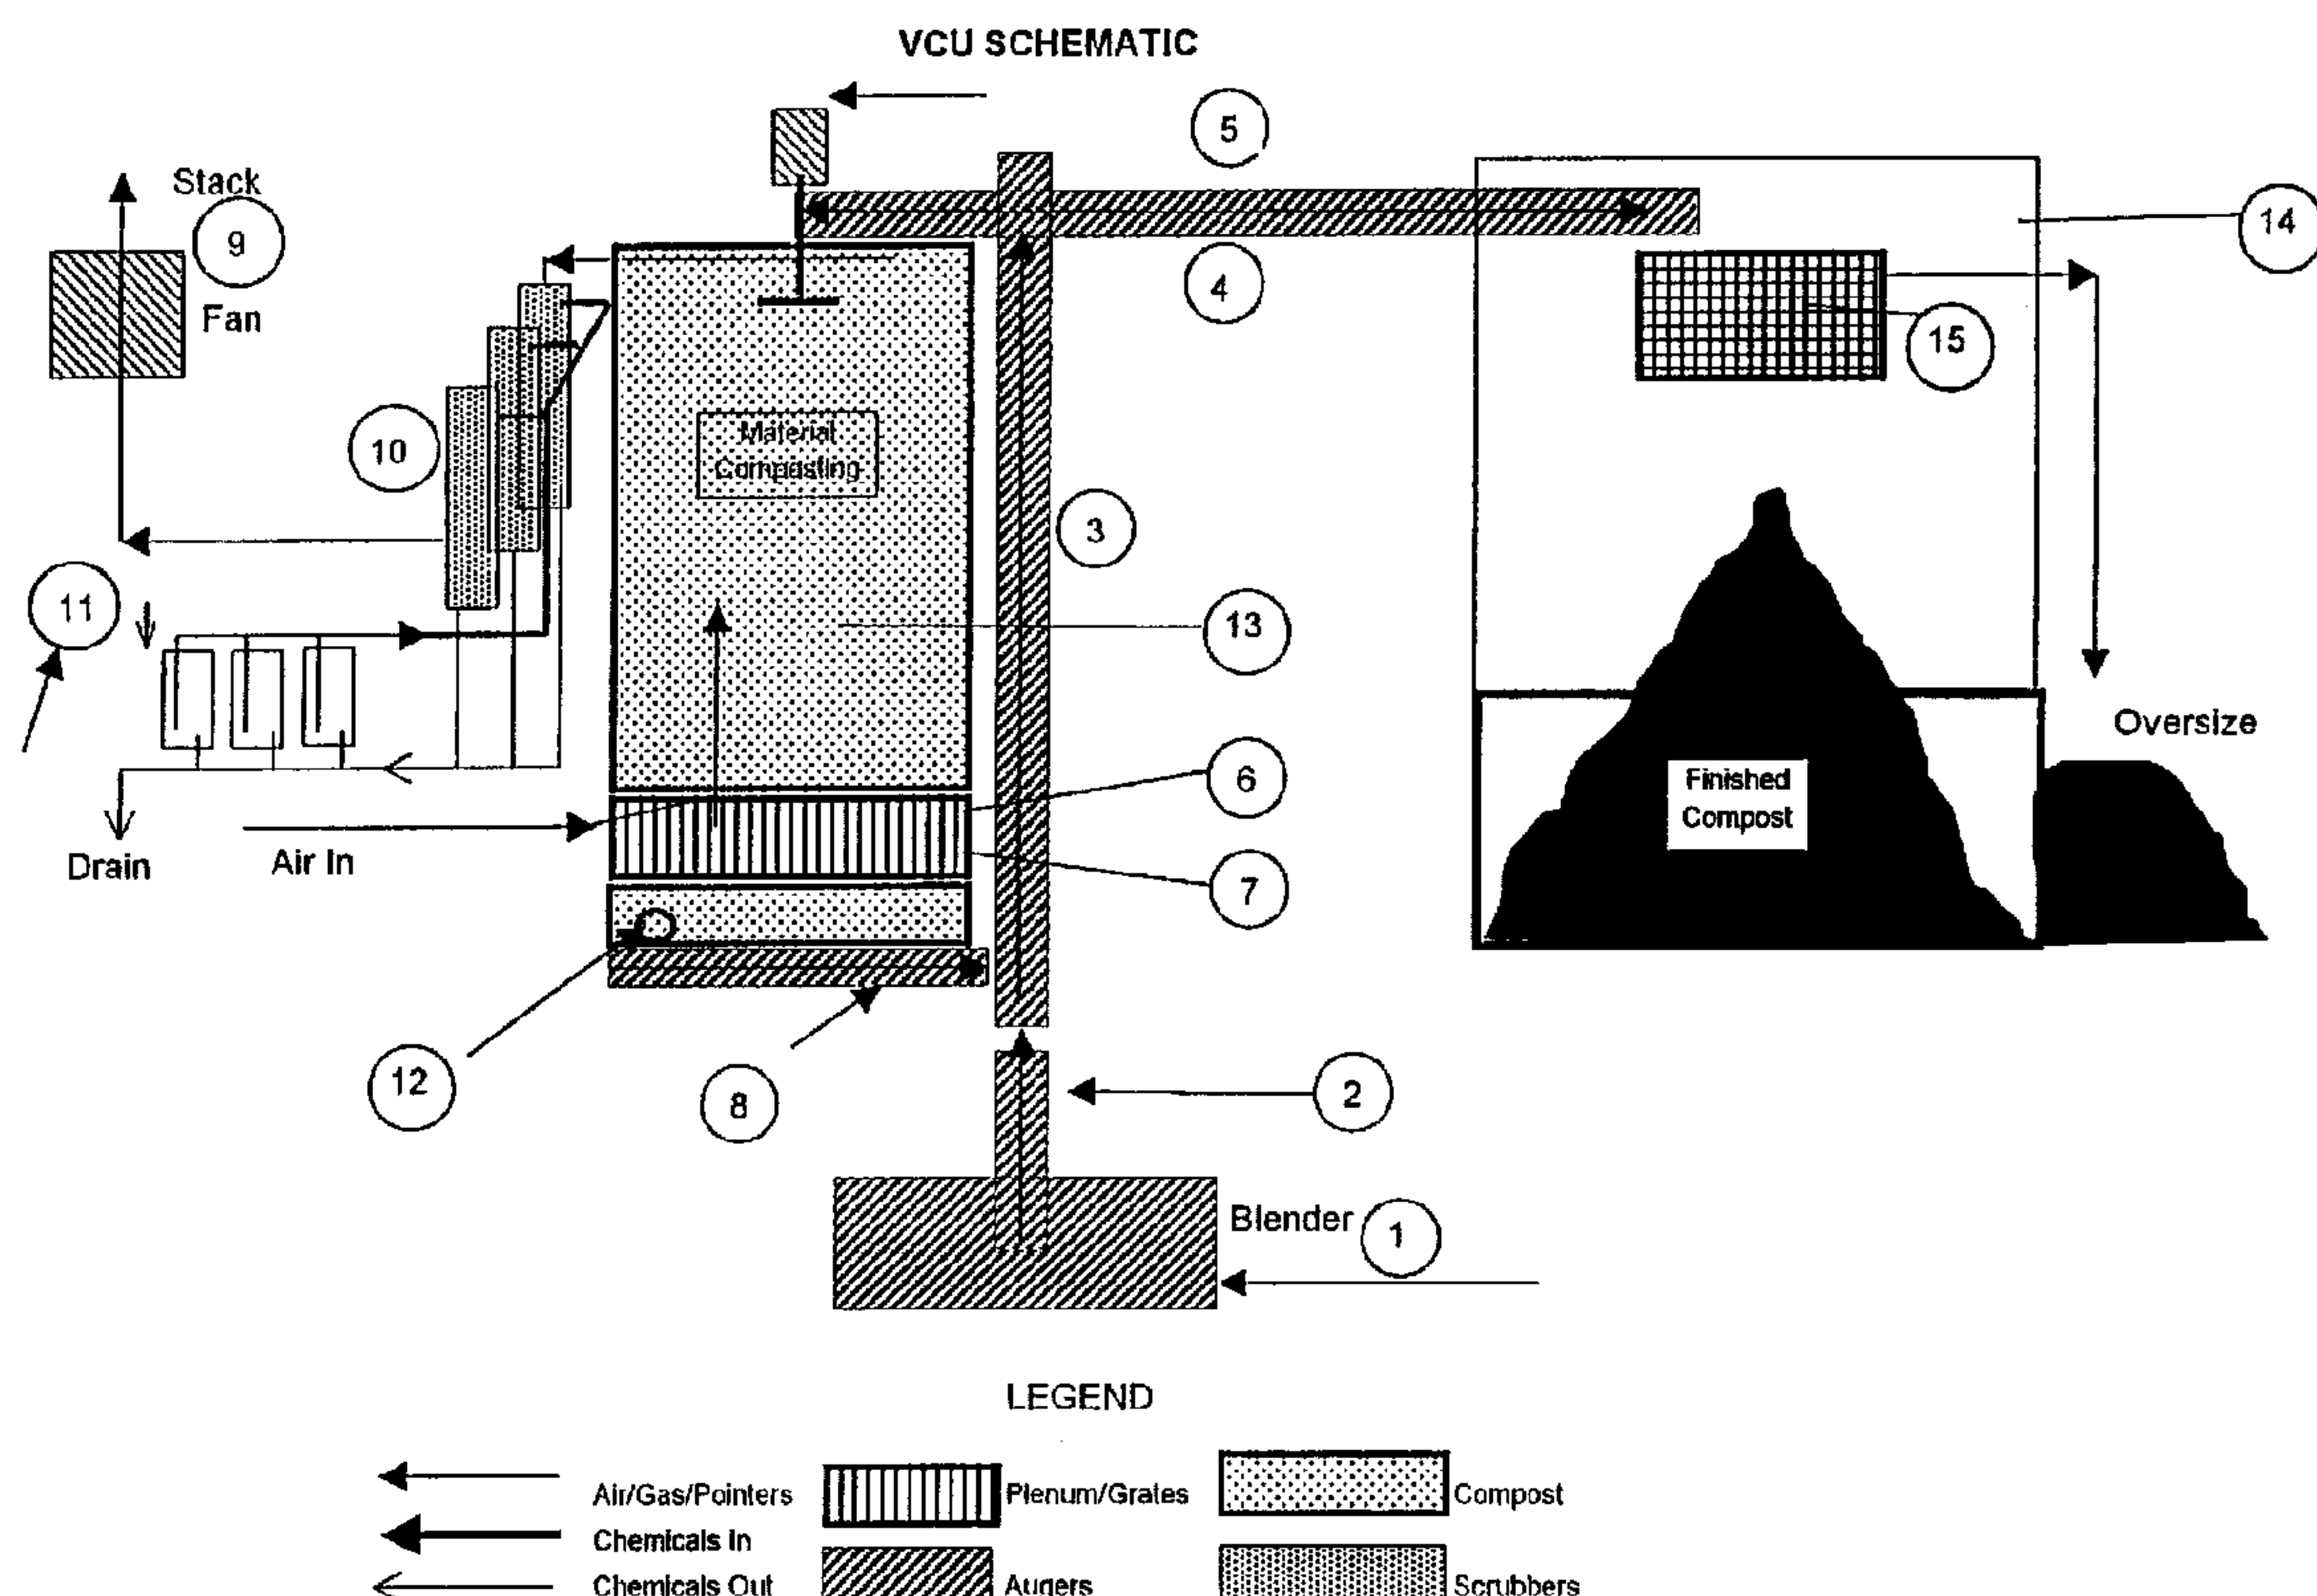

(57) **Abrégé/Abstract:**

A composting system and method incorporating a vertical insulated composting tower with one or more compartments. The base of each compartment being fitted with a plenum and grate through which air is self induced and output is regularly removed. The method of composting biodegradable waste material utilises a plug flow principle including inducing low air flow rates through a compost pile using column energy. The method utilises high temperature pyro/thermopylic micro-organism activity in the compost pile and retaining pile energy above stoichiometric levels by controlling the induced air flow. Evolved gas extraction is utilised in the compost pile and constant biofilm is maintained by combined cycle anaerobic/aerobic operation.



PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C05F 17/02, 9/02	A1	(11) International Publication Number: WO 99/03799 (43) International Publication Date: 28 January 1999 (28.01.99)
(21) International Application Number: PCT/NZ98/00107 (22) International Filing Date: 20 July 1998 (20.07.98) (30) Priority Data: 328373 18 July 1997 (18.07.97) NZ (71) Applicant (for all designated States except US): WILLSON BROWN ASSOCIATES LIMITED [NZ/NZ]; 46 Rockfield Road, Penrose, Auckland (NZ). (72) Inventors; and (75) Inventors/Applicants (for US only): BROWN, Paul [NZ/NZ]; 46 Rockfield Road, Penrose, Auckland (NZ). WILLSON, Graham, Fairlie [NZ/NZ]; 3 Mary Anne Muller Crescent, Stoke, Nelson (NZ). (74) Agents: HAWKINS, Michael, Howard et al.; Baldwin Shelston Waters, NCR Building, 342 Lambton Quay, Wellington (NZ).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>
(54) Title: IMPROVEMENTS TO MECHANICAL COMPOSTING (57) Abstract A composting system and method incorporating a vertical insulated composting tower with one or more compartments. The base of each compartment being fitted with a plenum and grate through which air is self induced and output is regularly removed. The method of composting biodegradable waste material utilises a plug flow principle including inducing low air flow rates through a compost pile using column energy. The method utilises high temperature pyro/thermopylic micro-organism activity in the compost pile and retaining pile energy above stoichiometric levels by controlling the induced air flow. Evolved gas extraction is utilised in the compost pile and constant biofilm is maintained by combined cycle anaerobic/aerobic operation.		

- 1 -

VERTICAL INSULATED COMPOSTING APPARATUS AND METHOD

FIELD OF THE INVENTION

The invention relates to improved composting and particularly to an improved
5 mechanical composting machine or system.

BACKGROUND TO THE INVENTION

At present biomass and, in particular food waste, wood waste, wood chips,
sewage sludge and even some hazardous wastes and other materials are difficult
10 to handle particularly in bulk.

A number of composting systems are currently available for handling this type of
material, however most of these are costly and produce odour, which means
that the machines must be located in the countryside, away from urban areas.

15

Composting of biomass has been practised for thousands of years in various
forms. Some composting is natural, as occurs in the humification of material
decaying by biological action in natural environments. Mankind has made many
attempts to enhance and speed up this process using manually assembled heaps
20 of organic matter and, more recently, mechanical devices. This has arisen from
the centralisation of populations and the urban concentration of organic wastes
from farm produce generally destined for landfill or sewage ponds. This is
opposed to the more recent need to reduce landfill volumes because of their cost
of establishment and operation and remediation of sewage ponds after their
25 useful life has ended or urban encroachment has made them unpopular.

Recycling organic matter as compost is an important feature of a sustainable future for the planet. Whatever form of fertigation used, organic matter provides essential nutrient holding capacity as it is broken down by soil organisms and this is a feature of all natural and undistributed ecosystems in their cycles of growth,
5 death and decay.

It is a feature of currently mechanized composting that the materials to be composted are agitated and a large amount of air, and therefore energy, is consumed in these processes. The number of current Patents and prior art are
10 too numerous to detail but we refer to an important compilation of composting processes by Robert T. Haug. "The Practical Handbook of Compost Engineering", Lewis Publishers 1993. ISBN #0-87371-373-7. In this work can be found a complete guide to the science and mechanics of composting including accelerated mechanical systems.

15

An object of the invention is therefore to provide a low cost composting system suitable for a range of biomass and further, usable as a biofiltration system.

Further objects and advantages of the invention will become apparent from the
20 following descriptions which are given by way of example only.

SUMMARY OF THE INVENTION


According to one aspect of the invention there is provided a composting system
25 incorporating a vertical, insulated and parallel sided composting apparatus with one or more similar chambers for bacterial and fungal breakdown of biodegradable materials, wherein a rate of an air flow provided by naturally induced upward draft due to the energy retained in the composting biomass by said insulation is stoichiometrically matched to biological oxygen demand plus an
30 excess of between three and seven percent, a base of the or each chamber being fitted with a mechanical compost removal mechanism through which said air flow is induced and output is regularly removed.

According to another aspect of the invention there is provided a method of composting biodegradable waste material including providing a vertical, insulated and parallel sided composting tower with one or more similar chambers suitable for bacterial and fungal breakdown of biodegradable materials; the method
5 further including inducing, by naturally induced upward draft due to the energy retained in the composting biomass by said insulation, an air flow at a rate stoichiometrically matched to biological oxygen demand plus an excess of between three and seven percent, providing a mechanical compost removal mechanism through which said air flow is induced and; regularly removing output
10 from said removal mechanism.

Operation of the composting system is continuous and operates on a plug flow principle using controlled shrinkage of biomass materials during their descent through the vertical chamber such that the effects of pressure on the walls of the
15 chamber means that straight sided walls can be used instead of negatively inclined walls as is commonly known in the art and this simplifies construction methods and reduces costs.

The system is hereinafter referred to as a VCU or Vertical Composting Unit.
20

A second chamber if included can be used for compost maturation and operates in the same manner as the first chamber or, with modular configuration, many individual units can be run in parallel with one feed system.

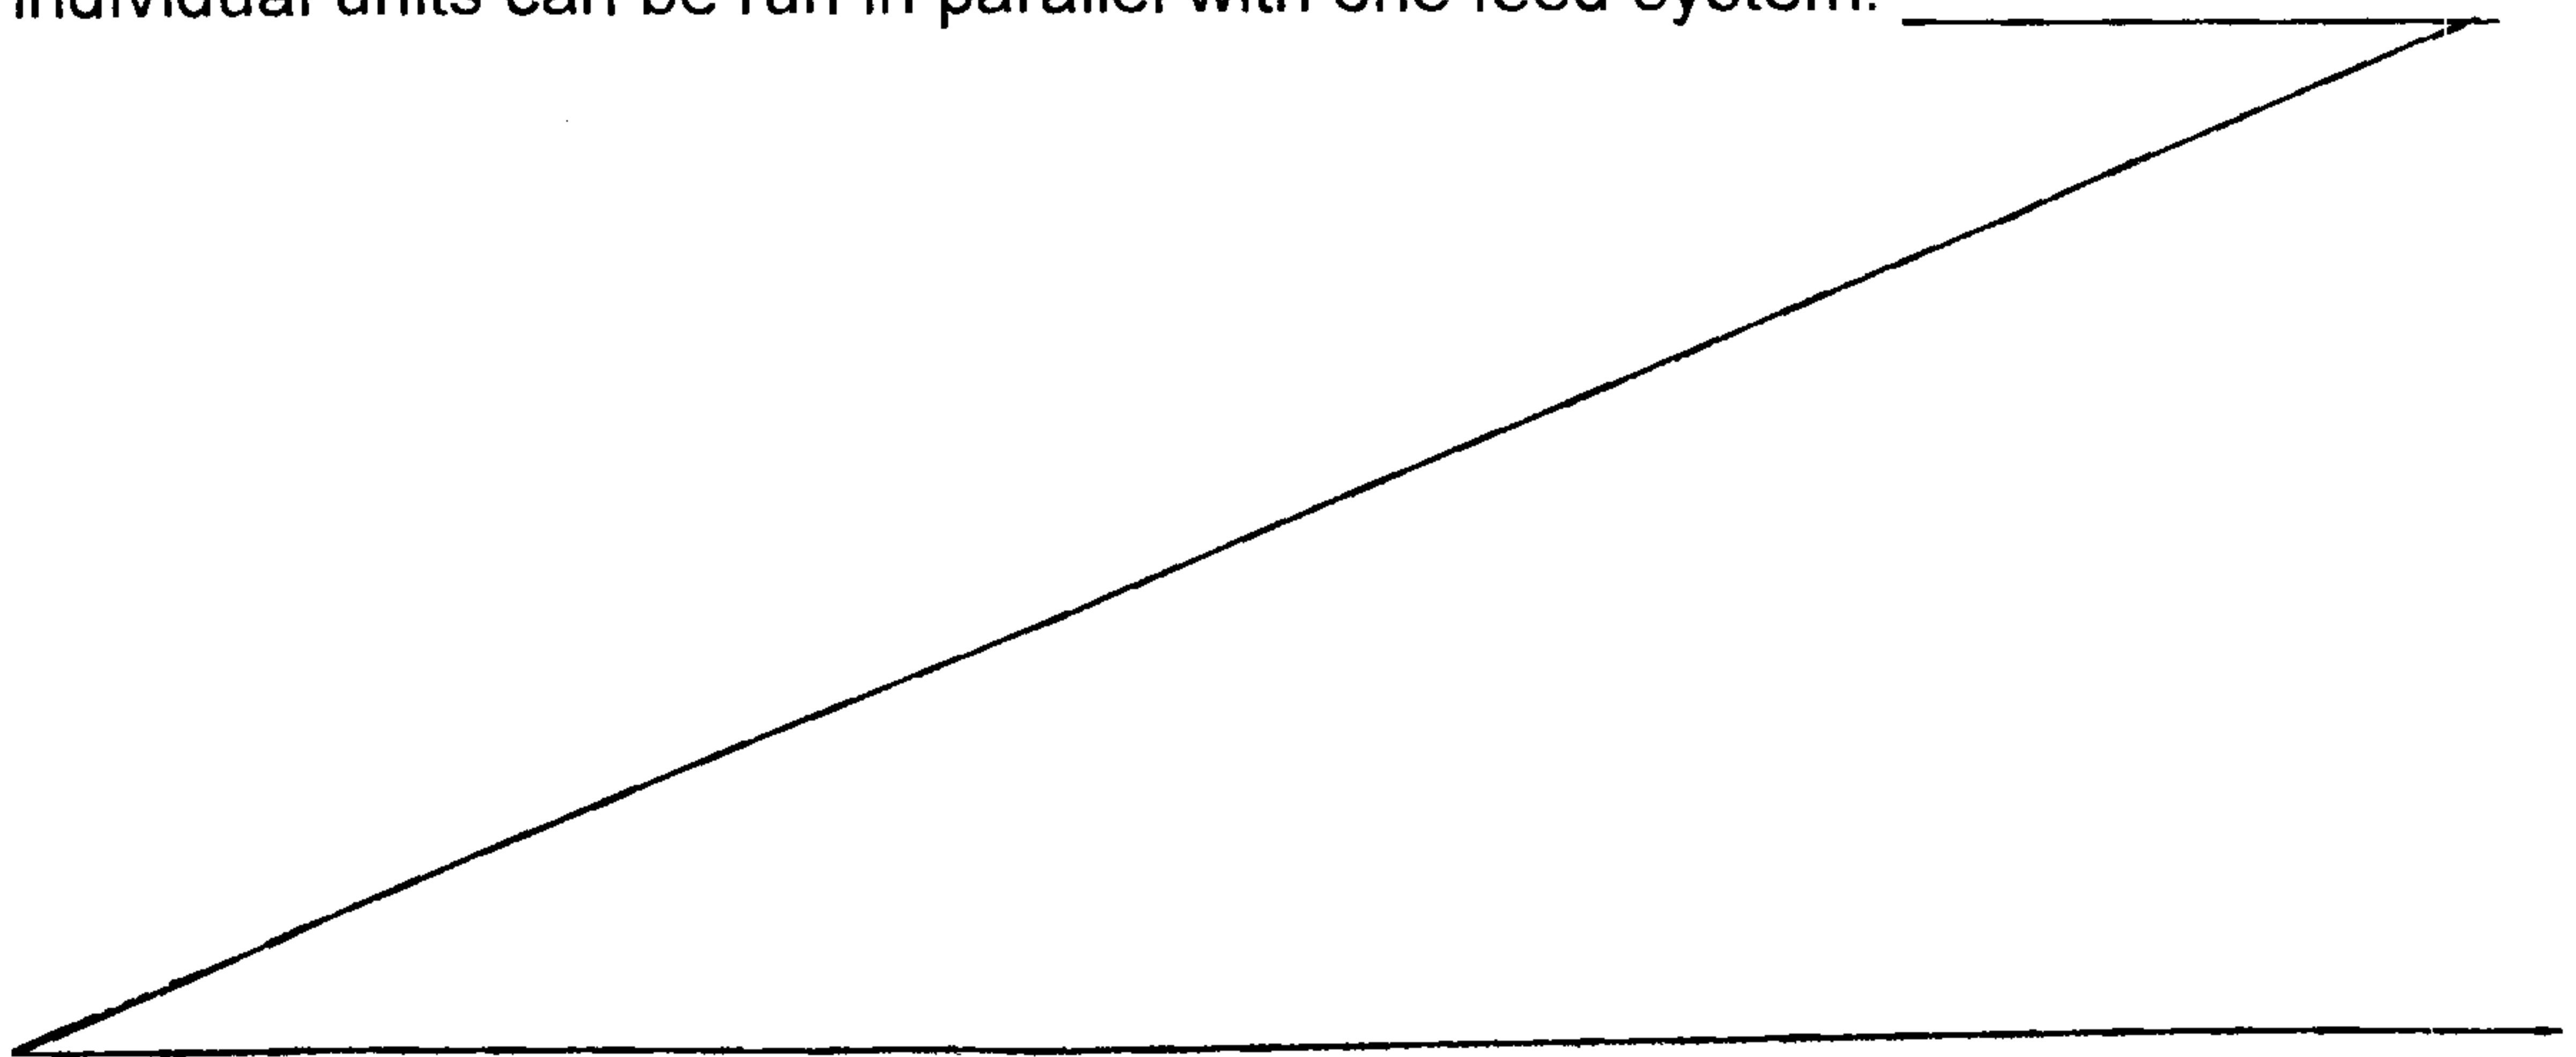

The base of each compartment is fitted with a plenum and grate system to control air injection and removal of daily output.

- 5 Retained pile energy (7.8 G Joules in a 65m³ VCU) induces air intake above stoichiometric levels. A naturally induced excess air rate and evolved gas is controlled by a fan with integral condenser/scrubber for condensate removal and odour control assurance wherever this might be required or mandated by legal requirements.

10

The continuous-flow vertical composting tower with the insulated thermic pile is advantageously held clear of the ground, freely allowing air induction through the base of the tower, at rates close to the metabolic requirement of the bacteria in the pile, (the stoichiometrically determined oxygen requirement). The tower can
15 be mounted on a plinth or open ended supporting structure, or over an over cavity to achieve this.

- The VCU is weather sealed and vermin proof. Low output gas rates reduce scrubber size and cost and increases odour removal efficiency. Odour levels in
20 tests are typically 1-2DT (Dilutions to Threshold) in the stack.

- The biomass material requires no agitation, considerably reducing odour potential. Harnessing the lowest air rates in any modern in-vessel system known to the applicants, the VCU promotes high activity of pyrohpilic and thermophilic
25 bacteria and fungi with both aerobic and anaerobic activity occurring simultaneously. The normally smelly gases produced by anaerobic activity are

- 5 -

used as food by the high temperature thermophylic and pyrophylic bacteria in the upper zones thus allowing the VCU to filter itself of odours.

The VCU allows for the maintenance of an active moisture bound biofilm from input to output (typically 45-50% w/w) which prevents the possibility of pyrolysis and encourages microbe activity. This makes it especially efficient for processing green wastes combined with food wastes or sewage sludge.

The term "biofilm" as used herein means a thin film of water coating a discrete medium. Organic molecules in gas phase are adsorbed to the medium via the biofilm in which micro-organisms can live and consume the organic molecules in a process called "biofiltration".

Low air flow reduces the cooling effect of incoming air in the bottom layers giving high efficiency for effective working heights.

High induced air rates commonly used render the bottom levels of a vertical thermic pile ineffective thus adding to the height of the column for productive outputs. High induced air rates further increase the velocity of the gases through the column which leads to the entrainment and emission of bioaerosol particulates and smelly off-gas.

A second chamber (larger installations) is designed for compost maturation and operates on the same principles as the first chamber. Being modular, the system can be run so that one chamber feeds another for purposes of compost maturation. This method may be required on difficult combinations of biomass

- 6 -

inputs or in cases of soil remediation. Such slow cycles become split between two VCU's in series to avoid excessive compaction of material.

5 A gated walking floor passes material down from processing in a controlled daily cycle.

The composting system is continuous giving a daily cycle of input and output activities for staff (2 staff up to 40m³/D output). The VCU produces compost ready for use in 14 days but can be used as an accelerator (7 - 10 days) where
10 windrow and subsequent pile turning are viable (80-200m³/D with present designs).

The major advantage of the VCU is the ability to site the system closer to urban areas reducing collection and disposal costs and enhancing sales of finished
15 products. It also enables the use of corporate, commercial and institutional units on-site.

The VCU uses the "insulated" pile energy to "induce draft" to the "plug flow" thermic pile column. In larger sizes the pile energy amounts to several thousand
20 gigajoules. The heat energy is enough to induce the "appropriate draft" via the inlet manifold, (controlled at "app. Draft plus 3-7% average"). The VCU principle is to extract only the evolved gas from the chamber processes, along with the small amount of naturally induced excess air.

25 Tests by the New South Wales Environmental Protection Authority show 3-7% excess air without the fan operating.

The applicants test results have shown that there are advantages in allowing anaerobic pockets of activity to develop during shrinkage/compaction processes in the vertical pile. This provides extra food sources for aerobic bacteria capable
5 of adsorbing this "food" in the gas phase or as dissolved in the biofilm. Particular gases formed by mesophilic bacteria and anaerobes are H_2S and CH_4 (hydrogen sulphide and methane) which are gases that normally lead to composting systems smelling and causing nuisance.

10 Furthermore, condensation on the inside of the vessel roof drops back into the composting biomass sustaining an active biofilm within the composting matrix. While rendering an output of higher moisture content than conventional systems, this biofilm serves two important functions. Firstly it allows an active moisture/solids interface for bacteria and fungi, including anaerobic bacteria,
15 down to the outlet. Secondly it allows an active moisture/gas-flow interface for those aerobic bacteria as mentioned above which obtain their food either in a "gas phase" at the surface of this biofilm or as dissolved within it. This action renders the process virtually completely self-filtering in respect of odours.

20 Conventional processes try to keep temperatures at under $65 - 70^{\circ}C$, using large volumes of air. This cools the microbial processes, retarding the beneficial high temperature micro-organisms and produces large amounts of off-gas from intermediate anaerobic reactions. It is this action which makes odour clean up
25 issues much larger and harder to control. The introduction of large amounts of excess air renders a vertical in-vessel composting system inefficient in its lower column section while requiring large amounts of energy.

The applicants computer model (Table 1.) predicts accurately the energy process and the amount of air required. This has been measured on a prototype unit by the New South Wales EPA.

5

Further aspects of the invention which should be considered in all its novel aspects will become apparent from the following description.

DESCRIPTION OF THE DRAWINGS

- 10 The following description will be with reference to a test compost unit an example of which is shown schematically in the accompanying drawing (Figure 1).

DESCRIPTION OF PREFERRED EXAMPLES

- 15 The specifications for such a unit (Figure 1) are set out below:

WO 99/03799

PCT/NZ98/00107

- 9 -

Typical Commercial Specifications: (Smaller Domestic and Institutional units not listed)

	Sizes:	Daily production rates (m3) of : 0.2, 1.0, 5.0, 25, 50, 100	
5		Accelerated production rates (m3) of : 0.5, 2.0, 10, 50, 200	
	Chamber Sizes:	5, 20, 50, 250, 500, 1000	
10	Air Use:	Typically 1.25 scm/min (42scfm)	
	Power Usage:	Air:	10 watts/m3
		Feeding/Shredder:	950 watts/m3
		Controls:	5 watts/m3
15			
	Feed System:	Materials to be processed are placed into a blender (1) to be mixed together with any additives. Blended material is then sent by the stuffing auger (2) to vertical (3) and transverse (4) augers. Input is distributed evenly by rotating disk (5). Automatic level control allows enough space to empty the feed system. The feed hopper is closed off after filling to maintain negative pressure throughout the system and avoid residual odours. A small batch of fresh green waste can be run through the system to scarify and clean out the blender and auger tubes.	
20			
25			

WO 99/03799

PCT/NZ98/00107

- 10 -

Inputs: Food waste, sewage sludge, some hazardous wastes, with bulking agent (shredded green waste or wood chips) to a maximum of 85% food waste/sludge w/w. Moisture content range 60% to 80%. Humic acid 60ml/m³ with Calcium Ammonium Nitrate at 150gm/m³, variable depending on percentage of food waste. Gypsum at 150gm/m³. Additives vary according to feed stock analysis. Magnesium Sulphate (Kieserite) is sometimes recommended.

10

Extraction Systems: Oscillating hydraulically operated grates (6) above plenums (7) which open for discharge into storage bin (not shown) underneath. A larger single chamber accelerator unit can have wheel loader access bins underneath. Larger systems can also have a floor sweep auger (12) and return auger (8) for discharge to a screening and oversize return arrangement, and a screening and oversize return arrangement, and finished compost storage as shown in Figure 1.

20

Cycle Times: 7 to 28 days depending on fineness of product required and method of maturation.

Outputs: Self-mulching compost (unscreened) or graded in separate screening plant. Oversize can be used as additional bulking agent in recycle or pulverised. Compost yield at 10mm is

25

SUBSTITUTE SHEET (Rule 26)

WO 99/03799

PCT/NZ98/00107

- 11 -

generally volume 85% with shredded green waste,
+ 10mm wood chip bulking agents are recycled after
screening. A system with a second maturation chamber
gives product ready for use without windrow curing.

5

In Figure 1 is shown a bunker (14). The bunker may be
covered on three sides with a roof. The bunker (14) may
include a screen and optional grinder (15).

10 Operating Temps: Primary Chamber (12)

Top: 80 - 85°C

Middle: 60 - 70°C

Bottom: 45 - 50°C

15 Filtration: Largely self-filtering through compost base material

combined with very low air rates. Odour potential is 1-2DT
at the fan outlet (9) when operating on food waste/green
waste. (Gaussian Dispersion Distance Model) – result is
therefore well below human detection thresholds at a
20 distance of 20 metres.

Outlet gas is optionally passed through a triple scrubber
(10) containing NaOH, NaOCl, CH₃COOH and water.

Scrubbers (10) can be standard packed spray towers.

25 Scrubber fluids are pump recirculated with tanks (11)

refilled as activity is neutralised by carry over. Economic

SUBSTITUTE SHEET (Rule 26)

- 12 -

5 tank sizes give approximately 12-18 months activity and are sealed and locked. Disposal is environmentally benign since chemicals are used to neutralise each other to pH 7. This cost effective gas scrubbing system needs only to be used on potentially aggressive bioremediation processing.

10 Normally a simple condensate filter is used. This is because the stack gases are so small compared with other systems that they have a very large dilution factor on release to atmosphere. Should any operational errors produce smelly gases, the effect would be rapidly dispersed into ambient air without noticeable effects to those close by.

15 Condensates: Test traps are located in the condensers. Condensate is clear and almost tasteless at pH 5 (average) with no pathogens or nitrates and suitable for irrigation or storm water disposal (Cawthron Institute Tests and NSW EPA Tests).

20 Leachates: None unless input moisture exceeds 80%. Leachate pH 6.5 with some brown humus solids and some nitrate. Biological oxygen demand (BOD) is negligible. Leachates are easily controlled by input management but can be contained for recycle if they occur.

25

WO 99/03799

PCT/NZ98/00107

- 13 -

- Pathogens: Assumed to be pathogen free and pathogen resistant at 14 day minimum composting period because of composting conditions. Pathogen screens by the Cawthron Institute and NSW EPA confirm zero pathogens.
- 5
- Toxicity Index: 90% root length (AS3743).
- Germination: 99% (AS3743) (applies to system with maturation chamber producing finished compost).
- 10
- Weed Seeds: Zero survival after 14 days.
- Post Curing Time: Ready to use in 14 to 28 days depending on unit location and maturation requirements. The VCU can be used for
- 15 accelerated breakdown of food waste and sludge (7-10 days) but a large area may be required for windrowing for post curing. This type of use of the system means the operation can not be located close to urban areas.
- 20 Staffing: Two persons up to 500m3 model.

The applicants have found in operating the test unit (Typical of Fig.1) that a very large volume of food scraps or sludge can be mixed with shredded green waste. Food slops bring the moisture content of the mix to an ideal level (green waste is

25 generally less than 50% moisture and food wastes up to 90%). Large food scraps such as potatoes, pumpkins, onions etc. need to be shredded. This

- 14 -

drastically reduces bulk, increases surface area, and allows a mix to contain up to 80% food wastes/sludge by weight without greatly increasing overall volume.

This is because the mashed up food waste occupies most of what would otherwise be void space between shredded green waste particles. Higher than
5 80% moisture can sometimes lead to a small amount of leachate (pH 6.5) in the bottom plenum 8 and a slightly damper product. This moisture flashes off very quickly when the material is withdrawn (45 - 55°C) and has a natural earthy odour. Even with food scraps there is little ammonium nitrate or sulphurous odour detectable in the compost. By controlling inputs and additives, the main
10 cation predominating is calcium without detectable losses of nitrogen. Nutrient analysis (AS3743) is high for all nutrients and trace element balance but depends on the combination and analysis of material fed into the system.

The fungal growth is prolific in the bottom zones because of the moist
15 conditions provided. The applicants have identified both iron and sulphur converting fungi. The applicants believe, and will test further, the premise that extended high temperature zones exhibit favourable processing conditions and that there may be some pyrophylllic decomposer organisms which have not yet been identified. These research projects will be conducted at the University of
20 NSW.

Initial discussion with Cawthron Institute in respect of testing these fungi indicate that the VCU does produce an enhanced environment for
pyro/thermophyles, hitherto not typed, which aggressively attack ligno-cellulosic
25 structures in these ideal conditions provided by the VCU.

- 15 -

A computer model has been used and set out on attached drawing labelled Table 1 is the physical thermodynamic model for the example of a single chamber module version VCU shown in Figure 1.

5 Advantages of the present invention are as follows:

Enclosed insulated vertical pile;

Plug flow principles;

Insulated pile energy;

Column pile energy induced draft,

10 Low air rates;

High temperatures - utilising pyro/thermophylic micro-organism activities

Evolved gas extraction only;

Constant biofilm maintenance;

15 Low energy demand/consumption;

Small footprint/land use to production capacity;

Combined cycle anaerobic/aerobic operation;

Negligible odour and emission production;

Modular design --- several chambers with one feed/discharge system.

20

Key Principles embodied in the invention:

Low air rates, high temperatures;

Low power consumption;

Low operating costs;

25 Small footprint and land use;

Negligible odour (urban locations possible);

- 16 -

Column energy air induction;

Fan removal of evolved gases only;

Modular design: one feed system for several units.

- 5 Where in the description a particular mechanical or other integer has been described it is envisaged that their alternatives are included as if they were individually setforth.

- Particular examples of the invention have been described and it is envisaged that
10 improvements and modifications can take place without departing from the scope thereof.

Thus by this invention there is provided an improved mechanical composting unit.

15

CLAIMS

1. A composting system incorporating a vertical, insulated and parallel sided composting apparatus with one or more similar chambers for bacterial and fungal breakdown of biodegradable materials, wherein a rate of an air flow provided by naturally induced upward draft due to the energy retained in the composting biomass by said insulation is stoichiometrically matched to biological oxygen demand plus an excess of between three and seven percent, a base of the or each chamber being fitted with a mechanical compost removal mechanism through which said air flow is induced and output is regularly removed.
2. A composting system as claimed in Claim 1 wherein operation can be continuous with composting biomass descending in a plug flow manner using controlled shrinkage and wall pressure relief due to biological ablation of material, without internal agitation by mechanical means, during its descent through the one or more vertical chambers, combined with periodic removal of output.
3. A composting system as claimed in Claim 1 or Claim 2 in which the naturally induced excess air and off gases evolved through biological activity are modulated by a fan with integral condenser/scrubber for odour control assurance and condensate removal from the off gas stream for disposal or reuse within the one or more chambers to maintain minimum average pile moisture levels of between forty five and fifty percent (w/w), thereby securing the maintenance of a biofilm or matrix particulate moisture coating providing habitat for micro-organisms capable of high temperature gas phase conversions as a food source in high temperature zones and supporting fungal activity in lower temperature zones.
4. A composting system as claimed in Claim 3 wherein the majority of high temperature gas phase conversions at the interface of the gas/biofilm are of

anaerobically produced odorous gases and are carried out by aerobic bacteria of the pyrophilic and thermophilic groups which obtain their oxygen directly from the passing gas stream or as oxygen dissolved within the biofilm, resulting in undesirable odours being consumed within the composting mass and thereby removed from the exhaust gas before release.


5. The composting system of any one of Claims 1 to 4 wherein the rate of said air flow is sufficiently low to provide high thermal efficiency at the effective working height and to thereby promote fungal attack of remaining organic matter in the lower temperature bottom layers.

6. A method of composting biodegradable waste material including providing a vertical, insulated and parallel sided composting tower with one or more similar chambers suitable for bacterial and fungal breakdown of biodegradable materials; the method further including inducing, by naturally induced upward draft due to the energy retained in the composting biomass by said insulation, an air flow at a rate stoichiometrically matched to biological oxygen demand plus an excess of between three and seven percent, providing a mechanical compost removal mechanism through which said air flow is induced and; regularly removing output from said removal mechanism.

7. The method of composting biodegradable waste material as claimed in Claim 6 including:

providing suitable habitat within the upper level of the compost pile for pyrophilic and thermophilic micro-organisms through biofilm maintenance and moisture content control allowing combined aerobic and anaerobic activity within the pile without undesirable odours escaping to atmosphere; and regularly inputting and removing material with cycle retention times in accordance with output product characteristics and the degree of product maturity required.

- 5 8. The method of composting biodegradable waste of Claim 6 or 7 including the step of maintaining a matrix coating moisture bound biofilm from input to output which prevents the possibility of pyrolysis and encourages high temperature micro-organism activity.
- 10 9. The method of composting biodegradable waste material of any one of Claims 6 to 8 wherein the rate of said air flow is sufficiently low to provide high thermal efficiency at the effective working height and to thereby promote fungal attack of remaining organic matter in the lower temperature bottom layers.

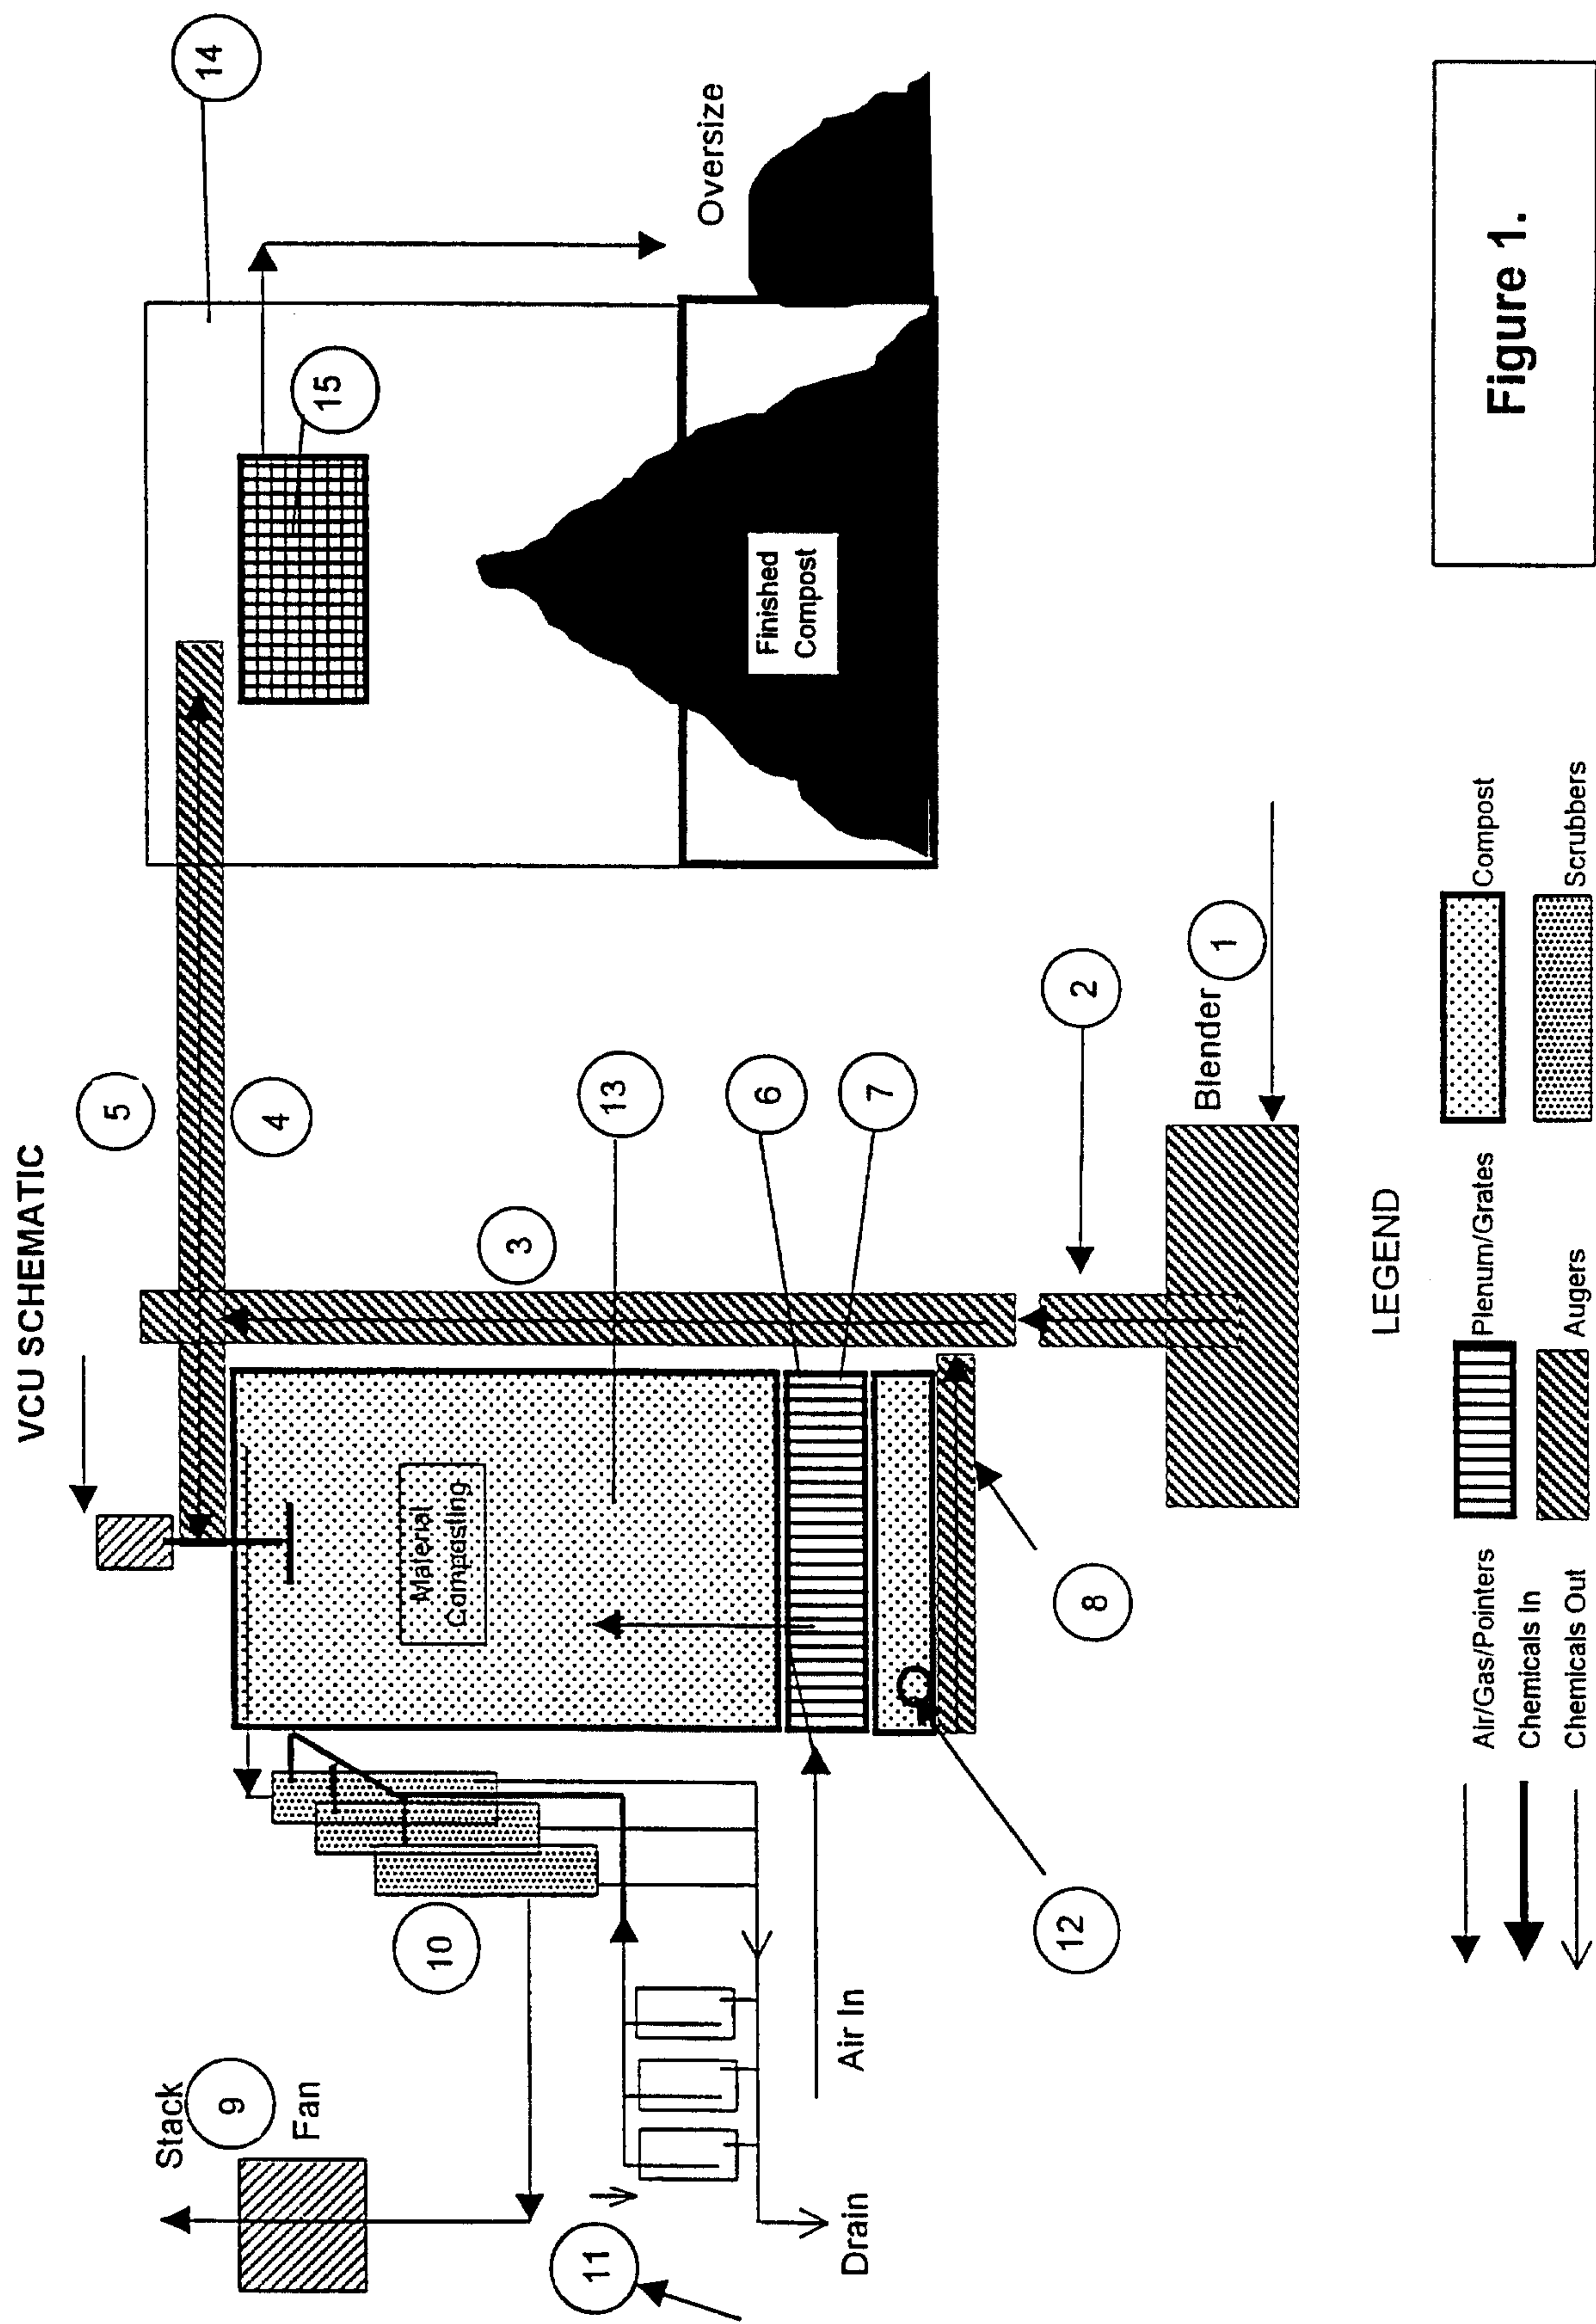

WO 99/03799

PCT/NZ98/00107

2/3

Table 1a.

VCU IN VESSEL COMPOST SYSTEM
Physical And Thermodynamic Model

VCU # Panels (One Side)	2.2 m	VCU MODEL 20S	
Putrescible % of Total	50 %		
Putrescible % Solids (w/w)	25 %	Client: NSW University Code: UNI File Version: 2	
Greenwaste Moisture Content	50 %		
Primary Chamber Output MC	30 %		
Bulk Density Greenwaste Input	0.30		
Density Sludge Dry Solids	0.83		
Ambient Temperature	14 Deg C		
Column Zone Temperatures			
Zone A Temp(Measured)	80 Deg C		
Zone B Temp(Measured)	75 Deg C		
Zone C Temp(Measured)	67 Deg C		
Zone D Temp(Measured)	45 Deg C		
Ultimate Analysis For C & H		Column Hgt	5 m
Carbon %	49 %	Product MC	45 %
Hydrogen %	9 %	Condensate	8 L/m3/day
		Cycle Time	14 Days
Average Temperature Rise	52.75 DegC		126.95 Degf
Ambient	14 DegC		57.2 Degf

WO 99/03799

PCT/NZ98/00107

3/3


Table 1b.
VCU IN VESSEL COMPOST SYSTEM

VCU DATA			
Volume (Main Chamber)	24 m3	24 m3	1.73
Daily Mass Greenwaste (wet)	1,162 lbs	519 kg	(m3/day)
Daily Mass Sludge (wet)	1,162 lbs	519 kg	
Daily Mass Total (Wet)	2,323 lbs	1,037 kg	
Plenum Loading	3.24 psi	0.29 Kg/cm2	Total Ground Loading(kg) 13,501
Mass of Water	1,452 lbs	648 kg	
Dry Mass Total	871 lbs	389 kg	
Overall Moisture Content	62.50 % (w/w)	62.50 % (w/w)	
Total Energy In Column	2,773,766 btu	2,926 MJ	31,213
Energy Use (Heating/Evaporation)	81,519 btu/hr	23 Kw/hr	67,932
Oxygen For Microbe Energy	25.36 lbs/hr	11.32 Kg/hr	
Oxygen Excess	0.76 lbs/hr	0.34 Kg/hr	
Total Oxygen In	26.12 lbs/hr	11.66 Kg/hr	
Nitrogen In	98 lbs/hr	44 Kg/hr	
Total Air Required	124.39 lbs/hr	55.53 Kg/hr	
Specific Air Volume Per Hour	64.17 scf/m3	1.89 scm/m3	634
Fan Spec @ 3" swg	42.63 scfm	1.25 scm/min	0.05
Daily Water Input	1,452 lbs/day	648 Kg/day	
Daily Water Evaporation	1,149 lbs/day	513 Kg/day	5.65%
Daily OD Solids Loss	163 lbs/day	73 Kg/day	1.34%
Predicted Stack Temperature	63 Degf	17 DegC	
Column Velocity	0.842 f/min	0.259 m/min	
Column Velocity	0.014 f/sec	0.004 m/sec	
OD Solids Loss Rate	7 lbs/hr	3 Kg/hr	
OD Solids Loss	7 lbs/m3/Day	3 kg/m3/D	
Water Reduction	47 lbs/m3/Day	21 kg/m3/D	
Daily Drop	1.53 m3 (Est)	452 kg	

Check Digits	355.13	0.158	6.79
--------------	--------	-------	------

Microbe Fuel Consumed (Primary Chamber)	lbs/hr	moles	scfm	acfm	
Carbon	5.435	0.453			
Hydrogen	1.359	0.679			
Oxygen Required	25.361	0.793	4.742	5.382	Stack Gas
Excess Oxygen	0.761	0.024	0.142	0.161	0.44%
(Evaporation) H2O	47.854	2.659	15.907	18.052	
(Oxidation) H2O	10.869	0.604	3.613	4.100	
CO2	14.492	0.329	1.971	2.237	8.41%
N2	98.270	3.510	20.999	23.831	
Stack Products From Oxidation	172.246	7.125	42.632	48.220	

VCU SCHEMATIC

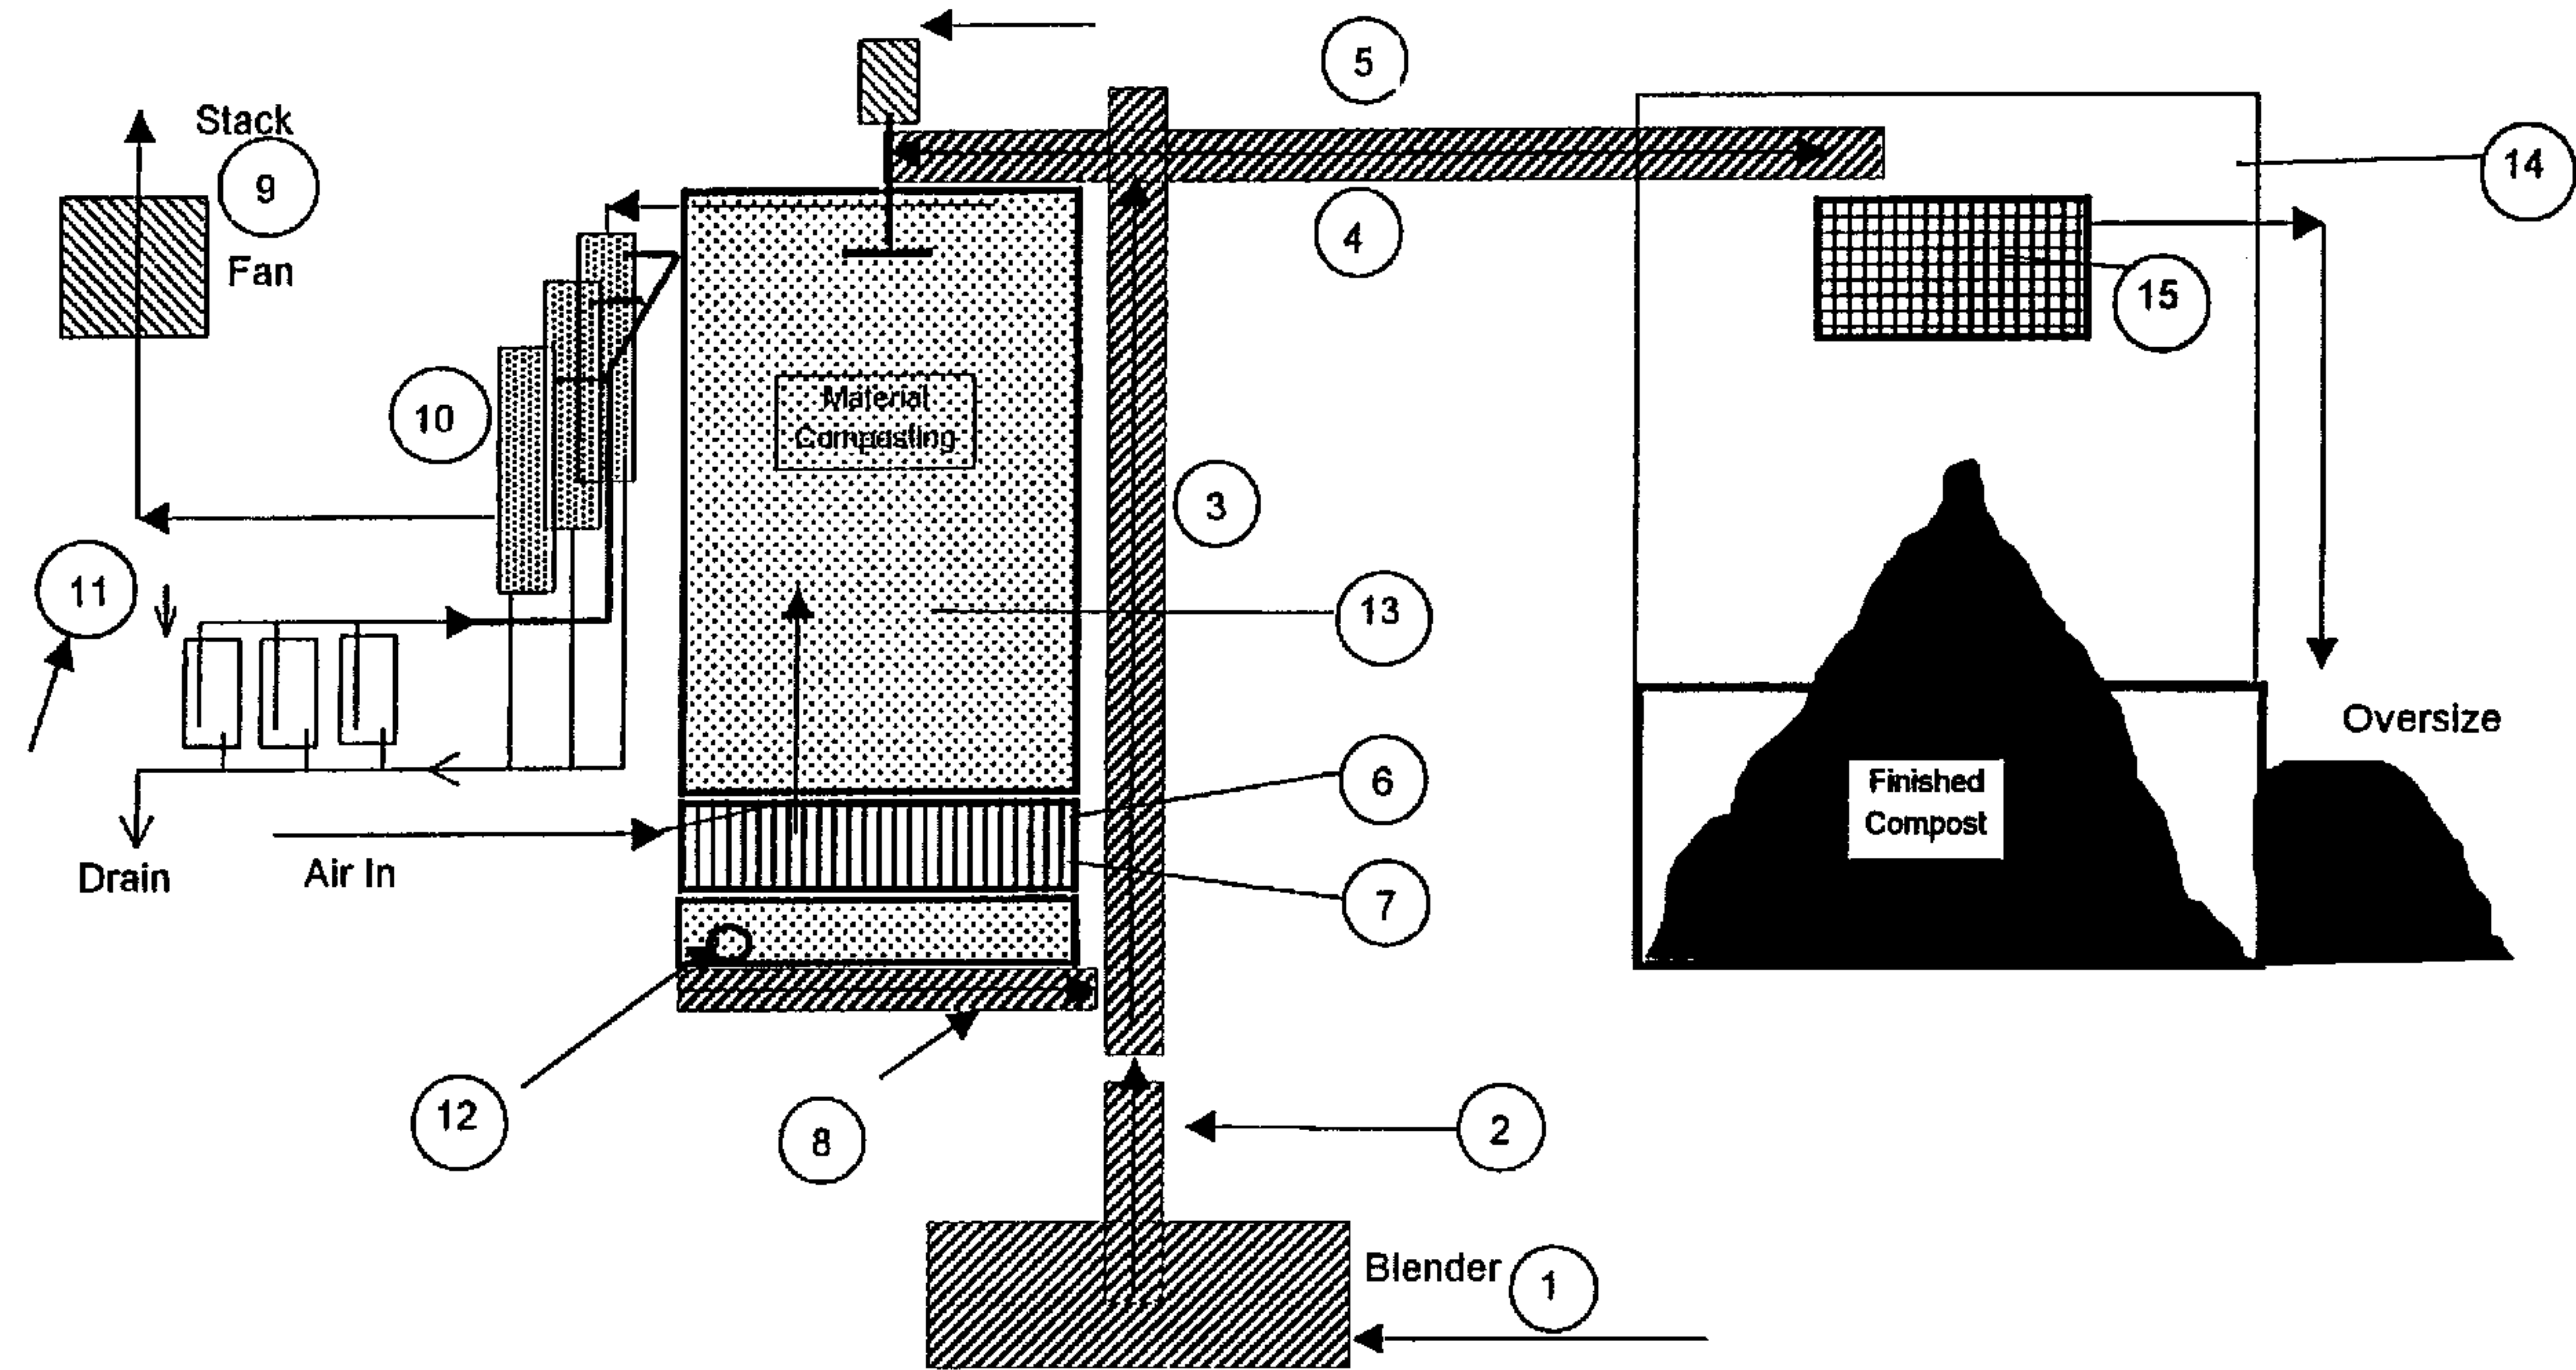

LEGEND

