

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 December 2005 (01.12.2005)


PCT

(10) International Publication Number
WO 2005/112869 A1

- (51) International Patent Classification⁷: **A61J 9/04**
- (21) International Application Number: PCT/GB2005/001883
- (22) International Filing Date: 17 May 2005 (17.05.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0410993.0 17 May 2004 (17.05.2004) GB
- (71) Applicant (for all designated States except US): **JACKEL INTERNATIONAL LIMITED** [GB/GB]; Dudley Lane, Cramlington, Northumberland NE23 7RH (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **REES, Arnold, Edward** [GB/GB]; 9 Melmerby Close, Whitebridge Park, Gosforth, Newcastle Upon Tyne NE3 5JA (GB).
- (74) Agents: **ROBERTS, Gwilym, Vaughan et al.**; Kilburn & Strode, 20 Red Lion Street, London WC1R 4PJ (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: FEEDING BOTTLE

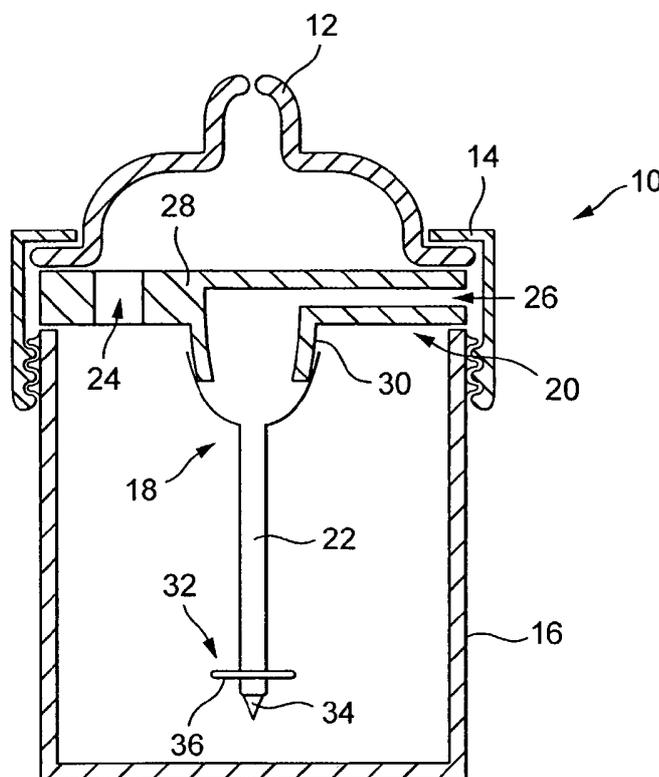

(57) Abstract: A feeding bottle (10) comprises a container (16), a teat (12) and a collar (14) to screw the teat (12) onto and seal the container (16). A vent assembly (18) is mounted between the teat (12) and the container (16) and includes a vent tube (22) passing down to a position close to the base of the container (16) and having a one way valve (34) allowing air to pass into the container (16) on application of suction to the teat (12) but preventing liquid flowing into the vent tube (22), together with a valve flange (36) acting as an anti-choke member.

WO 2005/112869 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

Feeding Bottle

The invention relates to a feeding bottle for example a vented feeding bottle.

5 Conventional feeding bottles comprise a container and a teat held on the container by a screw-on collar. A problem with conventional feeding bottles is that as an infant sucks on the teat a negative pressure builds up within the container as a result of which it becomes progressively more difficult to feed which can give rise to problems such as colic.

10

Various solutions have been proposed for alleviating the problem for example providing valves allowing air ingress. One example of such a solution is described in European patent application EP0845971. According to this document a feeding bottle includes a reservoir tube communicating at its upper
15 end with a vent to atmosphere. The reservoir tube has a bulbous upper reservoir portion with an air tube projecting down into it from the air vent. An air conduit portion projects down from the reservoir portion to a point close to the bottom of the container. In the upright position the container is filled with liquid nearly to the height of the reservoir portion. When the container is
20 inverted the end of the air conduit portion projects above the level of the liquid and the liquid previously in the air conduit portion drains into the reservoir portion and sits below the end of the air tube. As a result an air passage is provided from the vent via the air tube into the reservoir portion and through the air conduit to the bottle such that pressure equalisation is provided when the
25 infant drinks. However, there are various disadvantages to this arrangement. Firstly a very complex arrangement is required. Furthermore because no valves are provided, if the infant distorts the teat while feeding for example by biting down on it there is less resistance and liquid is pushed away from the teat.

Another approach is described in US6499615 which describes a bottle having an angled neck and a valved vent tube. Once again complex and specialised components are required for this arrangement which also presents cleaning
5 difficulties and even choking hazards as a result of the numerous small parts involved.

Furthermore, in known valved, vented feeding bottles, during the bottle feeding process the pressures fluctuate between positive and negative throughout the
10 feed. When the infant bites down on or compresses the teat during feeding this action creates positive pressure in the bottle as the milk is pushed back into the bottle, acting on the valve to close it and directing milk flow out of the teat. As the infant creates suction to draw more milk from the bottle a negative pressure is induced in the bottle as milk is dispensed and when this occurs the valve at
15 the end of the tube opens allowing air into the bottle. However in known systems a relatively significant negative pressure is required before the valve opens to allow air to vent such that the infant must suck unnaturally hard before pressure equalisation takes place. Accordingly known systems do not closely mimic natural feeding.

20

The invention is set out in the claims. Because the pressure at which the valve opens is minimised, the valve can vent at the very low negative pressures associated with infant feeding as a result of which the bottle provides a close similarity to natural breast feeding.

25

Furthermore, because of the provision of an anti-choke portion, feeding hazards are reduced and it is found also that the anti-choke portion provides a useful stirring/mixing member. Furthermore, by providing a feeding bottle insert with

a sealing portion which itself provides a liquid passage as well as an air vent passage a simple modular constructions is provided.

Embodiments of the invention will now be described by way of example, with
5 reference to the figures of which:

Fig. 1 is a sectional side view of a feeding bottle according to a first
embodiment of the present invention;

Fig. 2 is a sectional view of a detail of the feeding bottle insert shown in figure
1;

10 Fig. 3a is a sectional perspective view of a valve and valve flange assembly
according to an embodiment of the present invention;

Fig. 3b is a top plan view of the valve and valve flange assembly of Fig. 3a;

Fig. 3c is a front view of the valve and valve flange assembly of Fig. 3a;

Fig. 3d is a side view of the valve and valve flange assembly of Fig. 3a;

15 Fig. 3e is a bottom plan view of the valve and valve flange assembly of Fig. 3a;

Fig. 4a is a perspective view of an alternative valve and valve flange assembly
according to and embodiment of the present invention;

Fig. 4b is a bottom plan view of the valve and valve flange assembly of Fig. 4a;

Fig. 4c is a side view of the valve and valve flange assembly of Fig. 4a;

20 Fig. 5a is a sectional side view of a feeding bottle according to a second
embodiment of the present invention;

Fig. 5b is plan view of the teat according to the second embodiment of the
present invention;

25 Fig. 6a is a sectional side view of a detail of the feeding bottle according to a
third embodiment of the present invention;

Fig. 6b is plan view of the teat according to the third embodiment of the present
invention;

Fig. 7a is a plan view of an alternative feeding bottle head portion;

Fig. 7b is a sectional view along the line A – A of the feeding bottle head portion of Fig. 7a;

Fig. 7c is a sectional view along the line B – B of the feeding bottle head portion of Fig. 7a and

5 Fig. 7d is a perspective view of the feeding bottle head portion of Fig. 7a.

Referring to figure 1, a feeding bottle designated generally 10 includes a teat 12 mounted by a screw collar 14 onto a container 16. As is conventional, the collar 14 includes a central orifice through which the teat protrudes and the teat
10 includes a flange of similar diameter to the container such that when the collar is screwed down a seal is formed by pressure of the collar on the flange of the teat.

The feeding bottle 10 further includes a vent assembly in the form of a neck
15 insert 18 including a head portion 20 and a vent tube 22 projecting downwardly from the head portion. The head portion 20 includes a liquid conduit 24 providing communication between the container 16 and the teat 12 such that when the feeding bottle is inverted liquid passes via the liquid conduit 24 from the container into the teat allowing the infant to feed. Isolated from the liquid
20 conduit 24 the head portion also includes an air passage 26 communicating with the vent tube 22 at one end and with atmosphere at the other end.

The head portion 20 includes an upper flange portion 28 of similar diameter to the container and arranged to fit on the lip of the container to be gripped in a
25 liquid tight condition by the flange of the teat 12 pressed down by the collar 14 as described above. The flange portion 28 is of sufficient thickness to allow a generally radially extending bore to be formed inwardly from the cylindrical side wall providing the air passage 26. The air passage opens to atmosphere via the screw threads of the collar 14 and is sealed against liquid passage by

virtue of the seal formed by the neck insert flange portion 28 against the lip of the container 16.

5 The air passage 26 communicates at its other end with a formation 30 provided on the lower face of the head portion 20 comprising an open-ended chamber on to which the vent tube 22 is an airtight push fit. The vent tube 22 extends downwardly nearly to the bottom of the container and includes at its lower end 32 a one-way valve 34. In the embodiment shown the valve 34 comprises a duck-billed valve of well-known type which allows passage of air in one 10 direction, into the container, but prevents the flow of liquid in the opposite direction, into the vent tube 22. Also provided at the lower end 32 of the vent tube 22 is a valve flange 36 which in the embodiment shown is in fact formed integrally with the valve 34 and both of which are a push fit or otherwise airtight connection to the vent tube 22. The valve flange 36 can form, for 15 example, a ring around and concentric with the vent tube 22 and joined thereto by a web or ribs. The valve flange allows improved mixing and prevents a choking hazard in the event that the valve 34 should become detached for any reason.

20 In use the neck insert 18 is assembled (or pre-assembled) by fitting the valve 34 and flange 36 on to the vent tube 22 and fitting the vent tube 22 at its other end to the corresponding formation 30 of the head portion 20. The container 16 is filled and the neck insert 18 is placed on the upper lip of the container 16. The teat 12 is then placed on top of the neck insert 18 and the assembly is liquid 25 sealed by screwing the collar 14 down as discussed in more detail above. When mixing is required this can be facilitated by virtue of the valve flange 36. When the container is inverted liquid passes from the container 16 through the liquid conduit 24 in the neck insert 18 into the teat 12. When the infant sucks or feeds on the teat 12, causing a pressure drop in the container 16, air enters

the container via the air passage 26, the vent tube 22 and the valve 34 such that pressure is equalised and a vacuum build-up is greatly reduced.

5 Referring to figure 2 the head portion 20 of the neck insert 18 is shown in more detail. As can be seen the head portion includes a flange portion 28 that is generally disc shaped and provides a seal around the neck of the container 16 (not shown) and a liquid conduit 24 in the direction perpendicular to the plane of the flange. The air passage 26 passes through the cylindrical wall of the flange portion 28 generally to the centre of the flange portion 28 providing a
10 passage to the formation 30 and vent tube 22 (not shown).

Referring to Figs. 3a to 3e the valve 34 and valve flange 36 are shown in more detail and in particular it will be seen that a ring-shaped or other profile of valve flange 36 can be provided and mounted in any appropriate manner for
15 example by virtue of spokes extending from the central hub 35 on which the valve 34 is mounted or by an apertured web 37 as shown.

Figures 4a, 4b and 4c show an alternative one way vent valve that can be implemented in the embodiments of present invention. The hemispherical
20 valve 40 comprises a hemispherical shaped membrane with a central slit 41 which allows the passage of air therethrough. Any suitable cut such as a cross is also possible. The slit or cut is dimensioned to allow low pressure air venting as well as high temperature sealing.

25 The hemispherical valve of Figures 4a to 4c could also be used for other applications. For example, it could be located on the apex of the teat to allow the passage of fluid therethrough or on the flange of the teat to allow passage of air therethrough.

The dimension, material and construction of the valve 34 or 40 is of particular significance in obtaining a natural feeding action for the bottle. Most valving systems currently known allow a teat to vent at approximately 50 mB (milliBar) by virtue of the closing force determined by the resilience of the valve walls surrounding the slit, for example because of their stiffness. As a result, in use, the infant must exert an unnaturally high sucking force before venting can take place which can give rise to problems and results in sucking action more powerful than that required in natural feeding. However in known systems such a high resilient closing force is required to ensure that the valve does not leak milk into the vent tube, for example when the infant exerts squeezing pressure on the teat.

The valve 34 or 40 according to the present invention, on the other hand, is constructed such that a negative pressure in the region of 1 to 25 mB, more preferably 5 to 15 mB and most preferably 10 mB will be sufficient to open the valve to allow venting when the infant sucks on the bottle, requiring significantly less suction by the infant and a more natural feeding action. In particular this is allowed because of the recognition, according to the invention, that it is only necessary to prevent leakage of milk into the valve and vent tube when the bottle is in the upright position (and hence the valve is immersed in milk) whereas when the infant is sucking on the teat the bottle will tend to be inverted such that the valve is positioned above the level of the milk. Even if the valve opens when it is immersed in milk, no liquid will enter the valve and vent tube

Accordingly the invention recognises that a less significant resilient closing force is required for the valve because of the additional force applied to the sides of the valve when the bottle is standing upright as a result of the head of pressure exerted by the milk in the bottle. This force provides the additional

closing force sufficient to prevent leakage into the valve and vent tube. Accordingly when the infant is drinking from the bottle in its inverted position, because the valve has a smaller resilient closing force it opens under a lower negative pressure as a result of which a more natural feeding action is represented.

It will be appreciated that the skilled reader can fabricate an appropriate duck-billed valve or hemispherical valve to meet the criteria set out above using routine trial and experimentation, for example by varying the wall or membrane thickness and hence stiffness of valves and applying an appropriate negative pressure to obtain venting at the desired pressure and/or by immersing the valves in liquids of a similar density to that of milk or other fluids used by the infant with an appropriate head of pressure, for example 5 to 10 cm. Preferably the valve is fabricated so that it remains closed even with a low head of pressure, for example 5mm.

In the specific embodiment shown with respect to Figs. 3a to 3e, the valve is formed of pure silicone rubber with typical 30 to 60 Shore A hardness as available from any silicone supplier such as GE, Bayer, Dow, Wacker, Rhone Poulenc. Both liquid silicone and compression moulding silicone grades are suitable for the present invention as they provide high heat stability, important for repeated heat sterilising methods. Other grades may also be suitable. The valve walls having a valve thickness 0.5 mm. Viewed from the front the duck-billed valve forms the shape of an inverted triangle of height 10.0mm and base 8.0mm. Viewed from the side the duck-billed valve is generally rectangular in cross-section having a width of 7.0 mm. A slit is formed on the exit end of the valve by a cut with a length of 2.5mm to 4 mm. It is found that this configuration provides the desired operating range and in particular an ability to open up under a negative pressure of just 10 mB.

In the specific embodiment shown with respect to Figs. 4a to 4c, the hemispherical valve is formed of pure silicone rubber with typical 30 to 60 Shore A hardness as available from any silicone supplier such as GE, Bayer,
5 Dow, Wacker, Rhone Poulenc. Both liquid silicone and compression moulding silicone grades are suitable for the present invention as they provide high heat stability, important for repeated heat sterilising methods. Other grades may also be suitable. The key dimensions of the hemispherical valve 40 for high
10 temperature sealing are its radius, wall thickness, length of central slit 41 and material softness. The hemispherical valve has a radius of 2mm to 5mm, most preferably 3.5mm, and a wall thickness of 0.3mm to 0.7 mm, most preferably 0.5 mm. The central slit dimension is in the region of 2.5mm to 4.0 mm. It is found that this configuration provides low level suction but is also inherently strong enough to withstand pressures associated with liquid up to boiling point
15 temperature without leakage.

Figs. 5a and 5b show a second embodiment of the present invention in which there is an alternative air entry system. An air passage is formed by an air inlet aperture 51 on the flange of the teat 12 and an air conduit member 50
20 projecting downwardly of the teat. The air conduit member 50 provides communication between atmosphere and a vent tube 22 which is attached to the air conduit member with an airtight push fit. The air conduit member 50 can be integrally formed on the flange of the teat 12, for example in the form of a stalk projecting downwardly of the teat at the teat aperture 51. The teat 12 is
25 mounted by screw collar 14 onto container 16.

In a third embodiment of the present invention, as shown in Fig. 6, the air conduit member 56 is integrally formed on a support member, for example in the form of a sealing ring 52. The air conduit member 56 projects downwards

of the sealing ring 52. The sealing ring 52 is of similar diameter to container 16 and arranged to fit on the lip of the container to be gripped in a liquid tight condition by the flange of teat 12 pressed down by collar 14. The sealing ring 52 additionally provides support for the flange of the teat 12. A recess 55 is
5 formed on the flange of the teat 12 which leads to an air inlet aperture 53 in the teat. An air passage is formed between the flange recess 55 and the screw collar 14 which allows for the passage of air from atmosphere through the aperture 53 on the flange of the teat, which is suitably aligned above the conduit member 56 on the ring 52, and air conduit member 56 to the vent tube
10 22, as shown by dotted arrow 54. The vent tube 22 is attached to the air conduit member 56 with an airtight push fit.

Figs. 7a to 7d show an alternative feeding bottle insert head portion 70. As can be seen the head portion includes hub 71 connected to a rim 72 by spokes 73.
15 A liquid conduit is formed by spaces 74 between the hub 71, rim 72 and spokes 73. The liquid conduit provides communication between the container 16 and the teat 12 (neither shown) such that when the feeding bottle is inverted liquid passes from the container through the spaces 74 and into the teat allowing an infant to feed.

20 At least one of the spokes 75 is of sufficient thickness to allow a generally radial bore to be formed therethrough providing an air passage 76 to an open ended chamber 77. The air passage 76 communicates the vent tube 22 (not shown), which is attached to an open ended chamber 77 by push fit and
25 projects downwardly of the head portion 70, to the atmosphere via the screw threads of the collar 14 (not shown).

An annular recess 78 in the underside of the generally annular shaped rim 72 provides a liquid tight seal between the head portion and the container 12 (not

shown). The recess 78 is formed such that an inner surface 79 fits inside the container and an upper surface 80 rests on the lip of the container.

5 It will be appreciated that the various parts of the feeding bottles described above can be made with any appropriate material and in particular the teat 12, collar 14 and container 16 can be made of any standard material. The vent tube 22 is preferably made of generally rigid, inert material such as plastics material and the valve 34 or 40 can be made of silicone rubber or other appropriate material for the purposes required. The flange 36 is preferably made of rigid
10 plastic material allowing mixing and an anti-choke function and can be two-shot moulded with the valve 34 or 40 if appropriate. In the embodiments discussed various elements are connected by push fit allowing easy disassembly and cleaning but any appropriate manner of connection can be adopted and indeed where appropriate the various parts can be formed
15 integrally or non-detachably. The head portion 20 is preferably of a semi-rigid material ensuring that the air passage 26 is not closed by deformation of the flange portion 28 but at the same time a reliable liquid tight seal is provided at the neck of the container. Similarly the support member of the third embodiment is preferably of a semi-rigid material ensuring that the air conduit
20 member 56 is not closed by deformation when push fitted to the vent tube 22 but at the same time a reliable liquid tight seal is provided at the neck of the container 16.

25 The neck insert 18 can be integral with the container/collar or can be detachable as appropriate for cleaning purposes. In particular the neck insert 18 can provide a simple modular attachment to a standard feeding bottle and in many cases the existing collar can be used in cooperation with the neck insert 18. Alternatively the neck insert 18 can be provided with a specially tailored collar of appropriate depth to ensure good screw-thread engagement.

As a result of the arrangement described herein various advantages are provided. The valve allows natural feeding by venting at very low pressure. Because the vent tube 22 is valved at its base, pressure equalisation is provided
5 within the container without allowing the infant to deform the teat and push liquid away from the teat. Also, because the valve provides a liquid seal there is no risk of leakage of liquid through the neck insert and down the side of the container. A simple and modular arrangement is provided for the neck insert. By virtue of the addition of a valve flange mixing and stirring can be improved
10 whilst choke hazards can be avoided.

It will be appreciated by a skilled person that any appropriate type of valve can be used in place of the duck-billed valve or hemispherical valve described above. The dimensions of the container and the various components can be
15 varied as appropriate and the specific positioning of the various elements can be rearranged as appropriate. Similarly any other appropriate shape and positioning of the valve flange can be adopted. Although the discussion above is directed to a feeding bottle a similar approach can be used in any drinking vessel with any type of mouthpiece or feeding or drinking closure where the
20 desire is to provide pressure equalisation.

Claims

1. A feeding bottle comprising a container including a vent valve configured to vent at a negative pressure in the range 1 mB to 25 mB,
5 more preferably 5 mB to 15 mB and most preferably 10 mB.
2. A feeding bottle as claimed in claim 1 in which the vent valve is provided at the distal end of an air conduit extending from an air inlet end into the container.
10
3. A feeding bottle as claimed in claim 1 or claim 2 in which the vent valve comprises a duck-billed valve.
4. A feeding bottle as claimed in claim 1 or claim 2 in which the vent valve
15 comprises a hemispherical valve.
5. A feeding bottle comprising a container and an air conduit extending from an air inlet end into the container and having a vent valve at the distal end, the vent valve being configured to close as a result of the
20 pressure of a head of liquid in the container and to open under a negative pressure applied to the container.
6. A feeding bottle vent valve arranged to open to a venting position upon application of a pressure differential of between 1 mB and 25 mB, more
25 preferably 5 mB and 15 mB and most preferably approximately 10 mB.
7. A feeding bottle comprising a container and an air vent assembly comprising an air conduit extending from an air inlet end into the container and having a one way valve at the distal end, the air conduit

14

further including an anti-choke portion extending laterally from the air conduit at the distal end.

- 5
8. A feeding bottle as claimed in claim 7 in which the anti-choke portion is attached to the one way valve.
9. A feeding bottle as claimed in claim 8 in which the anti-choke portion and valve are integrally formed and removably attached to the air conduit.
- 10
10. A feeding bottle as claimed in claims 7 to 9 in which the vent assembly further includes a sealing portion sealable against the container opening, the sealing portion including a liquid passage between the container and the mouthpiece.
- 15
11. A feeding bottle as claimed in claim 10 in which the sealing portion further includes a vent passage providing an air passage to the air conduit.
- 20
12. A feeding bottle as claimed in any of claims 7 to 9 further comprising a teat having an air conduit member providing an air passage to the air conduit.
- 25
13. A feeding bottle as claimed in any of claims 7 to 9 further comprising a support member having an air conduit member providing an air passage to the air conduit.
14. A feeding bottle vent assembly comprising a sealing portion having separately a liquid passage and a vent passage, an air conduit

15

communicating with the vent passage and a one way valve mounted on the air conduit.

- 5 15. A vessel having a feeding or drinking closure having an air inlet aperture communicating with an air conduit member, and an air conduit communicating with the air conduit member.
16. A feeding bottle including a vent assembly as claimed in claim 14.
- 10 17. A vessel comprising a container, a mouthpiece mountable on the container and an air vent assembly comprising an air conduit extending from an air inlet end into the container and having a one way valve at the distal end, the air conduit further including an anti-choke portion extending laterally from the air conduit at the distal end.
- 15 18. A feeding bottle valve assembly comprising a valve and an anti-choke portion attached thereto.
- 20 19. A vessel comprising a container including a vent valve configured to vent at a negative pressure in the range 1 mB to 25 mB, more preferably 5 mB to 15 mB and most preferably 10 mB.
- 25 20. A hemispherical valve comprising a hemispherical member of wall thickness 0.3 mm to 0.7 mm, most preferably 0.5mm, with a radius 2mm to 5mm, most preferably 3.5 mm, and a slit of dimension 2.5 mm to 4.0 mm for passage of fluid there through.
21. A hemispherical valve as claimed in claim 20 wherein the hemispherical member is made of a material with Shore A hardness of 30 to 60.

22. A teat comprising the hemispherical valve of claim 20 or claim 21.
23. A teat as claimed in claim 22 wherein the hemispherical valve is located
5 on the apex of the teat to allow passage of fluid there through.
24. A teat as claimed in claim 22 wherein the hemispherical valve is located
on a flange portion of the teat to allow passage of air there through.
- 10 25. A feeding bottle, vent assembly valve or drinking vessel substantially as
herein described with reference to the drawings.

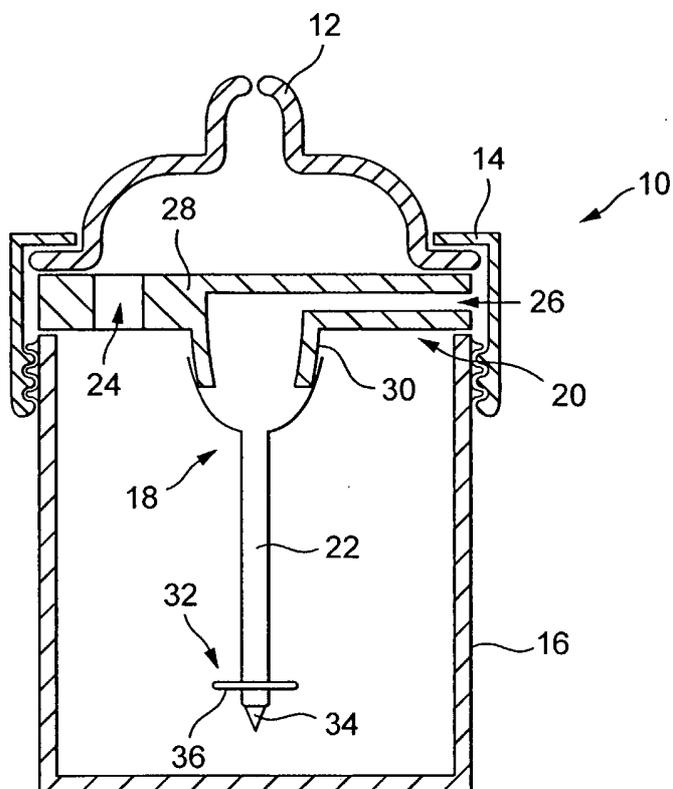


FIG. 1

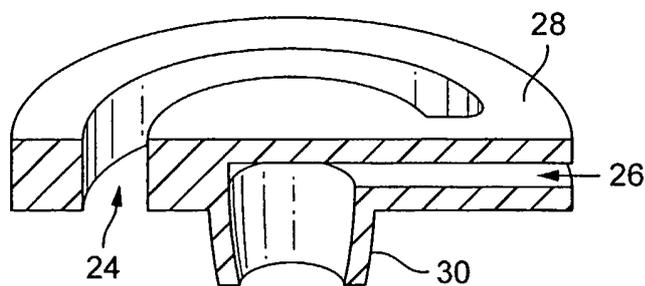


FIG. 2

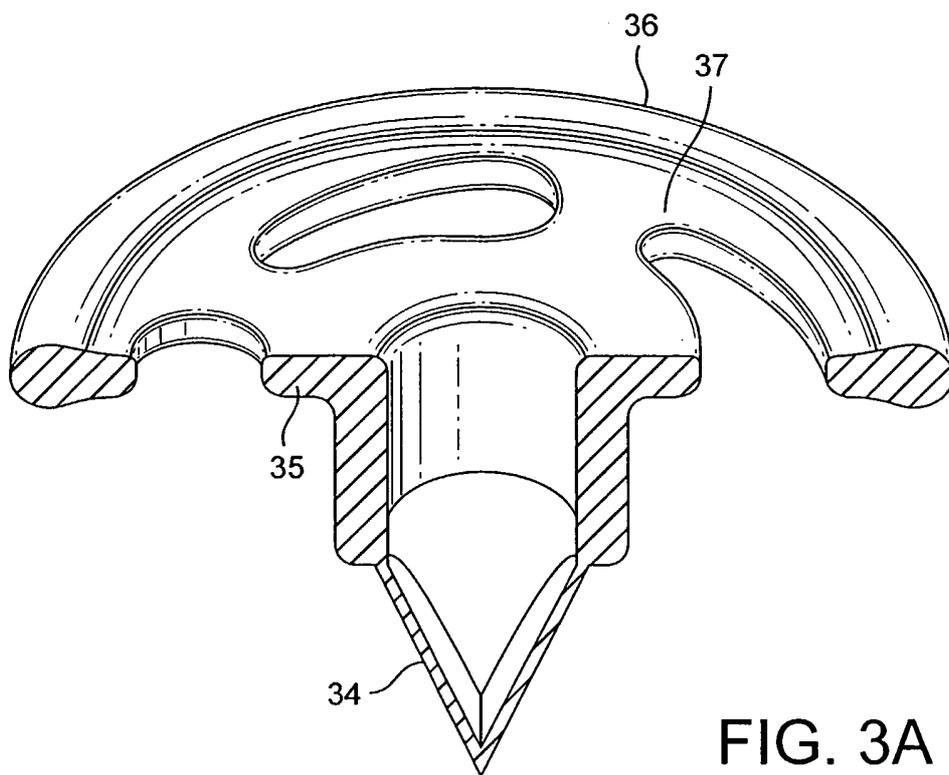


FIG. 3A

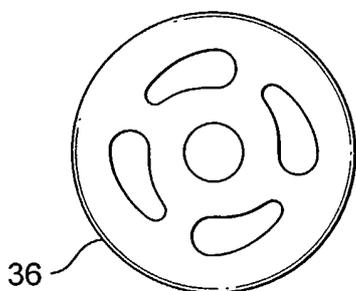


FIG. 3B

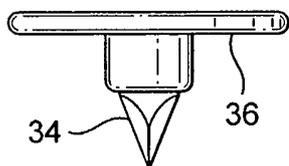


FIG. 3C

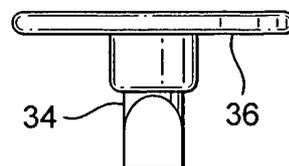


FIG. 3D

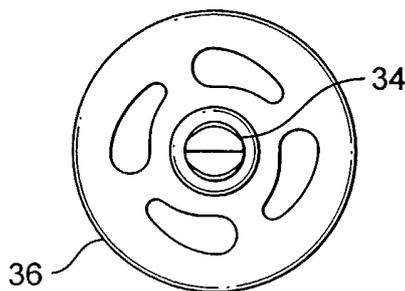


FIG. 3E

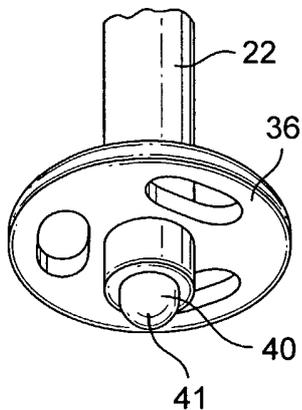


FIG. 4A

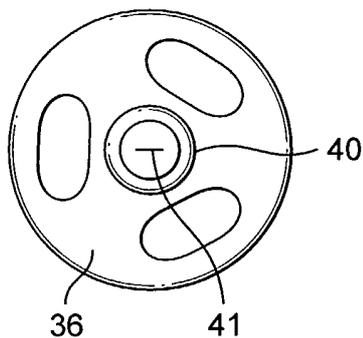


FIG. 4B

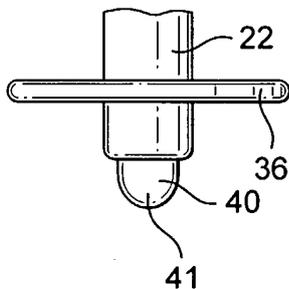


FIG. 4C

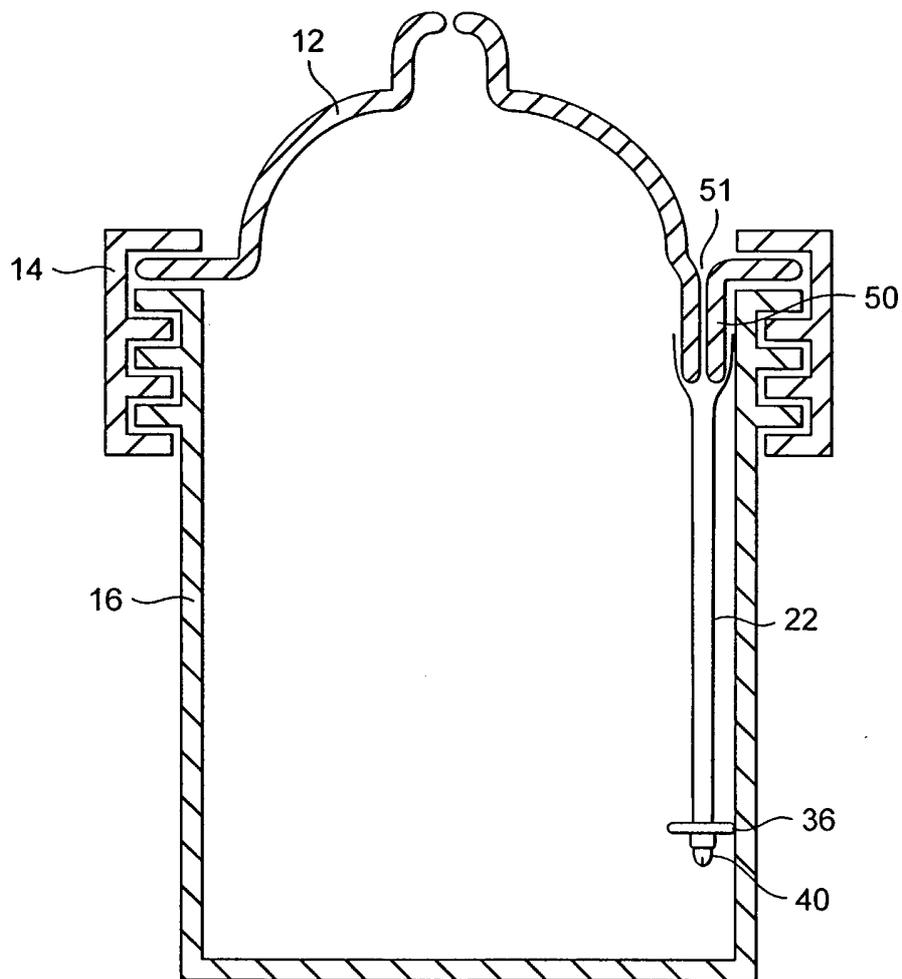


FIG. 5A

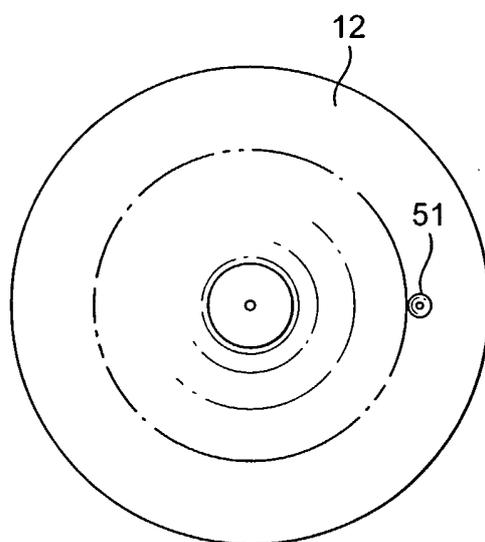


FIG. 5B

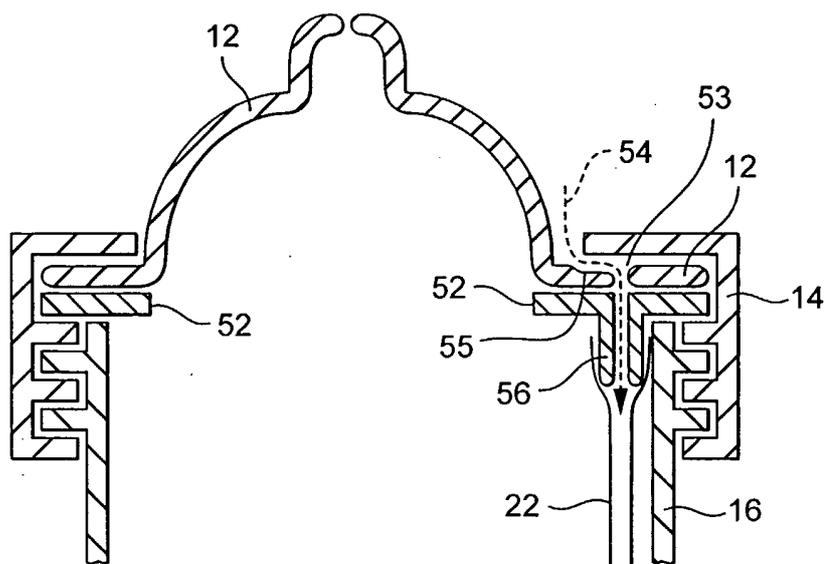


FIG. 6A

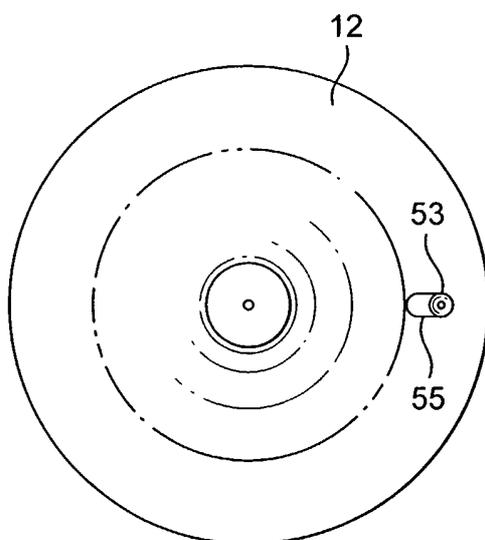


FIG. 6B

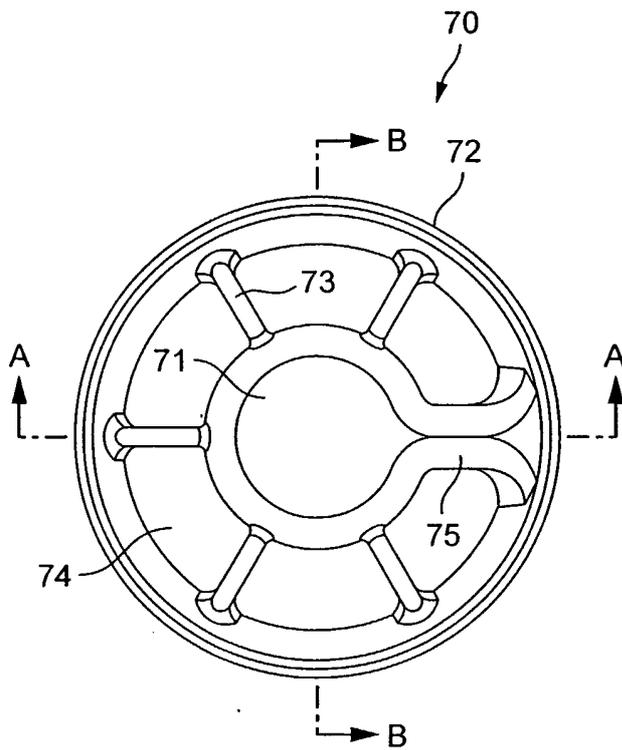


FIG. 7A

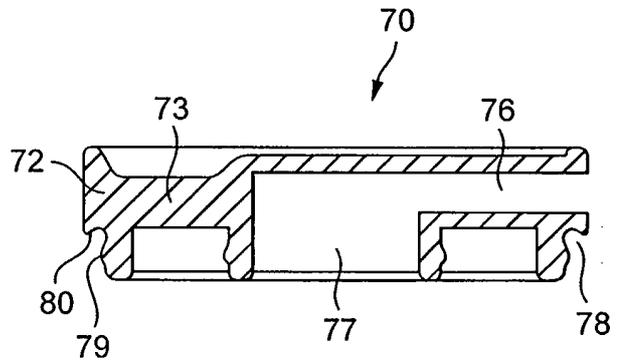


FIG. 7B

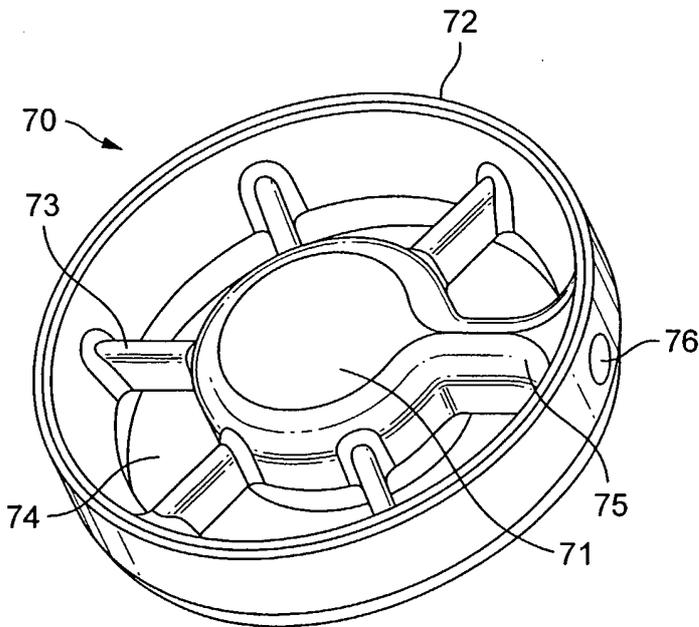


FIG. 7D

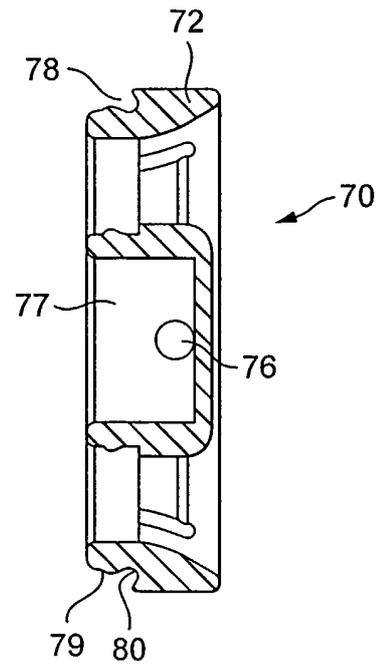


FIG. 7C

INTERNATIONAL SEARCH REPORT

PCT/GB2005/001883

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 A61J9/04		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC 7 A61J		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 207 349 A (RABE GEORGE B) 21 September 1965 (1965-09-21) column 2, line 32 - line 48; figure 1	1,2, 4-11, 13-19
X	DE 198 49 271 A1 (WILLMANN, HERBERT) 27 April 2000 (2000-04-27) the whole document	1,2, 4-11, 13-22
X	US 2004/089626 A1 (PYUN SUNG-HWAN) 13 May 2004 (2004-05-13) figures 3,8,25	1,2, 4-22,24
X	US 6 499 615 B1 (SZIEFF WILLIAM K ET AL) 31 December 2002 (2002-12-31) cited in the application column 4, line 8 - line 42; figure 2 -/--	1-3,5,6, 14-16,19
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.		
<input checked="" type="checkbox"/> Patent family members are listed in annex.		
° Special categories of cited documents :		
A document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family	
Date of the actual completion of the international search <p style="text-align: center;">5 August 2005</p>	Date of mailing of the international search report <p style="text-align: center;">11/08/2005</p>	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer <p style="text-align: center;">Godot, T</p>	

INTERNATIONAL SEARCH REPORT

PCT/GB2005/001883

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 380 835 A (WARE) 10 April 1888 (1888-04-10) the whole document	1-3,5,6, 14,16,19
X	DE 202 10 121 U1 (SHEU, MIIN-TSANG) 2 October 2002 (2002-10-02) the whole document	1,2,4-6, 14-16, 19-22,24
X	GB 2 250 017 A (FEREIDOUN * SEPEHR) 27 May 1992 (1992-05-27) page 3, line 8 - line 19; figure 1	1,2,4-6, 14,16, 19-24
X	US 5 474 028 A (LARSON ET AL) 12 December 1995 (1995-12-12) column 4, line 52 - column 5, line 10; figures	1,2,4-6, 14-16, 19-24

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.2

Claims Nos. 1-25

Reference to the drawings not allowed (See Rule 6.2(a) PCT).

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure. If the application proceeds into the regional phase before the EPO, the applicant is reminded that a search may be carried out during examination before the EPO (see EPO Guideline C-VI, 8.5), should the problems which led to the Article 17(2) declaration be overcome.

INTERNATIONAL SEARCH REPORT

PCT/GB2005/001883

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.: 25
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest.
- No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application; as follows:

1. claims: 1-4,6,19

Feeding bottle comprising a container including a vent valve configured to vent at negative pressure in the range 1mbar to 25 mbar

2. claims: 5,7-18

Feeding bottle comprising a container and an air conduit extending from an air inlet end into the container and having a vent valve and anti-choke portion at the distal end

3. claims: 20-24

Hemispherical valve

INTERNATIONAL SEARCH REPORT

PCT/GB2005/001883

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3207349	A	21-09-1965	NONE
DE 19849271	A1	27-04-2000	NONE
US 2004089626	A1	13-05-2004	NONE
US 6499615	B1	31-12-2002	WO 03022200 A1 20-03-2003
US 380835	A		NONE
DE 20210121	U1	02-10-2002	NONE
GB 2250017	A	27-05-1992	NONE
US 5474028	A	12-12-1995	AU 2060395 A 08-08-1995 WO 9519702 A1 27-07-1995 US 5784999 A 28-07-1998