

(19) **DANMARK**

(10) **DK/EP 3433430 T3**



(12) **Oversættelse af
europæisk patentskrift**

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **E 01 C 19/08 (2006.01)** **E 01 C 19/10 (2006.01)** **E 01 C 19/45 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2022-09-05**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2022-08-17**
- (86) Europæisk ansøgning nr.: **17771164.5**
- (86) Europæisk indleveringsdag: **2017-03-23**
- (87) Den europæiske ansøgnings publiceringsdag: **2019-01-30**
- (86) International ansøgning nr.: **US2017023840**
- (87) Internationalt publikationsnr.: **WO2017165664**
- (30) Prioritet: **2016-03-23 US 201662312168 P**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **A.L.M. Holding Company, 920 10th Avenue North, Onalaska, WI 54650, USA**
- (72) Opfinder: **ELIOT, Mark, 1350 Budd Ave, Maple Plain, Minnesota 55359, USA**
- (74) Fuldmægtig i Danmark: **Plougmann Vingtoft A/S, Strandvejen 70, 2900 Hellerup, Danmark**
- (54) Benævnelse: **BATCH-ASFALTBLANDEANLÆG**
- (56) Fremdragne publikationer:
FR-A1- 2 755 450
US-A- 3 856 275
US-A1- 2002 191 481
US-A1- 2007 122 235
US-A1- 2013 343 145
US-A1- 2014 119 829

DESCRIPTION

BACKGROUND

[0001] A typical asphalt mix plant is comprised of a cold aggregate storage system. This can be a series of storage piles, or bins that hold the structural elements of asphalt, such as sand, crushed rock, mineral fillers, and the like, collectively referred to as aggregate. Additionally, Reclaimed Asphalt Pavement (RAP) or Reclaimed Asphalt Shingles (RAS) can be a component of an aggregate blend.

[0002] A liquid asphalt binder which is added to the aggregate or blend aggregate and RAP is stored in heated tanks. The liquid asphalt binder may be a PG graded binders identified by well-known ASTM D6373 or AASHTO M320 or M332 standards or an asphalt emulsion which meets grades identified by well-known ASTM D977 or D 2397 or AASHTO M140 or M208 standards. The asphalt emulsion may include any of a variety of softening or rejuvenating oils obtained from petroleum refining or derived from biological sources such as soybean, corn, flax seed, rape seed and other sources of seed oil. Additionally, bio-derived oils may be obtained from tree sources where tall oil (obtained as a by-product of the Kraft paper pulping process) may be used in crude, distilled, or in modified forms.

[0003] The aggregate is then fed into a drum dryer heater, to which is added RAP (if used) and the asphalt binder. The drum dryer heater heats, dries and mixes the components to produce the finished asphalt mix. This drum mix process is well known in the bituminous paving industry. Bituminous mix plants known as batch plants may accomplish the same finished asphalt mix and although the process is not used as widely today the batch plant mixing procedure is also well known in the paving the industry.

[0004] The drum mixer is typically heated with an open flame burner using a fuel source, such as natural gas, LP gas, or fuel oils ranging from #2 through #6 or slurry oil.

[0005] The finished asphalt mix is then normally conveyed to a storage silo, and then dispensed as needed into trucks that take the finished asphalt to an application site.

[0006] Such plants may also include dust collectors, a bag house to remove harmful or volatile particulates, screens, scales, bitumen storage system, heaters for maintaining asphalt binder at usable temperatures, or an onsite generator for power unless power is commercially available for the plant.

[0007] Thus, asphalt mix plants require a great deal of infrastructure and special air pollution permitting. They need to be able to produce large volumes of asphalt to justify the expense; however, the demand for asphalt in most of the country is seasonal and/or sporadic. In the winter, in colder climates, it may not be possible to produce and supply asphalt; and as a result

plants may shut down for a large portion of the year. These economics place constraints on when and where asphalt can be produced.

[0008] Another type of plant comprises a portable asphalt mix plant. Portable asphalt mix plants are similar to the plant one described above, but typically would include one or two silos for storage and the asphalt mix produced is for a specific project. In some circumstances, the portable plant can be operated at a remote site and provides asphalt mix to customers on an as needed basis. Other plants may use some form of a silo at the end of the process to store a "batch" of finished asphalt mix of predetermined size that can be loaded, for example, into a truck.

[0009] As noted above, because of the cost of fixed site plants, the long hauling distances from permanent plants to the job site, and the sometimes infrequent demand for asphalt, portable plants may be set up to meet a specific short term need. For example, smaller municipalities, or counties, may have a small demand for asphalt at any given time, that would not justify a permanent plant, and instead they save up the demand and then use a portable plant every few years or as needed to make the asphalt or bituminous mix.

[0010] This is not an optimal situation, as the plants are still expensive to move, setup, and take down, and the need to wait until sufficient capacity has built up means that needs may be unmet for years before the demand justifies setting up a portable asphalt mix plant.

[0011] In some situations, the raw materials may not need to be stored on site, and especially with the portable asphalt mix plants, the raw materials must be brought on site in bulk quantity or in what are known as super sacks. Super sacks are large bags of aggregate, treated aggregate, reclaimed asphalt pavement (RAP), and other raw materials typically used in an asphalt mix in the range of 908 to 2268kg (2,000 to 5,000 pounds). These super sacks may be brought to the mix site as needed.

[0012] In any event, substantial infrastructure is still needed, which is expensive and time consuming to set up, move, and/or maintain. This is especially the case when even under the best of conditions the asphalt mix plant may be idle a great deal of the year due to weather or demand issues. Thus, a need exists for a batch asphalt mix plant that eliminates the drawbacks of the prior art.

[0013] Previously proposed batch asphalt mix plants have been discussed in FR2755450, US2013343145, US2014119829 and US3856275.

SUMMARY OF THE INVENTION

[0014] Accordingly the present invention is directed to a stationary batch asphalt mix plant as described in claim 1 and a process for using such batch asphalt mix plant as described in claim 5. Further advantageous features are described in subClaims 2 to 4 and 6.

DESCRIPTION OF THE DRAWINGS**[0015]**

Figure 1 is a side view illustrating an embodiment of a stationary asphalt mix plant with a LEHS.

Figure 2 illustrates an alternative embodiment of a modular asphalt mix plant with a LEHS.

Figure 3 illustrates various means of loading asphalt mix into the batch heating vessel.

Figures 4-8 show additional views from different perspectives or the various levels of the modular asphalt mix plant with a LEHS of Figure 2.

Figure 9 is section and cross section views of a microwave heating vessel.

Figure 10 is a side cross sectional view of a combiner.

DETAILED DESCRIPTION OF THE INVENTION

[0016] Figures 1-10 illustrate embodiments of an asphalt mix plant having a vessel comprising a microwave heated batcher, embodiments of an asphalt mix plant having a vessel consisting essentially of a microwave heated batcher, embodiments of an asphalt mix plant having a vessel consisting of a microwave heated batcher.

[0017] Figure 1 shows a stationary version of the asphalt mix plant 60, which is substantially similar to the mobile version but can be fixed to a particular location. The stationary version includes a hopper 61 that can accommodate aggregate, treated aggregate, RAP, RAS or combinations thereof mixed on site, or similar materials loaded from super sacks. A power generator 62 and LEHS power unit 63 are located at ground level. A drag line (slat conveyor) 64 moves aggregate, treated aggregate, RAP, RAS or combinations thereof up to the batcher, and a wave guide 65 runs along the underside of the drag line 64 to channel the microwave energy upward as well. As with the mobile plant, the stationary plant can use a batch heating vessel 66 located at the end of the drag line (slat conveyor), or a vessel that is attached to or enclosed within the silo 67.

[0018] Figure 2 shows an alternative embodiment of an asphalt mix plant with a LEHS comprising a modular asphalt mix plant. The disclosed asphalt mix plant 90 includes two T-shaped wings 91 and 92. Generally, one wing 91 houses various facility components primarily related to microwave operation 91, and the other wing 92 comprises a series of silos for storage of the finished asphalt mix.

[0019] In particular, this figure illustrates 3 modular silos (labeled 94A, 94B, 94C and shown transparently in Figure 2); however, more or less silos can be included. The silos allow for dispensing finished asphalt mix into trucks that can drive under the silos. Load cells are incorporated under the silos to weigh finished asphalt mix as it is dispensed.

[0020] Finished asphalt mix is moved to the silos by a combiner 92, which uses a series of paddles (not shown) to move and mix the finished asphalt mix from the microwave rotary heating vessel 98 to the silos 94A, 94B and 94C. Drop chutes (not shown) located on the underside of the combiner allow the finished asphalt mix to drop from the combiner into the chosen silo. The drop chutes can be mechanically operated to allow for selection between the silos, such that the silos can be filled on demand. For example, diverters can be used to channel the flow of the finished asphalt mix to the appropriate drop chute and silo. The silos, as well as the combiner are wrapped in insulated jackets, and an oil boiler (or similar system) can be used to circulate hot oil thereto to ensure that the finished asphalt mix is kept at a stable elevated temperature after leaving the microwave vessel in a target temperature range of about 138°C to 163°C (280°F to 325°F).

[0021] Figure 3 is a side view of the modular asphalt mix plant with a LEHS shown in Figure 2 . The facilities section of the plant is comprised of roughly 4 levels. The bottom level 101 can store facility equipment such as a chiller unit that provides cooling for the microwave units described below, or for any other purpose. A generator can be housed on this level, to provide primary or back up electricity to the plant.

[0022] The second level 102 can include space for offices, as well as facility equipment such as the HVAC unit for heating and cooling any of the various areas of the plant including the vessel area as well as the office space.

[0023] Figure 3 also illustrates various means of loading asphalt mix into the batch heating vessel 104. These include the use of a conveyor 103, either belt or paddle driven. Alternatively a bucket conveyor can be used as well. The top of the vessel includes loading doors 105 that can be opened and closed as needed to load asphalt mix, and to accommodate the heating step. As provided above, the asphalt mix may come from various sources such as aggregate, treated aggregate, RAP, RAS or combinations thereof.

[0024] At the second highest level 106 LEHS power units are located. The power units are electrically power and included a magnetron for generating microwave energy. Wave guides channel the microwave energy waves to the heating vessel. The microwaves can be introduced into to the vessel directly or using rotary joints.

[0025] Figures 4-8 show additional views from different perspectives or the various levels of the modular asphalt mix plant 100 with a LEHS shown in Figure 2 , and illustrate the matter disclosed above in additional detail.

[0026] Figure 9 shows section and cross section views of a microwave heating vessel 110, in which aggregate, treated aggregate RAP, RAS or combinations thereof is heated in batches by the LEHS microwave system. The aggregate, treated aggregate RAP, RAS or combinations thereof is loaded into the heating vessel from the top through doors 111 that can be opened for loading and closed for heating. Microwave energy enters the vessel from a variety of entry ports 112 to provide for distributing the energy throughout the heating vessel. The vessel is lined with a ceramic material, or some other similar material, that is not susceptible to heating when exposed to microwave energy, and is durable enough to handle asphalt mixt. After heating, exit gates 114 are opened to allow the heated finished asphalt mix to drop into the combiner or silo for storage of the heated finished asphalt mix. In Figure 9, the four wave guides 112 are stacked on top of one another, however, they can be placed side-by-side, where there are four wave guides two on each side; however, the wave guides on arranged horizontally instead of vertically.

[0027] Figure 10 is a side cross sectional view of a combiner for the use in the disclosed asphalt mix plant. As described above, finished asphalt mix can move from the microwave heating vessel into the combiner 120 for distribution to the appropriate silo. Alternatively, the heating vessel can be omitted with the heating taking place in the combiner 120 by channeling the microwave energy through wave guides 125 connected at various locations along the length of the combiner.

[0028] The finished asphalt mix is introduced into the combiner 120 through a hatch 121 that can be open and closed as needed. A set of paddles 122 move the finished asphalt mix along the length of the combiner under the power of an electric motor 123. Exit gates 124 are located along the bottom of the combiner over the silos (not shown), which can be selectively opened and closed to fill the silos. The combiner 120 is preferably insulated to avoid heat loss, and lined with a material that is not susceptible to microwave heat such as stainless steel. Heated oil can be circulated through the lining of the combiner to heat the combiner to a temperature consistent with that of the finished asphalt mix.

[0029] The advantage of the present invention is that it greatly simplifies the components of an asphalt mix plant and in particular a mobile plant. By eliminating the need for a large costly heater the present invention greatly reduces the required infrastructure and cost associated with prior art plants. Further, the heating step is moved to the point of storage which also reduces the amount of infrastructure. For example, since heated asphalt mix is no longer moved on a conveyor, the conveyor experiences far less wear and tear which occurs when the belts move heated asphalt mix. The present invention allows for small cost effective mobile plants to be used in environments where it was not cost effective in the past. Still further, the present invention makes it possible for retail providers of cold mix asphalt to easily provide hot mix asphalt by reducing the cost of such a plant, and the space needed for a plant. The asphalt mix plant of the present invention can be used at a retail home center and the like to provide hot mix asphalt. Municipalities which lack the demand for a dedicated prior art asphalt mix plant, can now afford to have a plant or more easily set up a temporary mobile plant at any time instead of waiting until long periods of time until the demand justified the investment.

[0030] These and other advantages will be apparent to those of ordinary skill in the art.

[0031] While the various embodiments of the invention have been described, the invention is not so limited. Also, the method and apparatus of the present invention is not necessarily limited to any particular field, but can be applied to any field where an interface between a user and a computing device is applicable. There are two earlier filed and related U.S. patent applications, U.S. Ser. Nos. 13/887,828 and 13/887,859.

[0032] Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. Although methods and materials similar to or equivalent to those described herein can be used in the practice or testing of the present invention, suitable methods, and materials are described above.

[0033] The present invention may be embodied in other specific forms without departing from the essential attributes thereof, and it is therefore desired that the present embodiment be considered in all respects as illustrative and not restrictive, reference being made to the appended claims rather than to the foregoing description to indicate the scope of the invention. Those of ordinary skill in the art that have the disclosure before them will be able to make modifications and variations therein without departing from the scope of the invention.

REFERENCES CITED IN THE DESCRIPTION

Cited references

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [FR2755450 \[0013\]](#)
- [US2013343145A \[0013\]](#)
- [US2014119829A \[0013\]](#)
- [US3856275A \[0013\]](#)
- [US887828 \[0031\]](#)
- [US13887859 \[0031\]](#)

Patentkrav

1. Stationært batch-asfaltblande anlæg (60) omfattende en elektricitetskilde (62), et mikrobølgeenergisystem (63) forsynet med strøm fra elektricitetskilden (62), bølgeledere (65) som leder og indeholder mikrobølgeenergi ind i en eller flere varmebeholdere (66), et transportbånd og en dragline (64) til at transportere ikke-opvarmet genanvendt asfaltbelægning RAP eller genanvendt asfaltshingle RAS eller begge og eventuelt aggregat og eventuelt asfaltbindemiddel eller asfaltemulsion for danne en asfaltblanding fra en tragt (61) til den ene eller flere varmebeholdere (66) indeholdende en eller flere omrøringsmekanismer for at tilvejebringe blanding af alle komponenter af den dannede asfaltblanding under opvarmning, hvor hver af den ene eller flere omrøringsmekanismer omfatter en flerhed af skovle, som bevæger den dannede asfaltblanding fra en side af den ene eller flere varmebeholdere (66) til den anden side under opvarmning, og en silo (67) til lagring af færdig asfaltblanding opvarmet i en eller flere varmebeholdere (66) med mikrobølgeenergi.

2. Asfaltblande anlæg ifølge krav 1, **kendetegnet ved, at** asfaltblandingen omfatter aggregat, behandlet aggregat, RAP, 100% RAP, RAS eller kombinationer deraf.

20

3. Asfaltblande anlæg ifølge krav 1 eller krav 2, **kendetegnet ved, at** mikrobølgeenergisystemet omfatter en enkelt mikrobølgesender (63) eller en flerhed af mikrobølgesendere (63).

25 4. Asfaltblande anlæg ifølge et hvilket som helst foregående krav, yderligere omfattende en blandetromle til at blande den opvarmede færdige asfaltblanding, før den flyttes til siloen (78) til opbevaring.


5. Fremgangsmåde til anvendelse af et stationært batch-asfaltblande anlæg (60) ifølge et hvilket som helst foregående krav til fremstilling af en færdig asfaltblanding omfattende trinnene til flytning af ikke-opvarmet genanvendt asfaltbelægning RAP eller genanvendt asfaltshingle RAS eller begge fra en tragt (61) til en eller flere varmebeholdere (66) for at danne en asfaltblanding, opvarmning af asfaltblandingen i de en eller flere beholdere (66) til en forudbestemt

temperatur med udelukkende mikrobølgeenergi for at tilvejebringe en færdig asfaltblanding, og flytning af den færdige asfaltblanding til en silo (67; 94A, 94B, 94C) til opbevaring.

- 5 **6.** Fremgangsmåde ifølge krav 5, **kendetegnet ved, at** asfaltblandingen omfatter aggregat, behandlet aggregat, RAP, RAS eller kombinationer deraf, og eventuelt asfaltbindemiddel eller asfaltemulsion.

DRAWINGS

Fig.1

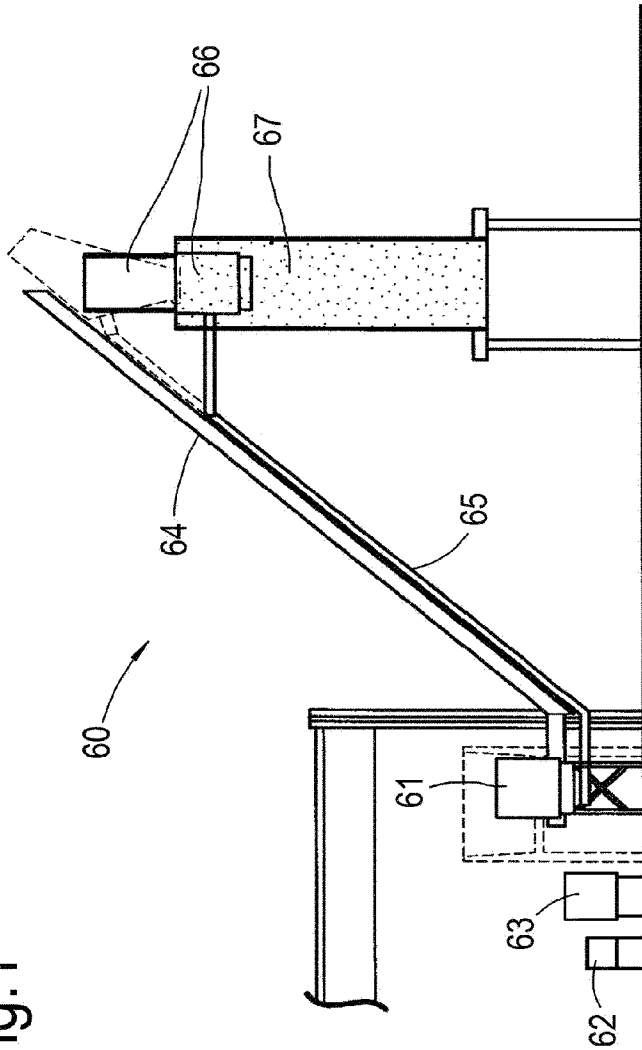

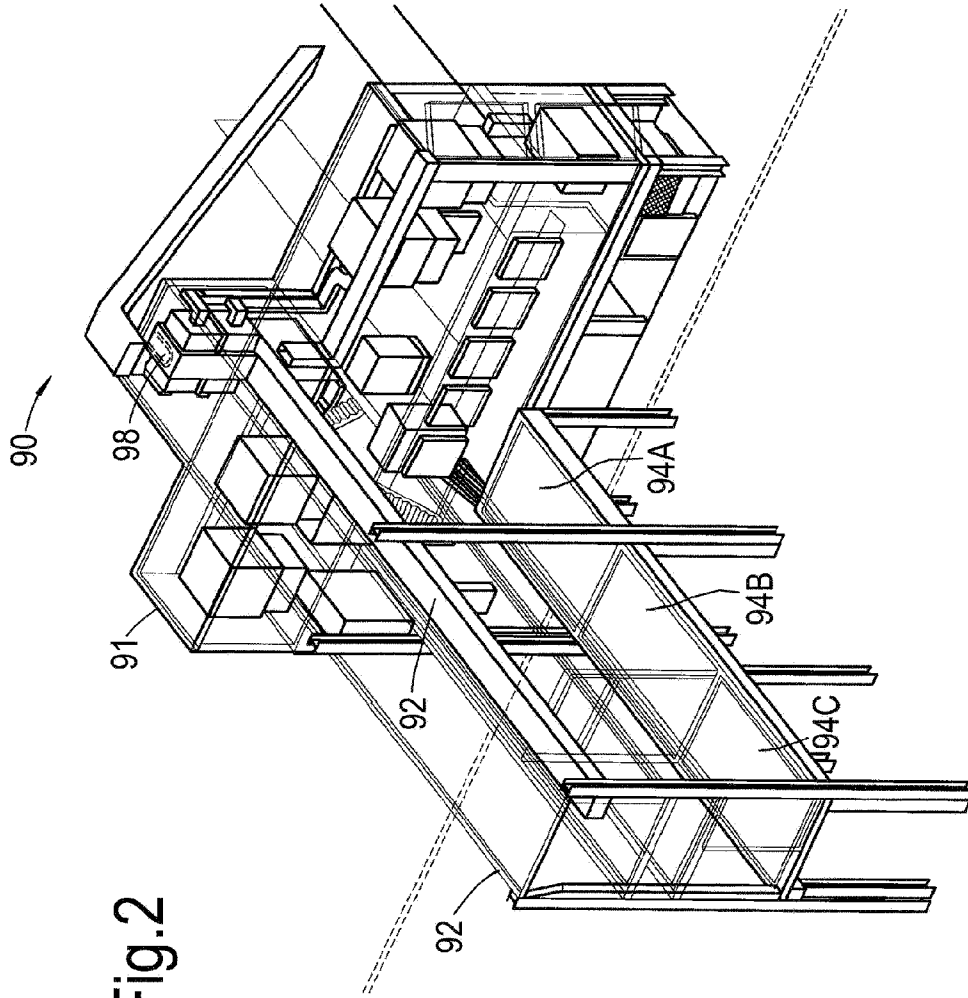


Fig. 2

Fig.3

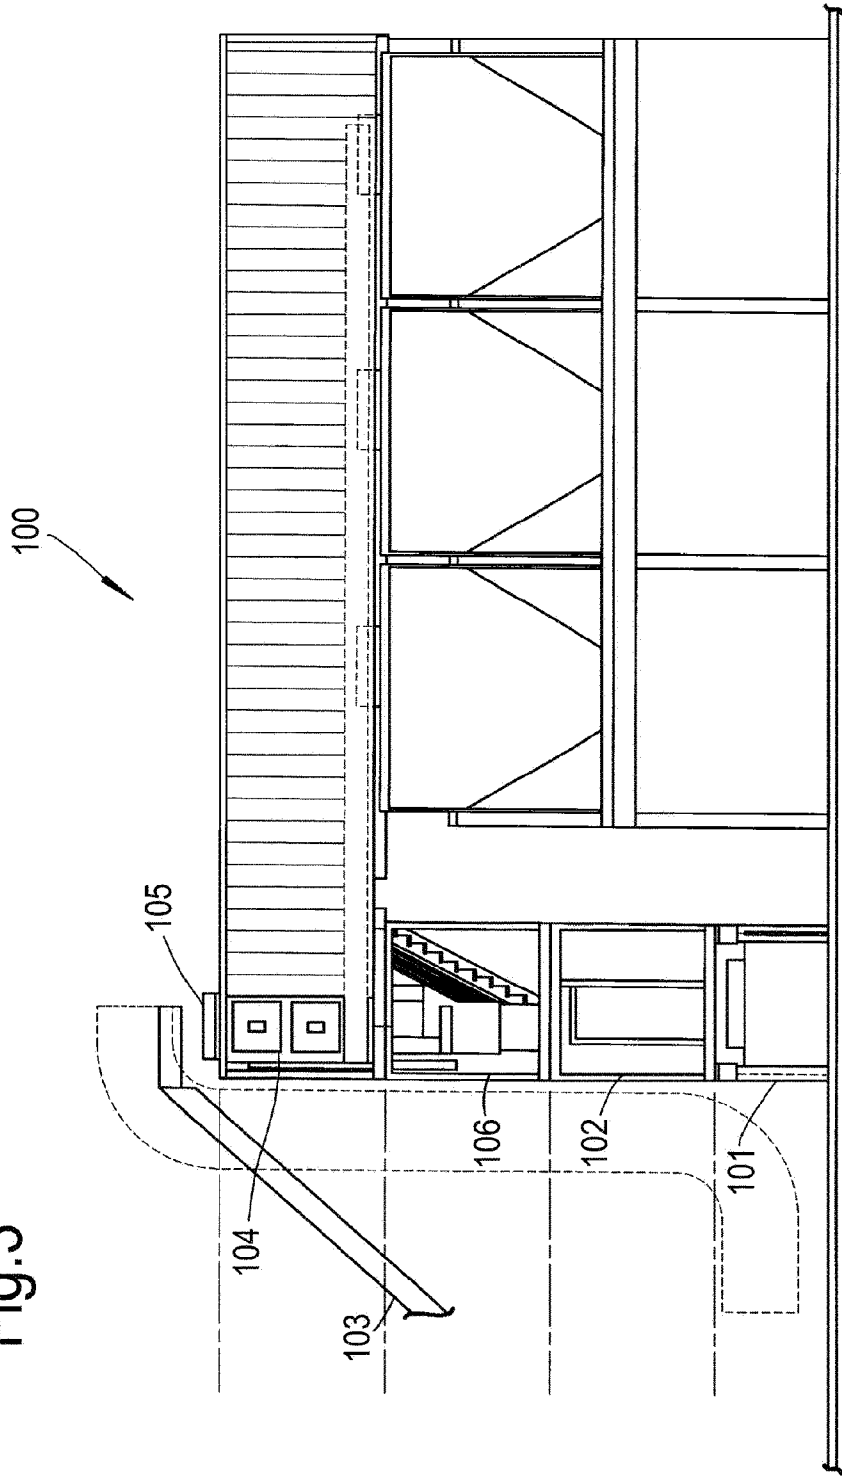


Fig.4

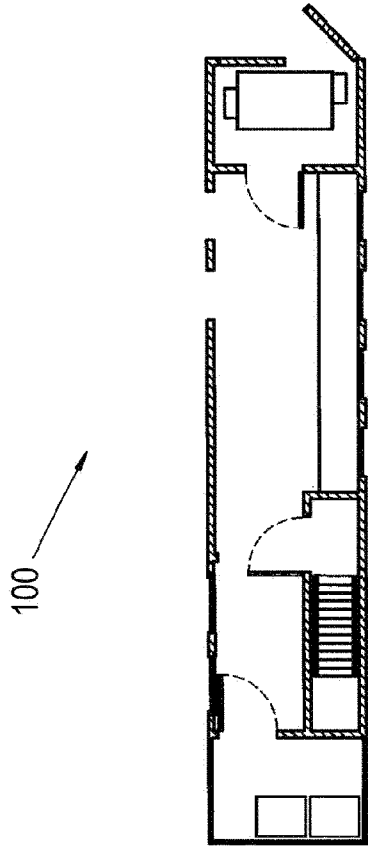


Fig.5

100

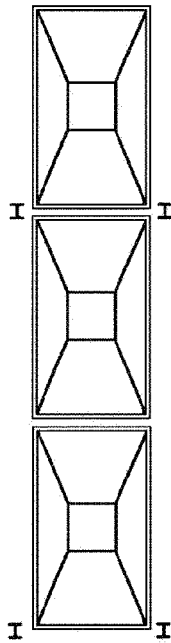




Fig.6

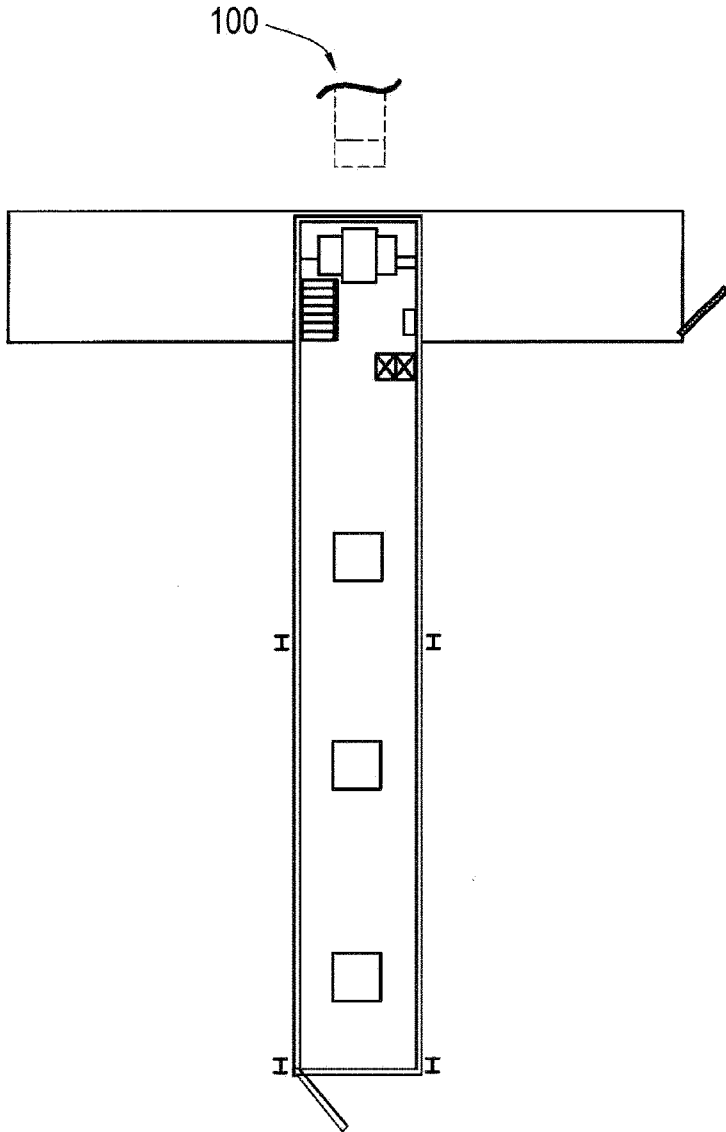
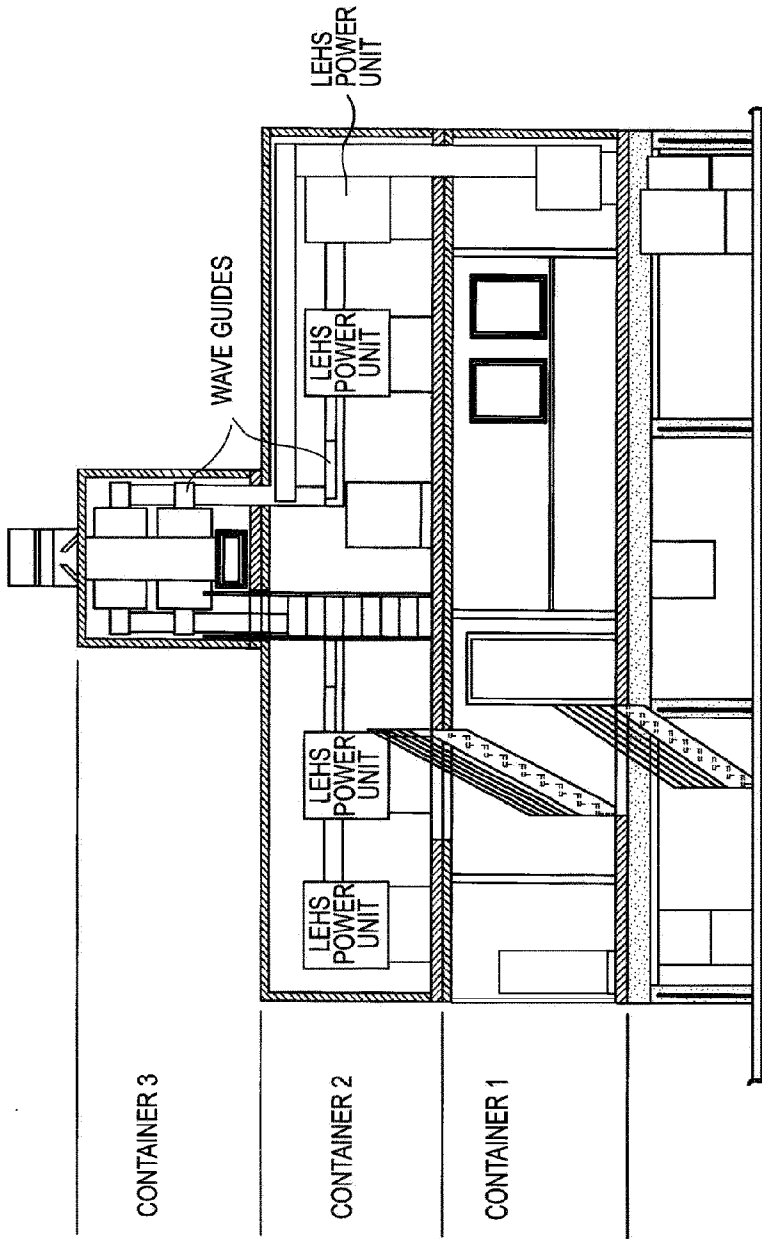


Fig.7

100



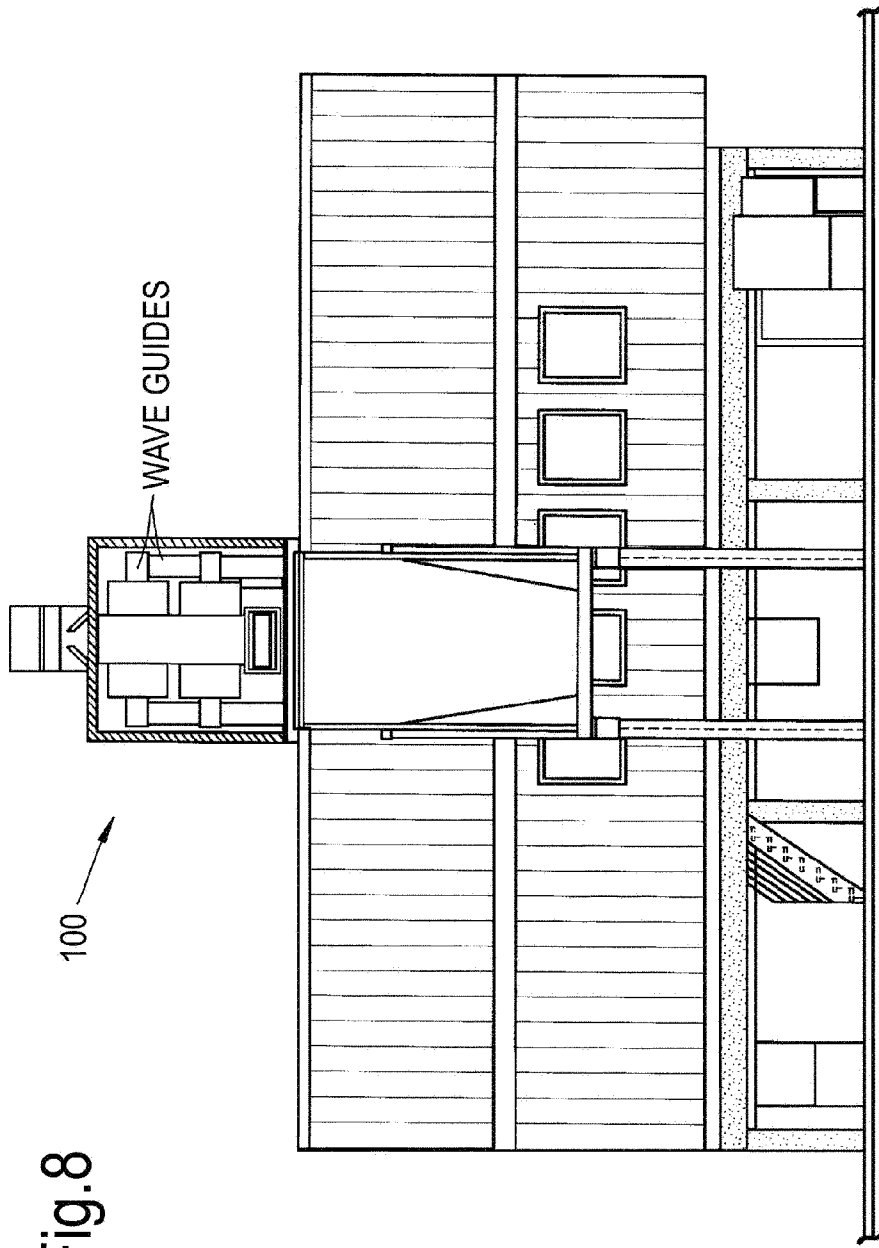


Fig.8

Fig.9

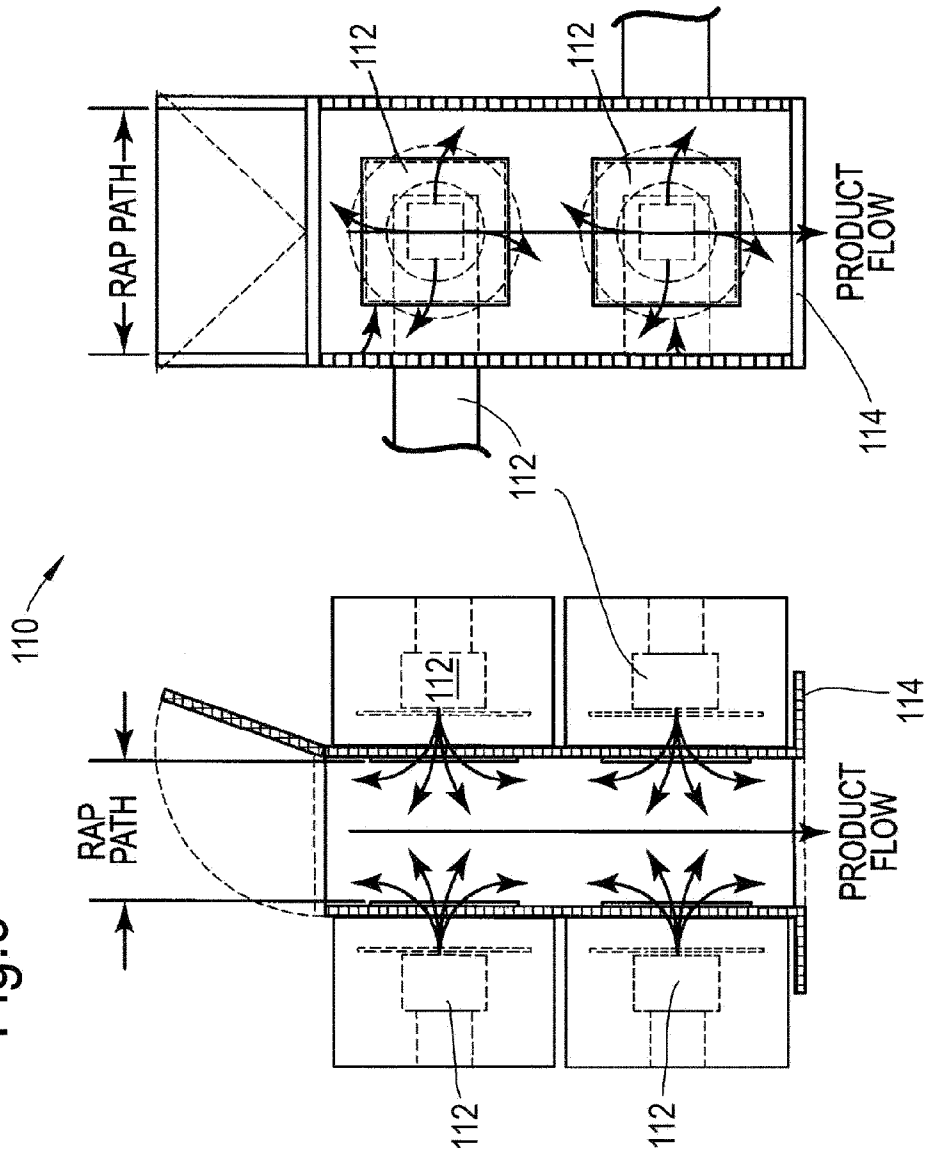


Fig.10

