

(12) STANDARD PATENT APPLICATION (11) Application No. **AU 2004231202 A1**
(19) AUSTRALIAN PATENT OFFICE

(54) Title
Folding push chair

(51)⁷ International Patent Classification(s)
B62B 007/08

(21) Application No: **2004231202** (22) Date of Filing: **2004.11.22**

(30) Priority Data

(31)	Number 0327158.2	(32)	Date 2003.11.21	(33)	Country GB
------	----------------------------	------	---------------------------	------	----------------------

(43)	Publication Date:	2005.06.09
(43)	Publication Journal Date:	2005.06.09

(71) Applicant(s)
Armon Limited



(72) Inventor(s)
Peters, Michael; Church, Graham

(74) Agent / Attorney
Patent Attorney Services, 26 Ellingworth Parade, BOX HILL, VIC, 3128

Abstract

- 5 A foldable push chair having two side frames, each side frame having a forward strut means and a rear strut means attached at its uppermost end to the forward strut means, and base strut means linking the rear and forward strut means, wherein the forward strut means comprises an upper section and a lower section, pivotally connected by connection means, the connection means allowing the
10 upper section and lower section to pivot relative to each other, between a folded state and an unfolded state, the upper and lower sections being parallel and co-linear when the push chair is in the unfolded state.

- 15 Representative Drawing: **Figure 4**

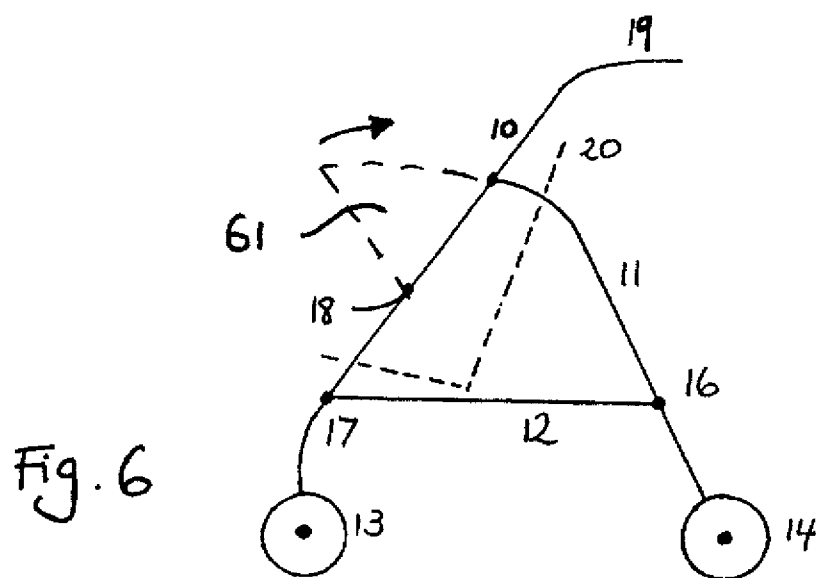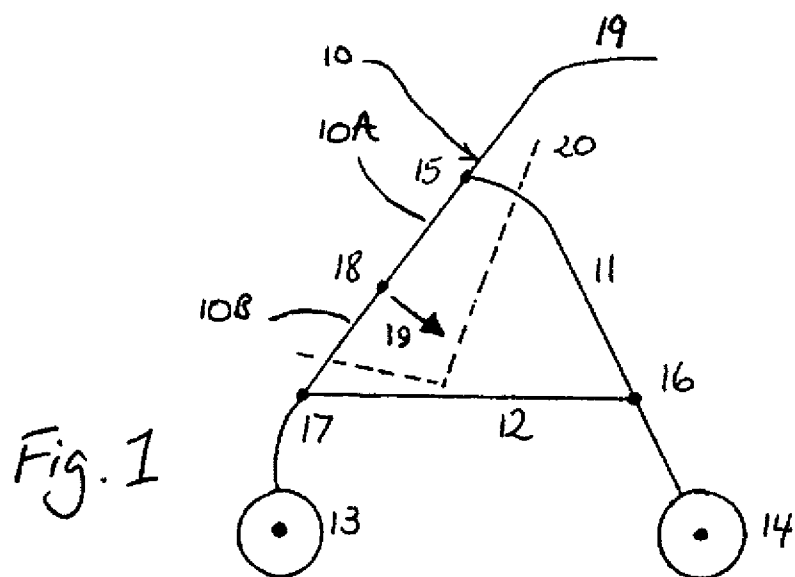

2004231202 22 Nov 2004

AUSTRALIA

Patents Act 1990

**COMPLETE SPECIFICATION
FOR A STANDARD PATENT
ORIGINAL**

Applicant(s): **ARMON LIMITED**

Actual Inventor(s): **Graham Church and Michael Peters**

Address for Service: **PATENT ATTORNEY SERVICES
26 Ellingworth Parade
Box Hill Victoria 3128
Australia**

Title: **FOLDING PUSH CHAIR**

Associated Provisional Applications: No(s).:

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

FOLDING PUSH CHAIR

The present invention relates to push chairs for children, and in particular push chairs which can be folded for storage.

The conventional construction of a push chair consists of two A frames linked by cross struts and having a seat located between them. Each of the two feet of each A frame has a wheel attached; one of the sloping sides of each A frame is extended at its upper end to form handle means by which the push chair can be pushed; and one of the three sides of the A frame (usually the side which extends to the handle) is hinged so that the buggy can be folded up eg. for storage. In some designs of push chair, the two A frames can also be collapsed together - this is commonly termed an umbrella fold.

According to the invention, there is provided a foldable push chair having two side frames, each side frame having a forward strut means and a rear strut means attached at its uppermost end to the forward strut means, and base strut means linking the rear and forward strut means, wherein the forward strut means comprises an upper section and a lower section, pivotally connected by connection means, the connection means allowing the upper section and lower section to pivot relative to each other, between a folded state and an unfolded state, the upper and lower sections being parallel and co-linear when the push chair is in the unfolded state.

According to another aspect of the invention, there is provided a foldable push chair having two side frames, each side frame having a forward strut means and a rear strut means attached at its uppermost end to the forward strut means, and base strut means linking the rear and forward strut means, wherein the forward strut means comprises an upper section and a lower section, pivotally connected

by connection means, the connection means allowing the upper section and lower section to pivot relative to each other, between a folded state and an unfolded state, the connection means including attachment means for attachment of a hood, shade, or other accessory.

5 According to another aspect of the invention, there is provided a connection member for a push chair comprising an upper section and a lower section, pivotally connected by connection means, the connection means allowing the upper section and the lower section to pivot relative to each other, between a folded and an unfolded state, the upper and lower sections being parallel and co-linear when the push chair is in the unfolded state.

10 A push chair embodying the invention will now be described, by way of example, with reference to the drawings, in which:

15 Fig. 1 is a diagrammatic side view of the main structural components of a push chair;

Fig. 2 shows a perspective view of the hinge assembly in the folded arrangement;

20 Fig. 3 shows a perspective view of the hinge assembly in the unfolded arrangement;

Fig. 4 shows an exploded view of the hinge assembly;

Fig. 5 shows a cross-sectional view of the hinge assembly in the unfolded arrangement;

25 Fig. 6 is a diagrammatic side view of the a push chair with a hood attached;

Fig. 1 is a simplified side view of a basic umbrella push chair, showing the A frame. The push chair comprises two A frames, one on each side, linked by

cross struts. The frame can be locked in the configuration shown in figure 1 (the unfolded position) by means of a standard "music stand" arrangement at the rear of the push chair frame.

5 Each A frame consists of a front sloping bar 10, a rear sloping bar 11, and a bottom bar 12. The front and rear bars 10 and 11 have wheels 13 and 14 attached to their lower ends, as shown. The front bar 10 is also extended and curved at its upper end to provide a handle 19, which may consist of a suitable termination of the bar or of a cross-bar between the two A frames, which is able to collapse together as the push chair is folded.

The bars 10-12 are attached to each other by hinged pivots 15-17 as shown. In addition, the front bar 10 has a hinge 18 located roughly midway between the pivots 15 and 17. The front bar 10 is made up of two separate bars, the upper front
15 bar 10A and the lower front bar 10B, which are pivotally connected by the hinge 18. When the frame is locked in the unfolded position, the hinge 18 is held in the position shown in figure 1, with the bar 10 straight. When the frame is folded, the upper front bar 10A and lower front bar 10B pivot about the hinge 18, allowing the front bar 10 to fold inward as indicated by arrow 19, to collapse the frame.
20 This allows the push chair to be folded into a compact form for storage (the folded position). The cross-bars and other elements may be lockably hinged so that the push chair can be folded by having its two A frames pushed together as well as by the folding of the individual A frames.

25 In conventional push chairs, bars 10A and 10B are jointed in such a way that the ends of bars 10A and 10B are overlapping, resulting in the ends of the bars protruding from the frame. It is easy for clothes to become caught or snagged on the ends of the bars.

Figure 2 shows the connection hinge 18 in the folded arrangement, for storage of the push chair. In this arrangement, the upper and lower bars, 10A and 10B, are arranged such that they are approximately at right angles to the long axis of the hinge AA and the bars are substantially parallel and adjacent to each other. In the folded arrangement, the push chair handles nestle in the push chair wheels, such that the upper and lower bars 10A and 10B are each at an angle to the axis of the hinge AA of just over 90° . In the folded arrangement, the folded seat is retained in the space between the bars 10A and 10B. The upper front bar 10A and lower front bar 10B are each pivotally connected to the hinge by pins 50.

Figure 3 shows the connection hinge 18 in the unfolded arrangement, for when the push chair is in use. In the unfolded arrangement the upper and lower bars, 10A and 10B, are lined up with each other, the angle between the two bars being 180° .

Figure 4 shows an exploded view of the hinge assembly. The hinge body 18 comprises a central part 23 of roughly uniform circular or elliptical cross-section and two planar parts 22 extending away from the central part in opposite directions along the long axis of the hinge AA. The two planar parts 22 are of thickness t . The planar parts are arranged end to end and parallel to each other, with the central portion 23 between. The planar parts 22 extend away from the centre of each end face 26 of the central part 23. There is a hole 24 extending through each of the planar parts 22, transverse to the long axis of the hinge, through which a pin 50 is inserted to pivotally attach the bars, 10A or 10B. The end faces 26 of the central part are concavely curved surfaces, and correspond to the curved ends 32 of the bars 10A and 10B.

There is a notch 28 in the top corner of each of the planar parts 22, leaving a flat face 27, parallel with the top face of the hinge and a convexly curved portion 25, perpendicular to the top face of the hinge.

5 Figure 4 shows the upper and lower bars 10A and 10B, detached from the hinge 18. There is a groove 30 in the hinge-engaging end of each bar. The width of the groove 30 is just greater than the thickness t of the planer extensions of the hinge 22, so that the planar parts 22 can be inserted in the groove 30 of each bar. There is a hole 31 in each of the groove walls. Each bar is placed on the hinge,
10 such that the planar part of the hinge 22 rests in the groove of the bar 30 and a pin 50 is inserted through the holes 31 and hole 24, to pivotally attach each bar to the hinge, allowing each bar to pivot about its pin. Wear plates 33 are positioned between the planar parts of the hinge and the groove walls. The wear plates 33 are made of plastic and act to protect the hinge body 18 from being scratched by the
15 groove walls, and to allow the bars to pivot more smoothly against the hinge body. Each plate is the same shape as the planar body 22 and has a hole 34, which corresponds to the hole 24 in the hinge body.

The hinge-engaging end of the bar is rounded such that it has two convexly
20 curved faces 32, which correspond with the concavely curved end surfaces 26 of the central part of the hinge and therefore the bars fit flush with the concavely curved surfaces 26 when the hinge assembly is in the unfolded position (see figure 5). When the hinge assembly is in the unfolded state, the gap between the convex faces 32 of the bars 10A and 10B and the corresponding concave surfaces 26 of
25 the hinge is such that there is no finger trap between each bar and the hinge. The gap between the convex face 32 of bar 10A or 10B and the concave face 26 of the hinge should not be more than 5 mm, so that there is no finger trap between each bar and the hinge.

When the bars are attached to the hinge body, each bar can pivot about its pin in a single plane, thus acting like a knee joint. The bars can pivot between the folded arrangement, as shown in figure 2, for when the push chair is to be stored,
5 and the unfolded arrangement, as shown in figure 3, for when the push chair is in use.

Referring to figure 5, showing the bars and hinge in the unfolded position, the bars 10A and 10B extend away from the hinge body end to end, with the
10 central part of the hinge 23 in between. Each of the bars can pivot from the folded position, through approximately 90° to the unfolded position, but the bars are blocked from any further rotation by the notches 28 at each end of the hinge. The base of the groove 30 in the end of each bar is stepped, so that it fits flush
15 against the notch in the end of the hinge. When the bar has been pivoted fully to the unfolded position, the stepped surface 40 of each bar engages with the flat surface of each notch 27, blocking each bar from rotating any further than 90° from the folded position. The base of the groove has two curved surfaces 41 and 42, which fit flush against the distal end of the hinge body and ensure that the bar
20 can be pivoted smoothly from the unfolded position to the folded position and vice versa.

When the hinge is fully open, the bars 10A and 10B are aligned end to end, forming a straight line, with the hinge in between. Referring to figure 3, when the hinge assembly is in the unfolded position, the bars 10A and 10B each engage
25 flush with the hinge, so that the hinge assembly has no extending open ends which clothes could get caught on and there are no finger traps between the ends of the bars and the hinge, for clothes or people's fingers to get trapped in. The hinge-engaging ends of the upper and lower front bars 10A and 10B are spaced apart

from each other by the central part of the hinge 23. When the push chair is in the folded state the folded seat fabric is retained in the space formed between the two bars 10A and 10B.

5 Referring to figure 3, the central part of the hinge 23 has a hole 60 which passes through the centre of the hinge body, perpendicular to the plane of rotation of the joint. This hole can be used to attach a push chair hood to the frame. Referring to figure 6, showing a hood 61 attached to a push chair frame, a pin can be inserted through the hood and holes 60, to pivotally attach the bottom corners
10 of the hood to the push chair frame. The top of the hood can be attached to the top of the seat. The hood can then be rotated between the in-use position as shown in figure 6, to a storage position, where it is pushed back against the seat, as shown by the arrow in figure 6. As the hood is pushed back against the seat, the material of the hood concertinas, so that the hood folds up and out of the way.

15 The foldable push chair may include a suitable locking means for locking the push chair in the unfolded state, and preventing it from collapsing when load is placed in the seat.

20 Although the disclosed joint has been described in relation to a push chair having an umbrella fold, it will be apparent that it can be applied to any type of push chair fold.

The claims defining the invention are as follows:

1. A foldable push chair having two side frames, each side frame having a forward strut means and a rear strut means attached at its uppermost end to the forward strut means, and base strut means linking the rear and forward strut means, wherein the forward strut means comprises an upper section and a lower section, pivotally connected by connection means, the connection means allowing the upper section and lower section to pivot relative to each other, between a folded state and an unfolded state, the upper and lower sections being parallel and co-linear when the push chair is in the unfolded state.
2. A foldable push chair according to claim 1 wherein the upper and lower sections pivot through approximately 90°, between the folded state and the unfolded state.
3. A foldable push chair according to any preceding claim wherein the upper section and the lower section are parallel and adjacent in the folded state.
4. A foldable push chair according to any preceding claim wherein the connection means includes stop means for retaining the upper and lower struts in the unfolded state.
5. A foldable push chair according to any preceding claim wherein the connection means has a first and second abutment surface 27, which engage with a corresponding abutment surface 40 on the upper section and lower section respectively, for retaining the upper and lower struts in the unfolded state.

6. A foldable push chair according to any preceding claim wherein the connection means has a first and a second arcuate receiving portion for receiving the upper and lower section respectively, the upper and lower section each having a corresponding arcuate surface, such that, in the unfolded state, there is no finger trap between the first arcuate receiving portion and the upper section and between the second arcuate receiving portion and the lower section.

7. A foldable push chair according to any preceding claim wherein the connection means includes bearing inserts disposed between the connection means and the upper section and between the connection means and the lower section.

8. A foldable push chair having two side frames, each side frame having a forward strut means and a rear strut means attached at its uppermost end to the forward strut means, and base strut means linking the rear and forward strut means, wherein the forward strut means comprises an upper section and a lower section, pivotally connected by connection means, the connection means allowing the upper section and lower section to pivot relative to each other, between a folded state and an unfolded state, the connection means including attachment means for attachment of a hood, shade, or other accessory.

9. A foldable push chair according to claim 8 wherein the connection means includes a hole for pivotal connection of the attached part.

10. A connection member for a push chair comprising an upper section and a lower section, pivotally connected by connection means, the connection means allowing the upper section and the lower section to pivot relative to each other, between a folded and

an unfolded state, the upper and lower sections being parallel and co-linear when the push chair is in the unfolded state.

11. A foldable push chair as claimed in claim 1 substantially as herein before described with particular reference to the accompanying drawings.

5

Dated this 3rd day of November 2004

PATENT ATTORNEY SERVICES

Attorneys for

10 ARMON LIMITED

