



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2349678 A1 2001/11/30

(21) **2 349 678**

(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(22) Date de dépôt/Filing Date: 2001/05/31

(41) Mise à la disp. pub./Open to Public Insp.: 2001/11/30

(30) Priorité/Priority: 2000/05/31 (09/584,920) US

(51) Cl.Int.⁷/Int.Cl.⁷ A63B 53/06, A63B 53/04, B22F 5/00


(71) Demandeur/Applicant:
CALLAWAY GOLF COMPANY, US

(72) Inventeurs/Inventors:
ERICKSON, JOEL B., US;
VECCHIO, KENNETH S., US;
DESHMUKH, UDAY V., US

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : BATON DE GOLF AVEC ELEMENT D'EQUILIBRAGE COMPRENANT PLUSIEURS MATERIAUX

(54) Title: GOLF CLUB WITH MULTIPLE MATERIAL WEIGHTING MEMBER

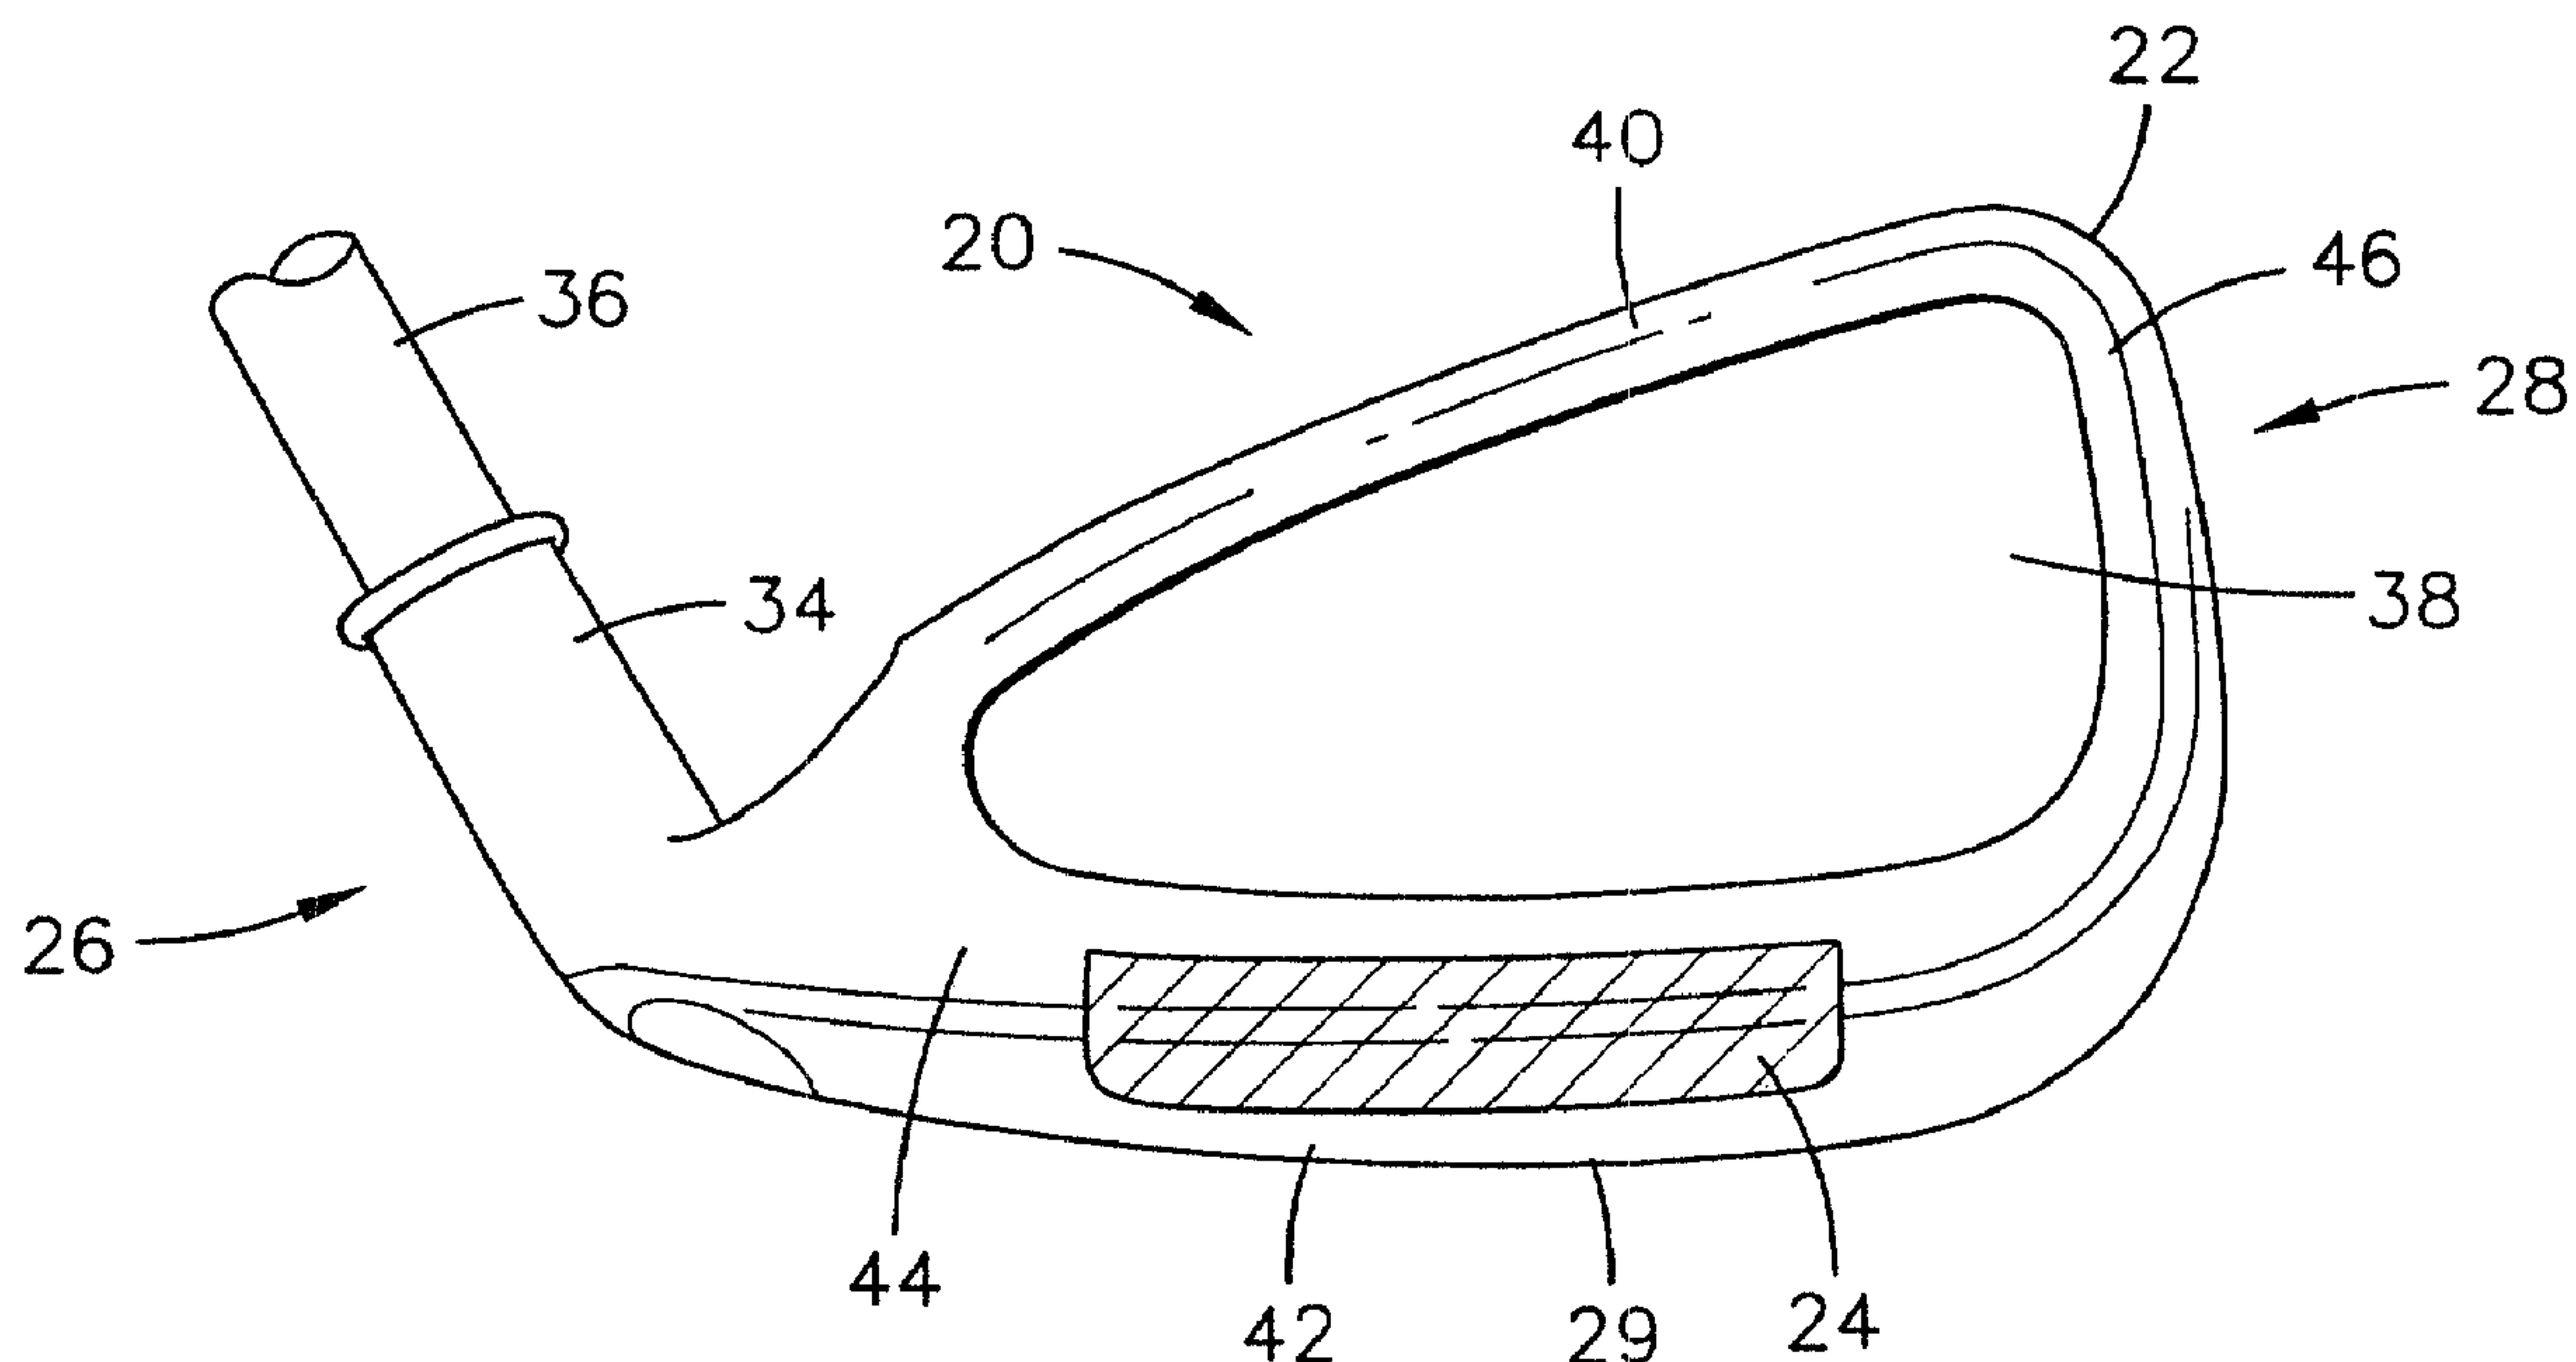

(57) Abrégé/Abstract:

The use of liquid phase sintering for weighting of a golf club head is disclosed herein. The preferred weighting material is a multiple component material that includes a high-density component, a binding component and an anti-oxidizing component. A preferred multiple component material includes tungsten, copper and chromium. The liquid phase sintering process is performed in an open air environment at standard atmospheric conditions.

PU1113

ABSTRACT OF THE DISCLOSURE

The use of liquid phase sintering for weighting of a golf club head is disclosed herein.

The preferred weighting material is a multiple component material that includes a high-density component, a binding component and an anti-oxidizing component. A preferred multiple component material includes tungsten, copper and chromium. The liquid phase sintering process is performed in an open air environment at standard atmospheric conditions.

TITLE OF THE INVENTION

GOLF CLUB WITH MULTIPLE MATERIAL WEIGHTING MEMBER
(Corporate Docket Number PU1113)

5

CROSS REFERENCES TO RELATED APPLICATIONS

Not Applicable

10

STATEMENT REGARDING FEDERALLY SPONSORED
RESEARCH OR DEVELOPMENT

Not Applicable

15

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a golf club. More specifically, the present invention
20 relates to a golf club with a weighting member composed of multiple materials.

Description of the Related Art

Golf club designs are constantly evolving with the primary purpose to improve a golfer's
performance. While the improvements may address a number of areas, a designer strives to
design a more forgiving golf club. Forgiveness in a golf club may be achieved by shifting the
25 center-of-gravity of a golf club to a desirable location, and creating a larger moment of inertia.

It is difficult to increase forgiveness in a golf club head composed of a homogeneous or
monolithic material, such as stainless steel, since there is a limit on the overall weight of a golf
club acceptable to the typical golfer. To overcome this difficulty, designers have resorted to
combining different materials (high density and low density) to achieve the desired center-of-
30 gravity and large moment of inertia. A very high-density material provides a designer with the
greatest freedom in improving the performance of a golf club head since less volume is needed to
achieve the proper weighting. The most economical, commercially available material with a

PU1113

very high density is tungsten, which has a density of 19.3 grams per cubic centimeter.

One challenge in using heterogeneous materials is the ability to join the materials together in a golf club head. Numerous techniques have been created by the golf industry to join heterogeneous materials in a golf club head. One example is the GREAT BIG BERTHA® 5 TUNGSTEN-TITANIUM™ irons, developed by the Callaway Golf Company of Carlsbad, California, which used a screw to attach a tungsten block to the rear and sole of a titanium iron. Another example is the GREAT BIG BERTHA® TUNGSTEN-INJECTED™ HAWK EYE® 10 irons, also developed by the Callaway Golf Company, which feature an internal cavity with tungsten pellets in a solder, as set forth in co-pending U.S. Patent Application Number 09/330,292, for an Internal Cavity Tungsten Titanium Iron , filed on June 11, 1999. An example of a wood is the GREAT BIG BERTHA® HAWK EYE® drivers and fairway woods, also 15 developed by the Callaway Golf Company, which use a tungsten screw in the sole of a titanium club head body. Other techniques use adhesives to join the materials, press fit the materials, braze the materials, or structurally hold one material piece within another material piece using undercuts or pockets.

For the most part, these techniques require a precisely machined weighting piece to fit within a precise location on a golf club head. The most economical method is to cast a golf club head body with a cavity for the weighting piece and attaching the weighting piece with a screw. However, casting tolerance are low, and require either machining of the cavity itself, or 20 machining of the weighting piece to fit each cavity. The use of softer materials is undesirable since this creates difficulty in finishing the final product due to smearing of such soft materials

PU1113

during grinding of the golf club head.

Further, a co-casting process, where the weighting piece is incorporated in the mold prior to pouring the base metal, is very problematic depending on the materials since the weighting piece is relatively cold when the hot liquid base metal is cast around it causing thermal shock.

5 Also, thermal expansion mismatch of materials is a problem with co-casting of heterogeneous materials. Other problems arise during re-shafting, where the golf club head is heated to remove the shaft. Such heating will result in low melting temperature materials (epoxies and solder) to flow, resulting in the possible movement of weighting pieces.

PU1113

BRIEF SUMMARY OF THE INVENTION

The present invention allows for a golf club head to be easily weighted without precisely machined weighting components. The present invention is able to accomplish this by using 5 liquid phase sintering for incorporating a weighting member composed of a multi-component material into the golf club head.

The most general aspect of the present invention is a golf club head with a body and a weighting member. The body has a striking plate, a heel end, a toe end and a cavity. The weighting member is composed of a multi-component material and is disposed in the cavity of 10 the body.

Another aspect of the present invention is a cavity back golf club head having a body and a weighting member. The body has a striking plate, a toe end, a heel end and a main rear cavity opposite the striking plate. A top wall, a bottom wall, a heel wall and a toe wall define the main rear cavity. The bottom wall has a second cavity with a predetermined configuration. The 15 weighting member is disposed within the second cavity and occupies the entire cavity. The weighting member is composed of a multi-component material.

Yet another aspect is a method for manufacturing a golf club head. The method includes introducing a multi-component powder/pellet mixture into a cavity on a body of a golf club head, and heating the multi-component powder/pellet mixture to a predetermined temperature for 20 liquid phase sintering of the multi-component powder/pellet mixture. The predetermined temperature is above the melting temperature of one component of the multi-component

PU1113

powder/pellet mixture.

The multi-component powder/pellet mixture may be composed of a heavy metal component, an anti-oxidizing component and a metal binder component. One variation of the multi-component powder/pellet mixture may be composed of tungsten, copper and an anti-5 oxidizing component. The anti-oxidizing component may be chromium or any chromium containing alloy such as nickel-chrome, stainless steel or nickel-chromium superalloy. Preferably, the anti-oxidizing component is nickel chrome.

Having briefly described the present invention, the above and further objects, features and advantages thereof will be recognized by those skilled in the pertinent art from the following 10 detailed description of the invention when taken in conjunction with the accompanying drawings.

PU1113

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

FIG. 1 is a rear plan view of a golf club head of the present invention.

FIG. 2 is a front plan view of the golf club head of FIG. 1.

5 FIG. 3 is a top perspective view of the golf club head of FIG. 1.

FIG. 4 is a heel end perspective view of the golf club head of FIG. 1.

FIG. 5 is a toe end perspective view of the golf club head of FIG. 1.

FIG. 6 is a bottom perspective view of the golf club head of FIG. 1.

FIG. 7 is a cross-sectional view of the golf club head of FIG. 1 along line 7-7.

10 FIG. 8 is a rear plan view of an alternative embodiment of the golf club head of the present invention.

FIG. 9 is a cross-sectional view of the golf club head of FIG. 8 along line 9-9.

FIG. 10 is a flow chart of the process of the present invention.

FIG. 11 is a rear plan view of an unfinished golf club head of the present invention.

15 FIG. 12 a cross-sectional view of the unfinished golf club head of FIG. 11 along line 12-12.

FIG. 13 is a rear plan view of the unfinished golf club head of FIG. 11 with the powder precursor material therein.

20 FIG. 14 is a rear plan view of the unfinished golf club head of FIG. 11 with the precursor material following liquid phase sintering.

FIG. 15 is a view of a putter golf club head.

PU1113

FIG. 16 is a view of a wood golf club head.

DETAILED DESCRIPTION OF THE INVENTION

As shown in FIGS. 1-7, a golf club head is generally designated 20. The golf club head 5 20 is a cavity-back iron with a body 22 and a weighting member 24. The golf club head 20 has a heel end 26, a toe end 28 and a sole 29. On the front of the body 22 is a striking plate 30 that has a plurality of scorelines 32 therein. A hosel 34 for receiving a shaft 36 is located on the heel end 26 of the golf club head 20. The rear of the golf club head 20 has a main cavity 38 that is defined by a top wall 40, a bottom wall 42, a heel wall 44 and a toe wall 46. The golf club head 10 20 also has an optional undercut recess 48 circumventing and openly exposed to the main cavity 38.

The weighting member 24 is composed of multiple component powder or pellet mixture that is processed via liquid phase sintering within a cavity 25 (shown in FIG. 11) of the body 22. The cavity 25 is preferably open to the sole 29 and the bottom wall 42. However those skilled in 15 the pertinent art will recognize that the cavity 25, and hence the weighting member 24, may be disposed in numerous locations to provide a desired affect. As shown in FIG. 7, the weighting member 25 locates a large percentage of the mass of the golf club head 20 in the lower center of the golf club head 20 thereby lowering the center of gravity of the golf club head 20 to make it more forgiving for a golfer.

20 An alternative embodiment of the golf club head 20a of the present invention is illustrated in FIGS. 8 and 9. The golf club head 20a is a blade-style iron as compared to the

PU1113

cavity-back iron of FIGS. 1-7. The golf club head 20a of FIGS. 8 and 9 does not have a cavity 38, nor does it have an undercut 48. The weighting member 24a is disposed annularly about the rear 39 of the body 22. Further, the cavity 25a containing the weighting member 24a is open only to the rear 39 and not the sole as in the previous embodiment. The annular weighting member 24a allows for the blade style golf club head 20a to have perimeter weighting similar to a cavity-back iron, and thus the forgiveness of a cavity-back iron while having the traditional appearance of a blade iron. The annular weighting member 24a will occupy a greater volume of the golf club head 20a than the weighting member 24 of FIGS. 1-7, and thus will also have a greater percentage of the mass of the golf club head 20a. The weighting member of the present invention may occupy various contoured cavities of golf club heads due to its unique manufacturing method. As shown in FIGS. 7A and 7B, the cavity 25b may have an interior projection 47, or the cavity 25c may have a plurality of interior projections 47a and 47b. The interior projections 47 create a structural means for retaining the weighting member 24 within the cavity 25b or 25c.

FIG. 10 illustrates a flow chart of the process of the present invention for producing a golf club head 20 or 20a with a weighting member 24 or 24a composed of a multiple component powder or pellet mixture. The process 200 begins with providing a golf club head 20, preferably prepared by a conventional investment casting process at block 202. However, those skilled in the pertinent art will recognize that the golf club head 20 or 20a may be prepared through other techniques well known in the golf industry, such as forging. The golf club head 20 may be composed of stainless steel, titanium, titanium alloys, zirconium, zirconium alloys, or like

PU1113

materials. The golf club head 20 is cast to have a cavity 25, as shown in FIG. 11. The cavity 25 has a predetermined volume according to the amount of mass needed from the weighting member 24 for the golf club head 20. At block 204, the precursor powder materials for the multiple component powder or pellet mixture are compacted for placement into the cavity 25.

5 The mixture may be composed of powders, pellets or a mixture thereof. The precursor powder or pellet materials are composed of a high-density component in various particle sizes (ranging from 1.0 mm to 0.01 mm) for achieving low porosity for the weighting member 24. The preferred high-density component is tungsten which has a density of 19.3 grams per cubic centimeter ("g/cm³"), however other high-density materials may be used such as molybdenum 10 (10.2 g/cm³), tantalum (16.7 g/cm³), platinum (21.4 g/cm³), rhodium (12.4 g/cm³), and the like. Additionally, high-density ceramic powders may be utilized as the high-density component. The amount of high-density component in the mixture may range from 5 to 95 weight percent of the weighting member 24.

In addition to a high-density component such as tungsten, the multiple component 15 powder or pellet mixture is composed of a binding component such as copper (density of 8.93 g/cm³), copper alloys, tin (density of 7.31 g/cm³), and the like. The multiple component powder or pellet mixture is also composed of an anti-oxidizing powder such as chromium (density of 7.19 g/cm³), nickel-chromium alloys (density of 8.2 g/cm³), or iron-chromium alloys (density of 7.87 g/cm³). Alternative anti-oxidizing components include aluminum, titanium, zirconium and 20 the like. The binding component in the multiple component powder or pellet mixture may range from 4 to 49 weight percent of the weighting member 24. The anti-oxidizing component in the

PU1113

alloy may range from 0.5 to 30 weight percent of the weighting member 24. The weighting member 24 is preferably 90 weight percent tungsten, 8 weight percent copper and 2 weight percent chromium. The overall density of the weighting member 24 will range from 11.0g/cm³ to 17.5 g/cm³, preferably between 12.5 g/cm³ and 15.9 g/cm³, and most preferably 15.4g/cm³.

5 Table one contains the various compositions and their densities.

Returning to FIG. 10, the powders are thoroughly mixed to disperse the anti-oxidizing component throughout the multiple component powder or pellet mixture to prevent oxidizing which would lead to porosity in the weighting member 24. The anti-oxidizing component gathers the oxides from the multiple component powder or pellet mixture to allow for the binding 10 component to "wet" and fill in the cavities of the multiple component powder or pellet mixture. Also, if the surface of the weighting member 24 engaging the wall of the cavity 25 is oxidized, adherence of the weighting member 24 could be decreased resulting in failure. The multiple component powder or pellet mixture is preferably compacted into slugs for positioning and pressing within the cavity 25 at block 206, and as shown in FIG. 13. Higher densities are 15 achieved by compacting the multiple component powder or pellet mixture prior to placement within the cavity 25. The mixture is pressed within the cavity 25 at a pressure between 10,000 pounds per square inch ("psi") to 100,000 psi, preferably 20,000 psi to 60,000 psi, and most preferably 50,000 psi.

Once the multiple component powder or pellet mixture, in compacted form or 20 uncompacted form, is placed within the cavity 25, at block 208 the unfinished golf club head 20b is placed within a furnace for liquid phase sintering of the multiple component powder or pellet

PU1113

mixture under standard atmospheric conditions and in air. More precisely, the process of the present invention does not require a vacuum nor does it require an inert or reducing environment as used in the liquid phase sintering processes of the prior art. In the furnace, the multiple component powder or pellet mixture is heated for 1 to 30 minutes, preferably 2 to 10 minutes, 5 and most preferably 5 minutes. The furnace temperature for melting at least one component of the mixture is in the range of 900 °C to 1400 °C, and is preferably at a temperature of approximately 1200 °C. The one component is preferably the binding component, and it is heated to its melting temperature to liquefy as shown in FIG. 14. However, those skilled in the art will recognize that the liquid phase sintering temperature may vary depending on the 10 composition of the multiple component powder or pellet mixture. Preferably the binding component is copper, and the liquid phase sintering occurs at 1200 °C to allow the copper to fill in the cavities of the multiple component powder or pellet mixture to reduce porosity and thus increase the density of the weighting member 24. As the copper liquefies, the tungsten (melting 15 temperature of 3400 °C), or other high-density component, remains in a powder form while the chromium or other anti-oxidizing component removes the oxides from the mixture to allow the copper to occupy the cavities and to reduce porosity caused by the oxides.

At block 210, the unfinished golf club head with the weighting member 24 therein is finished through milling, grinding, polishing or the like. Those skilled in the art will recognize that the density of the weighting member 24 will change depending on the particular club within 20 a set of irons, or fairway wood or putter. The density is manipulated through modifying the amount of high density component, such as tungsten, in the mixture as shown in Table One.

PU1113

Table One illustrates the compositions of the multiple component powder or pellet mixture, the processing temperatures, the theoretical or expected density, and the measured density. The processing was conducted at standard atmospheric conditions (1 atmosphere) and in air as opposed to the reducing environment of the prior art. The theoretical or expected density is the density if mixture was processed in a reducing environment under high pressure. The present invention is able to achieve between 70% to 85% of the theoretical density by using a method that does not require a reducing environment and high pressures.

Table One

10

	Composition	Temp.	Expected Density	Measured Density
1.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	12.595
2.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	12.595
3.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	12.375
4.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	12.815
5.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	13.002
6.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	12.386
7.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	13.123
8.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	14.069
9.	80.0 W + 10 Copper + 10 Ni-Cr	1200	17.19	11.935
10.	80.0 W + 7 Copper + 7 Ni-Cr + 6 Sn	1200	17.1	12.815
11.	80.0 W + 10 Bronze + 8 Ni-Cr + 2 Sn	1200	17.16	12.452
12.	85.0 W + 15 Sn	300	17.49	14.454
13.	84.0 W + 14 Sn + 2 Ni-Cr	300	17.4	14.295
14.	82.0 W + 12 Sn + 6 Ni-Cr	300	17.21	13.695
15.	80.0 W + 18 Cu + 2 Fe-Cr	1200	17.19	12.75
16.	80.0 W + 16 Cu + 4 Fe-Cr	1200	17.16	12.254
17.	80.0 W + 16 Cu + 4 Fe	1200	17.18	12.518
18.	80.0 W + 17 Cu + 3 Cr	1200	17	12.98
19.	90.0 W + 8.75 Cu + 1.25 Ni-Cr	1200	18.26	14.157
20.	60.0 W + 35 Cu + 5 Ni-Cr	1200	15.13	12.991

PU1113

21.	70.0 W + 26.25 Cu + 3.75 Ni-Cr	1200	16.18	14.3
22.	80.0 W + 17.5 Cu + 2.5 Ni-Cr	1200	17.22	14.41
23.	90.0 W + 8.75 Cu + 1.25 Ni-Cr	1200	18.26	14.63
24.	90.0 W + 8.75 Cu + 1.25 Ni-Cr	1200	18.25838	14.12
25.	92.0 W + 7 Cu + 1 Ni-Cr	1200	18.4667	14.34
26.	94.0 W + 5.25 Cu + 0.75 Ni-Cr	1200	18.67503	14.53
27.	96.0 W + 3.5 Cu + 0.5 Ni-Cr	1200	18.88335	14.63
28.	90.0 W + 8.75 Cu + 1.25 Ni-Cr	1200	18.25838	14.64
29.	92.0 W + 7 Cu + 1 Ni-Cr	1200	18.4667	14.85
30.	94.0 W + 5.25 Cu + 0.75 Ni-Cr	1200	18.67503	15.04
31.	96.0 W + 3.5 Cu + 0.5 Ni-Cr	1200	18.88335	15.22

PU1113

Although the present invention has been described in reference to irons, those skilled in the pertinent art will recognize that the present invention may be utilized with putter heads 91 and wood heads 93 as illustrated in FIGS. 15 and 16 respectively.

From the foregoing it is believed that those skilled in the pertinent art will recognize the 5 meritorious advancement of this invention and will readily understand that while the present invention has been described in association with a preferred embodiment thereof, and other embodiments illustrated in the accompanying drawings, numerous changes, modifications and substitutions of equivalents may be made therein without departing from the spirit and scope of this invention which is intended to be unlimited by the foregoing except as may appear in the 10 following appended claims. Therefore, the embodiments of the invention in which an exclusive property or privilege is claimed are defined in the following appended claims.

PU1113

CLAIMS

We claim as our invention:

1. A golf club head comprising:

a body with a striking plate, a heel end, a toe end, and a cavity; and

5 a weighting member disposed in the cavity of the body, the weighting member composed of a multiple component material having at least a high-density component, a binding component, and an anti-oxidizing component.

2. The golf club head according to claim 1 wherein the multiple component material

10 comprises tungsten, copper and an anti-oxidizing component.

3. The golf club head according to claim 2 wherein the anti-oxidizing component is selected from the group consisting of chromium, nickel-chrome, stainless steel, nickel superalloy and other chromium alloys.

15

4. The golf club head according to claim 2 wherein the anti-oxidizing component is nickel chrome.

5. The golf club head according to claim 1 wherein the golf club head is an iron.

20

6. The golf club head according to claim 1 wherein the golf club head is a diver, fairway

PU1113
wood or a putter.

7. The golf club head according to claim 1 wherein the golf club head is a blade iron and the weighting member is an annular structure about the rear wall of the blade iron opposite a striking plate of the blade iron.

5

8. The golf club head according to claim 2 wherein the weight percentage of the tungsten is greater than the weight percentage of the anti-oxidizing component.

9. The golf club head according to claim 1 wherein the weight member is less than twenty percent of the volume of the golf club head and is more than twenty percent weight of the golf club head.

10. The golf club head according to claim 2 wherein the tungsten component is 5-90 weight percent of the weight member, the copper component is 5-40 weight percent of the weight member, and the anti-oxidizing component is 0.5-10 weight percent of the weight member.

11. The golf club head according to claim 1 wherein the high-density component is selected from the group consisting of tungsten, molybdenum, tantalum and platinum.

20

PU1113

12. A golf club head comprising:

a body having a striking plate, a toe end, a heel end, a main rear cavity opposite the striking plate, the main rear cavity defined by a top wall, a bottom wall, a heel wall and a toe wall, the bottom wall having a second cavity with a predetermined configuration; and
a weighting member disposed within the second cavity and occupying the entire cavity, the weighting member comprising a multiple component material having at least a high-density component, a binding component and an anti-oxidizing component.

10

13. The golf club head according to claim 12 wherein the multiple component material comprises tungsten, copper and an anti-oxidizing component.

15 14. The golf club head according to claim 13 wherein the anti-oxidizing component is selected from the group consisting of chromium, nickel-chrome, stainless steel, nickel superalloy and other chromium alloys.

15. The golf club head according to claim 12 wherein the main rear cavity further comprises 20 an undercut recess into at least one region of the top wall, bottom wall, toe wall or heel wall.

PU1113

16. The golf club head according to claim 13 wherein the weight percentage of the tungsten is greater than the weight percentage of the anti-oxidizing component.

17. The golf club head according to claim 12 wherein the weight member is less than twenty 5 percent of the volume of the golf club head and is more than twenty percent weight of the golf club head.

18. The golf club head according to claim 12 wherein the body is composed of material selected from the group consisting of titanium, titanium alloy, steel, zirconium and zirconium 10 alloy.

19. A method for manufacturing a golf club head, the method comprising:
introducing a multiple component material into a cavity on a body of a golf club head; and
15 heating the multiple component material to its liquid phase temperature for liquid phase sintering of at least one component of the multiple component material.

20. The method according to claim 19 further comprising compacting the multiple component material subsequent to introducing the multiple component material.

20

21. The method according to claim 19 wherein introducing the multiple component material

PU1113

comprises pressuring a plurality of compacts of the multiple component material into the cavity.

22. The method according to claim 19 wherein heating the multiple component material is performed in an open air environment at one atmosphere of pressure.

5



23. The method according to claim 19 wherein heating the multiple component material is performed in an inert environment or a reducing environment.




24. The method according to claim 19 wherein the multiple component material is in a
10 powder form prior to heating.

25. The method according to claim 19 wherein the multiple component material comprises tungsten, copper and an anti-oxidizing component.

15 26. The method according to claim 25 wherein the anti-oxidizing component is selected from the group consisting of chromium, nickel-chrome, stainless steel, nickel superalloy and other chromium alloys.

27. The method according to claim 19 wherein the golf club head is an iron, putter, driver or
20 fairway wood.

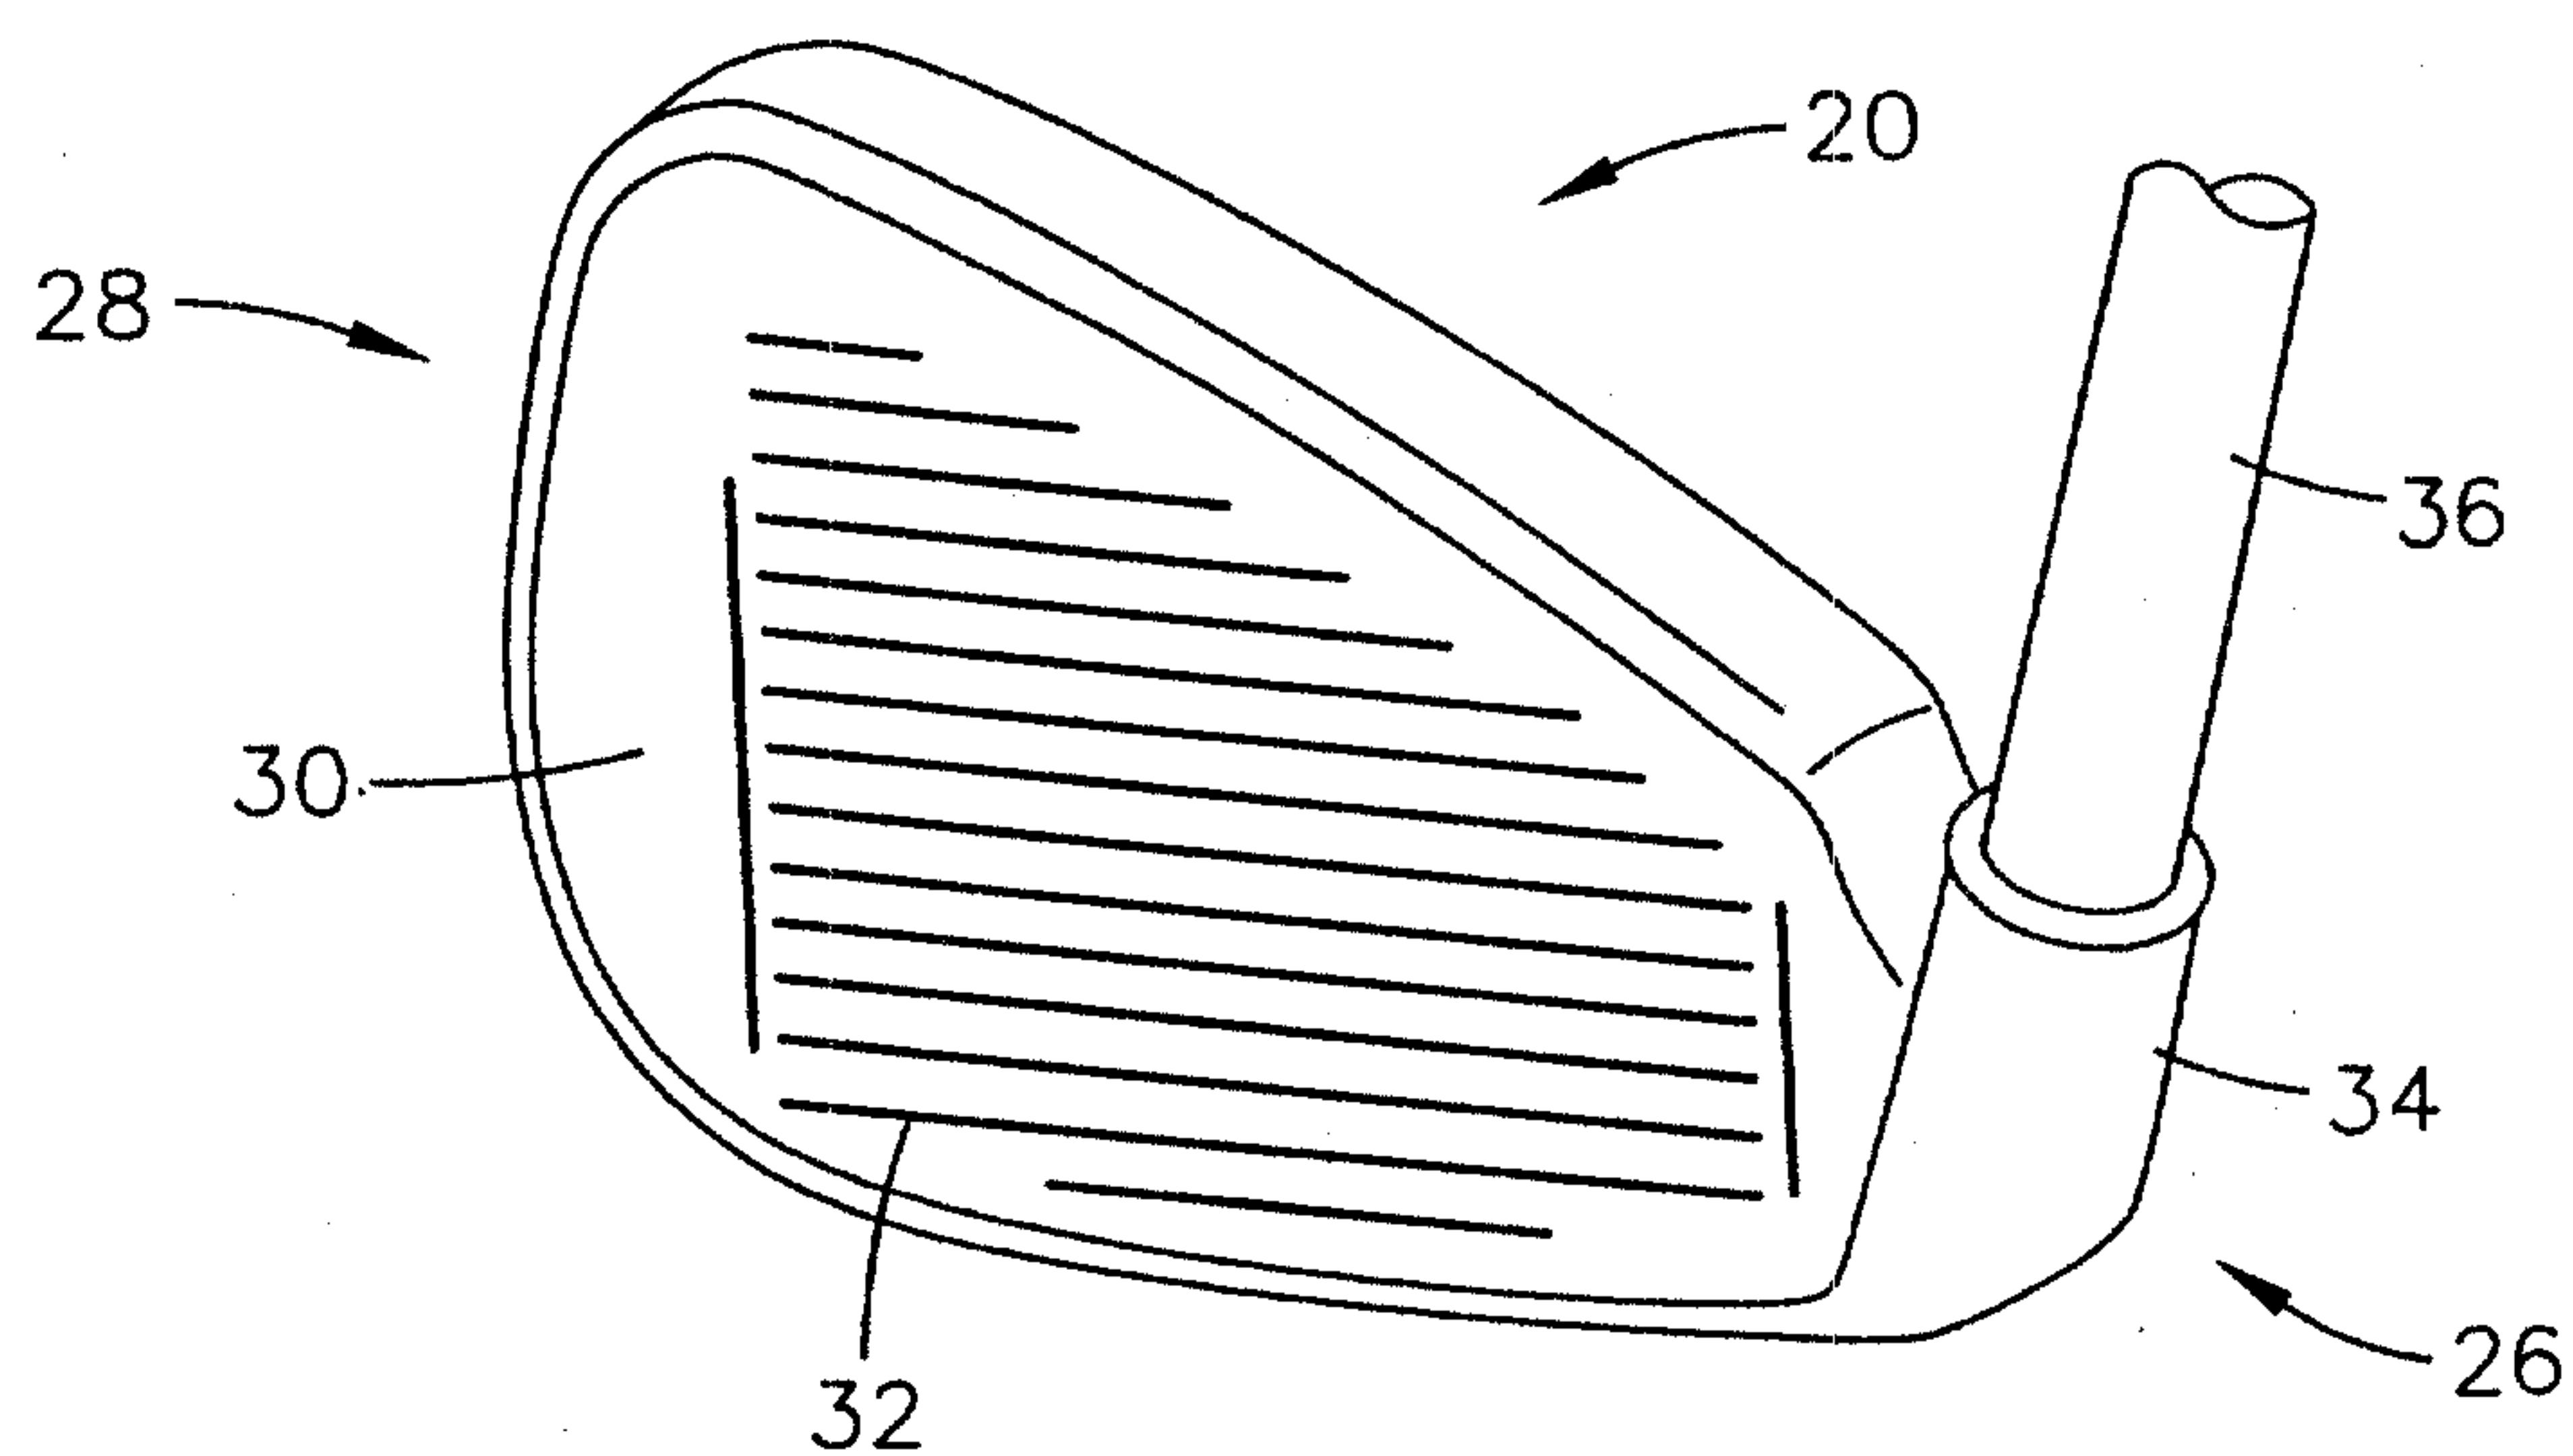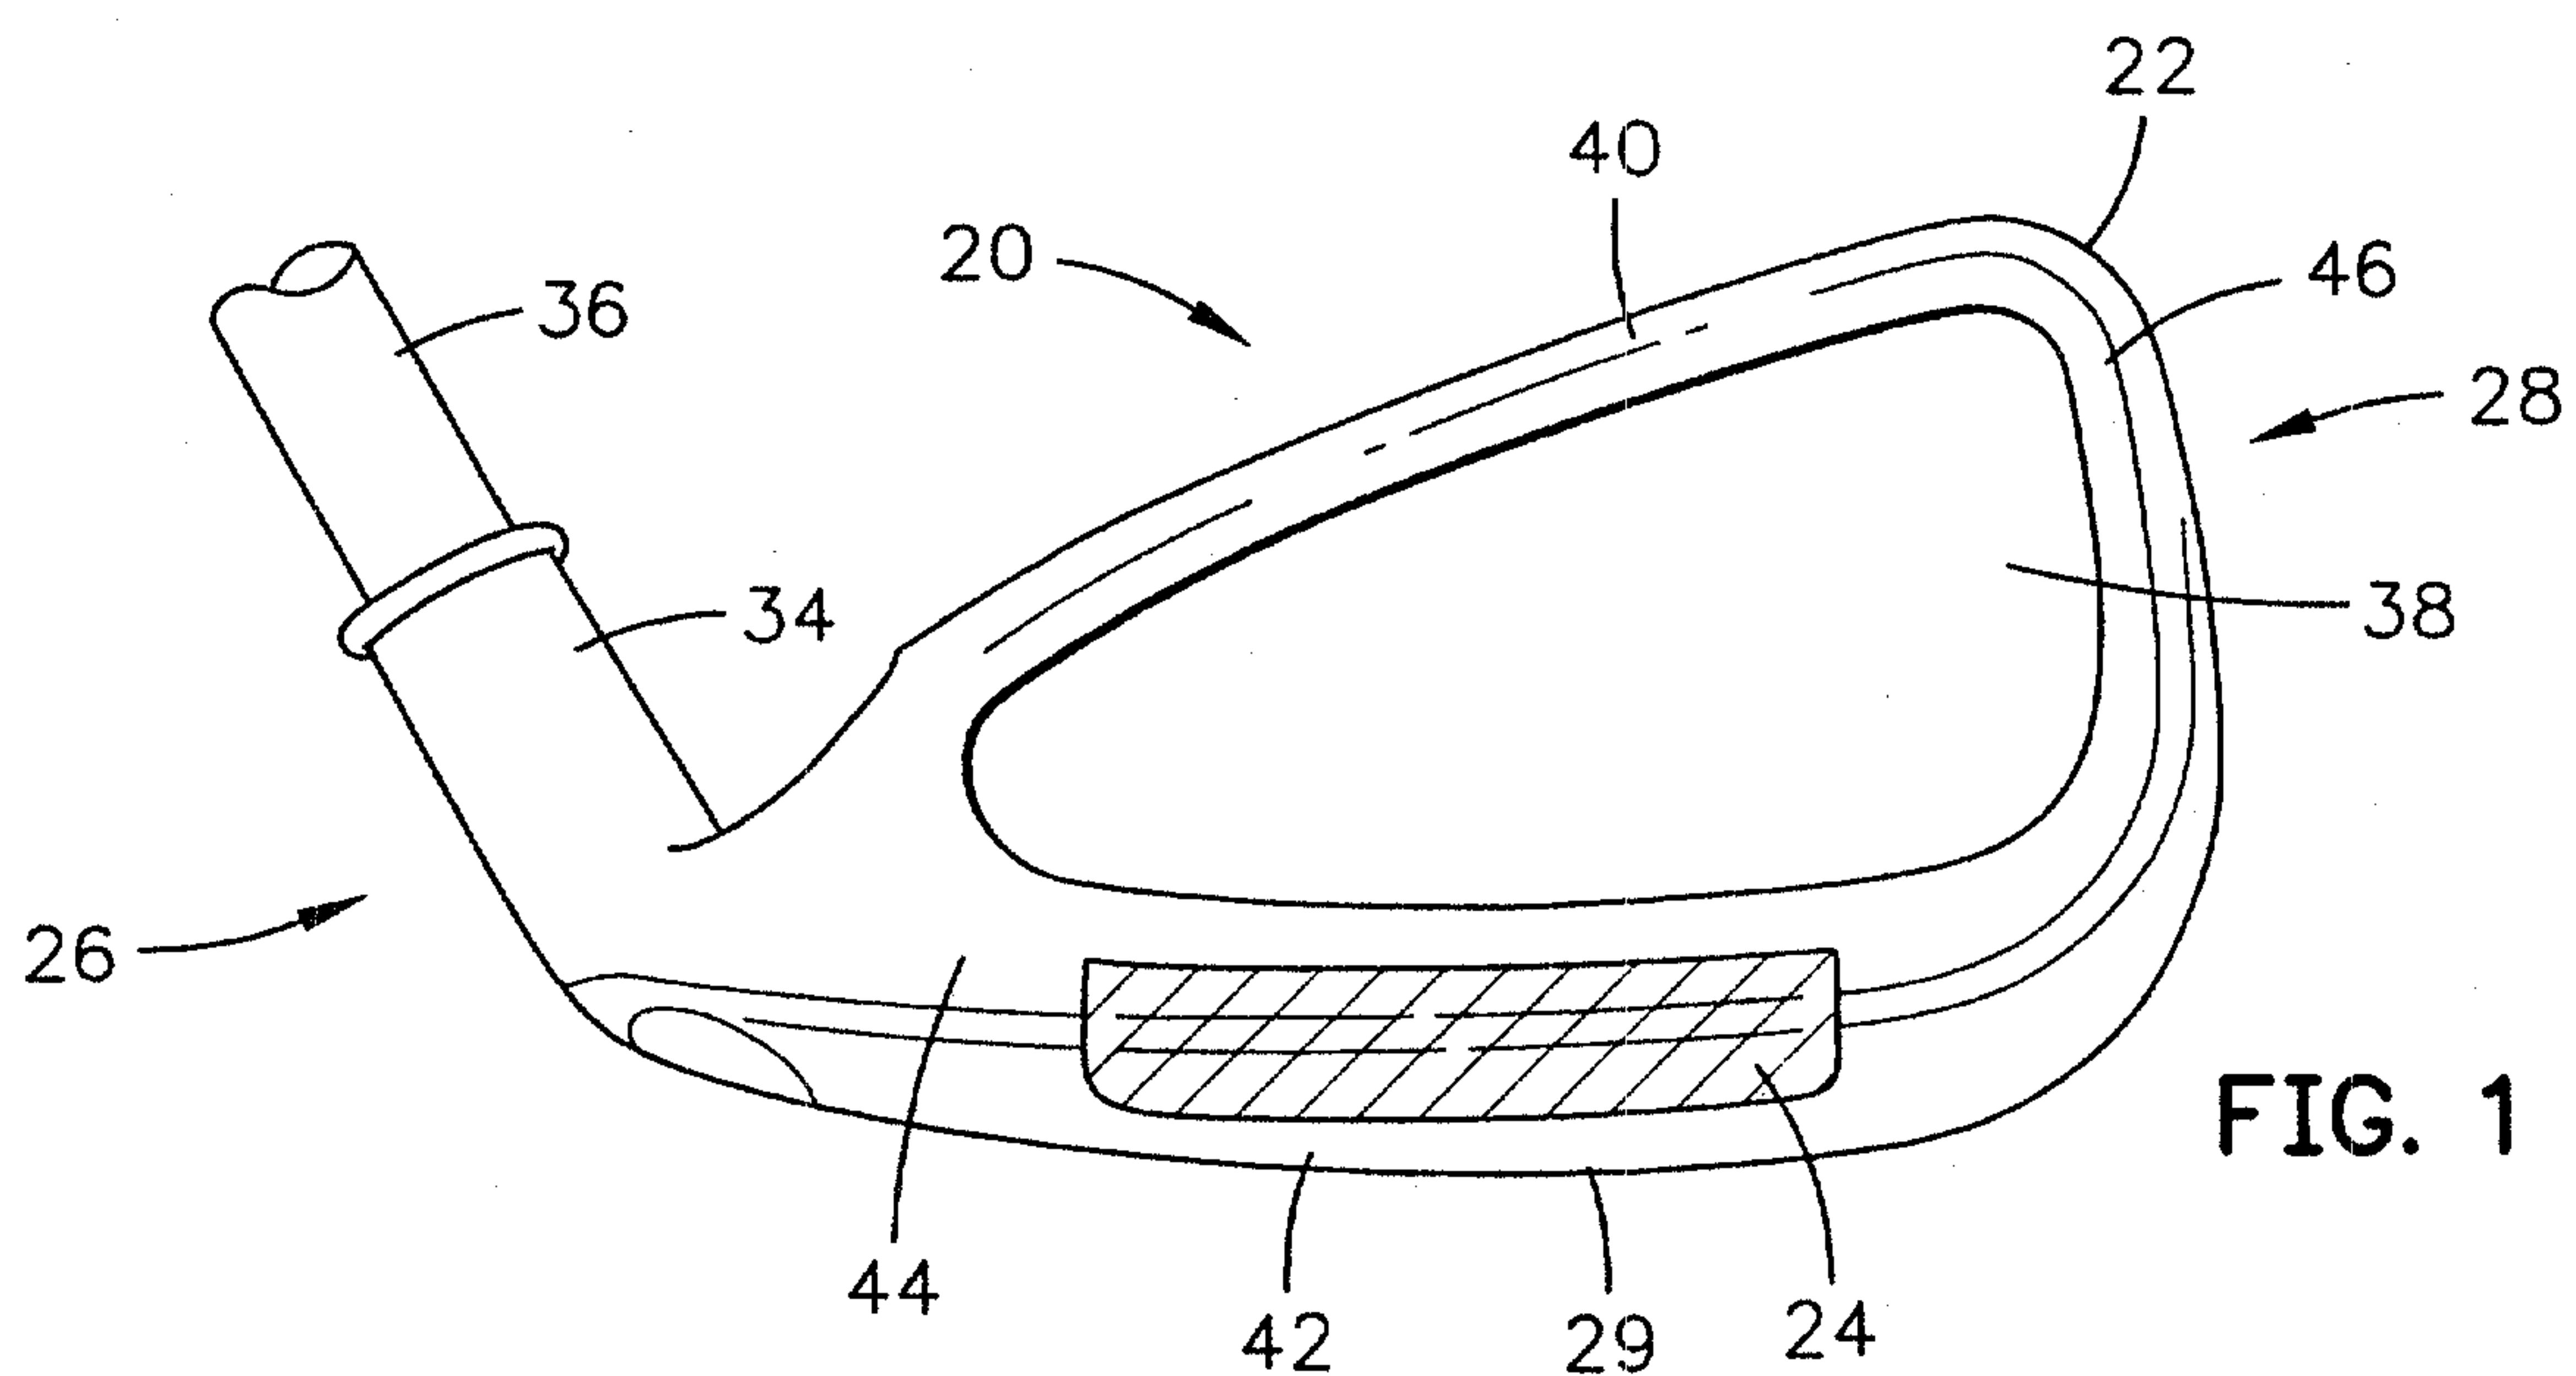

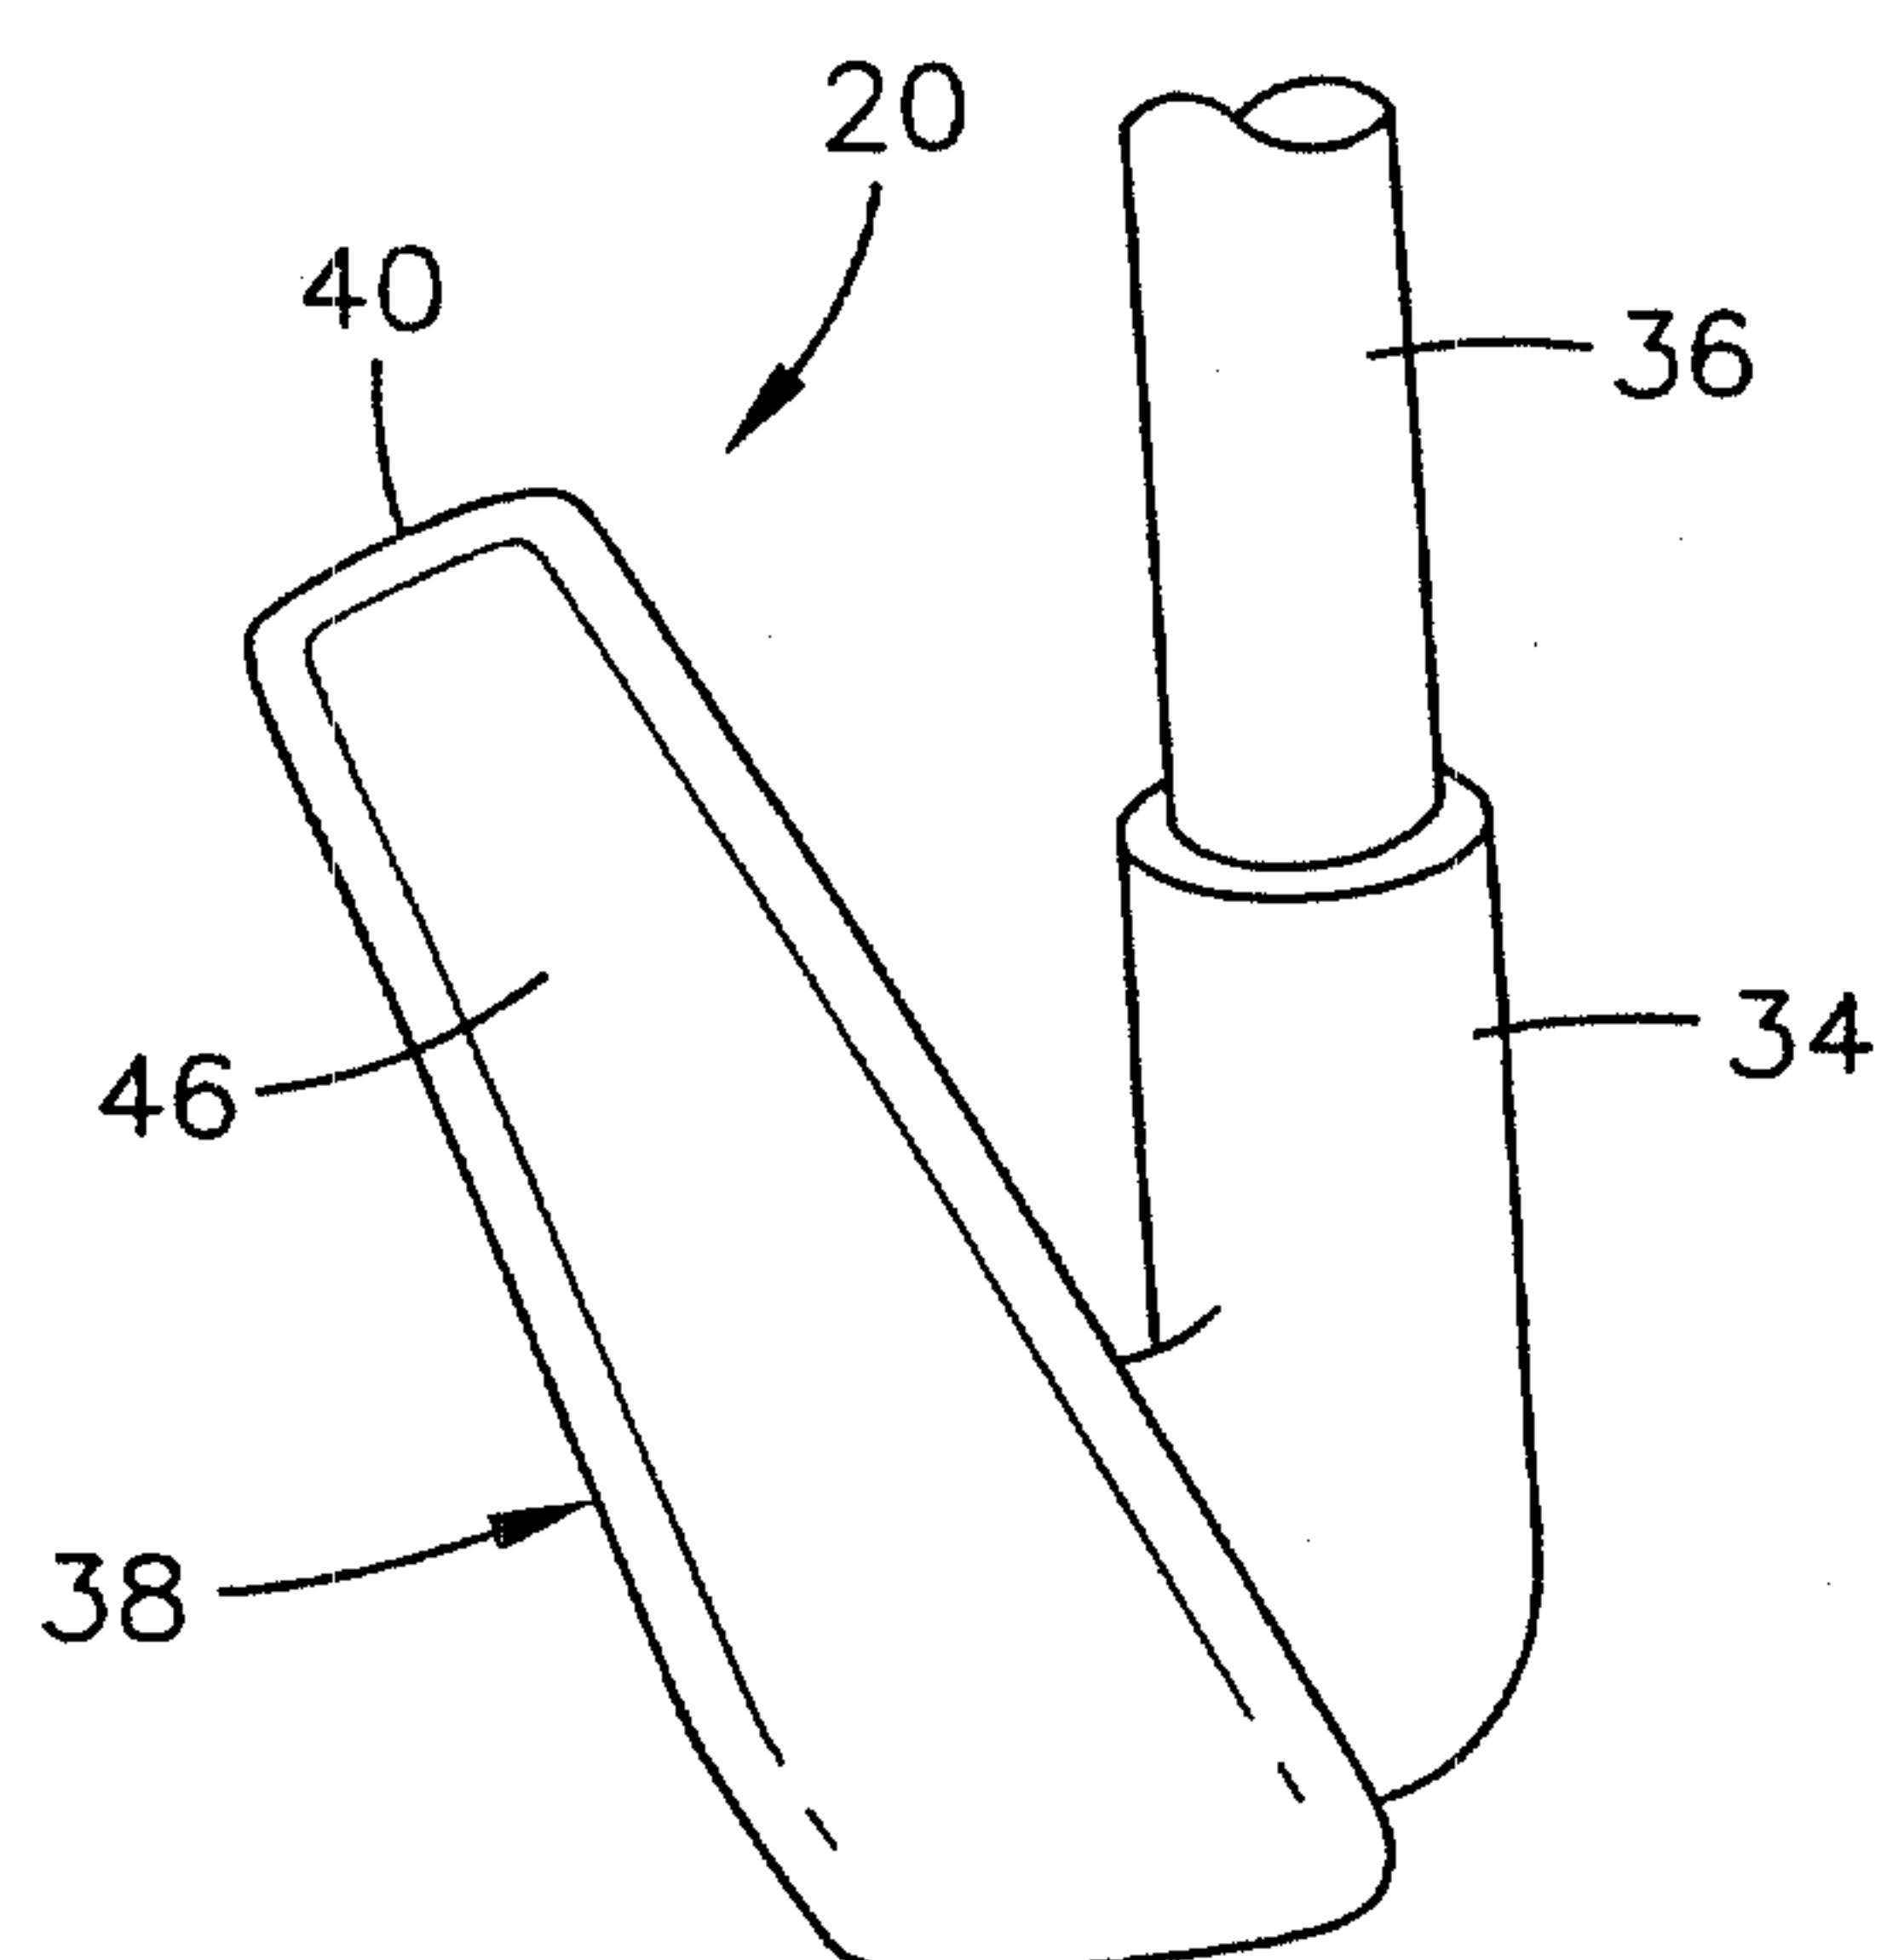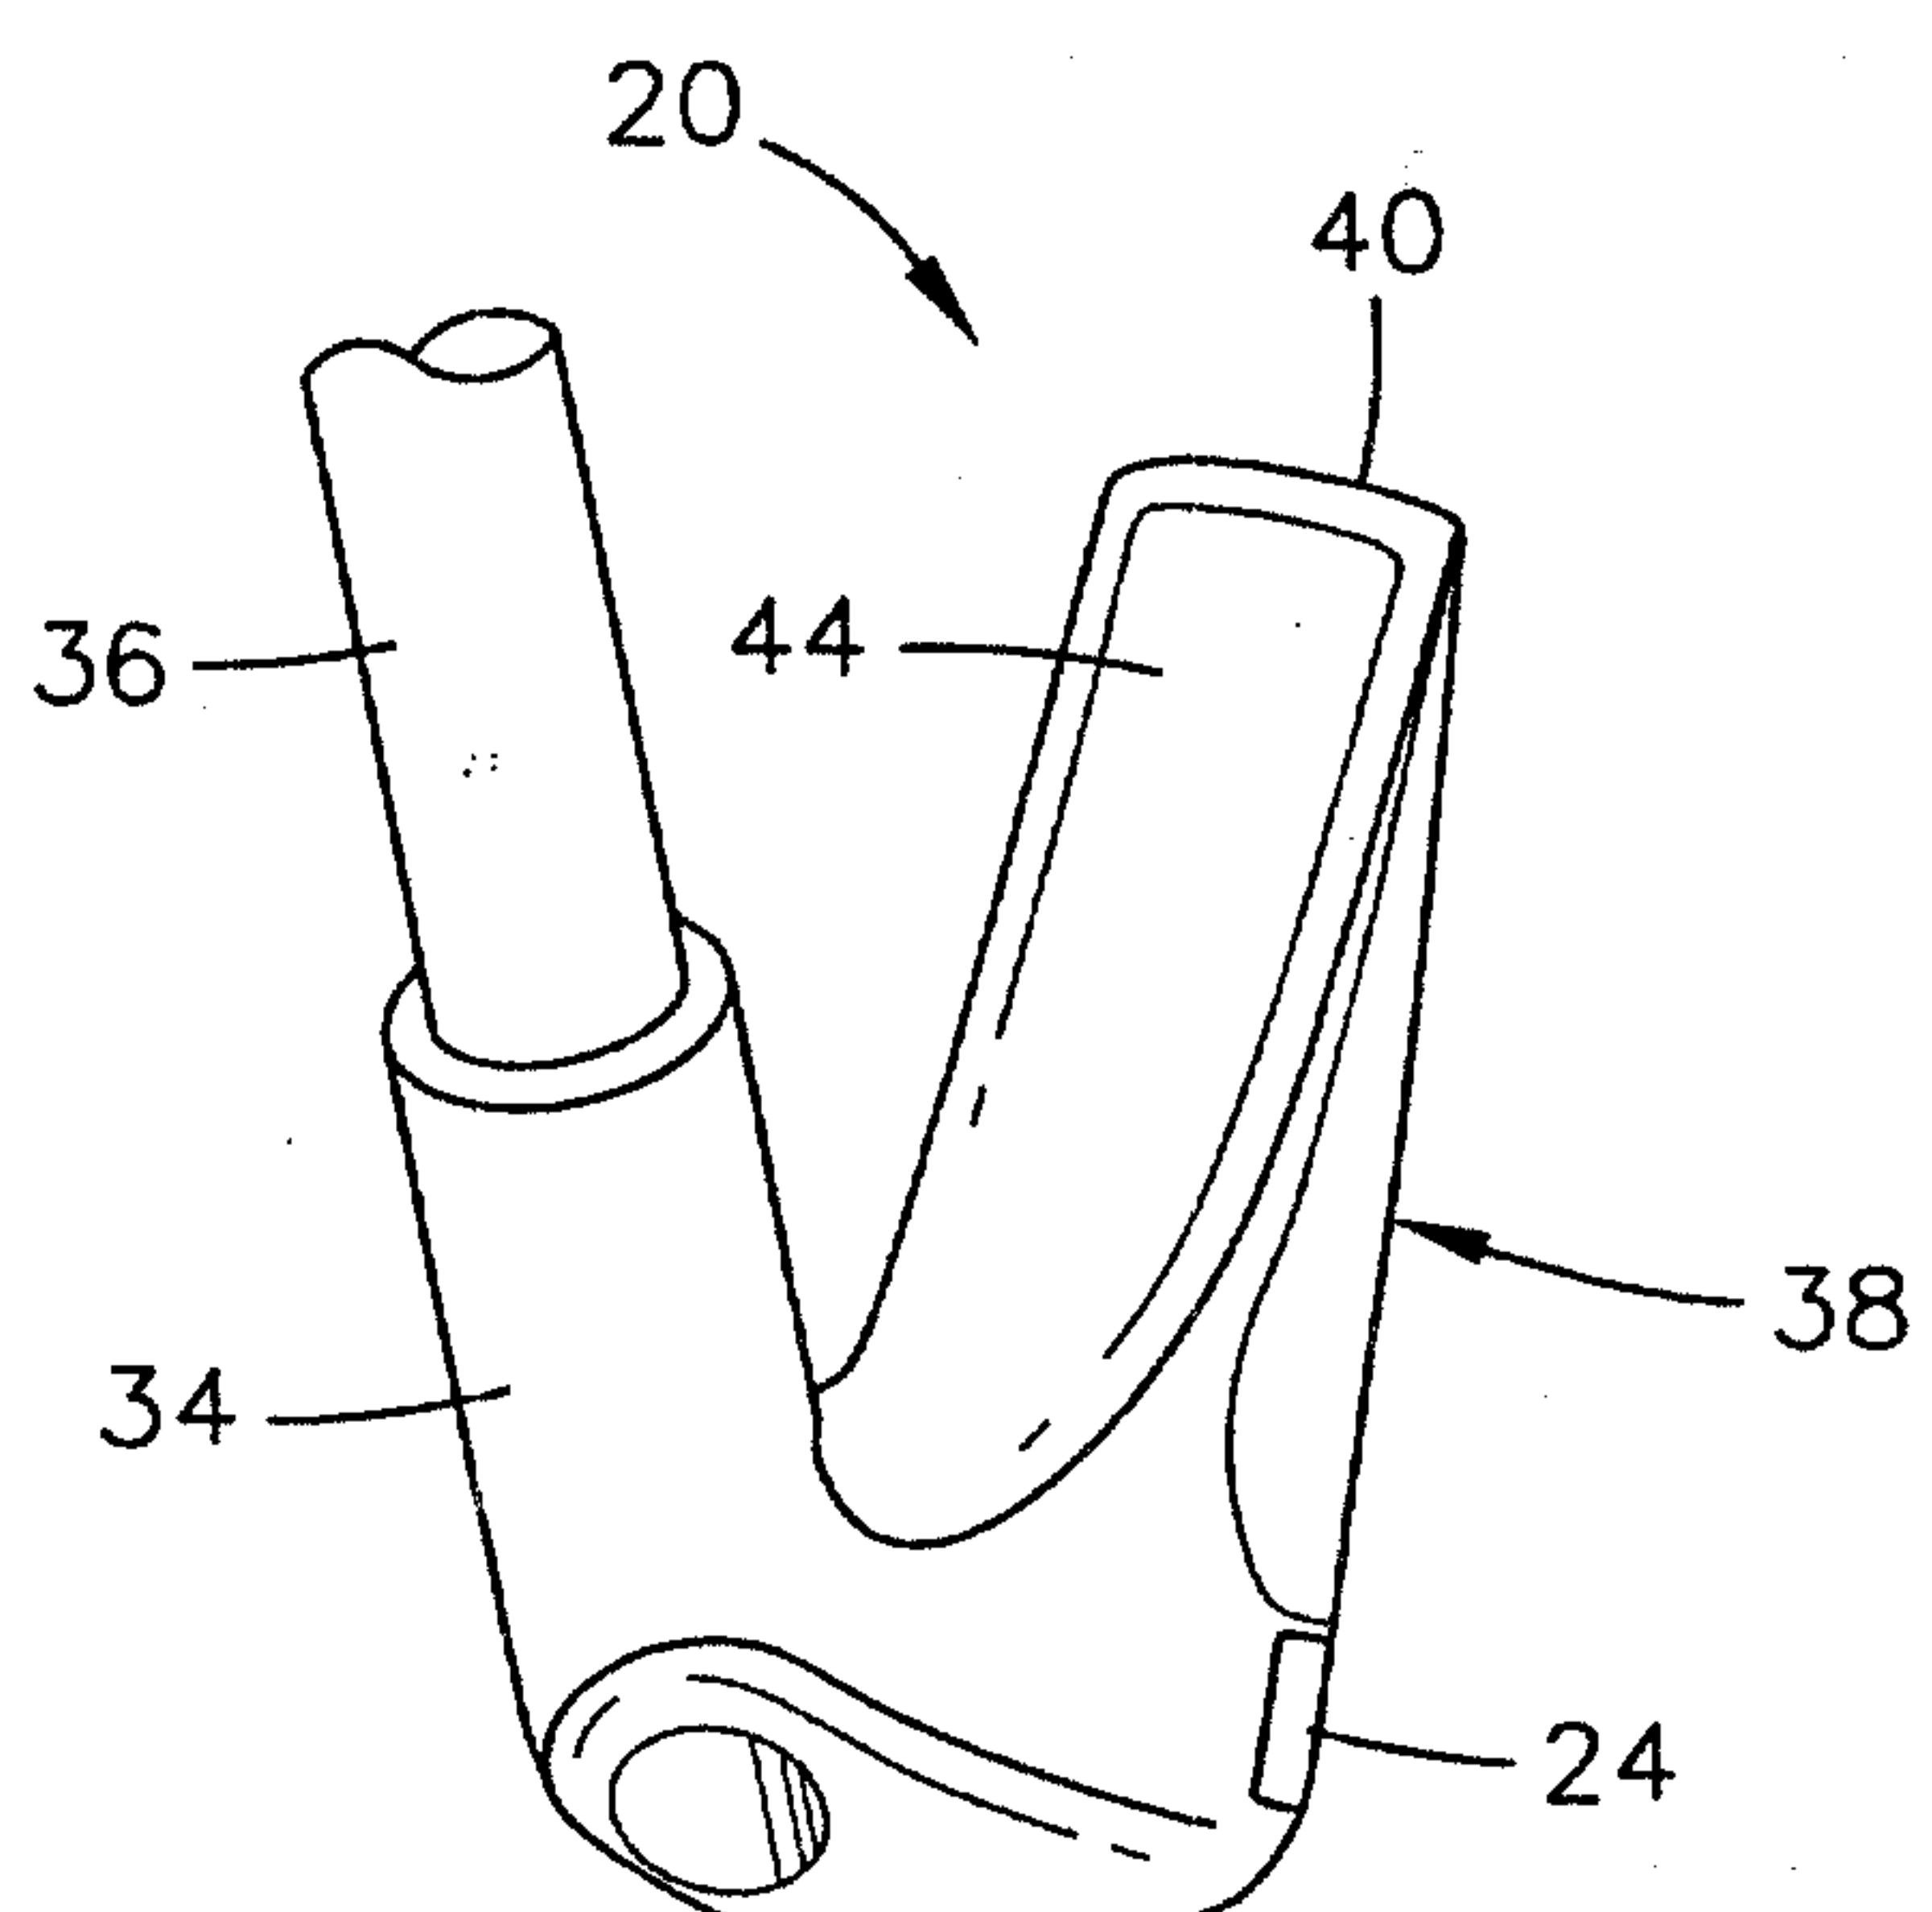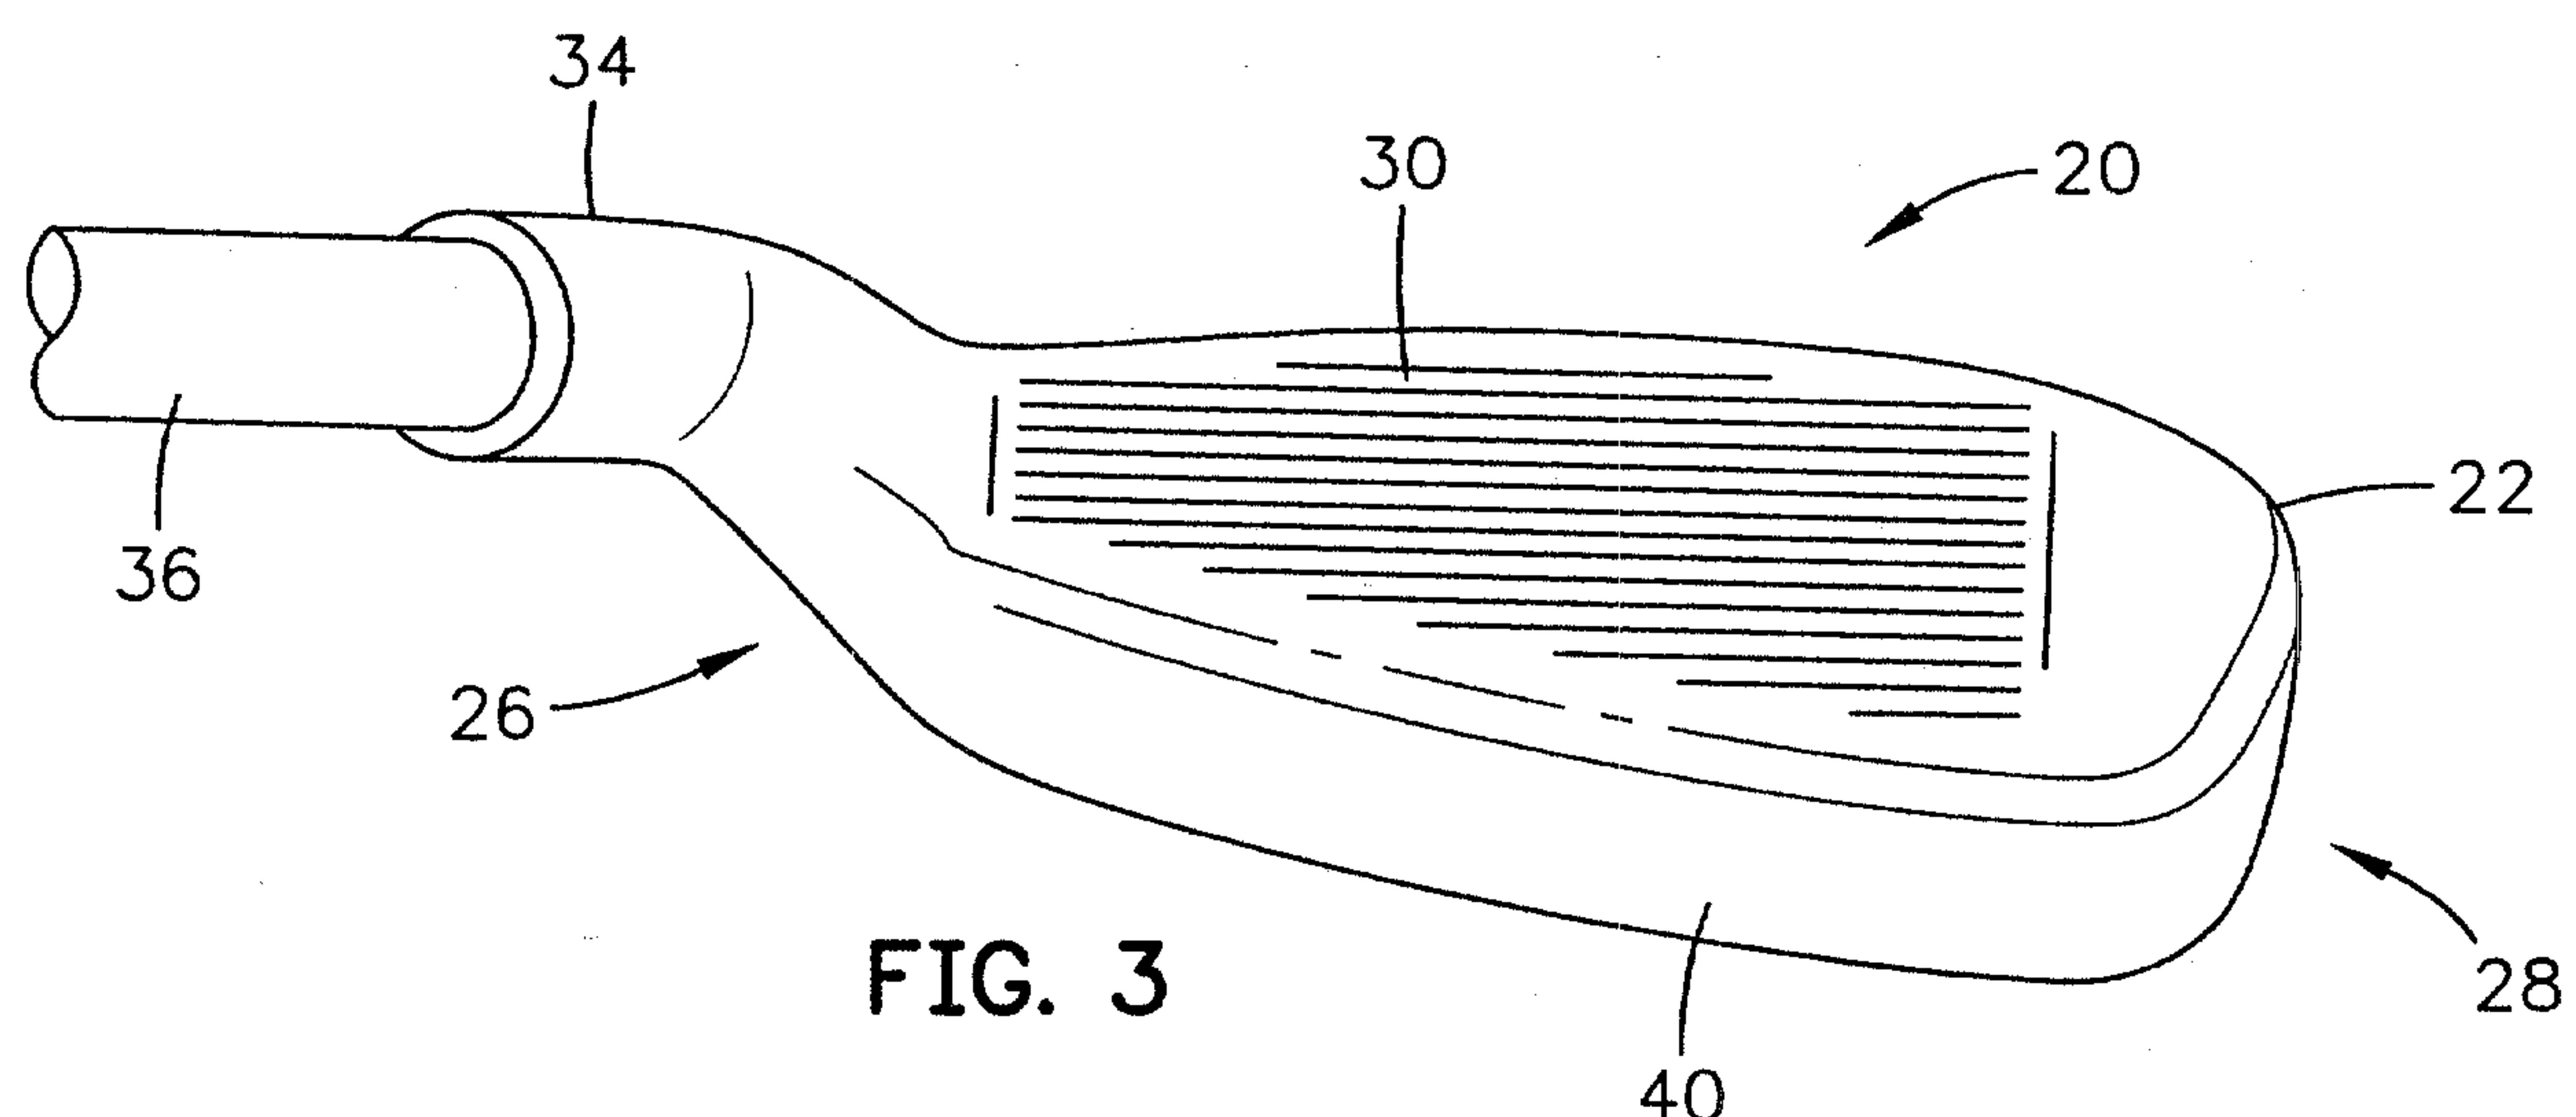

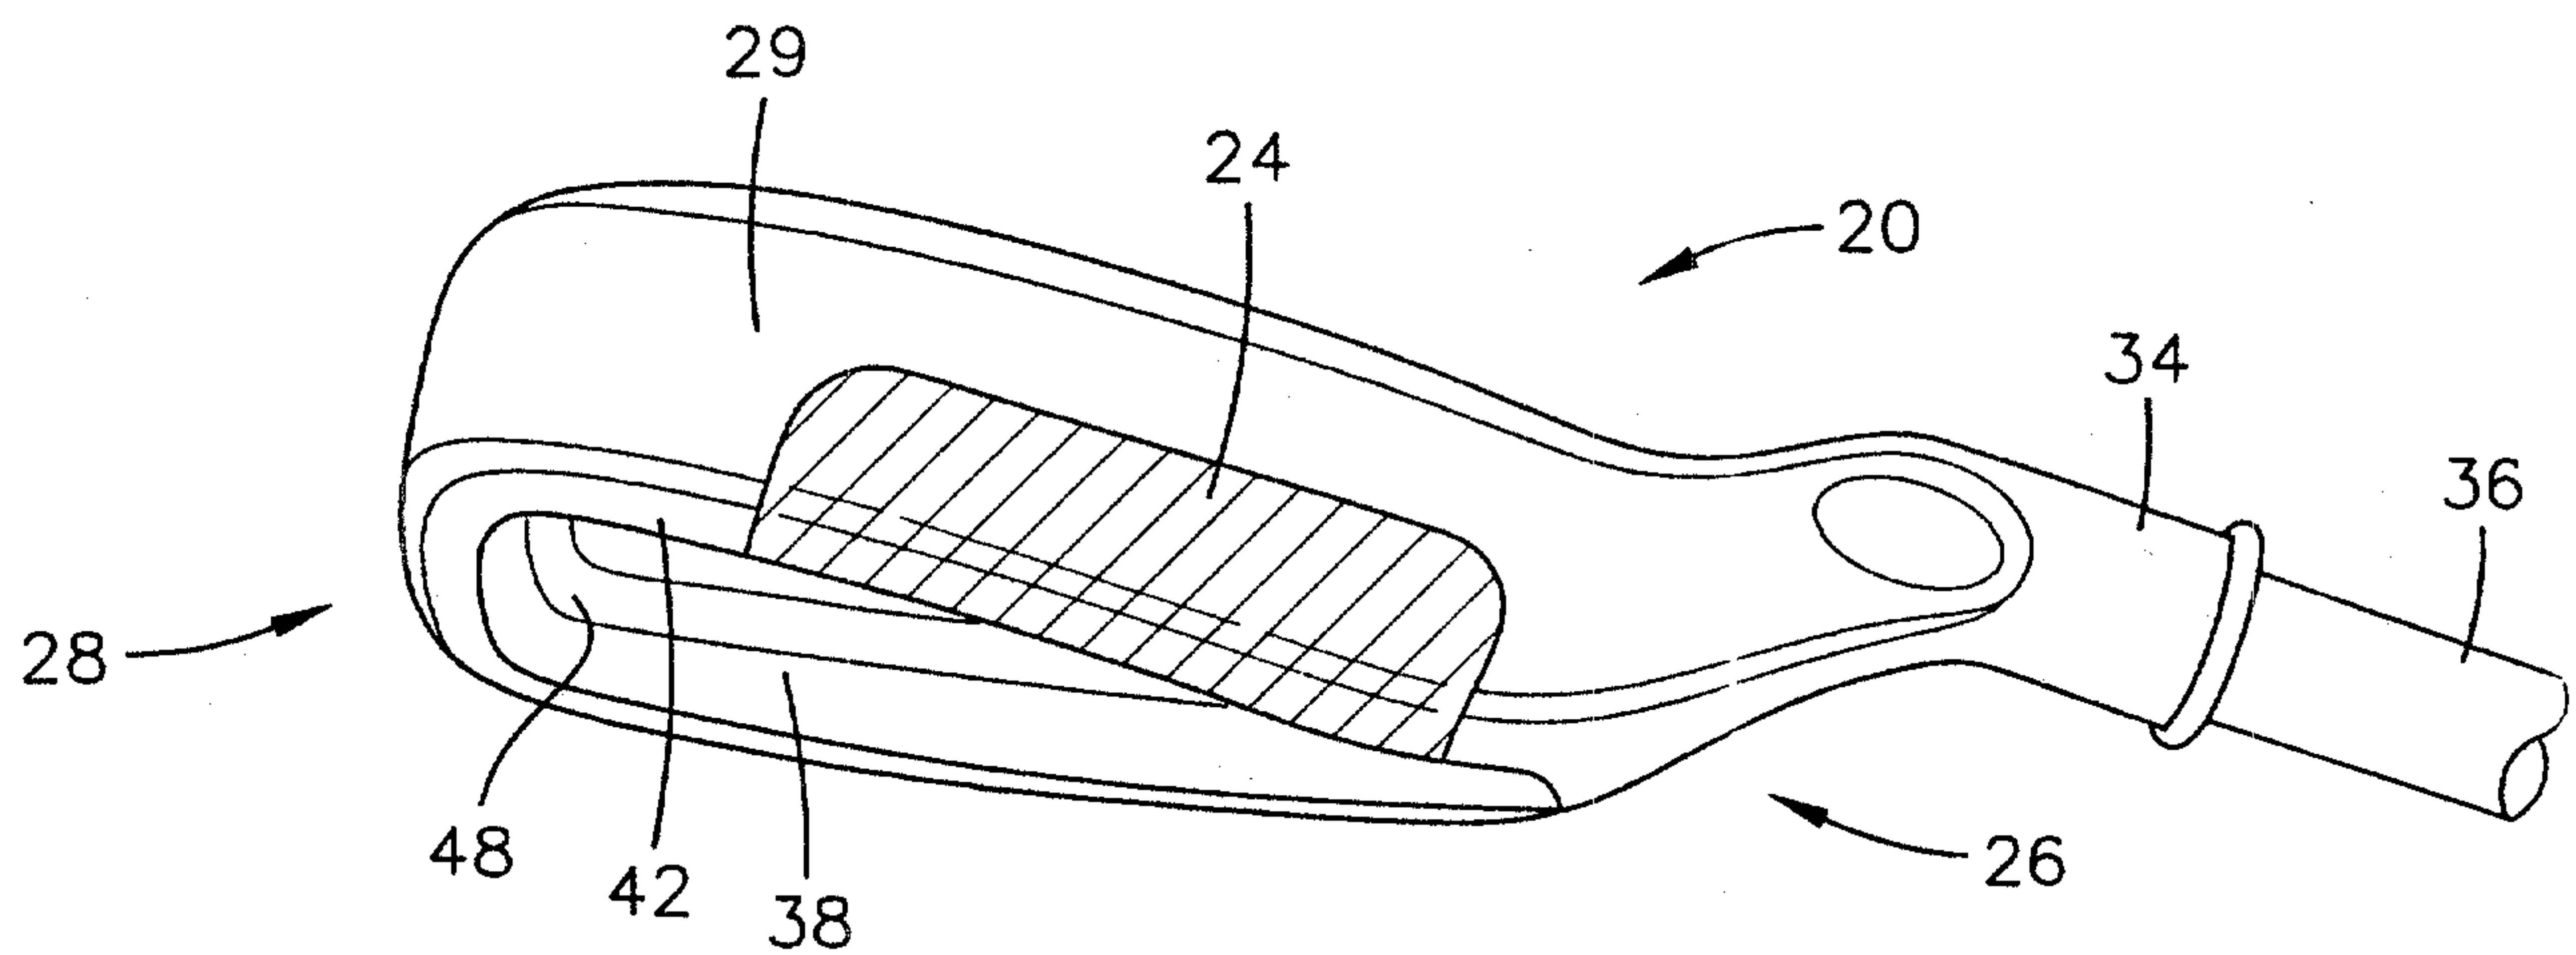


FIG. 6

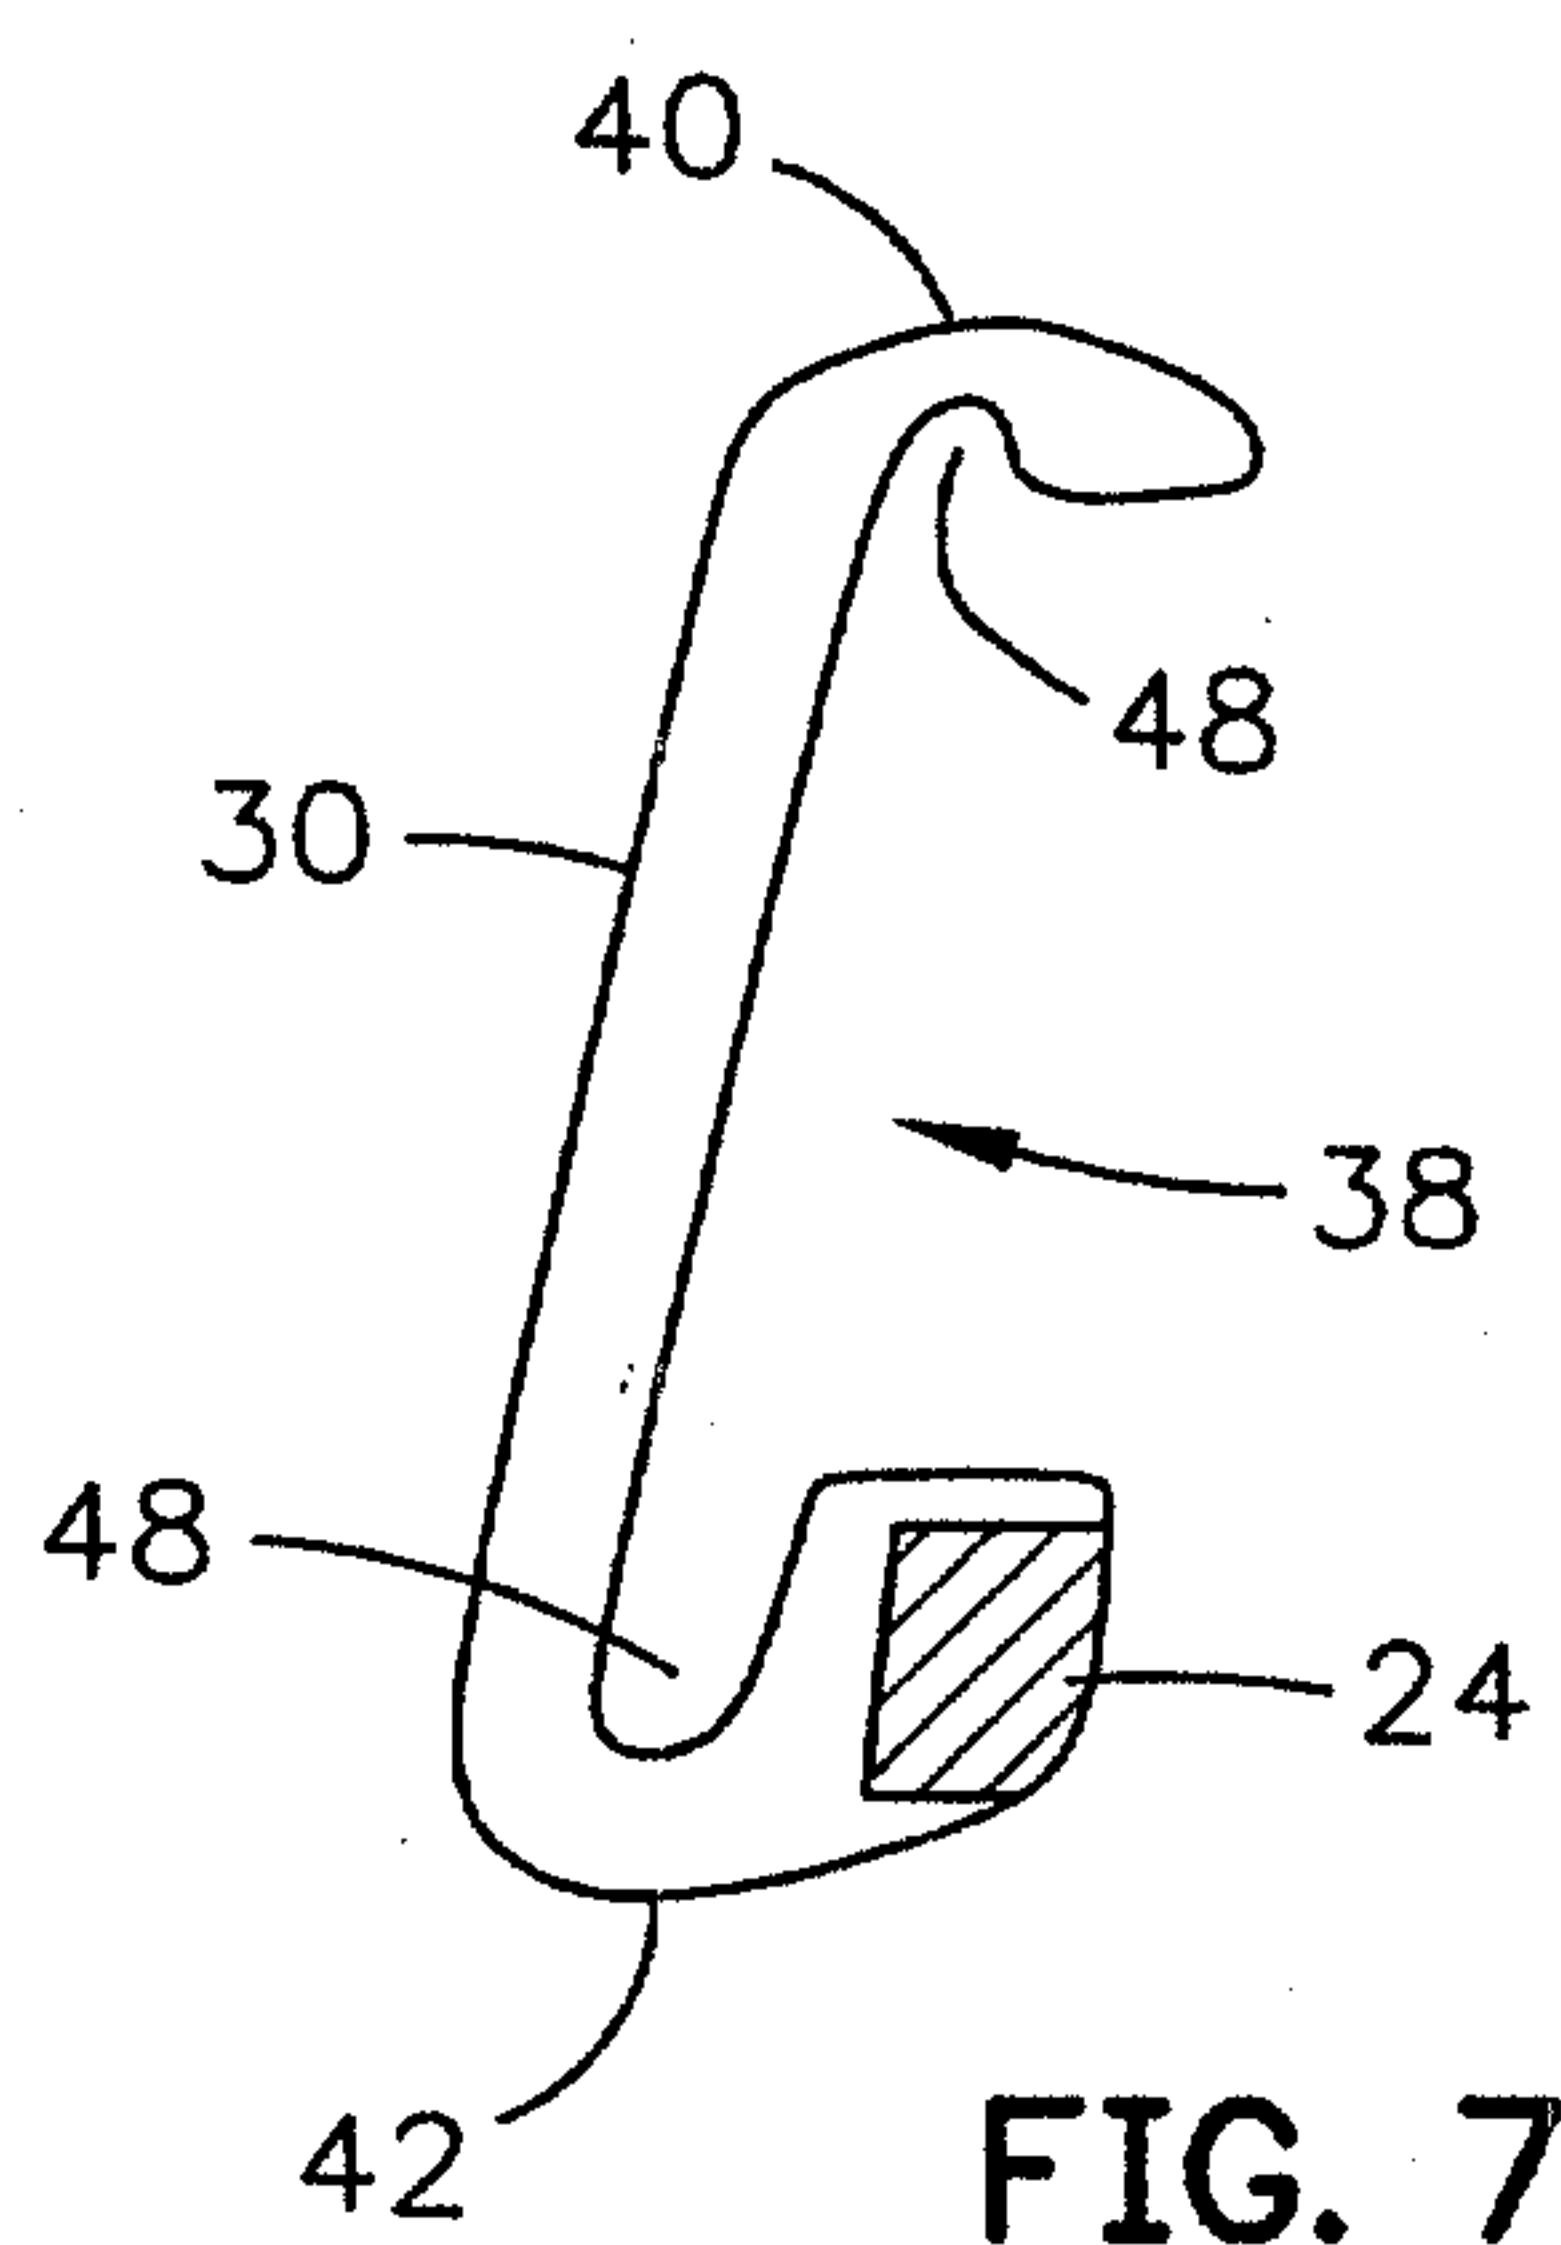


FIG. 7

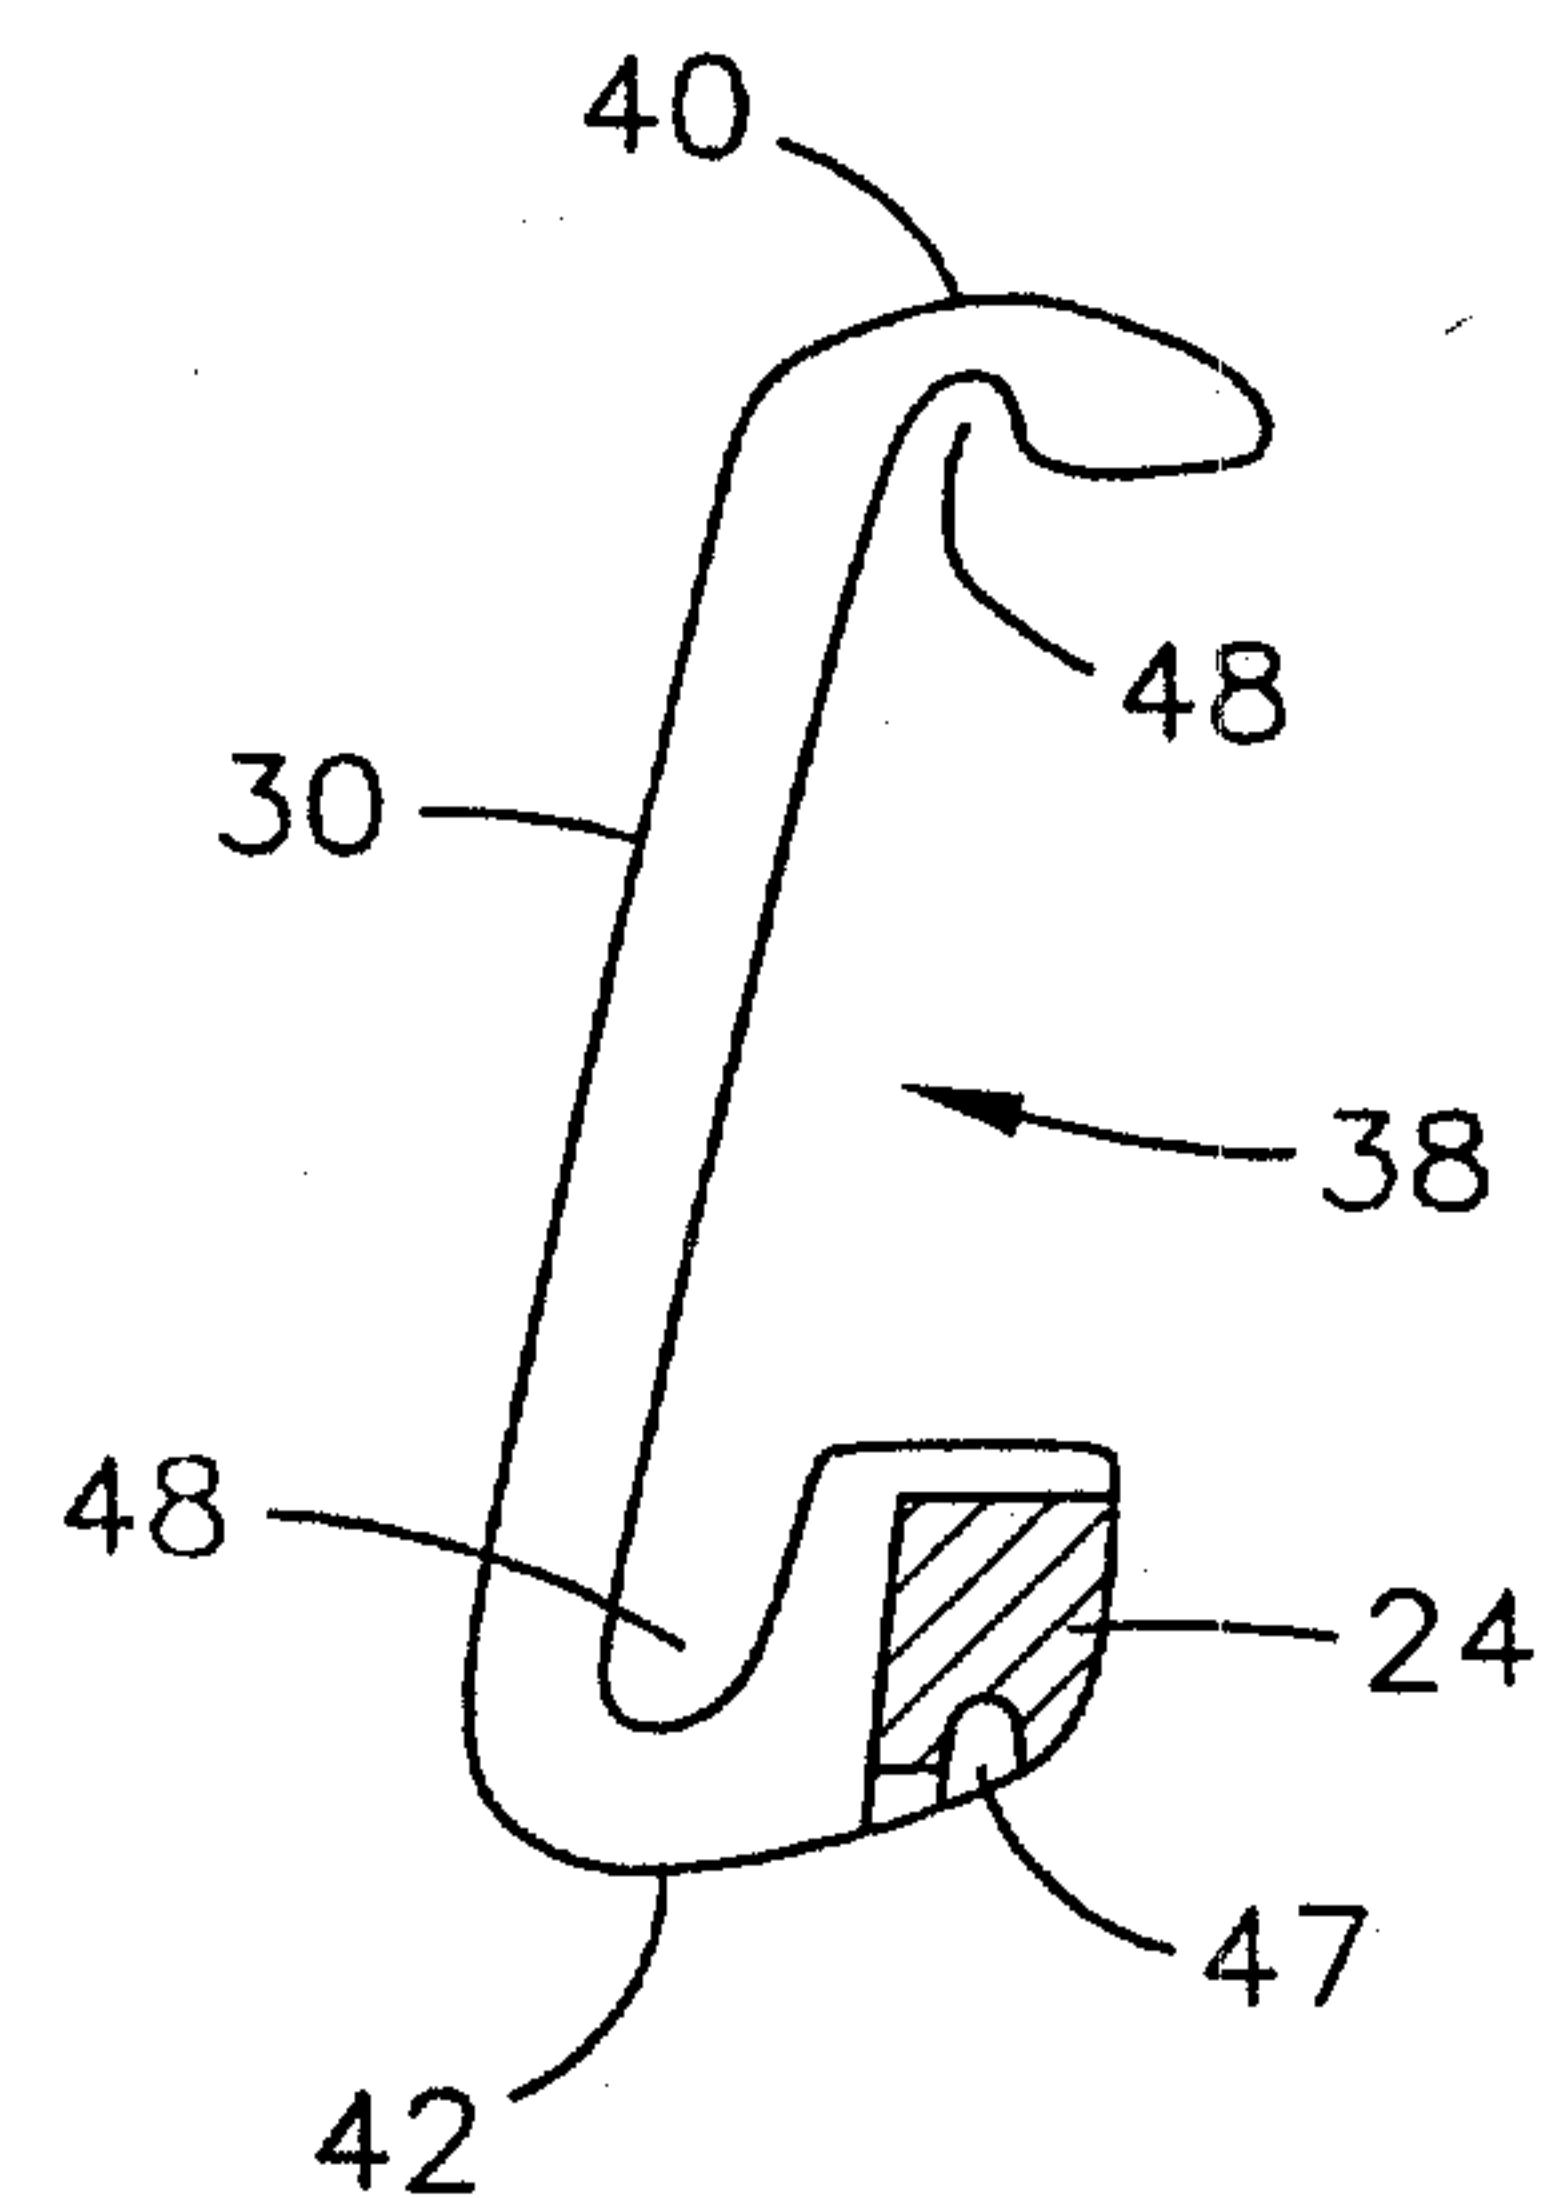


FIG. 7A

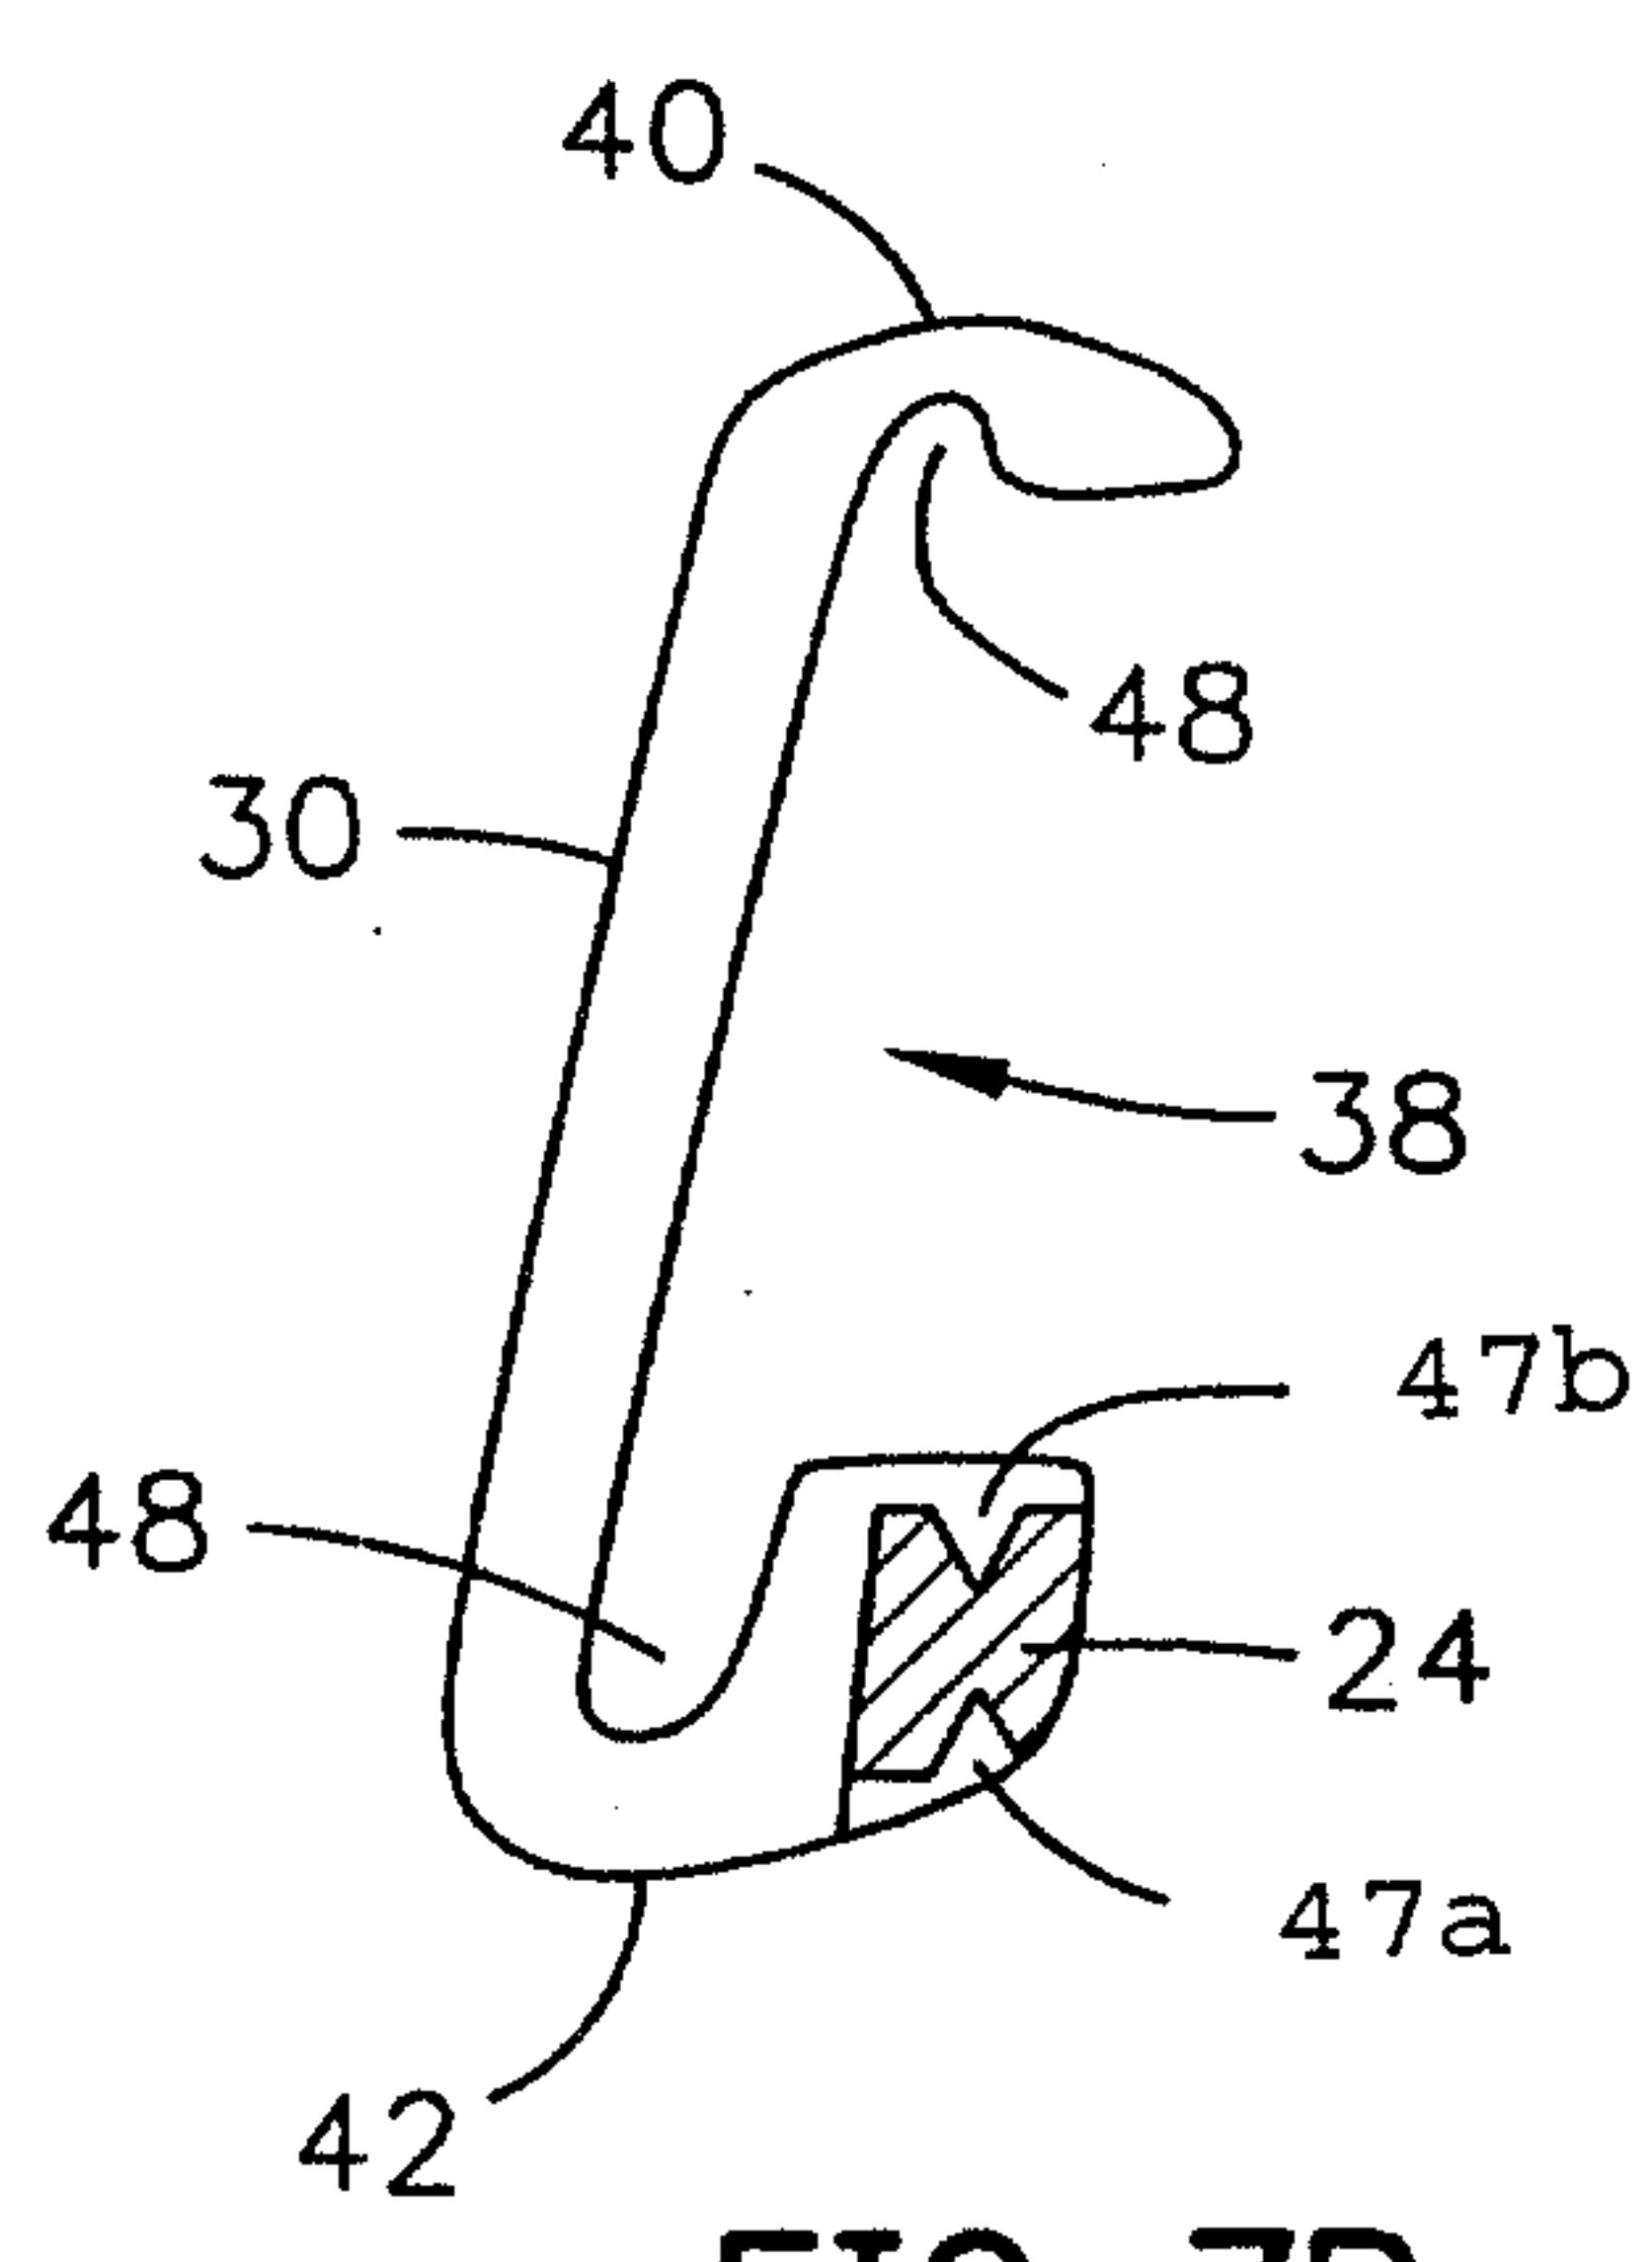


FIG. 7B

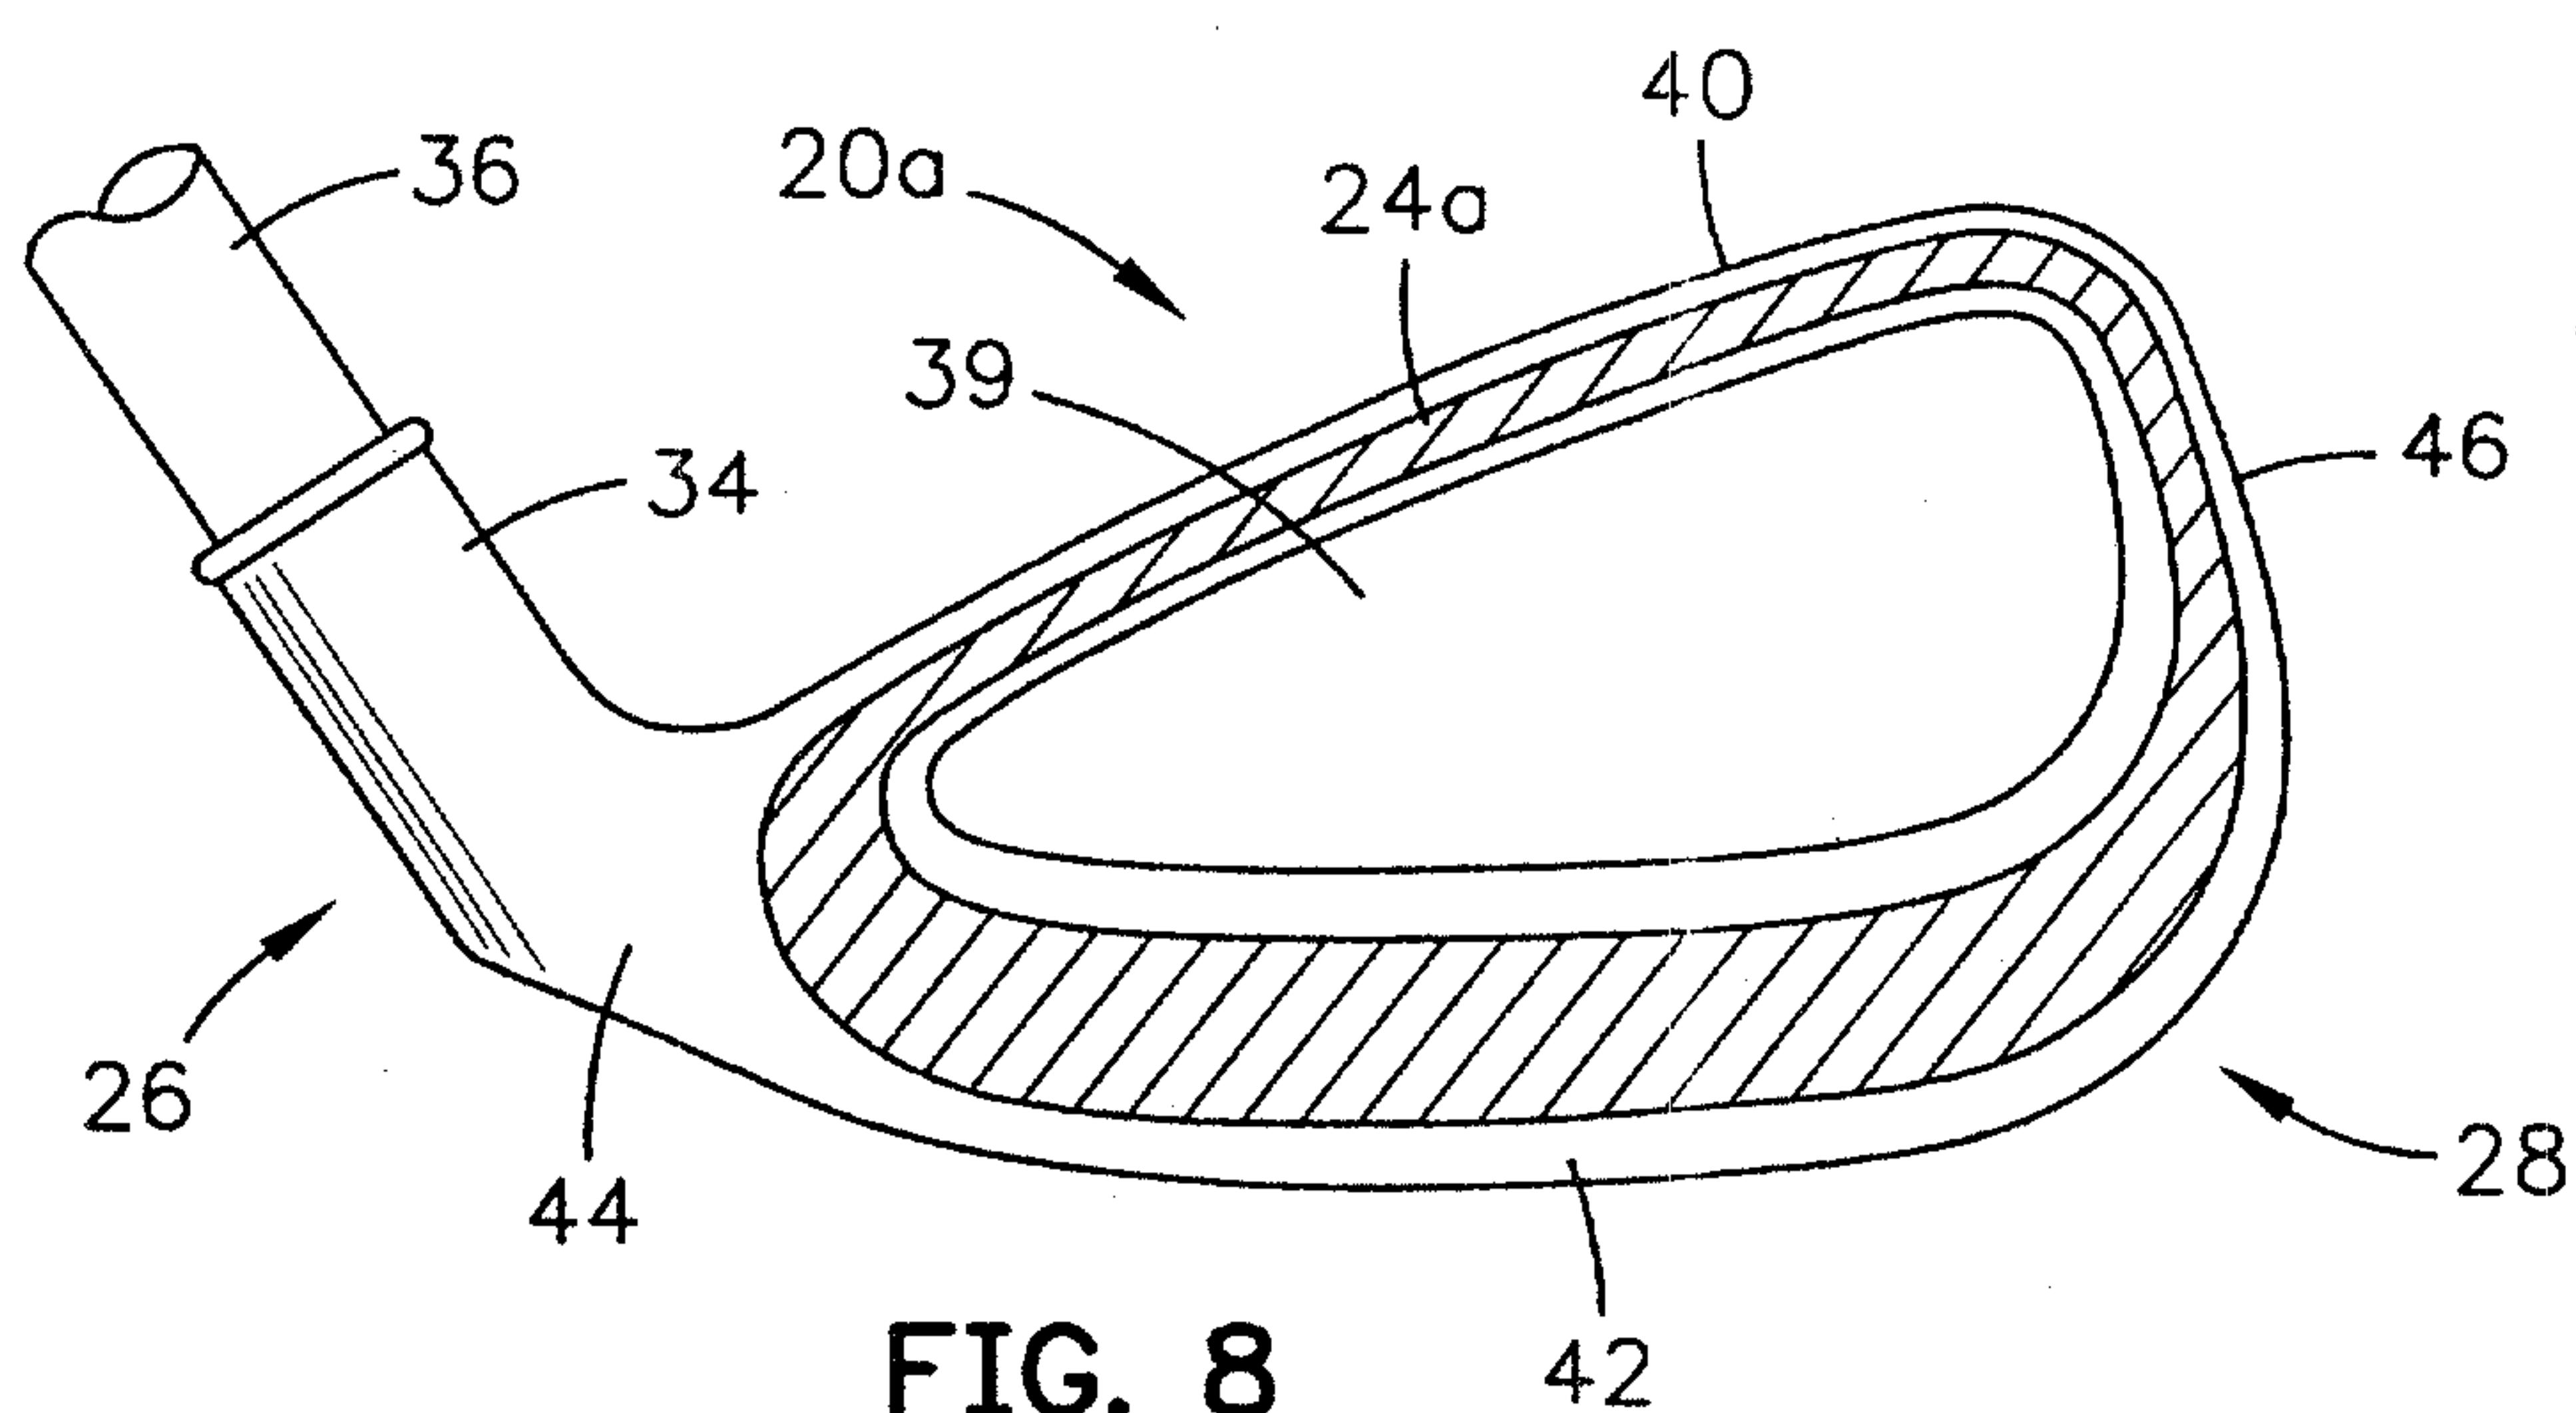


FIG. 8

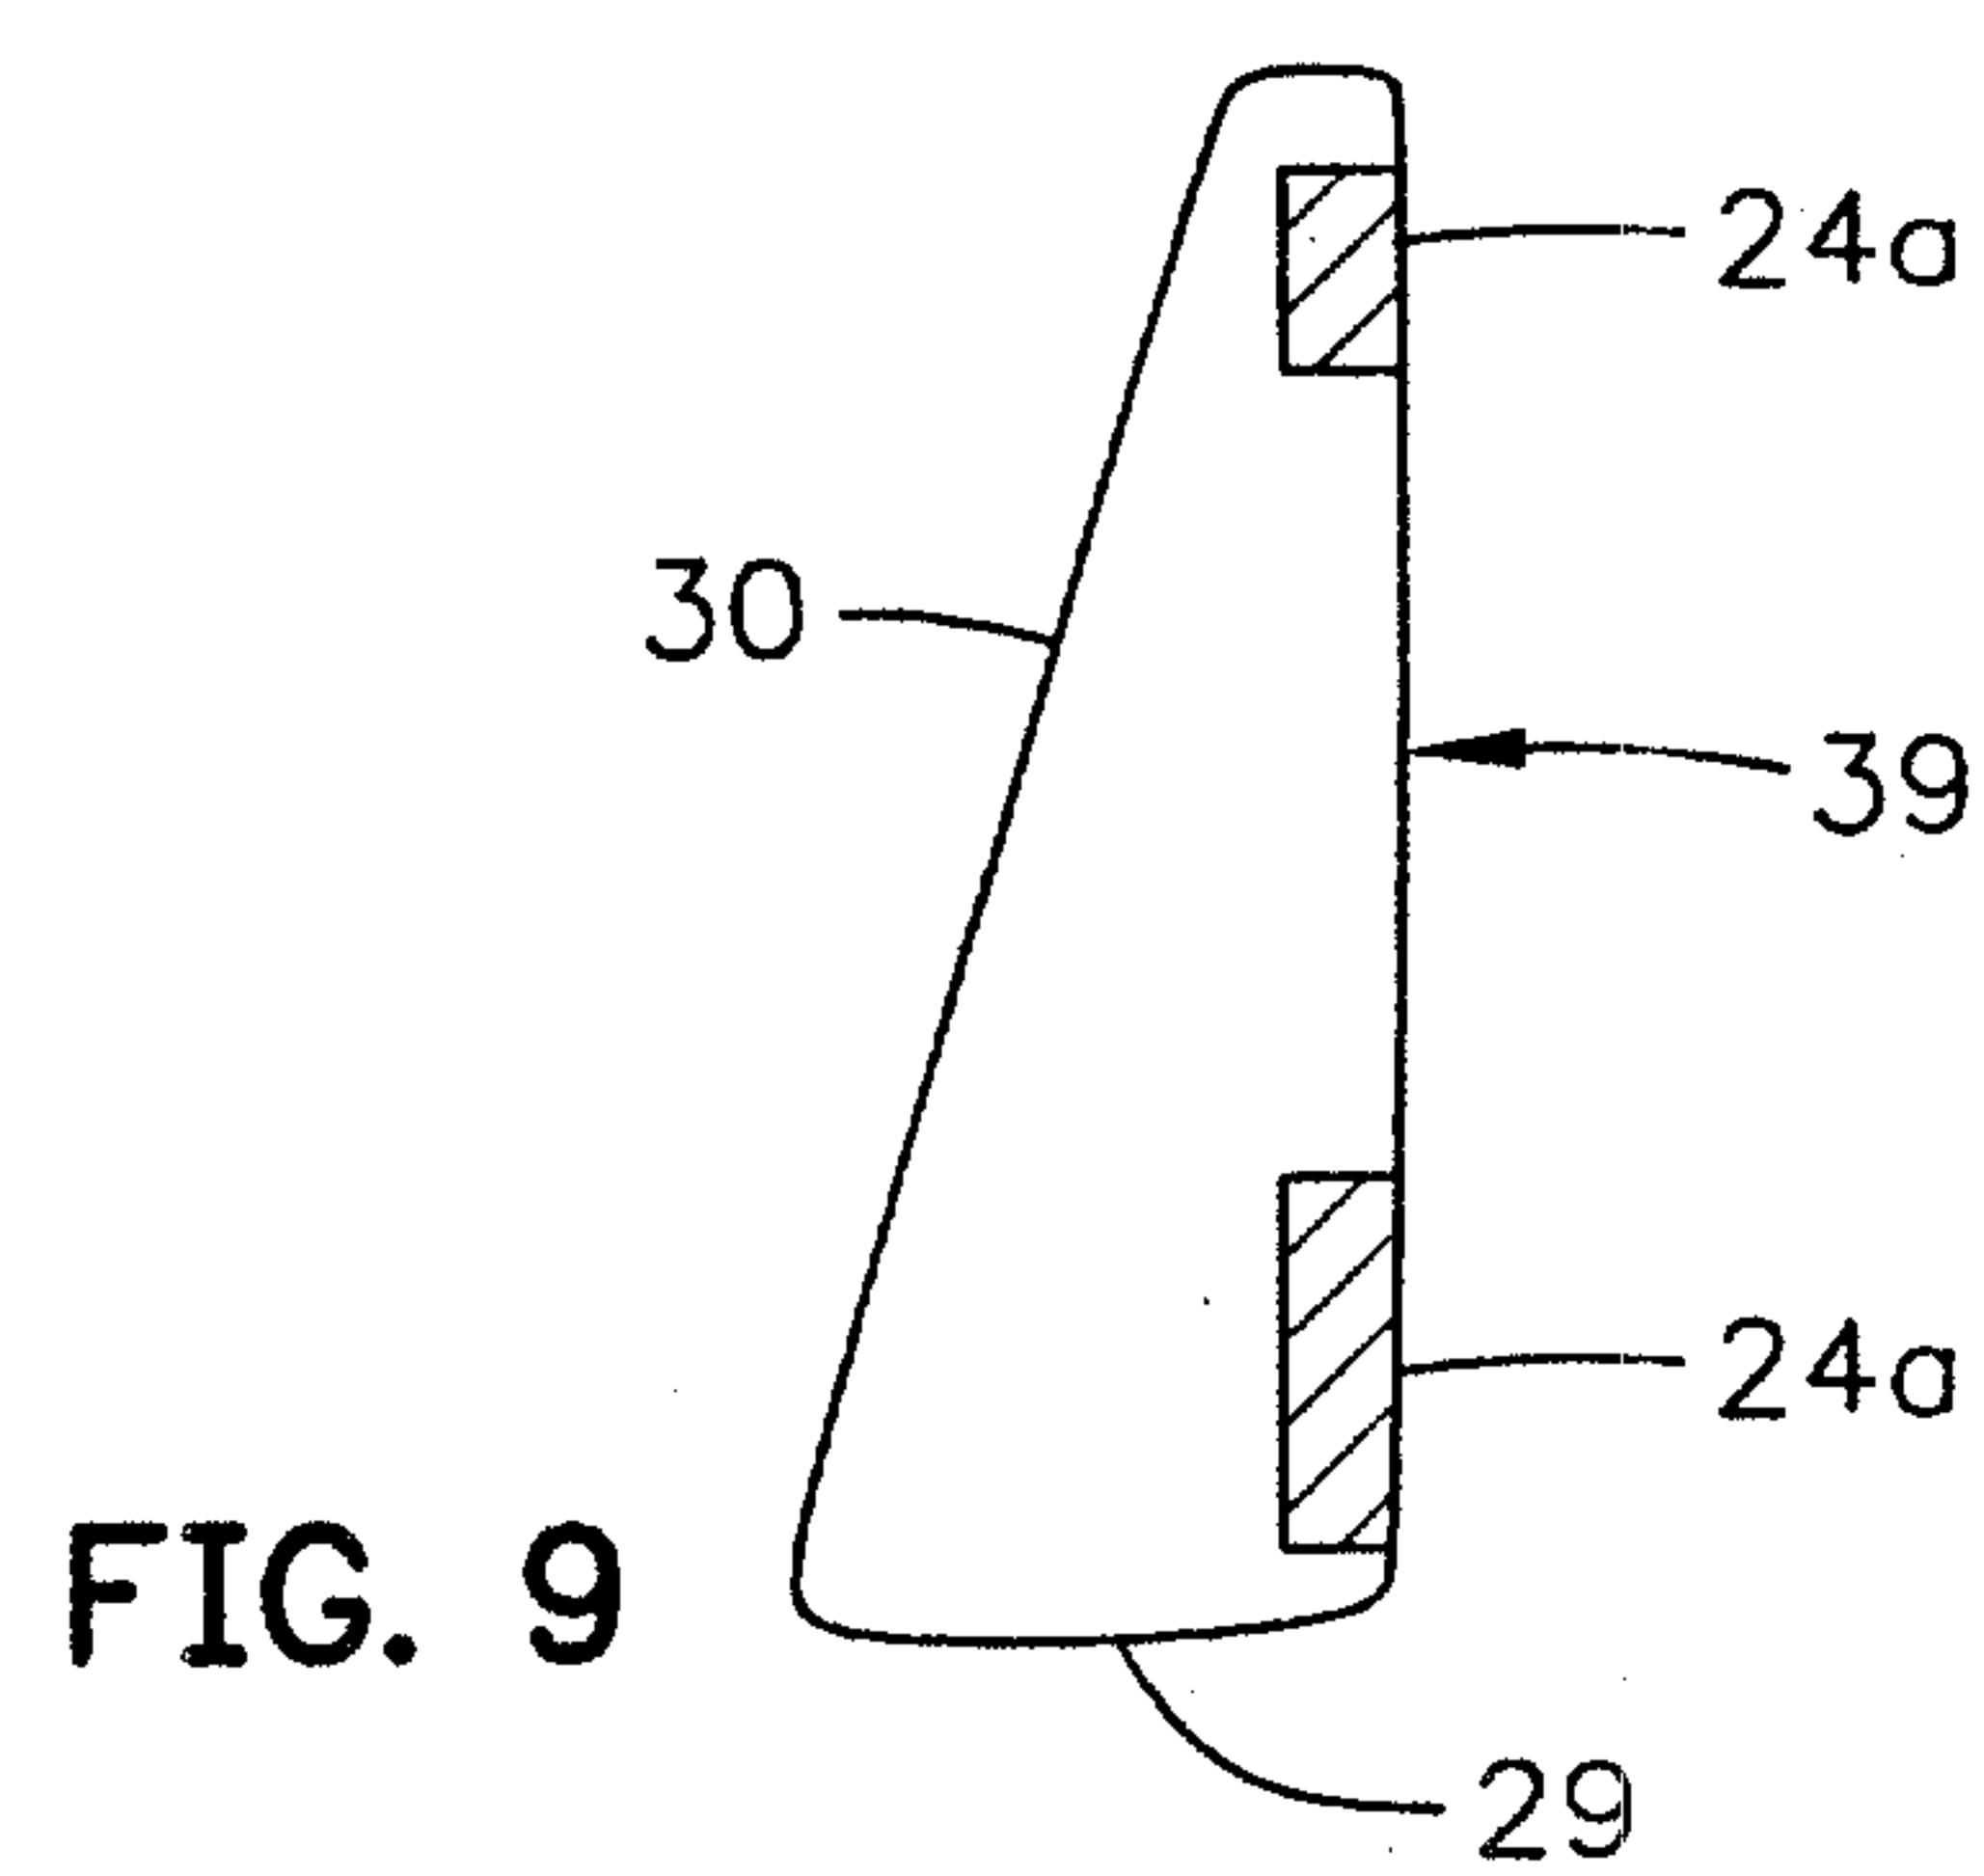


FIG. 9

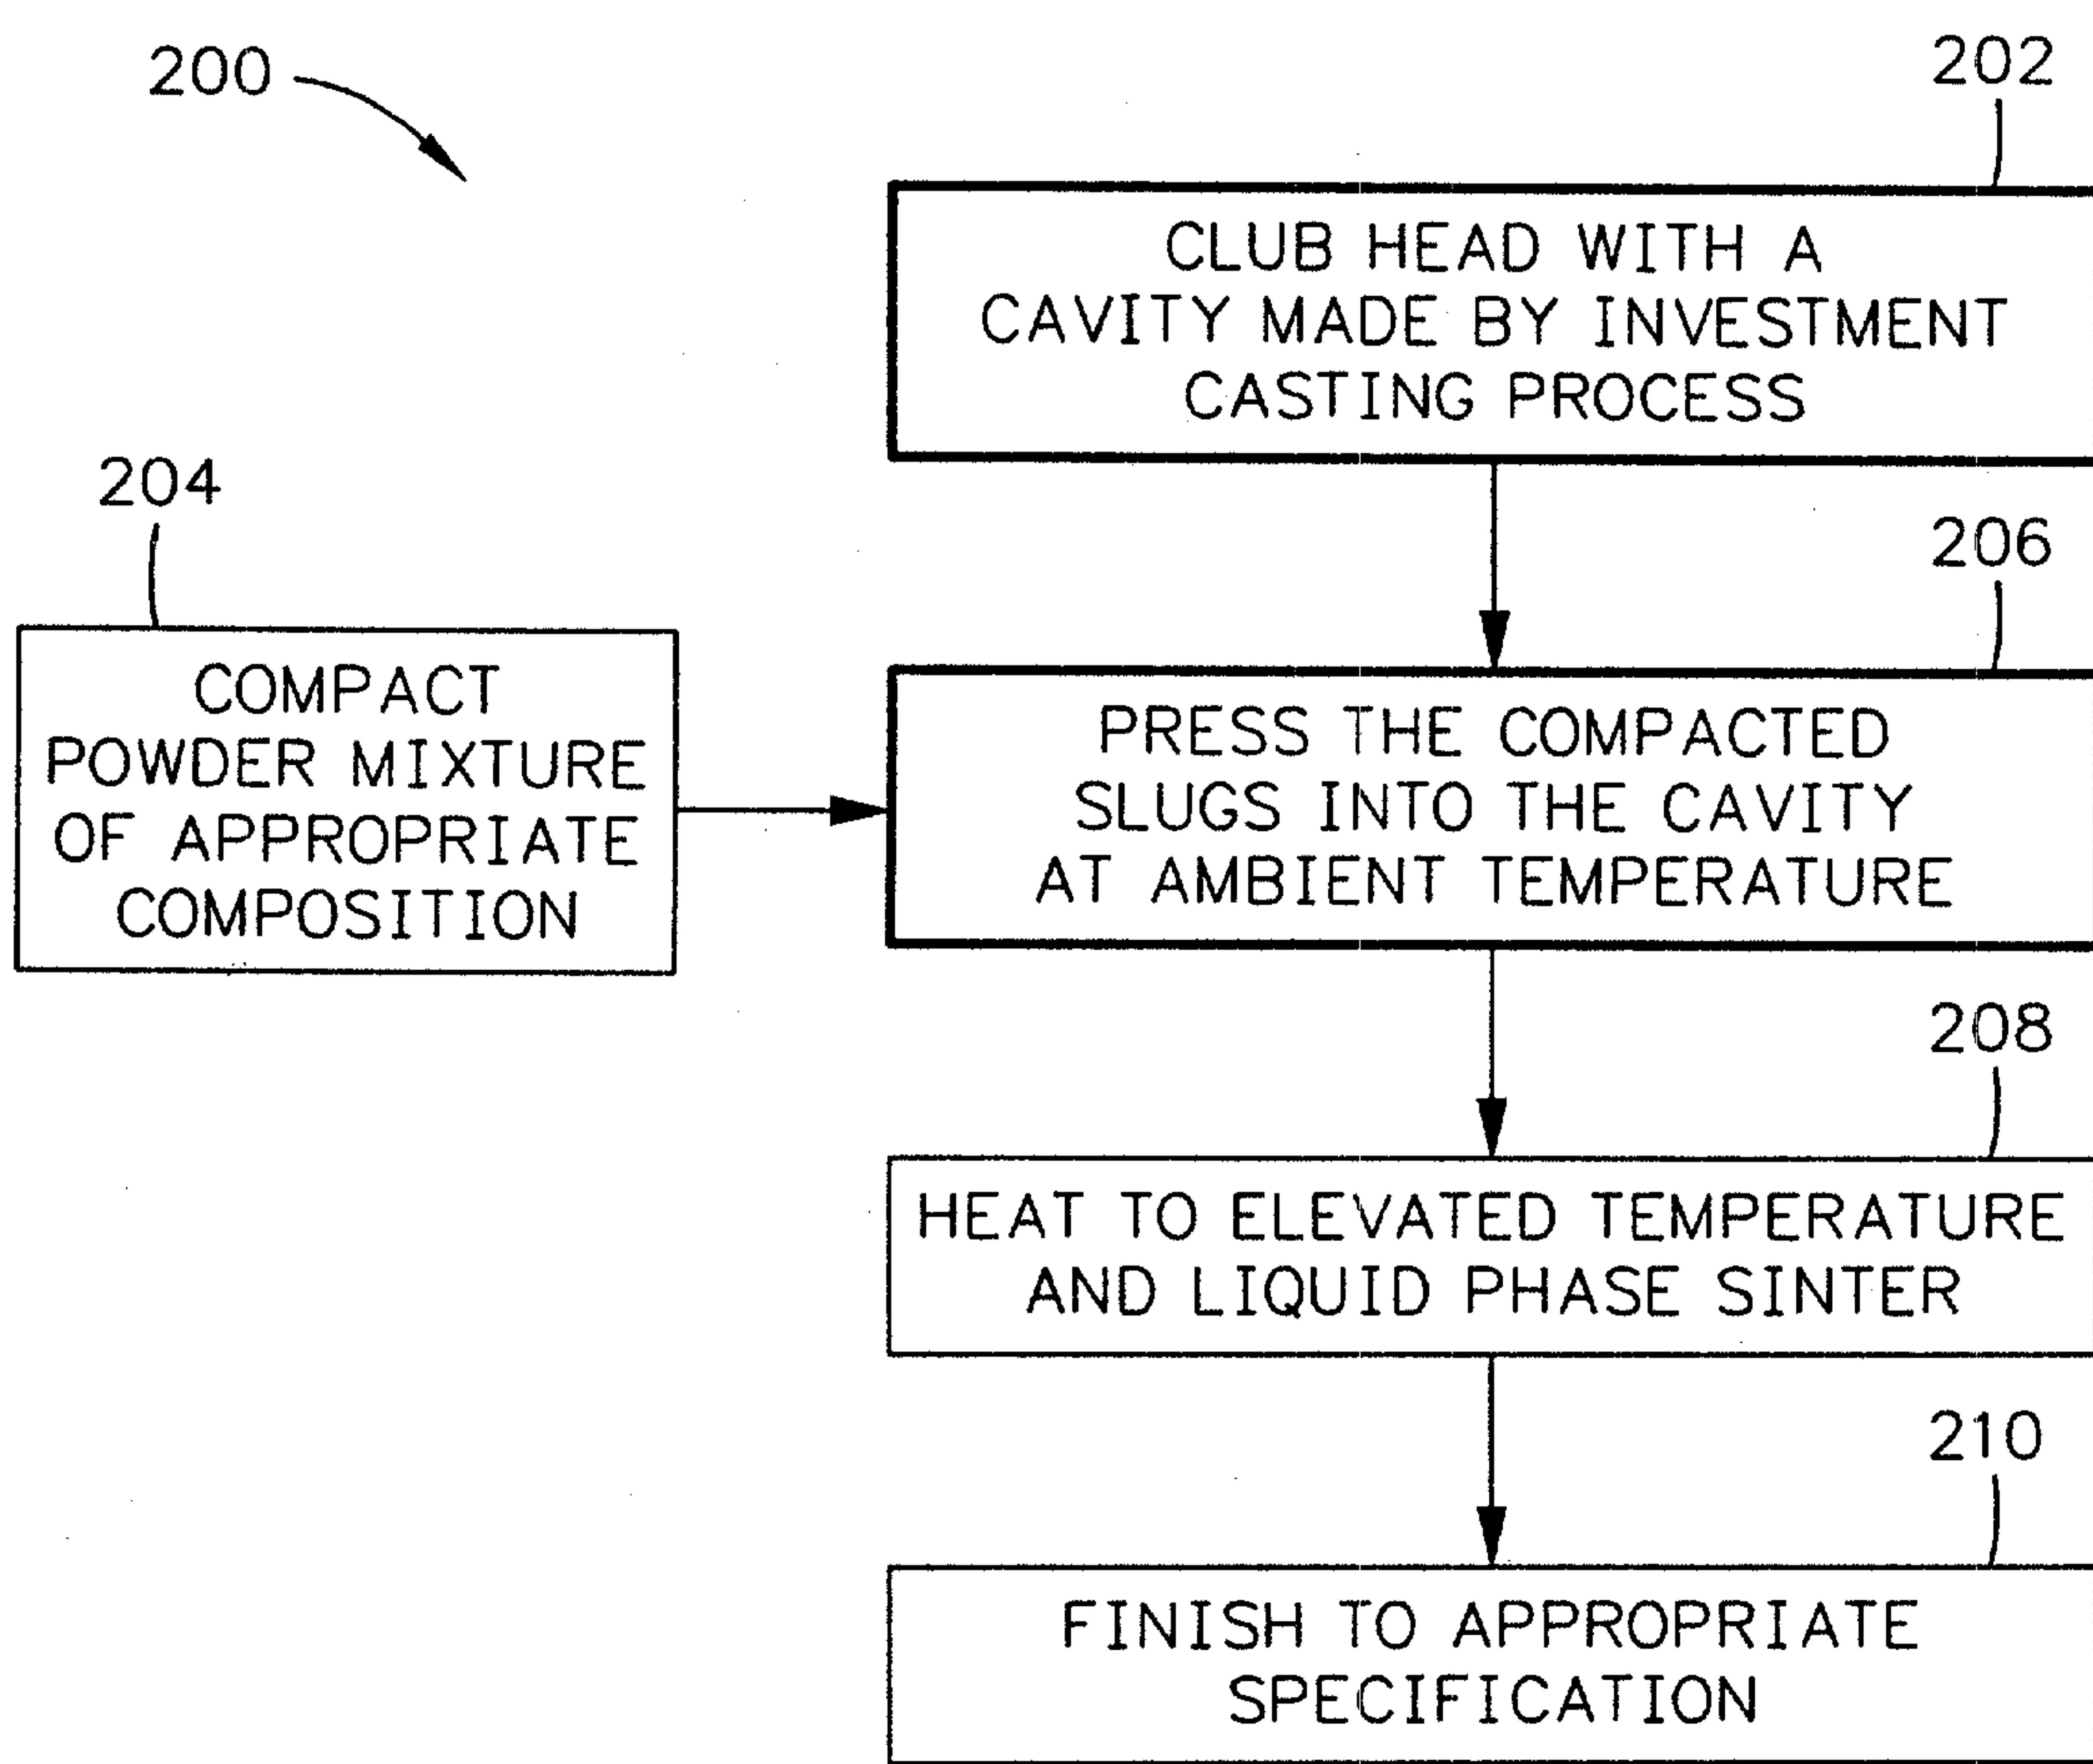


FIG. 10

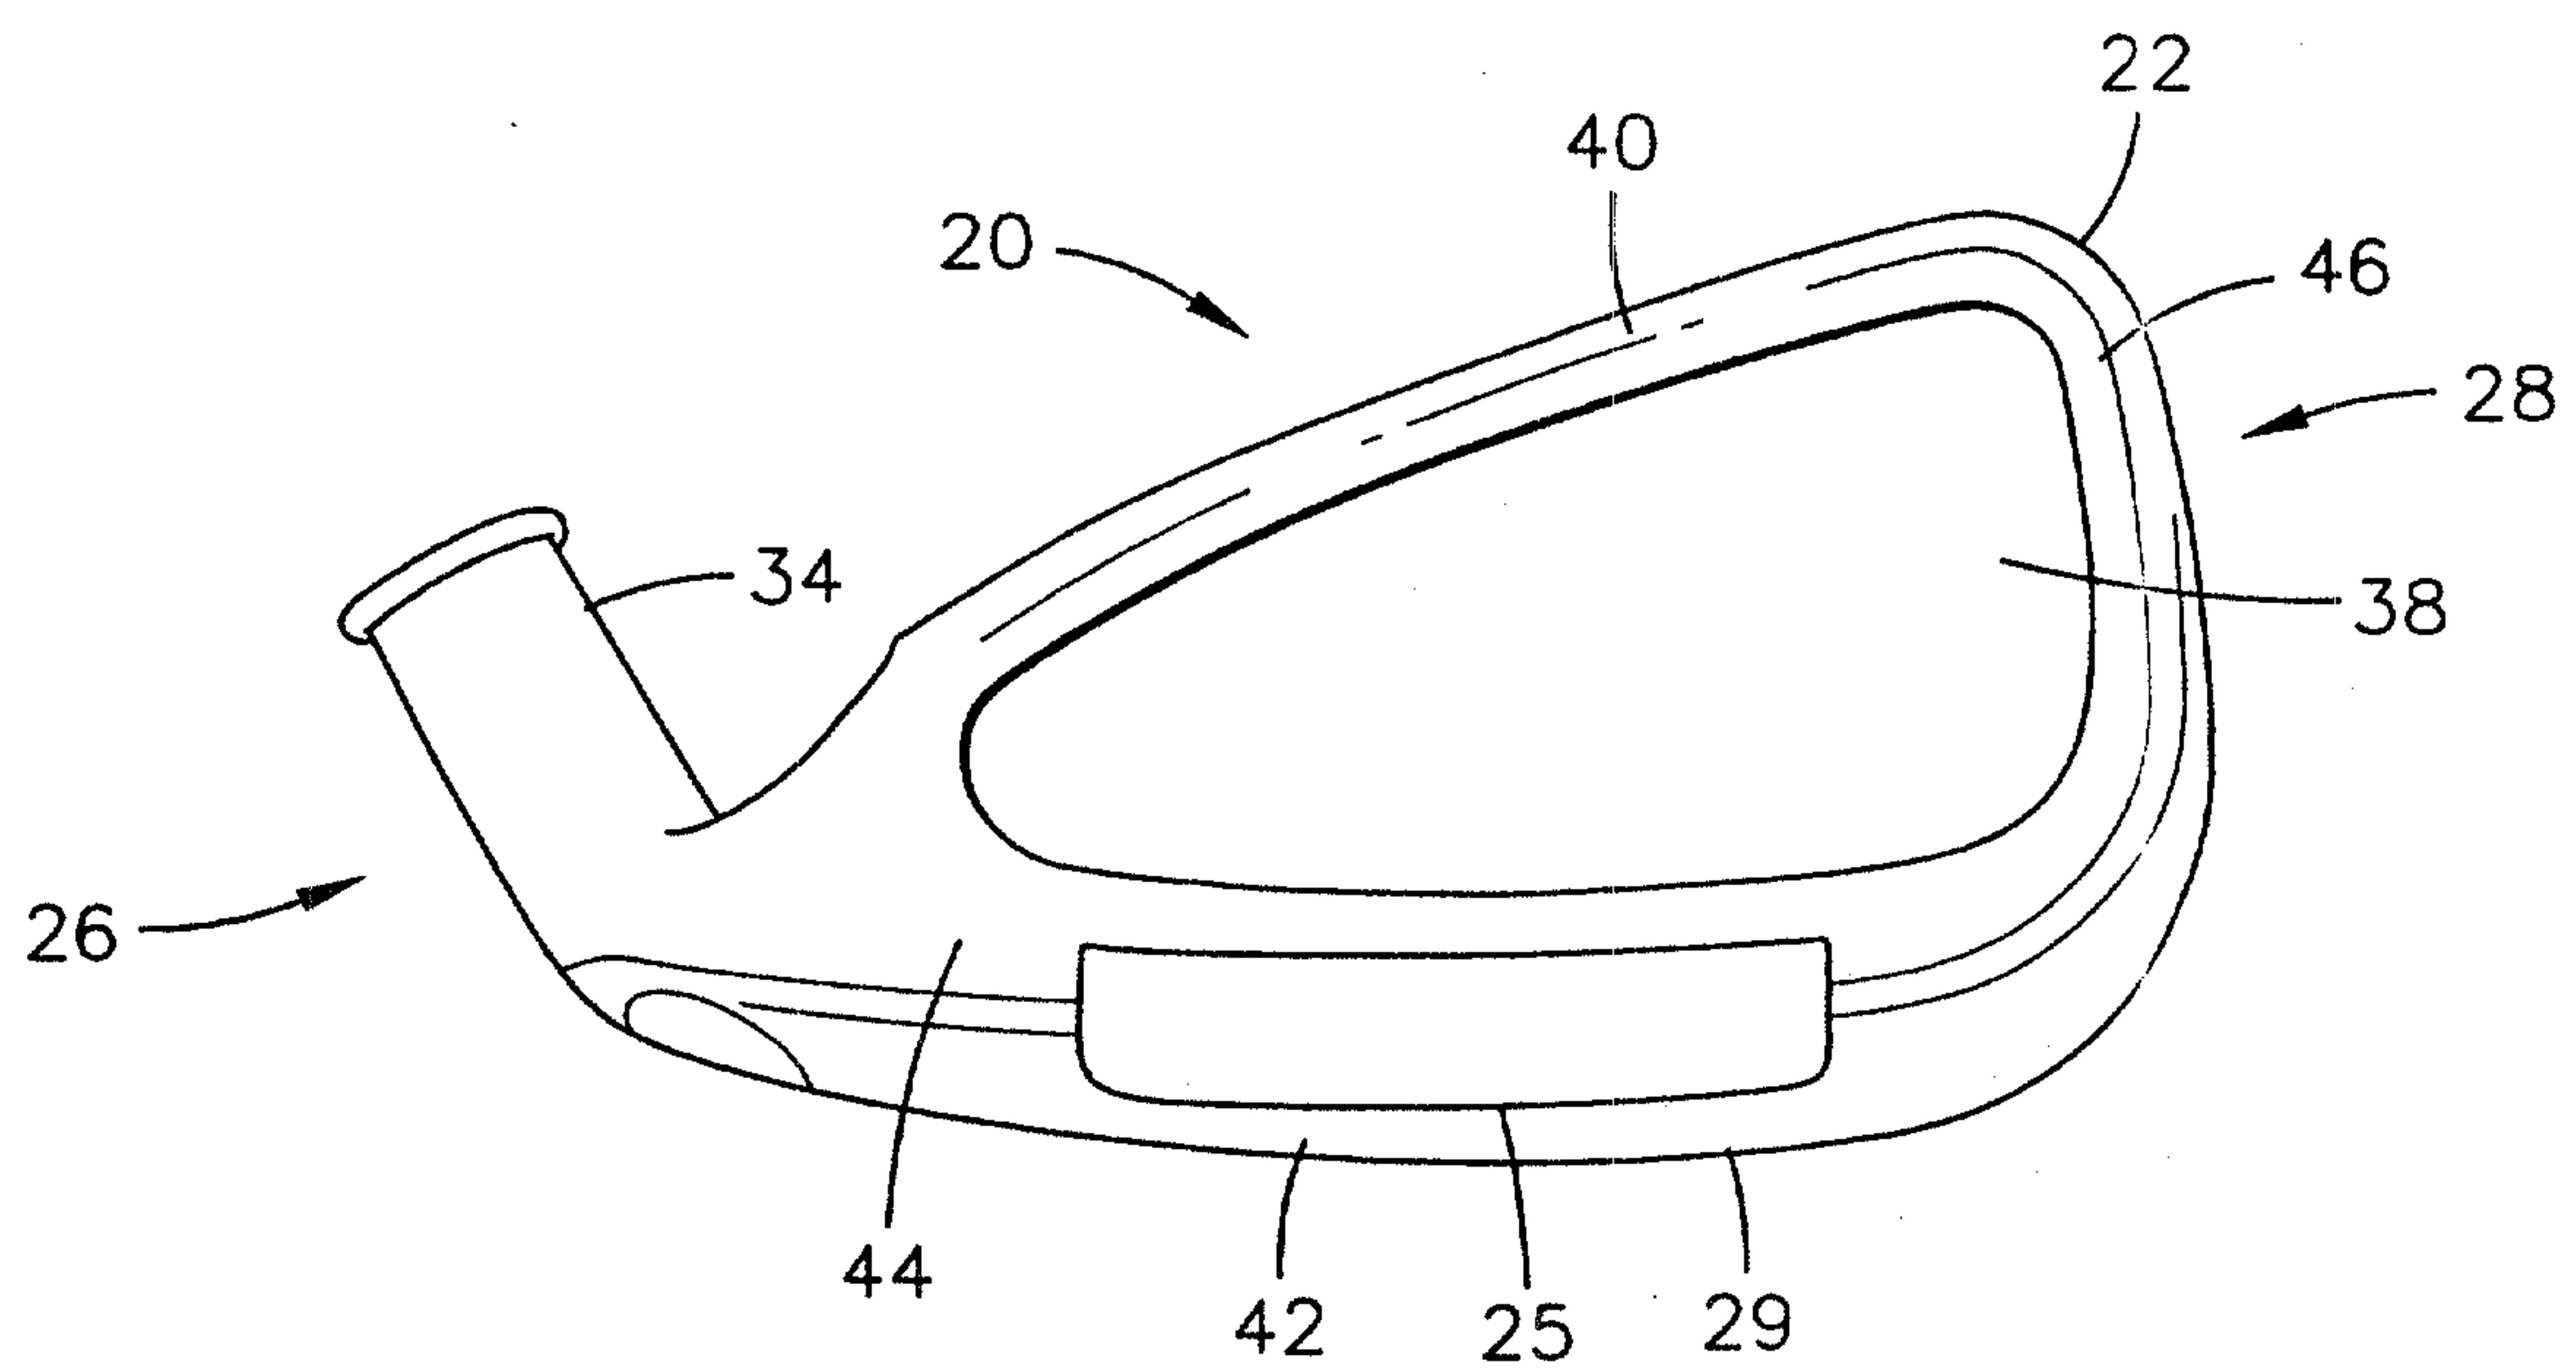


FIG. 11

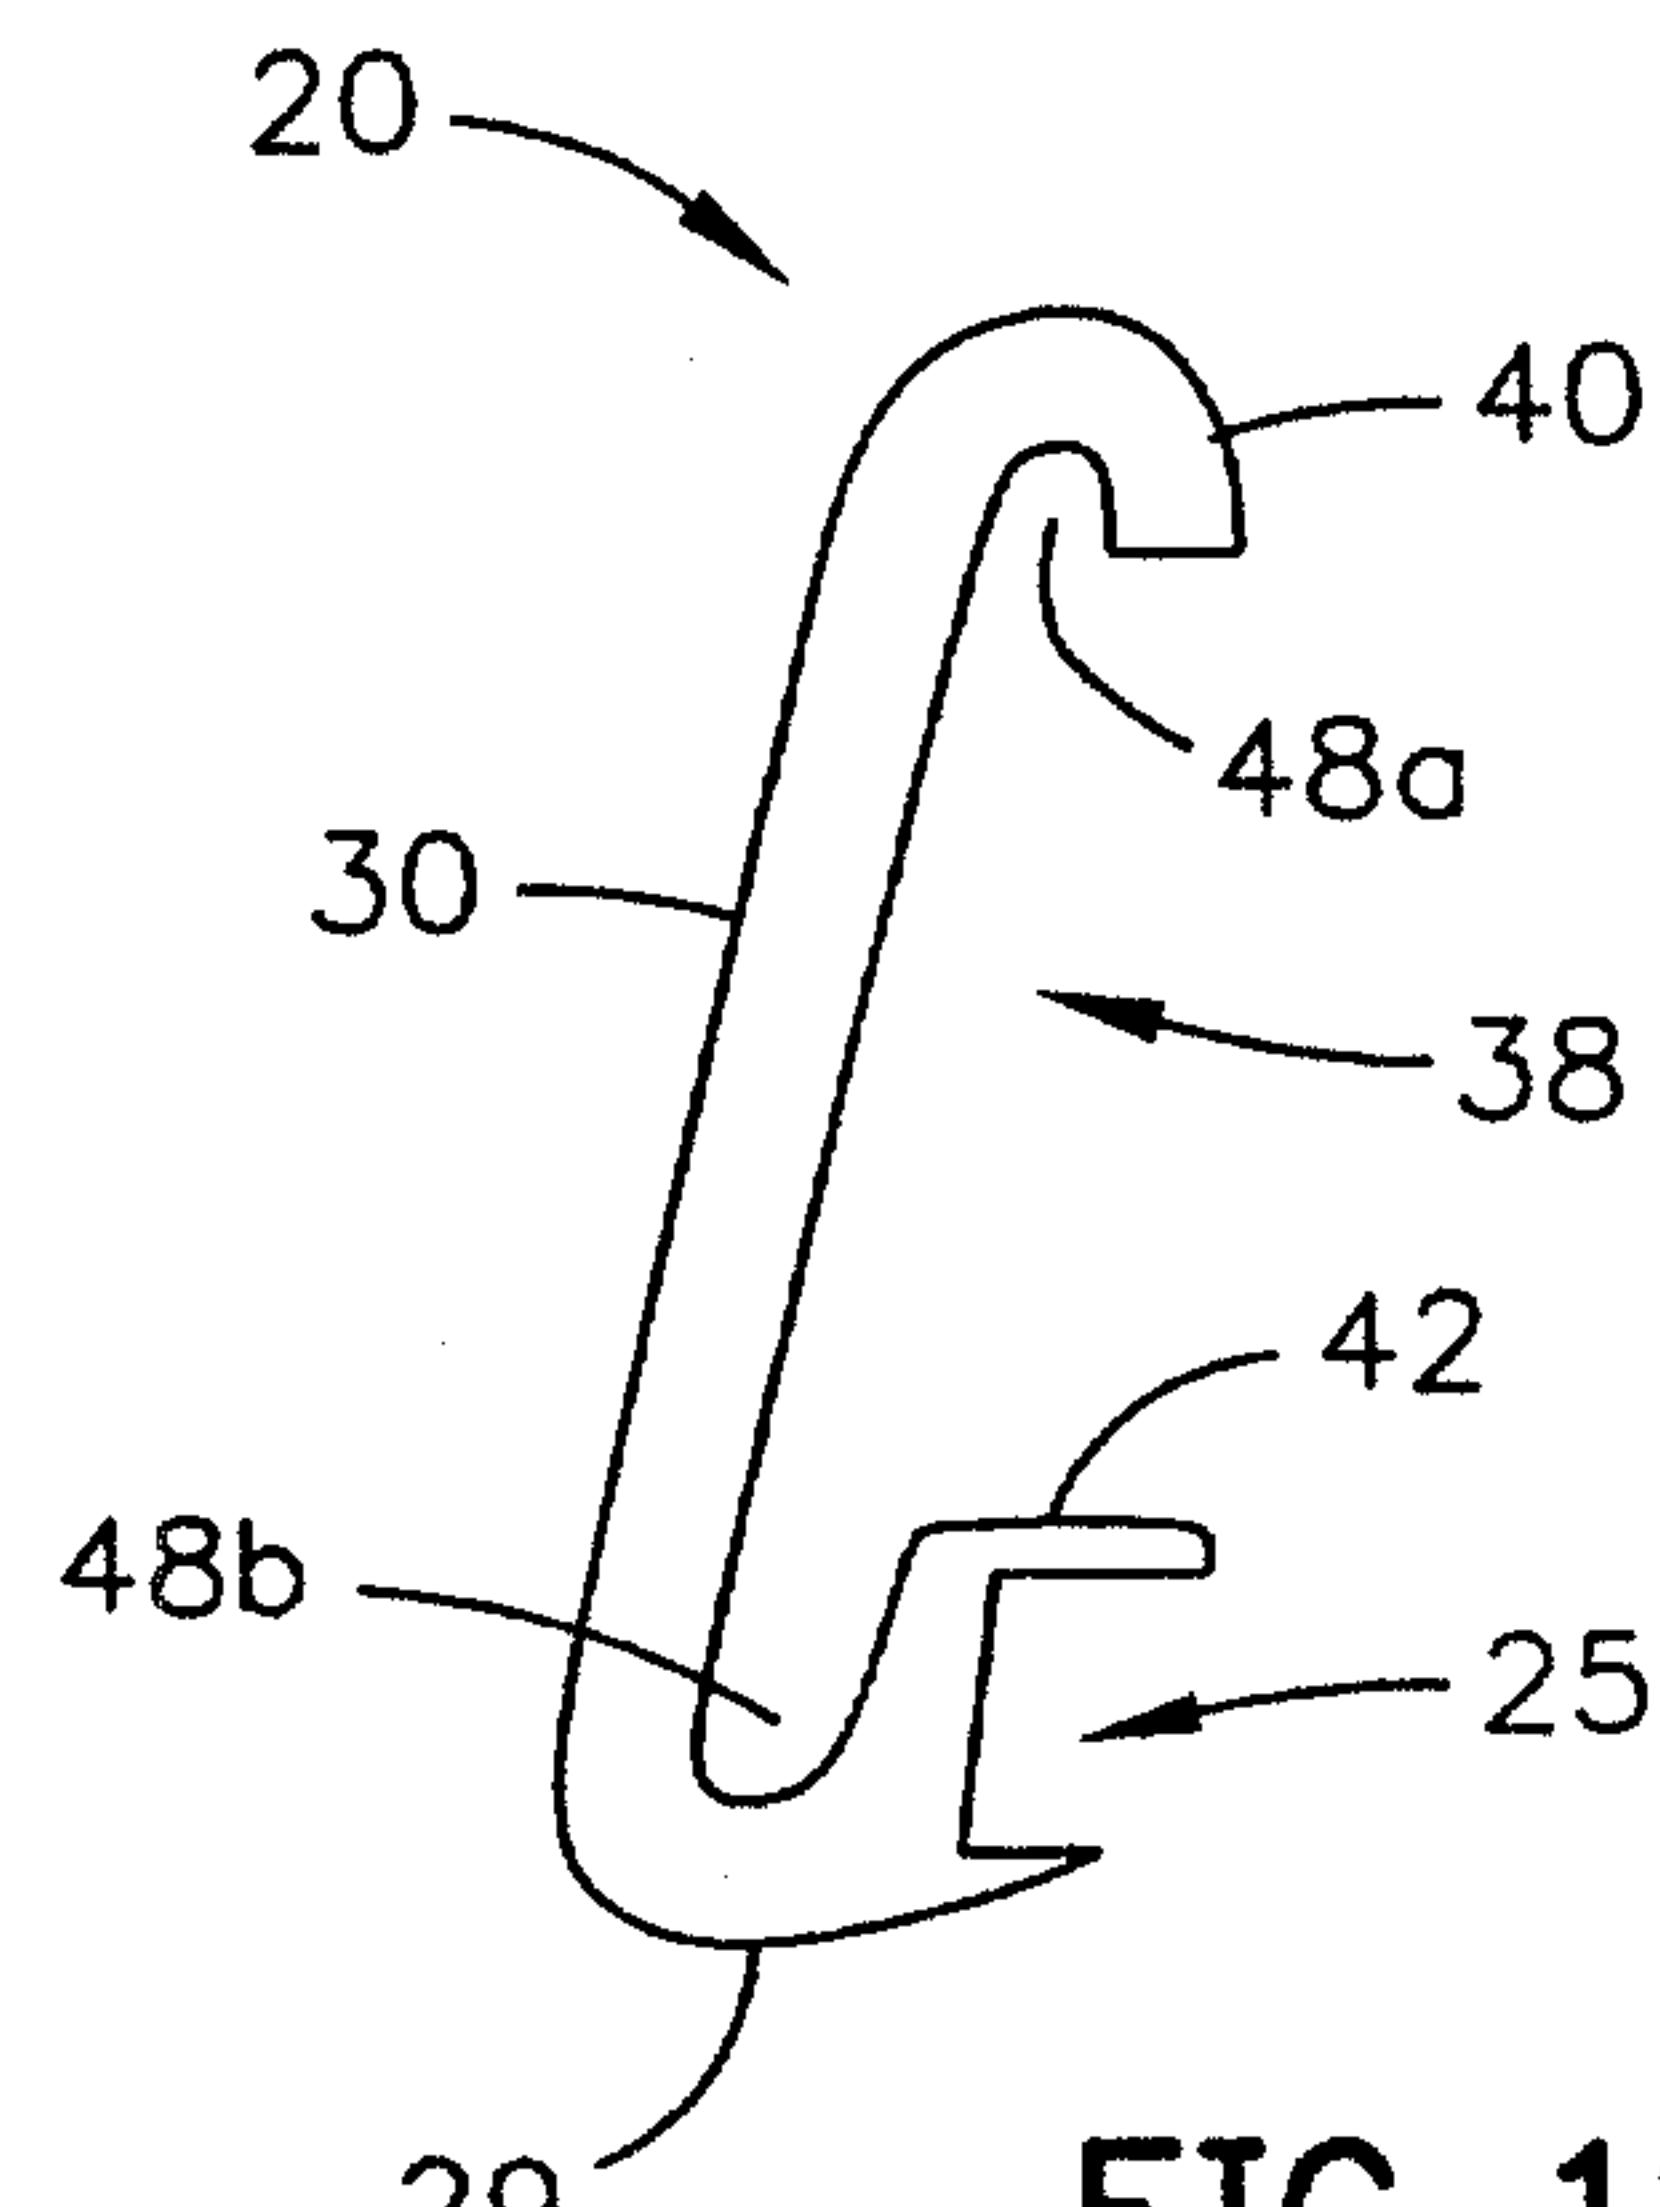


FIG. 12

