PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 :		(11) International Publication Number:
D04B 35/18	A1	WO 93/24691
		(43) International Publication Date: 9 December 1993 (09.12.93)

(21) International Application Number: PCT/EP93/01259

(22) International Filing Date: 21 May 1993 (21.05.93)

(30) Priority data:
TO92A000449 26 May 1992 (26.05.92) IT

(71) Applicant *(for all designated States except US):* MICROTEX S.A.S. DI DOTT. L. MICHETTI [IT/IT]; Via Tetti Dora, 20, I-10040 Almese (IT).


(72) Inventors; and
(75) Inventors/Applicants *(for US only) :* MICHETTI, Paolo [IT/IT]; MICHETTI, Andrea [IT/IT]; Via Tetti Dora, 20, I-10040 Almese (IT).

(74) Agents: NOTARO, Giancarlo et al.; Buzzi, Notaro & Antonielli d'Oulx S.r.l., Corso Fiume, 6, I-10133 Torino (IT).

(81) Designated States: CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: DEVICE FOR CONTINUOUSLY MONITORING THE NEEDLES OF A KNITTING MACHINE DURING OPERATION THEREOF

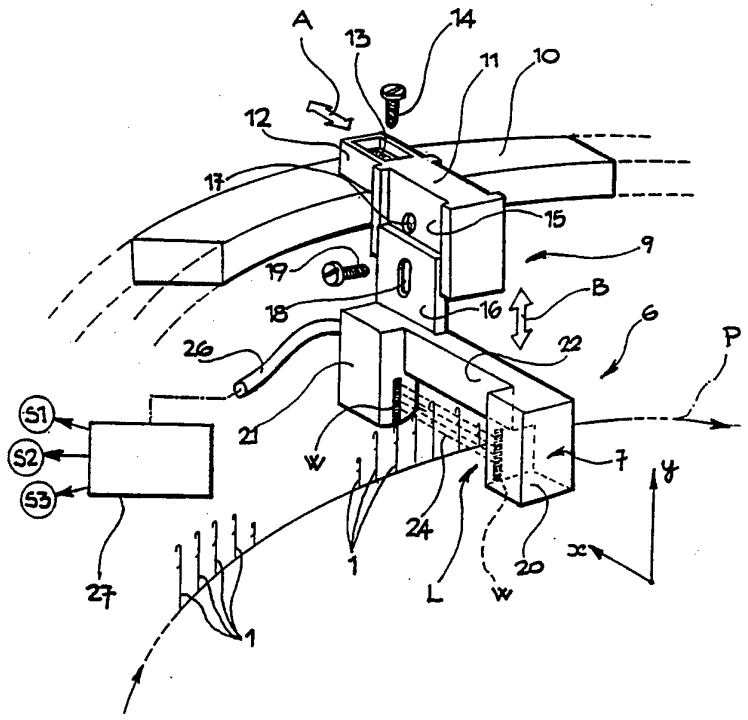

(57) Abstract

The needles (1) of a knitting machine are continuously monitored, during operation of the machine, by an optical head (6) comprising a light source (23) and an electro-optical receiver which receives the light beam after that the latter has crossed the area (24) of passage of the needles (1). The output signals from the receiver are sent to an electronic control unit (27).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	**FR**	France	**MR**	Mauritania
AU	Australia	**GA**	Gabon	**MW**	Malawi
BB	Barbados	**GB**	United Kingdom	**NL**	Netherlands
BE	Belgium	**GN**	Guinea	**NO**	Norway
BF	Burkina Faso	**GR**	Greece	**NZ**	New Zealand
BG	Bulgaria	**HU**	Hungary	**PL**	Poland
BJ	Benin	**IE**	Ireland	**PT**	Portugal
BR	Brazil	**IT**	Italy	**RO**	Romania
CA	Canada	**JP**	Japan	**RU**	Russian Federation
CF	Central African Republic	**KP**	Democratic People's Republic of Korea	**SD**	Sudan
CG	Congo			**SE**	Sweden
CH	Switzerland	**KR**	Republic of Korea	**SK**	Slovak Republic
CI	Côte d'Ivoire	**KZ**	Kazakhstan	**SN**	Senegal
CM	Cameroon	**LI**	Liechtenstein	**SU**	Soviet Union
CS	Czechoslovakia	**LK**	Sri Lanka	**TD**	Chad
CZ	Czech Republic	**LU**	Luxembourg	**TG**	Togo
DE	Germany	**MC**	Monaco	**UA**	Ukraine
DK	Denmark	**MG**	Madagascar	**US**	United States of America
ES	Spain	**ML**	Mali	**VN**	Viet Nam
FI	Finland	**MN**	Mongolia		

Device for continuously monitoring the needles of a knitting machine during operation thereof.

Technical Field

The present invention relates to knitting machines and particularly to devices for continuously monitoring the needles used in such machines.

Figure 1 of the annexed drawings shows, by way of example, two typical failures of a needle of a type used in such knitting machines.

Figure 1 shows a needle 1 of the so called "tab-type" or "automatic-type", comprising a stem 2 ending with a hook 3 and a tab 4 pivoted in 5 to stem 2 and movable between an open position, shown in the figure, and a closed position, in which it defines the needle eye together with the hook 3.

Such needles are subject to a continuous mechanical stress, due to the pulling action exerted by the needle on the yarn; this stress, which takes place with every action of the needle on the yarn, causes a fatigue condition which may lead to the failure of the needle. This failure usually takes place in the area of hook 3, as visible in figure 1, and may be preceded by a stage of relevant deformation of the shape of the hook, usually consisting in a torsion deformation and in an opening movement of the hook.

The failure of a needle of a knitting machine during operation thereof has the consequence of a production of faulty fabric due to the absence of the loop corresponding to the broken needle. This results in an economical damage which may be very relevant, considering the very high production speed of the piece or cloth of fabric by the machine, as well as the fact that quite often the faulty fabric cannot be used.

Background Art

In the absence of automatic control devices, the production of the faulty fabric goes on until the fault is visually noticed by the machine operators. This happens with a delay depending accidentally upon various factors, since the operator usually attends to various machines and to various tasks on each machine, beside controlling the product quality.

In the endeavour to overcome this drawback, there have been provided devices for the continuous and automatic check of the needles during the operation of a knitting machine. Most of the devices which are being presently marketed are based on electro-optical techniques which exploit the principle of the optical reflection.

Devices of this kind are described for example in US Patents Nos. 4.027.982 and 3.937.038.

Such reflection-type devices comprise a light emitting device, able to direct a light beam in the direction of a detecting area which is crossed in sequence by the needles during the operation of the machine, and a receiving device, which receives the light reflected by the needles. If the needles are not correctly positioned, are deformed or broken, the quantity of reflected light energy changes, and this is detected, at least theoretically, by the receiving device.

The electro-optical devices based on the principle of the optical reflection, however, have a number of drawbacks. First of all, installing the detector is difficult because of the need to search critical alignment conditions with respect to the path of the needles, conditions which may be kept with difficulty.

Furthermore, the device is not precise, since it tends to overview broken needles or to consider unbroken needles as being broken. Consequently, wrong decisions are taken in controlling the operation of the machine.

Finally, the performance of the device depends in an unacceptable way from the cleanness condition of the detector.

Solutions have also been tested based on the principle of the optical transmission, as, for example, the devices disclosed in US Patents Nos. 3.659.346 and 3.946.578.

For instance, the device disclosed in US Patent 3.946.578 comprises a light emitting device, able to direct a light beam in the direction of a detection area crossed by the needles, and two (or more) receiving devices (or surfaces) which receive the light emitted by the emitting device.

The needles, travelling across the detection area, intercept part of the light directed towards the receiving devices. In this manner, such receiving devices are able to show when the respective portions of the detection area are crossed by each needle.

The detection of the faulty needles is made by checking that the needles cross all the portions of the detection area controlled by the receiving devices, in the correct time sequence. The detection is possible in fact due to the specific shape and arrangement of the receiving devices, which are such that the faulty needles do not cause a correct time sequence.

This detection system has drawbacks similar to those of the reflection-type devices. As a matter of fact, for a correct operation of the device, it is necessary that the configuration and installation of the detecting electro-optical devices are very accurate and designed specifically for controlling a given type of needles.

In this way, the operation of the device is very critical, particularly with respect to variations of position of the installed device, vibrations, as well as variations in speed or type of operation of the knitting machine.

These drawbacks of the devices of the prior art render the performance of such devices not fully satisfactory, and cause a decrease of such performance during the operation.
The object of the present invention is to provide a device for continuously monitoring the needles during the operation of a knitting machine which overcomes all the drawbacks of the prior art.

Disclosure of the Invention

In order to achieve this object, the present invention provides a device of the type indicated in the annexed claim 1.

Brief Description of the Drawings

The invention will be now described with reference to the annexed drawings, given purely by way of non limiting example, in which:
figure 2 is a diagrammatic perspective view of a device according to the invention in a condition mounted on a knitting machine,
figure 3 is a diagrammatic view which shows the principle of operation of the device according to the invention,
figures 4, 5 show two further variants of the device,
figure 6 is a diagrammatic view which shows the principle of operation of the variant of figure 5,
figures 7, 7a and 8, 8a are diagrammatic views which show a further detail of the device according to the invention,
figure 9 is a diagrammatic view which show a variant of the device according to the invention,
figure 10 is a block diagram of the control unit of the device according to the invention,
figures 11 and 12 are representations of the signals of the control unit of figure 10,
figures 13 and 15 are diagrammatic views of two transmission-type devices forming part of the prior art,
figure 14 is a diagram which shows a feature of the transmission-type devices,

figure 16 is a diagrammatic view which shows the principle of operation of a component of the device according to the invention, and

figure 17 is diagrammatic view which shows the operation of the device according to the invention.

Modes for Carrying Out the Invention

With reference to figure 2, reference numeral 6 generally designates an optical head forming part of the device according to the invention. The optical head 6 has a supporting structure 7 which is fixed to a part of the knitting machine by support means 9 which allow the position in space of structure 7 to be adjusted.

With reference to the specific example illustrated in the annexed drawings, structure 7 of the optical head 6 is connected to a fixed ring 10 forming part of the structure of a circular knitting machine, by means of an adjustment support 9.

The adjustment support 9 includes a first element 11 having a connecting portion 12 which has a slot 13 for engagement of a fixing screw 14. The arrangement of the slot 13 allows fine adjustment of the position of the connecting portion 12 along a radial direction indicated by arrow A. Element 11 on its turn comprises a guide portion 15 where is vertically slidably mounted a connecting portion 16 joined to the supporting structure 7 of the optical head 6. Elements 15, 16 have a hole 17 and a slot 18 respectively for engagement of a fixing screw 19. The slot 18 allows fine adjustment of the position of the optical head 6 in the vertical direction indicated by arrow B, before tightening of screw 19.

Naturally, the adjustment means 9 may have any other configuration adapted to allow a fine adjustment of the position in space of structure 7.

Also with reference to the specific example illustrated in the annexed drawings, structure 7 has a bridge-like

configuration, with two side elements 20, 21 connected by a cross member 22. The optical head 6 is positioned in space so that it bridges the path P of travel of needles 1 of the knitting machine. Naturally, as it has already been mentioned, the configuration of support 9 of optical head 6 is chosen so as to allow said positioning by simple operations and to ensure that such positioning is kept with the time.

The configuration of support 9 is also chosen so that it may be adapted to the specific needs of mounting and installation required by the various types of knitting machines.

According to the conventional art, during operation of the machine, needles 1 are forced to move along path P and are simultaneously subject to a reciprocating movement which brings them to protrude periodically from the guide structure or to retract within such structure.

Figure 2 shows the simplest case in which the needles are mounted on a single path P. However there are machines in which the needles are mounted along two separate paths. It is clearly appearent that the invention is applicable also to this latter case.

The optical head 7 carries a light emitting source which emits a light beam L in the direction of a detecting area 24 which is crossed in sequence by the needles 1 of the knitting machine during operation of the latter, and an electro-optical receiver which is located so as to receive the light beam L after that this has crossed the detecting area 24.

The electrical-optical receiver is able to generate, in a way known per se, an electrical signal indicating the received light energy, which is obviously a fuction of the quantity of light energy intercepted by the needle 1 which is at the detecting area.

The detecting devices of the transmission type require, for best performaces, that the light beam L which is used has an intensity distribution which is as far as possible uniform in the cross section orthogonal to the direction of view. Only with an intensity distribution of this type signal variations caused by an object interposed between the transmitter and the receiver are directly proportional to the fraction of the beam intercepted thereby, and may be directly associated with the shape of the object under examination.

In the case of detectors of the transmission type, according to the prior art, it is observed that the use of conventional electro-optical devices, having in some case emitting (receiving) surfaces whose shape is defined by means of diaphragms, does not allow a suitable distribution of the light intensity in the cross section of the light beam L.

In figure 13, there is shown a detector of the transmission type comprising two conventional electro-optical devices Tx and Rx, transmitter and receiver respectively, for example a L.E.D. and a photo-transistor, with two diaphragms DF associated therewith in order to define the shape of a light beam having a cross section with a width indicated by D in the direction indicated by z in the figure.

In figure 14, there is shown the value Id of light intensity I, versus z, of the light beam of the device of figure 13.

As it may be seen, the distribution of intensity Id has a strong curvature and is far from the ideal distribution with uniform intensity shown with curve Ig.

A result similar to Id is obtained also with a conventional device configured as shown in figure 15, in which the light emitting source Tx is an unmasked L.E.D., which emits therefore a light beam with a cross section

which is not rectangular, only a part of which is received by the optical window Rx.

The present invention provides a system to obtain a light beam L with uniform distribution and at the same time with limited cross-section, having therefore a light intensity distribution substantially similar to that shown with Ig in figure 14, consisting in the use of planar optical guides.

Planar optical guides are non-conventional optical devices, which have the property of affecting the light propagation between an emitter and a receiver so that the propagation takes place in a guided way according to the desired characteristics. The light guiding effect is obtained by the use of plates of dielectric material, having uniform thickness, which due to the property of optical restraint of the dielectric materials, allow a propagation of bidimensional type to be obtained. In particular, the side surfaces S of such planar dielectric plates may be used as surfaces for inputting and outputting light rays as shown in figure 16. By defining a suitable shape of such plates it is possible also to obtain a bidimensional propagation according to the desired paths and distributions.

In figure 17 there is shown a configuration of the light beam obtained by planar optical guides.

The planar optical guides, both for emitting and for receiving light, have emitting/receiving surfaces or windows W whose dimensions directly depend upon the average dimensions of the needles which are used. This characteristic is shown also in figure 3. In particular, the width D, along direction z, is preferably greater than the width of the stem 2 of the needles with respect to the direction of view and is also preferably lower than the distance between two adjacent needles. The height H of

window W must be obviously greater of the portion h of the needle (visible in figure 3) to be put under observation. Consequently, a transmitted light beam is defined having a cross section WL with the same shape and size of the surfaces W. In the cross section WL of figure 17 there is shown also the portion SA which is intercepted by a needle which is in the optical channel.

The beam emitted and received by surfaces W of the planar optical guides opens slightly in the plane xz of figure 17, as indicated by rays R while it remains collimated in the plane xy, and has a substantially uniform distribution.

Furthermore, the use of planar optical guides allows a more efficient use of the light source because the guided transmission brings on the receiver a much greater portion of the light emitted by the light source with respect to the conventional devices.

The electric signals generated by the electrical-optical receiver are transmitted by a line 26 to a control electronic unit 27, which will be now described with reference to figures 10, 11 and 12.

Control unit 27 comprises an amplifier 32 having the function of amplifying the signal coming from the electrical-optical receiver in order to provide an output amplified signal Vin, shown in figures 11 and 12, to the various functional units of the control unit 27. The two figures refer to similar sequences of needles, having different frequence and width.

A first functional unit comprises a lever comparator 33, and an envelope demodulator 34 which receive as an input the signal Vin and have their outputs connected to a correct-installation module 35 of which they are the inputs. As a function of the level and the envelope of the signal Vin, the module 35 for controlling the correct installation emits two outputs, 50 and 51, respectively,

indicating the achievement, with respect to the installation of the device, of a correct level of the received signal, and a correct positioning of the optical head 7.

A second functional unit is provided to control that the needles 1 are faultless. This unit comprises a module 36, adapted to receive signal Vin as an input and to output clock signals CLK in synchronism with the waveforms Vin corresponding to the various needles.

These clock signals CLK, also visible in figures 11 and 12, are used as inputs by three further modules of the unit: a single waveform extracting module 38, a low-pass filter 39 and an envelope demodulator 40. The single waveform extractor 38 also receives as an input the signal Vin and has the purpose of translating into a single level information the single waveforms produced by needles 1 and to emphasize the differences referring to a 0 level; its output is constituted by a signal Ve.

This signal Ve is subject to fluctuations typical of a sequence of unbroken needles mounted on a knitting machine. For this reason, it is necessary to filter signal Ve by a low-pass filter in order to reduce the chance of faulty detections. Filter 39 therefore has an input signal Ve and has an output signal Vf, visible in the figures.

Filter 39 also has the non-conventional characteristic to introduce a phase difference null in frequence, to allow the device to operate in a way independent from the frequence, without the need of adjustment from outside.

Signal Vf is a further input of the envelope demodulating module 40. The purpose of this module is to create an output signal Vinv which is substantially a level signal relative to the previous needle, in respect of the needle which is crossing the optical head 6.

As a matter of fact, the device according to the present invention does not perform the comparison of the needle

under examination with a threshold fixed value during the installation, but rather with a threshold value obtained from the needles which have just crossed the detection area.

In this way, the result is obtained that the comparison check for locating any failure in the needles is no longer affected by speed variations, type of operation, vibrations or other disturbing factors. As a matter of fact, the device is continuously self-calibrating.

Signal Vinv goes into a module 43 whose purpose is that of generating an output signal Vref. Module 43 supplies the threshold for the comparison, i.e. the reference signal Vref, by multiplying signal Vinv by a sensitivity coefficient α , fixed in 45 at installation. Signals Vinv and Vref supply the level information used for the comparison, and such level is represented in figures 11 and 12 by the dotted lines indicated by 1 and $\alpha 1$ respectively.

The comparison between the needle presently being examined, or needle i, and the previous needle, or needle i-1, is carried out in module 42 which includes a level comparator.

The inputs of module 42 therefore are signal Vf, relating to needle i, coming from filter 39, and the reference or threshold signal Vref, relating to needle i-1, described above.

For each needle, comparator 42 then compares the two above mentioned signals; in case is Vf>Vref, the device proceeds in its checking function, naturally updating the two signal Vf and Vref relating to the next needle to be checked; in case is Vf$\leq$Vref, comparator 42 will show, by its output Vn, that a faulty needle has been detected.

Output Vn is the input of a processing module 44, which, upon receiving an input signal Vn indicating a faulty needle, carries out the necessary operations which

tipycally consist in stopping the knitting machine and activating a signal for the operator.

Such operations are carried out by modules 48 and 49 respectively, which are provided to this purpose.

The control unit 27 further comprises an auxiliary unit, essentially consisting of a module for controlling the configuration of needles 41. This module receives input signals Vin, Ve and Vf, which have been described above, and renders them accessible for devices outside the control unit 27 in order to let them be displayed or processed. Such outside devices can be for example an oscilloscope 47 or a suitably arranged personal computer 46.

Figure 9 diagrammatically shows a further variant, in which the transmitting portion and the receiving portion lie on a same side with respect to the needles 1 to be observed. In this case, a mirror 28 is used to deviate the light beam coming from transmitter Tx after that the latter has crossed the detecting area, in the direction of receiver Rx. Such solution is preferred in those cases in which, for construction or dimensional needs, it is not possible to use the solution illustrated in figure 2.

Figures 4, 5 show two further variants which are characterised by a greater detecting sensitivity.

As apparent from figure 1, the failure of the needle can take place both along the curvature of the hook 3 (left portion of figure 1) and along the stem portion which is next to the hook (right portion). In order to detect also failures of the type illustrated in the left portion of figure 1, the optical head 6 can be inclined in the way illustrated in figure 4, so that the optical channel is not orthogonal to the needle direction. Figure 5 shows another solution in which the optical head 6 is rotated in a horizontal plane, so that the direction of the optical channel is not orthogonal to the plane of the needles. In

this way, the needle image along the direction of the optical channel is that illustrated in figure 6 which allows failures of the end portion of the hook to be detected.

Preferably, the control unit 27 is provided with display lights which make the installation of the device easier and correspond to the functions carried out by the correct-installation module 35 as previously described. In particular, control unit 27 may be provided with a first display light S1, indicating the light intensity of the optical channel used by the detecting head. This first display light corresponds to the level output 50 of said module 35. Due to the adoption of a detecting system having the characteristics described above, the said adjustment is totally independent from the type of knitting machine, the type of needles which are used and the needle width and in general from any particular characteristic of any operation going on. Furthermore, a second display light S2 is provided, which shows when the sensor has been positioned in the proper way with respect to the needle sequence. This second display light corresponds to the position output 51 of said module 35.

Also this display is totally independent from the type of knitting machine, the type of needles which are used, the width thereof and the particular features of the operation going on, as well as from said level display of the light intensity of the optical channel.

The two said displays S1, S2 allow the device to be installed properly, and also provide an instant by instant information, while the knitting machine is operating, on whether the light intensity of the optical channel and the positioning of the sensor remain correct, once the initial installation has been carried out.

Another drawback of the devices used up to now lies in that the knitting machines usually operate in difficult environmental conditions.

As a matter of fact, in the surrounding air, there is present a substantial quantity of textile particles of little size, generated by the working process. Furthermore, there are present particles of the oils for the lubrication of the moving parts. The flying fibers and the oil particles tend to form a sort of greasy felt on every surface of the textile machine, including the surfaces of the detecting head, so as to decrease the intensity of the light beam used for the needle detection, until the whole device is rendered inoperative.

The control unit 27 is also able to display (S3) any dimming of the sensor due to the deposit of impurities, so as to invite the operator to proceed with the removal of the undesired deposit. An essential feature of the control unit is its ability of continuing to operate properly for a long time from the moment in which the progressive dimming of the optical channel has commenced.

This feature allows the textile process to proceed undisturbed with no faults, and the operator to attend to cleaning of the sensor according to the usual timing of the general maintenance operations without that any exceptional or repeated intervention is needed.

The control unit 27 automatically provides to stop the machine on which it is installed as soon as the dimming of the optical channel has reached and passed an acceptable maximum value, so that it is no longer possible to ensure a proper operation of the system.

In this manner, one avoids uncontrolled production of textile with faults due to needle failures, which would represent a much greater damage with respect to a temporary stop of the process.

Thus, the operator is forced to proceed to the cleaning operations, which can be carried out in a particularly easy way, due to a further feature of the device according to the present invention which will be now described.

The undesired deposit of said particles is particularly relevant on the surfaces which have some discontinuance, as areas joining planar elements, edges, steps, etc.

Still a worse consequence is that unqualified personnel are not able to remove the undesired deposits in short time and easily from such discontinuous surfaces, as it is instead required by the continuous operation of the textile machine and the lack of specific training of the personnel.

According to the invention, the detecting head is so arranged as to have its transmission and reception optical windows not lying on a planar surface, but rather on a cylindrical surface, as that indicated by 30 in figure 8. This measure allows an easy removal of the undesired deposits by simply rubbing a rag 31, held on the back side of the portion to be cleaned, as illustrated in figure 8a. On the contrary, in the case of an edged shape (see figures 7, 7a) it is not possible to carry out an easy clean operation since the rag 31 is not able to adhere effectively to the optical windows, because of the edges of the structure.

Naturally, the principle of the invention remaining the same, the details of construction and the embodiments may widely vary with respect to what has been described and illustrated purely by way of example, without thereby departing from the scope of the present invention.

CLAIMS

1. Device for continuously monitoring the needles of a knitting machine during operation thereof, characterised in that it comprises, in combination:
- a detecting optical head (6), comprising a main structure (7) carrying:
- a light emitting source,
- first planar-type optical means for receiving the light emitted by said source and guiding said light up to an emitting window (W), for emitting a planar light beam (L) obtained thereby in the direction of a detecting area (24) which is crossed in sequence by the needles (1) of the knitting machine during operation thereof,
- a receiving window (W) which is located in such a way as to receive said planar light beam (L) after that the latter has crossed the detecting area (24),
- second planar-type optical means for receiving the light of said planar beam (L) coming into said receiving window (W) and for guiding said light up to an electro-optical receiver, said receiver being able to emit an electric signal indicating the light energy which comes to the receiver as being not intercepted by the needle which is at each time at the detecting area,
- means (9) for adjustably supporting said optical head (6) on a fixed part (10) of the knitting machine, and
- a control electronic unit (27) for receiving the signals emitted by said electro-optical receiver and processing such signals in order to obtain an information on the configuration and the degree of integrity of the needles of the knitting machine, said electronic unit (27) comprising: extracting means (36, 38, 39, 40, 43) adapted to extract said signals (Vin) emitted by said electro-optical receiver, output signals (Ve, Vf, Vinv, Vref) relating to the degree of integrity of said needles (1) and independent from variations relating to the

environment of operation of the device; means (42) adapted to compare said output data (Vf) relating to one of said needles (1), with output data (Vref) relating to at least another one of said needles (1), generated previously by said extracting means (36, 38, 39, 40, 43) in view of rendering said control operation of the integrity of said needles (1) independent from variations relating to the type and width of the needles (1), the operating conditions of the knitting machine, and the initial calibrating operations of the device.

2. Device according to claim 1, characterised in that said support means comprise a first element (11) which is to be fixed on a part (10) of the knitting machine in a way adjustable along a first direction (A) and a second element (16) which is to be fixed on the first element (11) in a way adjustable along a second direction (B) orthogonal with respect to said first direction (A).

3. Device according to claim 1, characterised in that said supporting structure (7) has a bridge-like configuration, with two side elements (20, 21) carrying the light emitting source (23) and the electro-optical receiver (25) respectively, as well as a cross-member (22) which connects said side elements (20, 21) to each other.

4. Device according to claim 1, characterised in that said supporting structure is located on a same side of the path (P) of the needles (1) and in that there is provided a reflecting element (28) for reflecting the light energy emitted by the light source (Tx) in direction of the electro-optical receiver (Rx).

5. Device according to claim 1, characterised in that said planar-type optical means are formed by substantially planar plates of dielectric material.

6. Device according to claims 1 and 5, characterised in that said emitting and receiving windows (W) of said planar light beam (L) are comprised of surfaces of said

first and second planar-type optical means which are substantially perpendicular to said plates of dielectric material.

7. Device according to claims 1 and 6, characterised in that the light emitted by said light emitting source comes into said first planar-type optical means through a further one of said substantially perpendicular surfaces and the light of said beam (L) guided up to said electro-optical receiver goes out from said second planar-type optical means through a further one of said substantially perpendicular surfaces.

8. Device according to claim 1, characterised in that said emitting and receiving surfaces (W) are arranged parallel to the needle which is at each time at the detecting area (24).

9. Device according to claim 1, characterised in that said optical head (7) is inclined in the plane of the optical channel (L), so that the direction of the optical channel forms an angle different from 90° with respect to the direction of the needle (1).

10. Device according to claim 1, characterised in that said optical head (6) is rotated so that the plane of the optical channel (L) forms an angle different from 90° with respect to the plane of the needles which cross the detecting area (24).

11. Device according to claim 1, characterised in that the surfaces of the supporting structure (7) where the receiving and emitting windows (W) are located are cylindrical surfaces (30).

12. Device according to claim 1, characterised in that said extracting means (36, 38, 39, 40, 43) comprise means (36) adapted to extract from said emitted signals (Vin) timing signals (CLK) indicating the passage of said needlees (1) at the detecting area (24).

13. Device according to claim 1, characterised in that said extracting means (36, 38, 39, 40, 43) comprise means (38) adapted to extract from said signals (Vin) output signals (Ve) whose level is a function of the waveforms of the output signals (Vin).

14. Device according to claim 1, characterised in that said extracting means (36, 38, 39, 40, 43) comprise filtering means (39) adapted to filter said output signals (Ve), said filtering means operating in a condition of difference of phase null in frequence, to generate filtered output signals (Vf).

15. Device according to claim 1, characterised in that said extracting means (36, 38, 39, 40, 43) comprise envelope demodulating means (40) adapted to demodulate said filtered output signals (Vf), to generate demodulated output signals (Vinv), said demodulated output signals being delayed by a time interval corresponding to the passage of at least one needle.

16. Device according to claim 1, characterised in that said extracting means (36, 38, 39, 40, 43) comprise level translating means adapted to move the level of said demodulated output signals (Vinv) as a function of a sensitivity parameter (α) which is pre-arranged by selecting means (45).

17. Device according to claim 1, characterised in that said electronic control unit (27) comprises aiding means (33, 34, 35) for checking the installation of the device.

18. Device according to claim 17, characterised in that said aiding means (33, 34, 35) for checking the installation are adapted to generate output signals (50) indicating the level of the signal generated by the needles (1) passing in the device.

19. Device according to claim 17, characterised in that said aiding means (33, 34, 35) for checking the installation are adapted to generate output signals (51)

indicating the position of the device relative to the path (P) of the needles (1).

20. Device according to claim 1, characterised in that said electronic control unit (27) comprises a processing unit (44), receiving as an input output signals (Vn) generated by said comparating means (42), adapted to control actuating means (48) and display means (49).

21. Device according to claim 1, characterised in that said electronic control unit (27) comprises communication means (41) adapted to render accessible for outside devices (46, 47) inside signals (Vin, Ve, Vf) of the electronic control unit (27).

22. Device according to claim 1, characterised in that said electronic control unit (27) supply two signals (S1, S2) indicating the degree of light intensity of the optical channel (L) and the proper positioning of the optical channel (L) with respect to the needles to be detected, respectively.

23. Device according to claim 1, characterised in that said electronic control unit (27) supply a third signal (S3) indicating the state of cleanness of the surfaces (30) having the receiving and emitting windows (W).

24. Device according to claim 1, characterised in that said electronic control unit (27) is adapted to automatically stop the knitting machine, by said actuating means (48), in case the degree of dimming of the optical windows (W) by any impurity passes a predetermined level.

FIG. 1

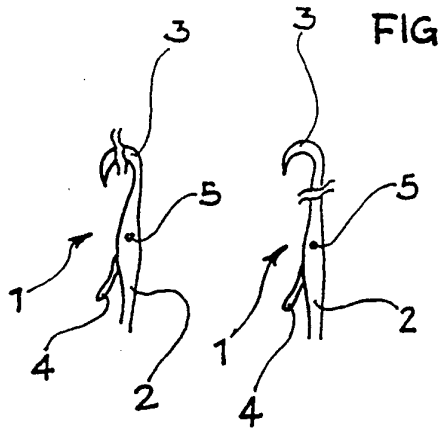


FIG. 2

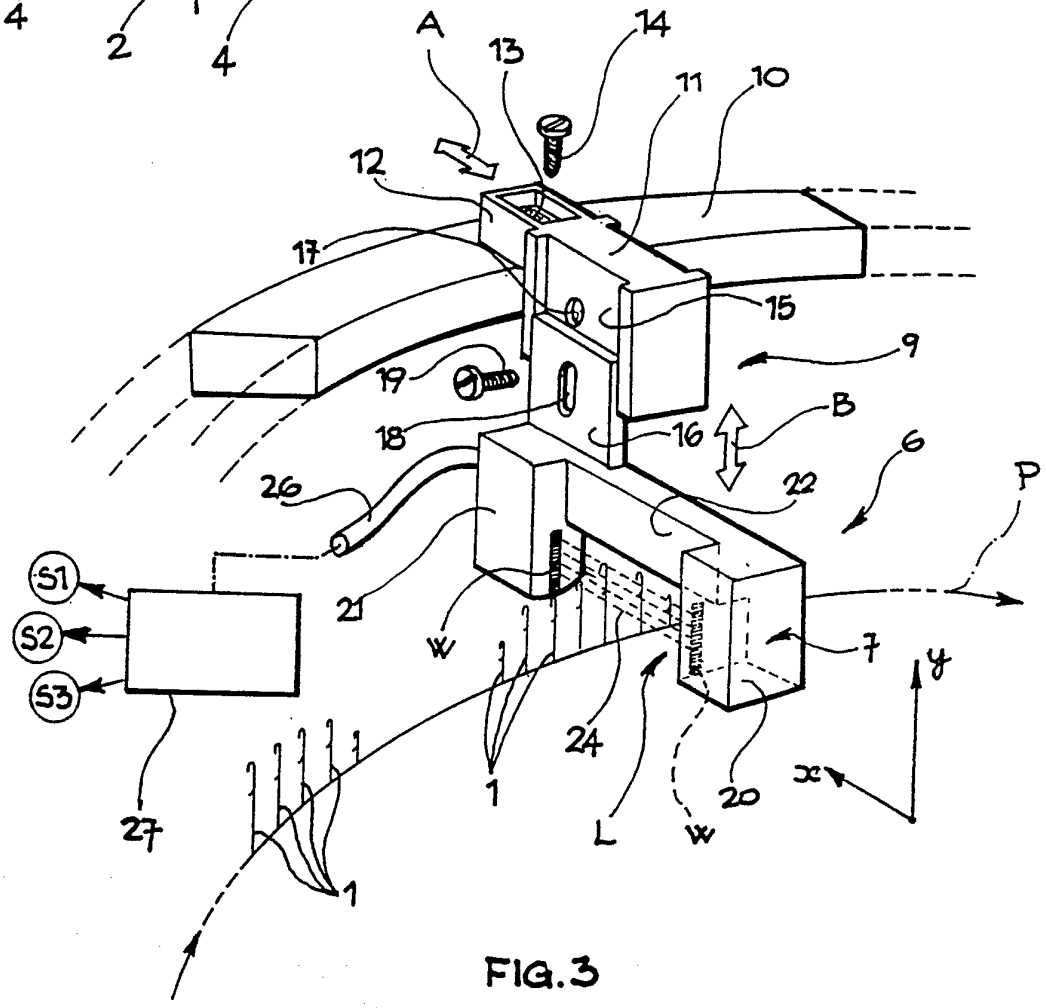


FIG. 3

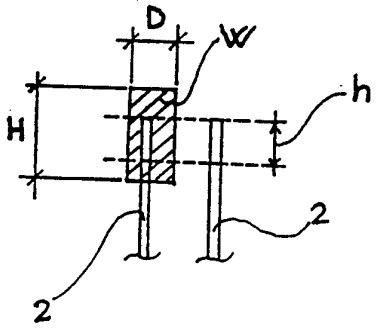


FIG.4

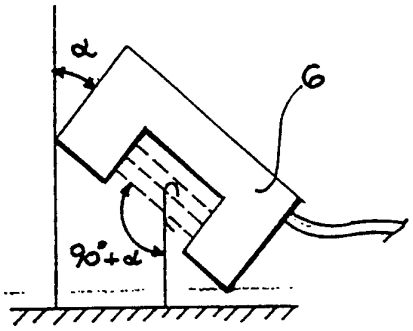


FIG.5

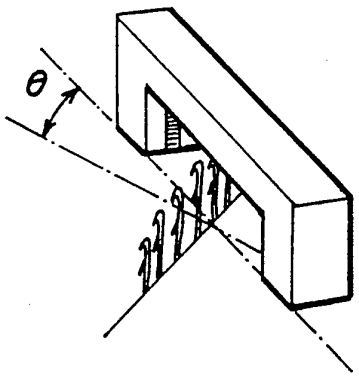


FIG.6




FIG.7

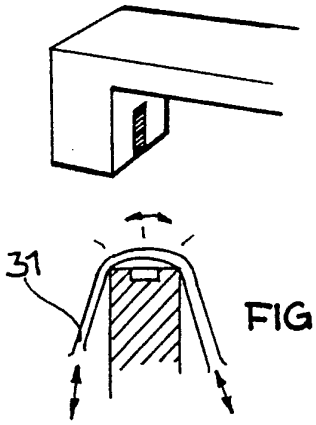


FIG.7a

FIG. 8

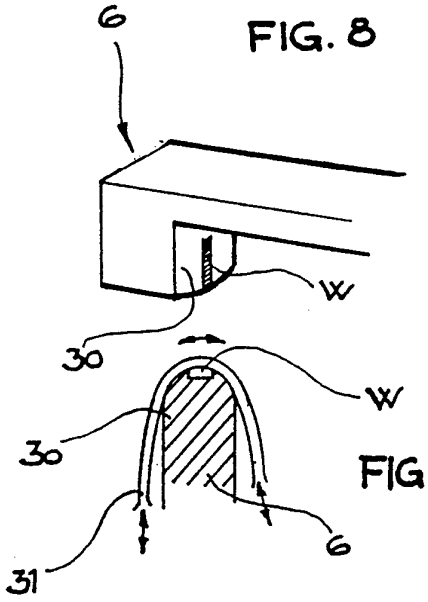


FIG.8a

FIG.9

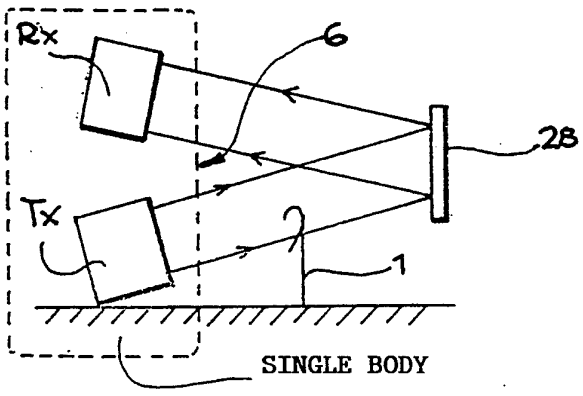


FIG. 10

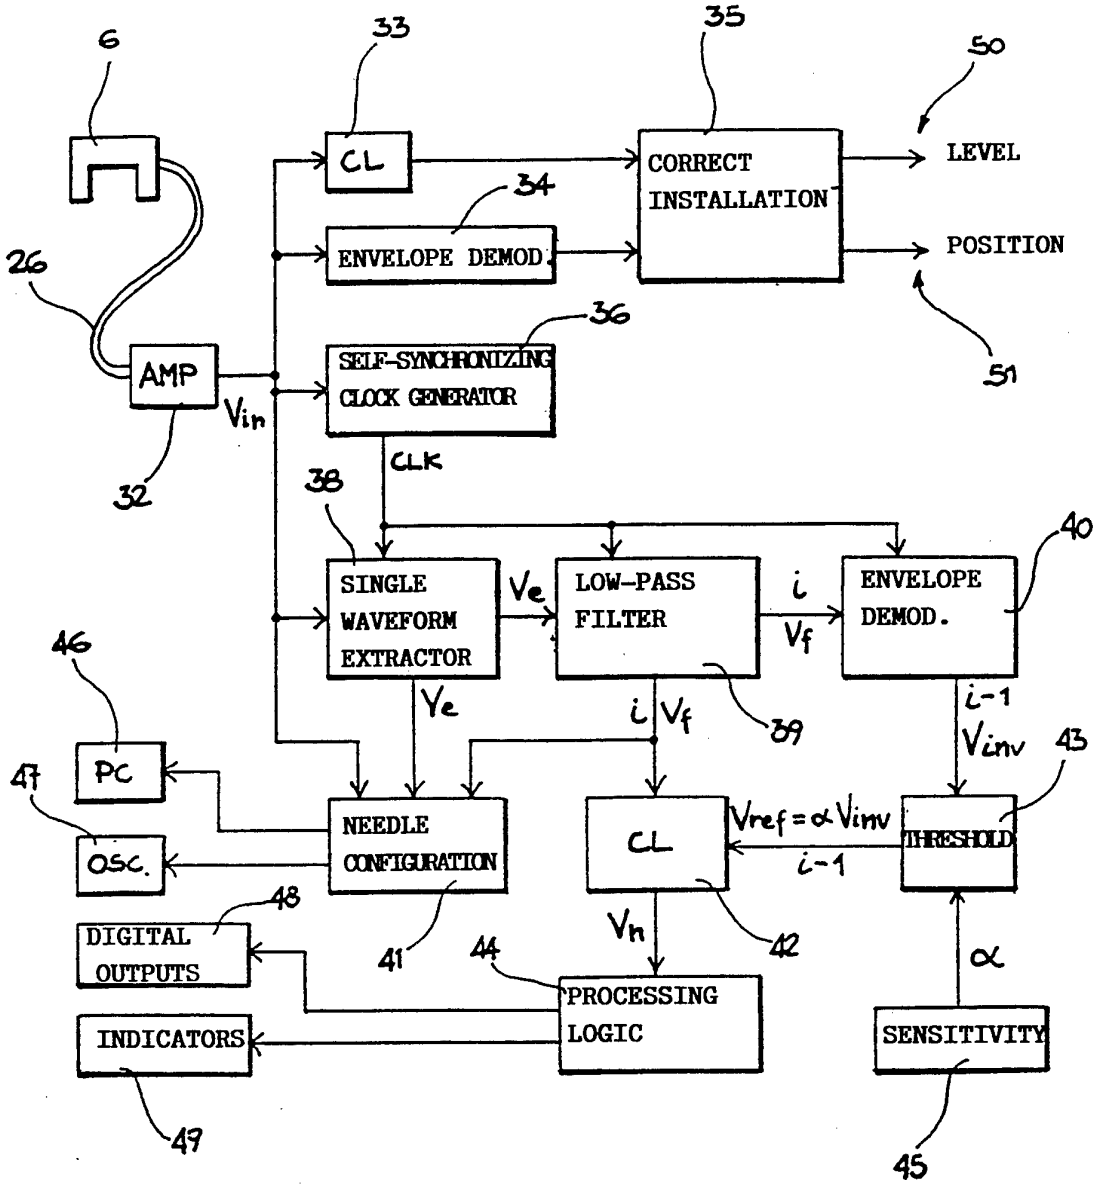

6
33
35
50
CL
CORRECT INSTALLATION
LEVEL
34
ENVELOPE DEMOD.
POSITION
26
36
AMP
SELF-SYNCHRONIZING CLOCK GENERATOR
51
Vin
32
CLK
38
40
SINGLE WAVEFORM EXTRACTOR
Ve
LOW-PASS FILTER
i
Vf
ENVELOPE DEMOD.
46
i-1
Vinv
43
Ve
i Vf
39
47
PC
OSC.
NEEDLE CONFIGURATION
CL
Vref = α Vinv
i-1
THRESHOLD
48
DIGITAL OUTPUTS
41
Vh
42
44
α
PROCESSING LOGIC
INDICATORS
SENSITIVITY
49
45

FIG. 11

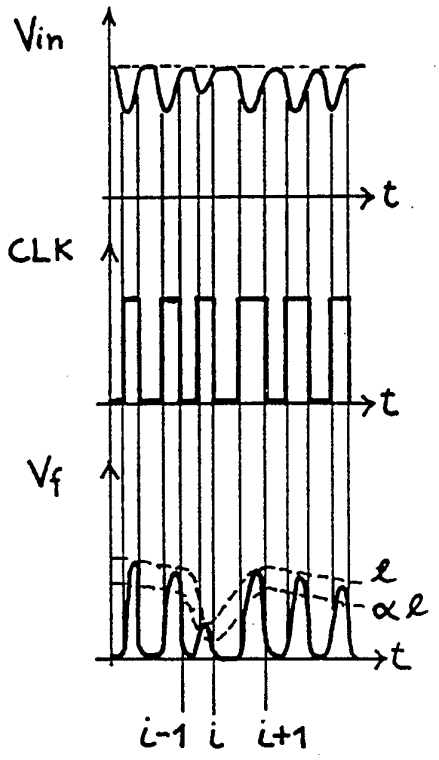


FIG. 12

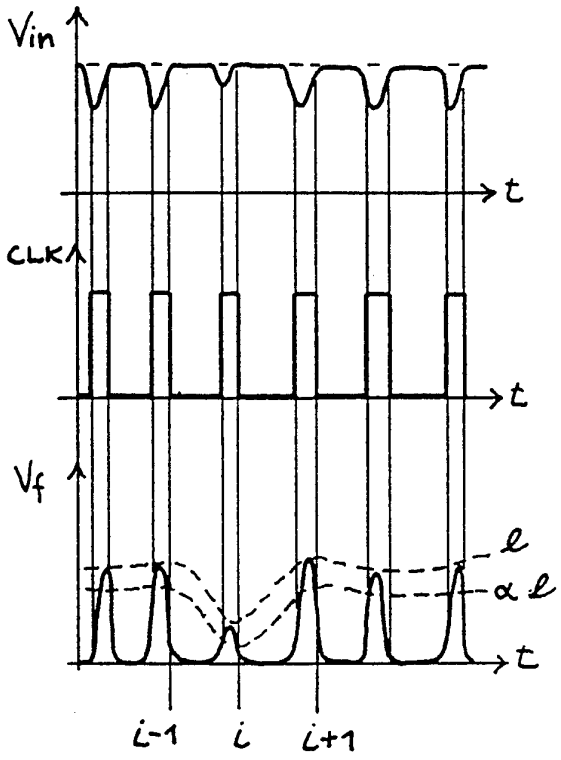


FIG. 13

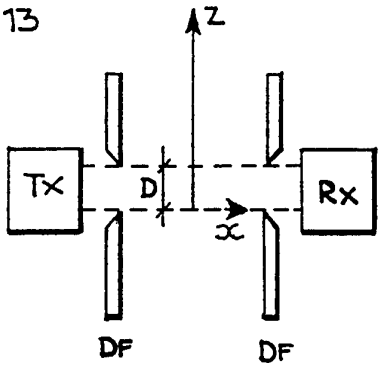


FIG. 14

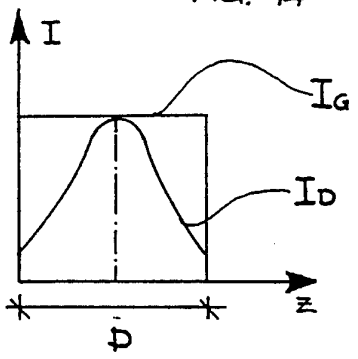


FIG. 16

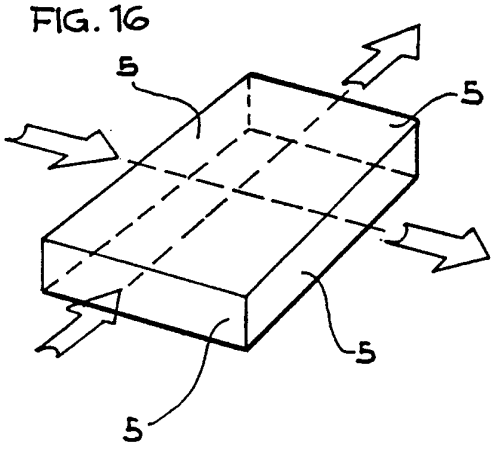


FIG. 15





FIG. 17

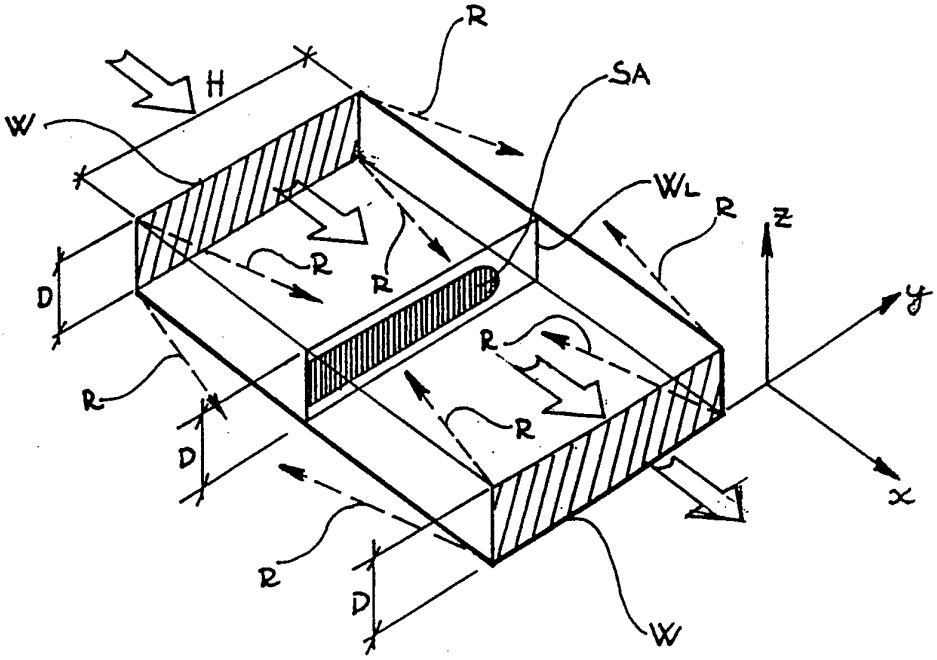

INTERNATIONAL SEARCH REPORT

International Application No PCT/EP 93/01259

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all)[6]

According to International Patent Classification (IPC) or to both National Classification and IPC

Int.Cl. 5 D04B35/18

II. FIELDS SEARCHED

Minimum Documentation Searched[7]

Classification System	Classification Symbols
Int.Cl. 5	D04B

Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched[8]

III. DOCUMENTS CONSIDERED TO BE RELEVANT[9]

Category °	Citation of Document,[11] with indication, where appropriate, of the relevant passages[12]	Relevant to Claim No.[13]
A	GB,A,1 186 985 (ELECTRONIT LTD) 8 April 1970 see page 2, line 69 - line 127; figures 1-4	1,7,8, 13,20
A	DE,A,2 242 266 (FA. ERWIN SICK, OPTIK-ELEKTRONIK) 7 March 1974 see claim 1; figures 1,2	1,2
A	DE,A,2 538 002 (ERWIN SICK GMBH OPTIK-ELEKTRONIK) 3 March 1977 see page 3, line 11 - line 22; figures 1,2	1,3
A	US,A,3 946 578 (VENCZEL) 30 March 1976 cited in the application	

-/--

° Special categories of cited documents :[10]

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report
15 SEPTEMBER 1993	07. 10. 93
International Searching Authority	**Signature of Authorized Officer**
EUROPEAN PATENT OFFICE	VAN GELDER P.A.

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)

Category °	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	US,A,3 937 038 (SICK) 10 February 1976 cited in the application	
A	US,A,4 027 982 (OHISI) 7 June 1977 cited in the application	

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

EP 9301259
SA 75291

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 15/09/93

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
GB-A-1186985	08-04-70	DE-A-	1937246	30-07-70
		FR-A-	2013454	03-04-70
		US-A-	3577750	04-05-71
DE-A-2242266	07-03-74	GB-A-	1434625	05-05-76
		US-A-	3854687	17-12-74
DE-A-2538002	03-03-77	None		
US-A-3946578	30-03-76	GB-A-	1446172	18-08-76
		AU-A-	7305174	11-03-76
		CA-A-	996768	14-09-76
		CH-A-	582264	30-11-76
		DE-A-	2443479	27-03-75
		FR-A-	2244032	11-04-75
		JP-A-	50076373	23-06-75
		NL-A-	7412282	20-03-75
US-A-3937038	10-02-76	DE-A-	2229232	10-01-74
		FR-A-	2190301	25-01-74
		GB-A-	1399698	02-07-75
US-A-4027982	07-06-77	None		