US 20150071775A1

(19) United States

(12) Patent Application Publication

(10) Pub. No.: US 2015/0071775 A1

(43) Pub. Date: Mar. 12, 2015

KASHIHARA et al.

(54) FAN UNIT AND AIR CONDITIONER

(71) Applicant: **DAIKIN INDUSTRIES, LTD.**, Osaka (JP)

(72) Inventors: **Takashi KASHIHARA**, Sakai-shi (JP); **Takahiro YAMASAKI**, Sakai-shi (JP); **Kaname MARUYAMA**, Sakai-shi (JP)

(73) Assignee: **DAIKIN INDUSTRIES, LTD.**, Osaka (JP)

(21) Appl. No.: **14/482,269**

(22) Filed: **Sep. 10, 2014**

(30) **Foreign Application Priority Data**

Sep. 11, 2013 (JP) 2013-188510

Publication Classification

(51) **Int. Cl.**
F24F 7/06 (2006.01)

(52) **U.S. Cl.**
CPC *F24F 7/065* (2013.01)
USPC **415/206**; 454/338

(57) **ABSTRACT**

A fan unit includes a fan case, a partition member and a centrifugal fan. The fan case has an inflow port and a blowout port. The fan case includes a unit connecting portion for connecting the heat exchange unit. The partition member partitions an inside of the fan case into an upstream side space and a downstream side space. The partition member has an opening for allowing the upstream side space and the downstream side space to communicate with each other. The centrifugal fan includes an impeller including a plurality of backward curved blades. The centrifugal fan is arranged such that the impeller is located in the downstream side space and sucks air in the upstream side space through the opening. The blowout port is located on an outer side in a radial direction of the impeller in the downstream side space.

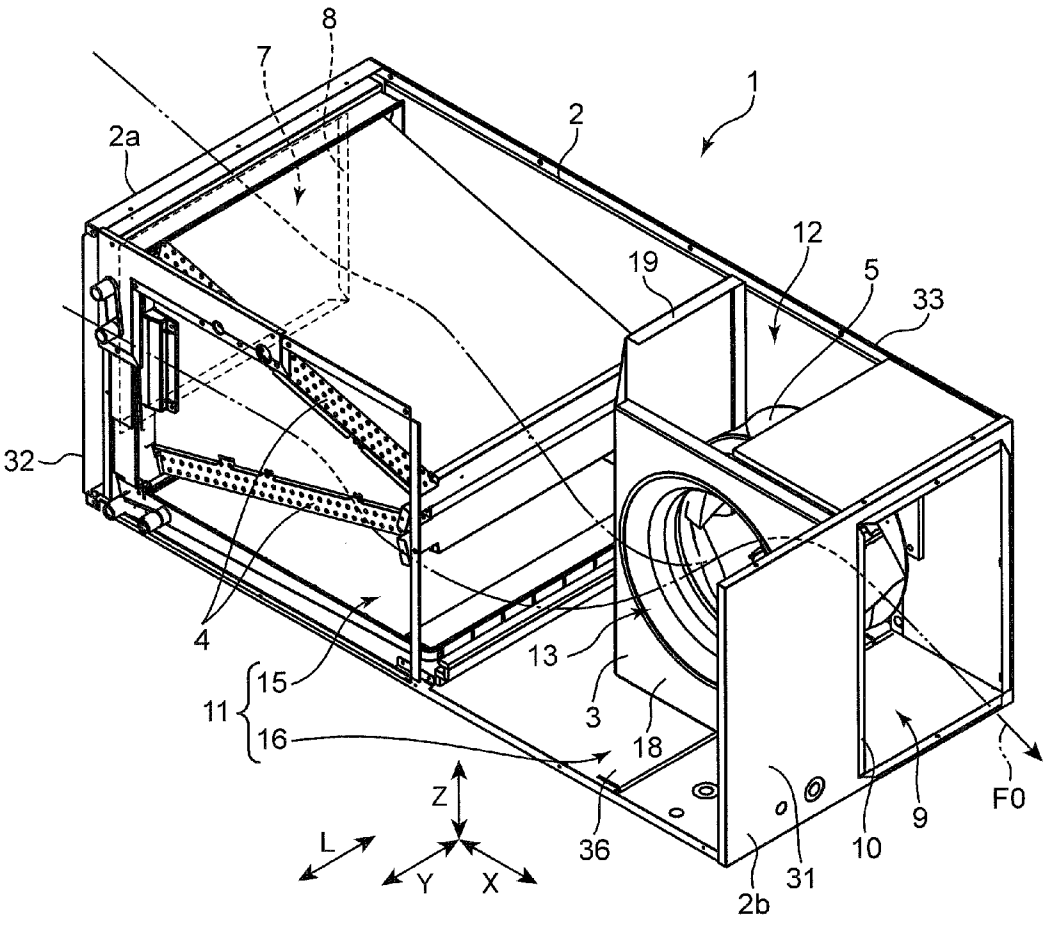


FIG.1

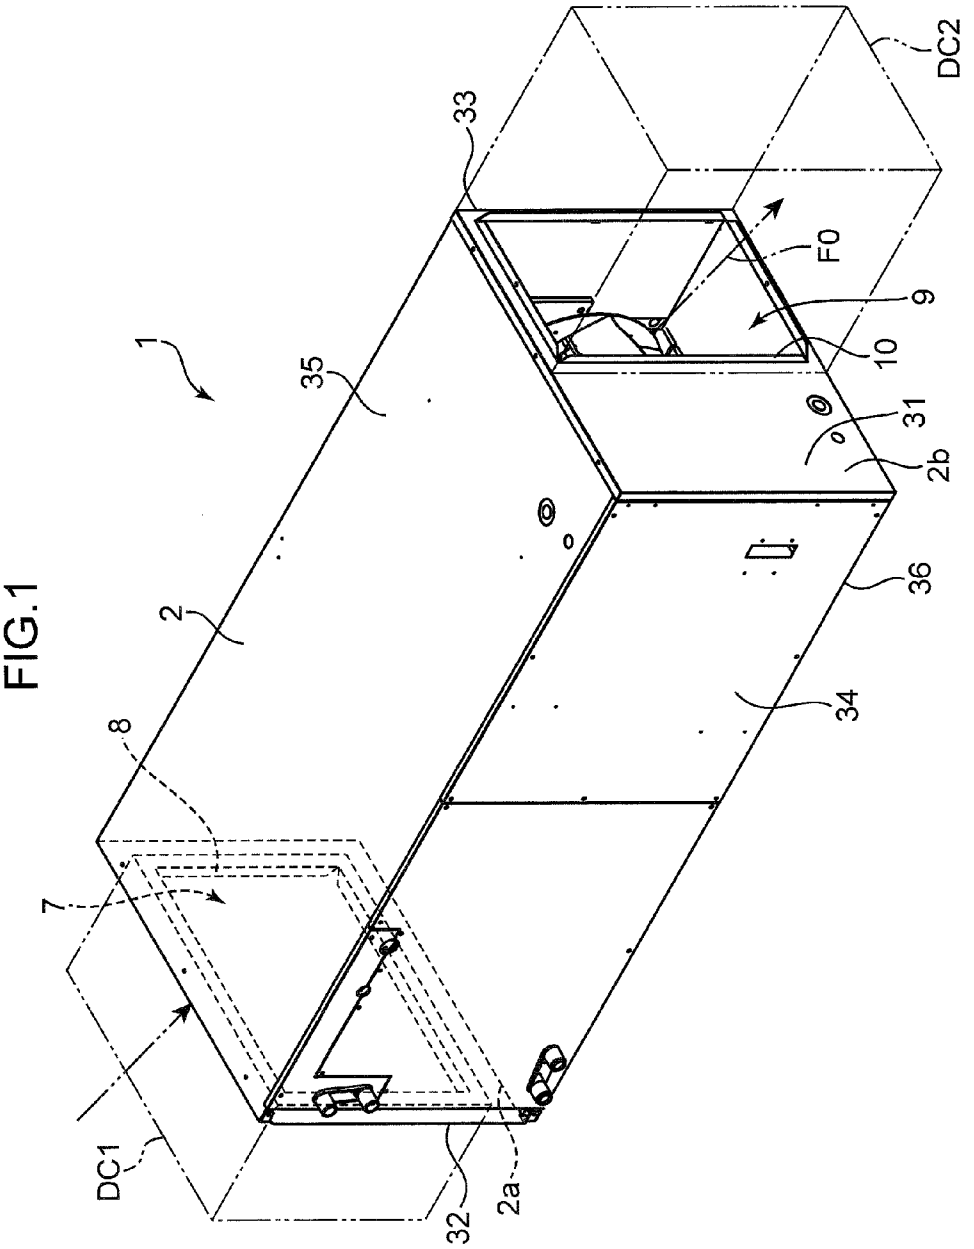


FIG.2

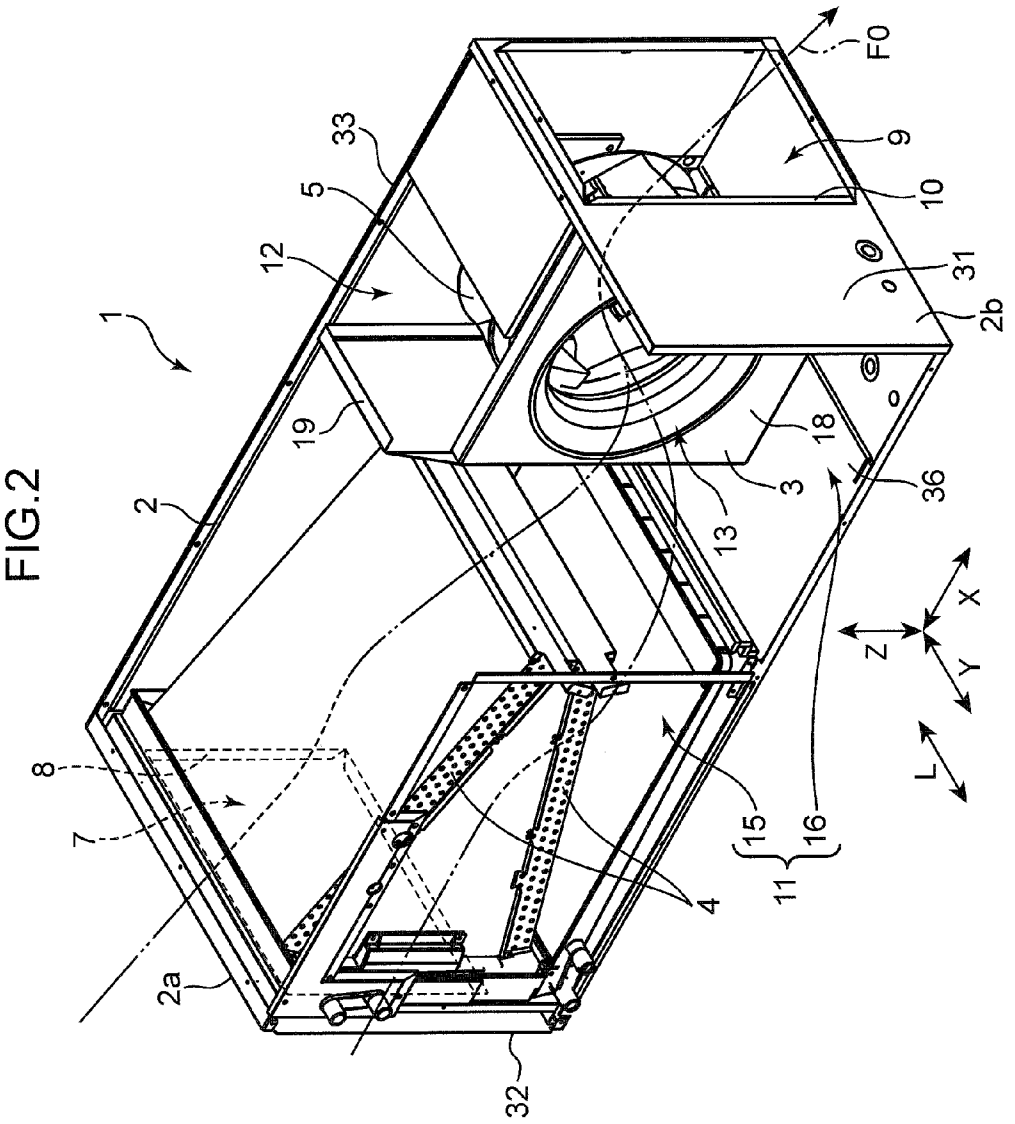


FIG.3

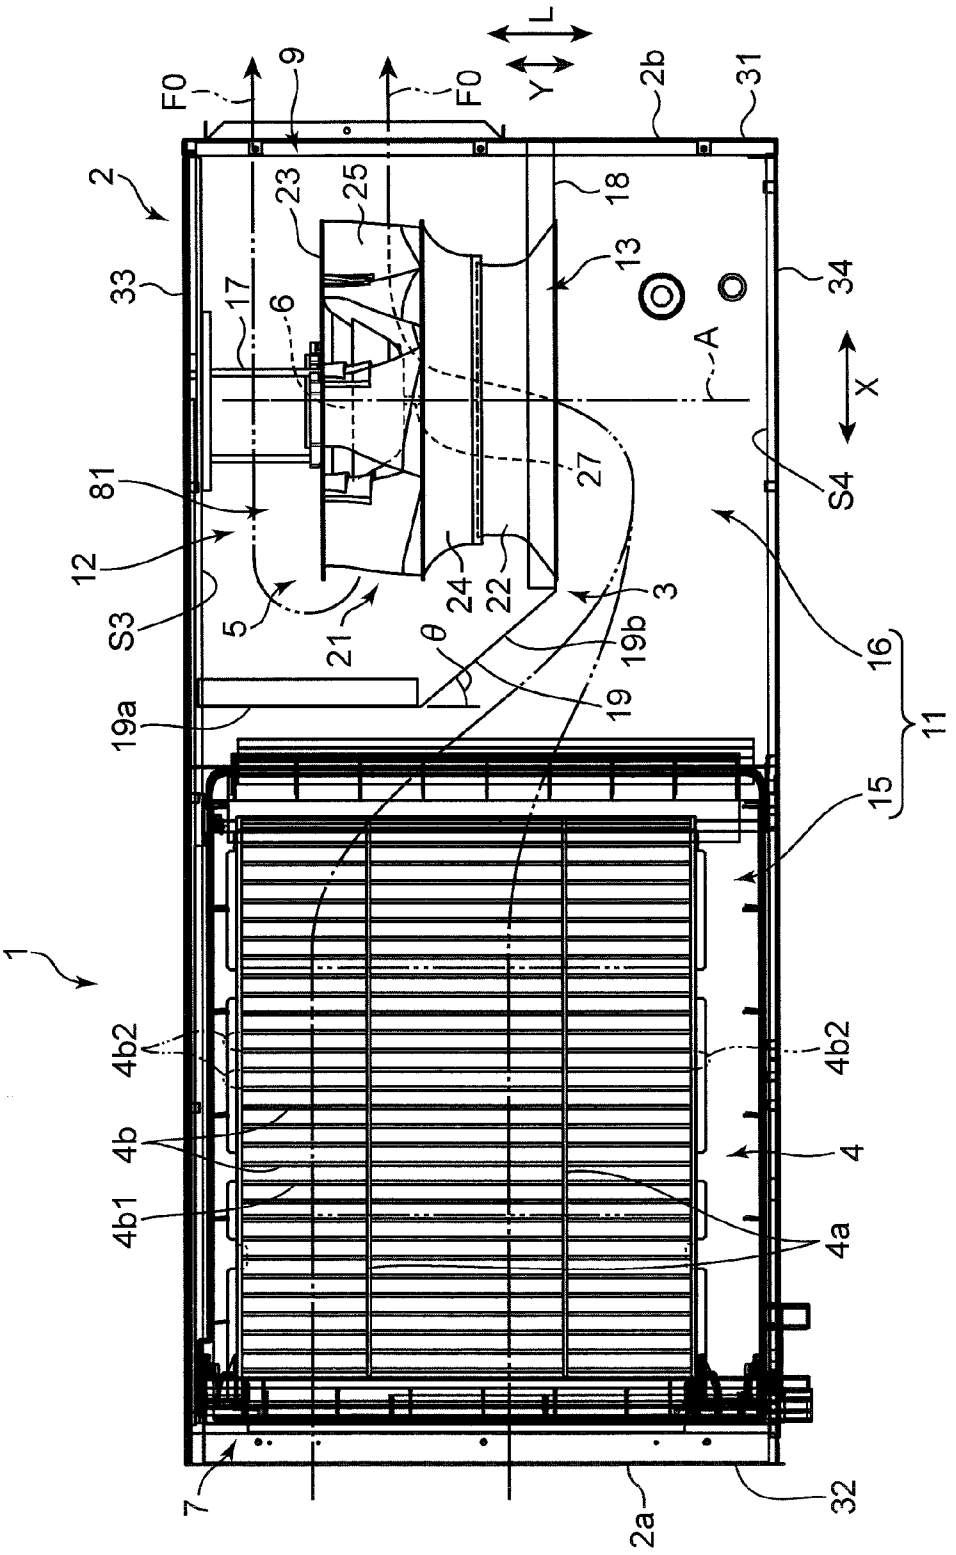

L
Y
X
F0
F0
9
2b
31
2
23
25
18
13
33
17
6
34
A
81
27
S4
12
S3
5
21
24
22
3
θ
19b
19
16
19a
11
15
1
4b2
4b2
4b
4
4b1
4a
7
2a
32

FIG.4

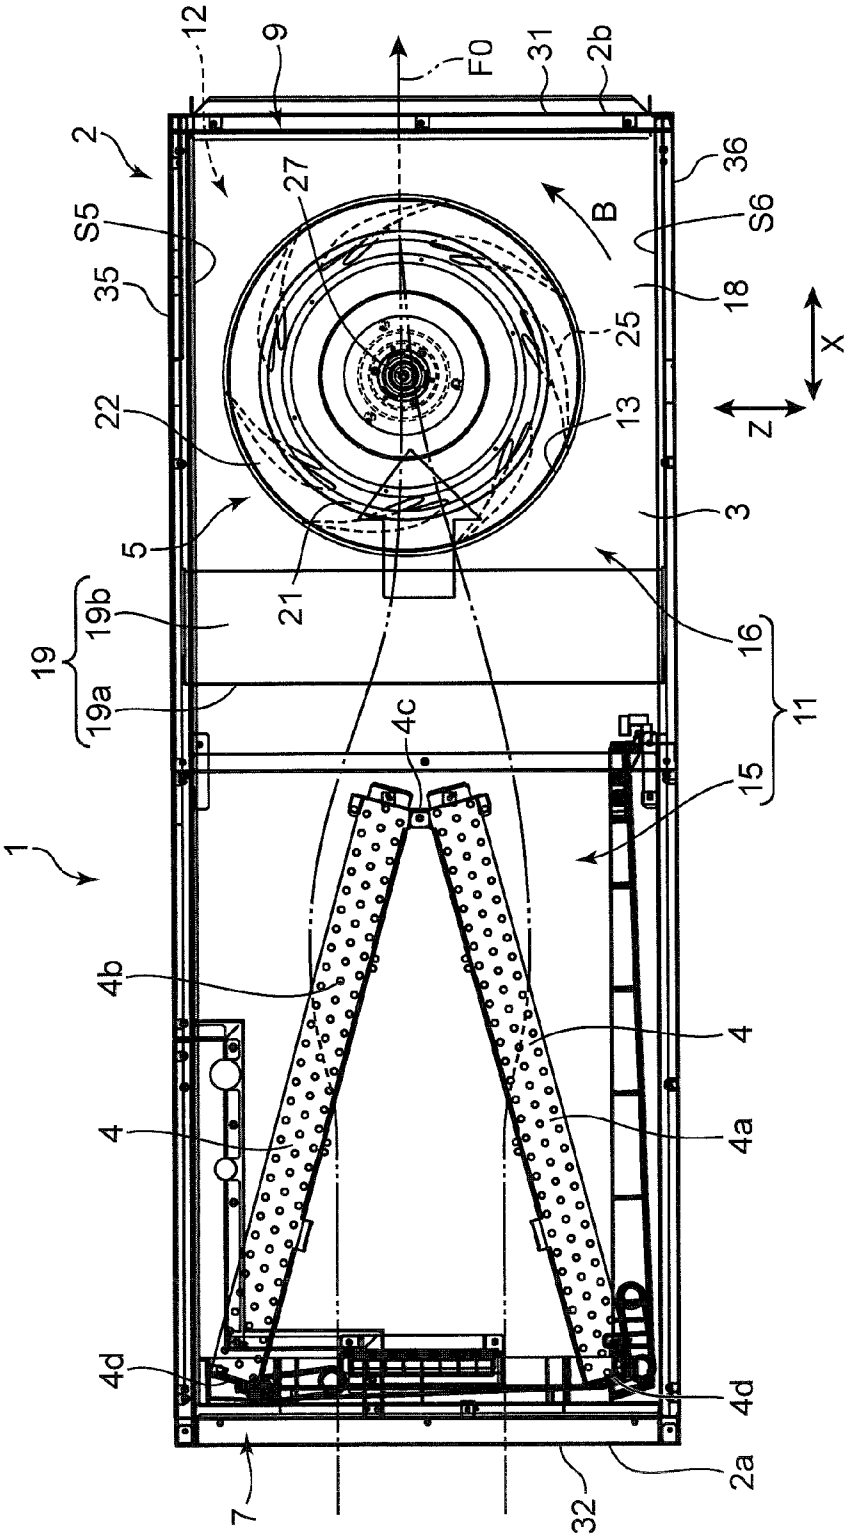

12
9
F0
31
2b
2
36
S5
27
B
S6
35
18
25
X
22
13
Z
3
5
21
16
19
19b
19a
11
4c
15
1
4b
4
4
4a
4d
4d
2a
7
32

FIG.5

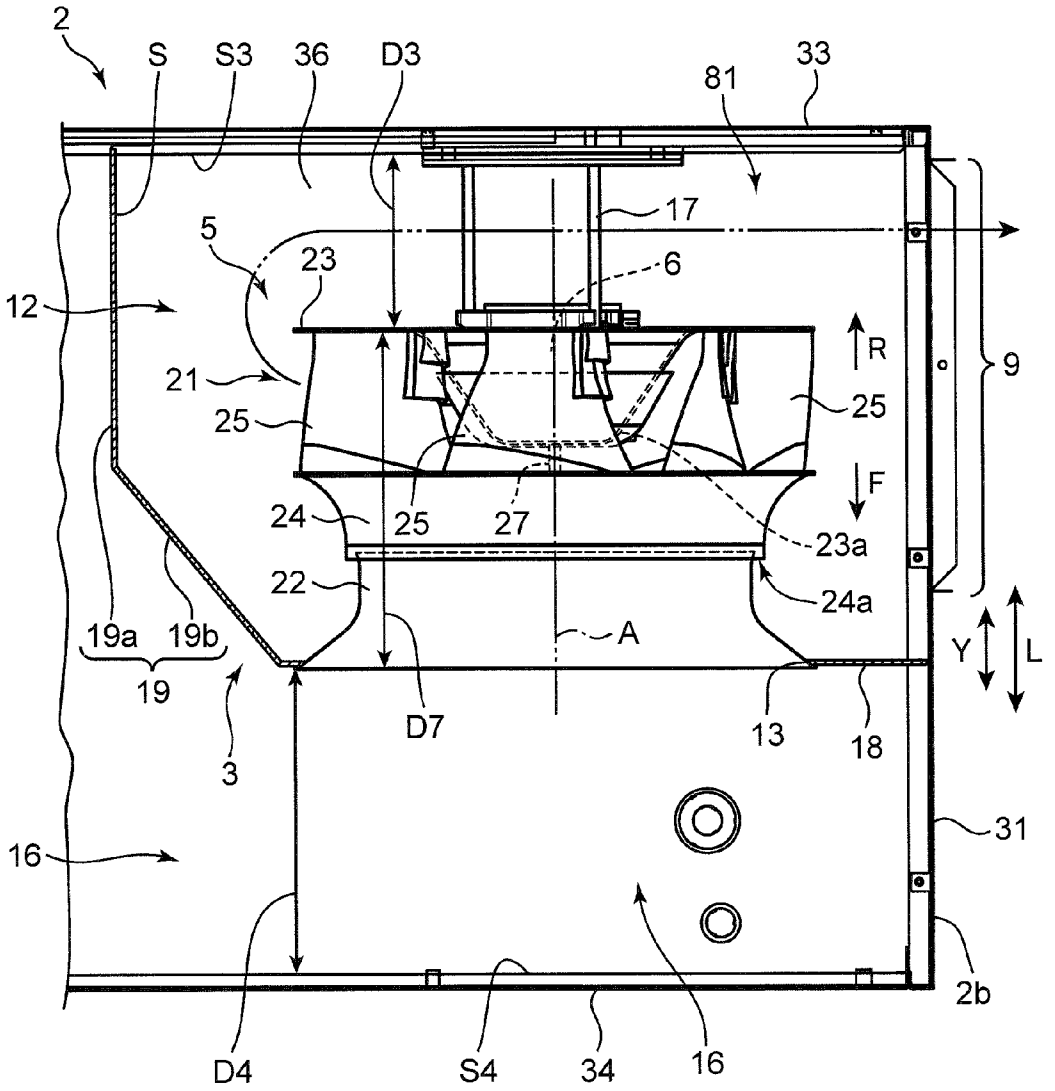

2
S
S3
36
D3
81
33
17
5
23
6
12
21
25
R
9
25
F
24
25
27
23a
22
24a
19a
19b
19
A
Y
L
D7
13
18
3
31
16
2b
D4
S4
34
16

FIG.6

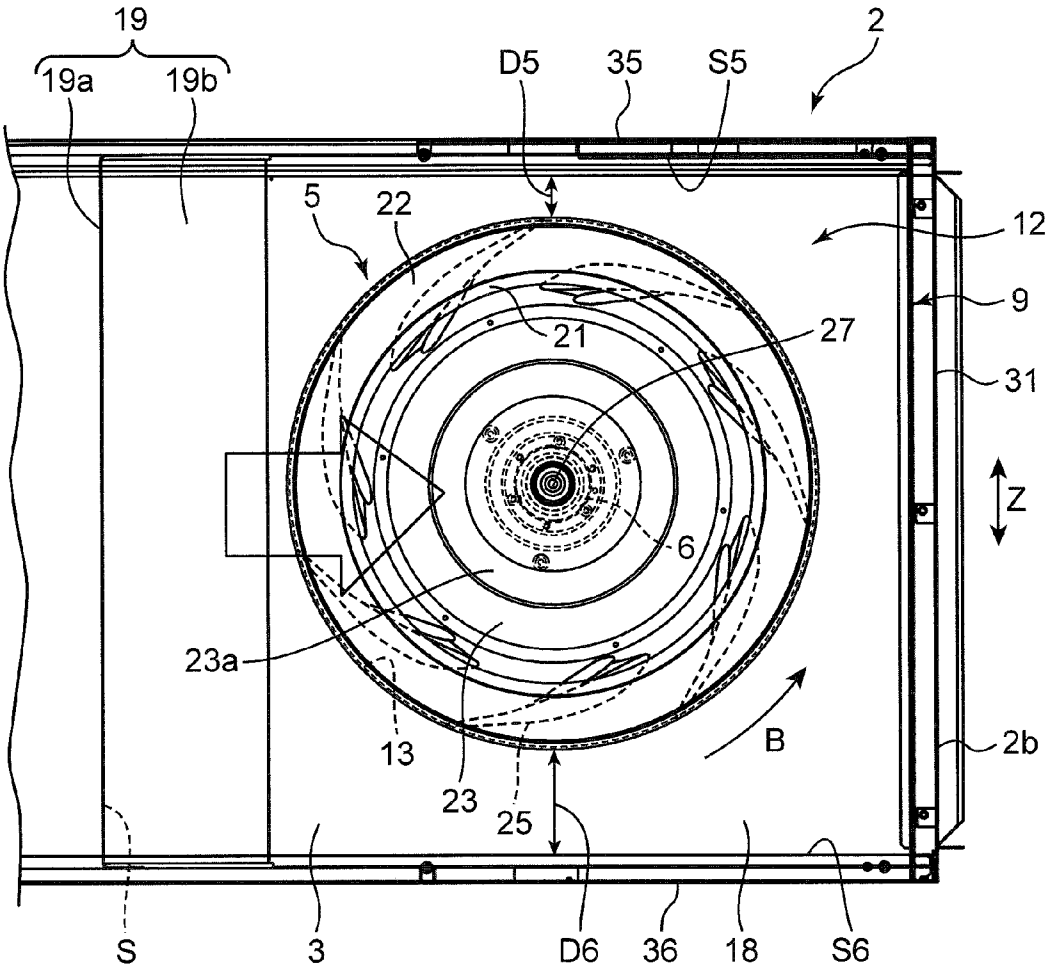

19
19a
19b
D5
35
S5
2
5
22
12
9
21
27
31
Z
6
23a
13
23
25
B
2b
S
3
D6
36
18
S6

FIG.7

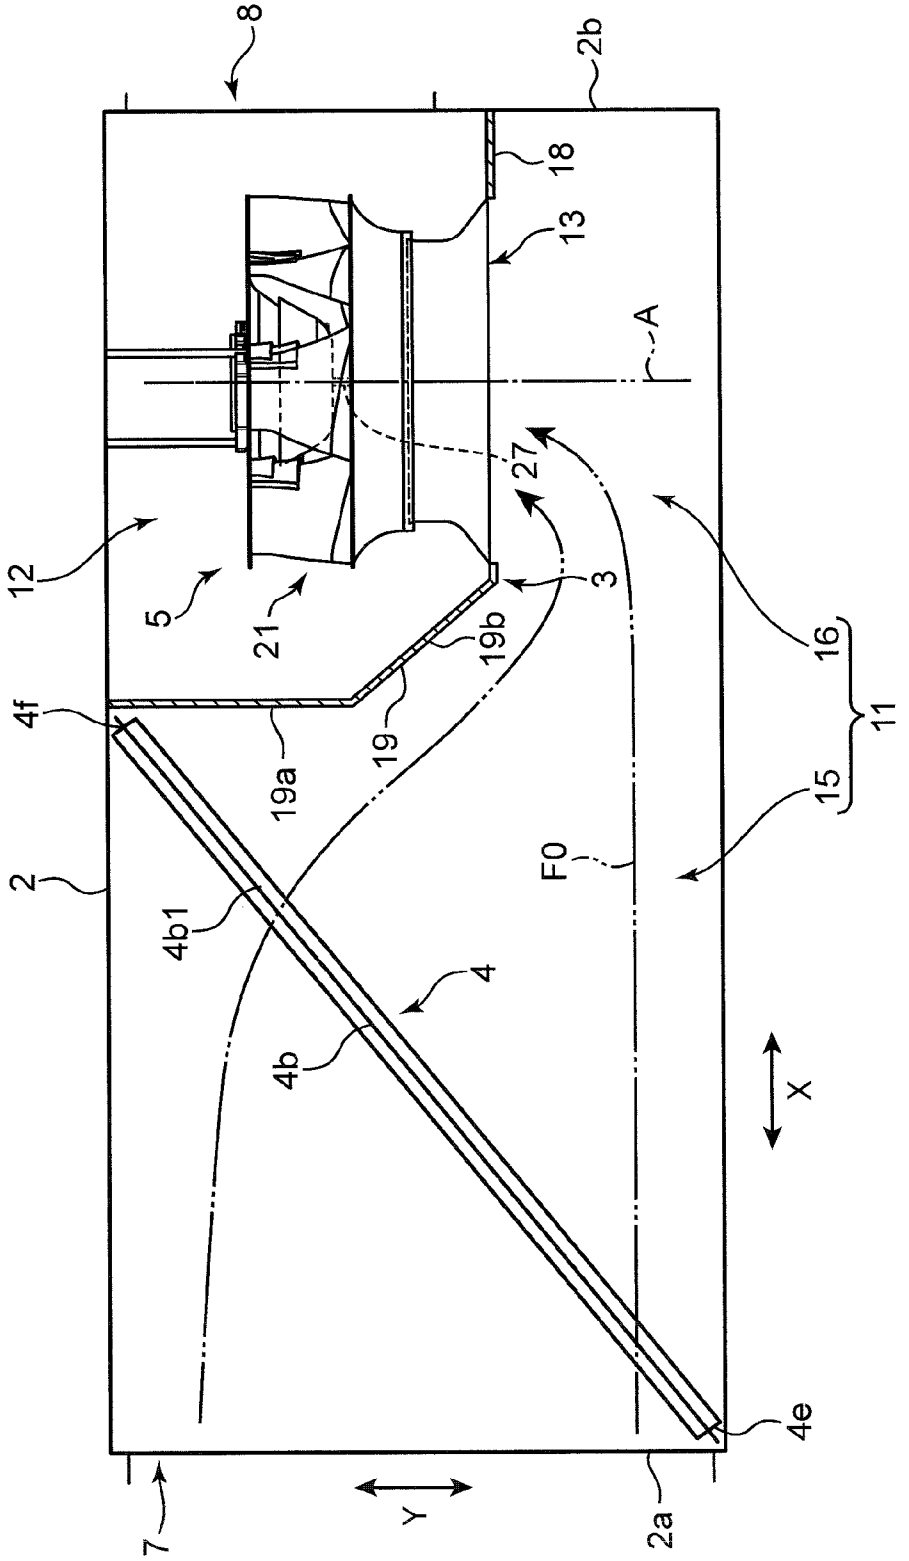


FIG.8A

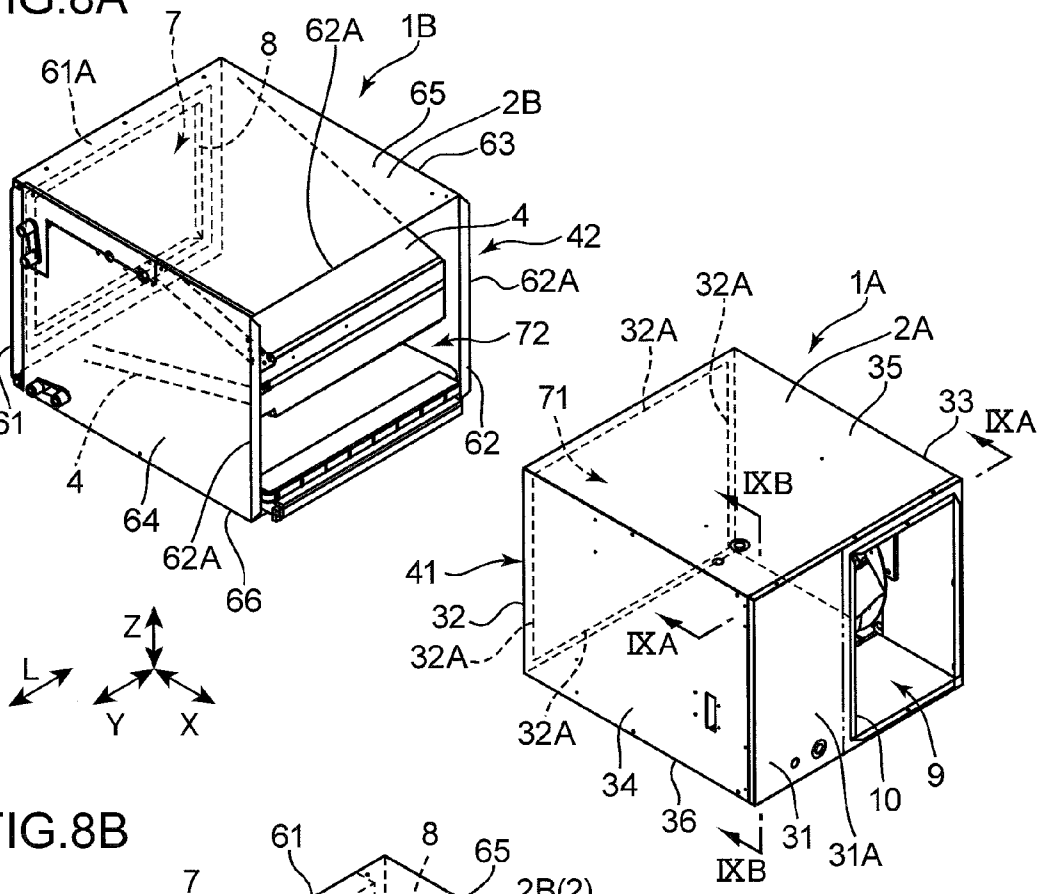

7
8
62A
1B
61A
65
2B
63
4
42
62A
72
61
62
4
64
62A
66
32A
1A
32A
2A
35
33
IXA
71
IXB
41
32
32A
IXA
32A
34
36
31
31A
10
9
IXB
Z
L
Y
X

FIG.8B

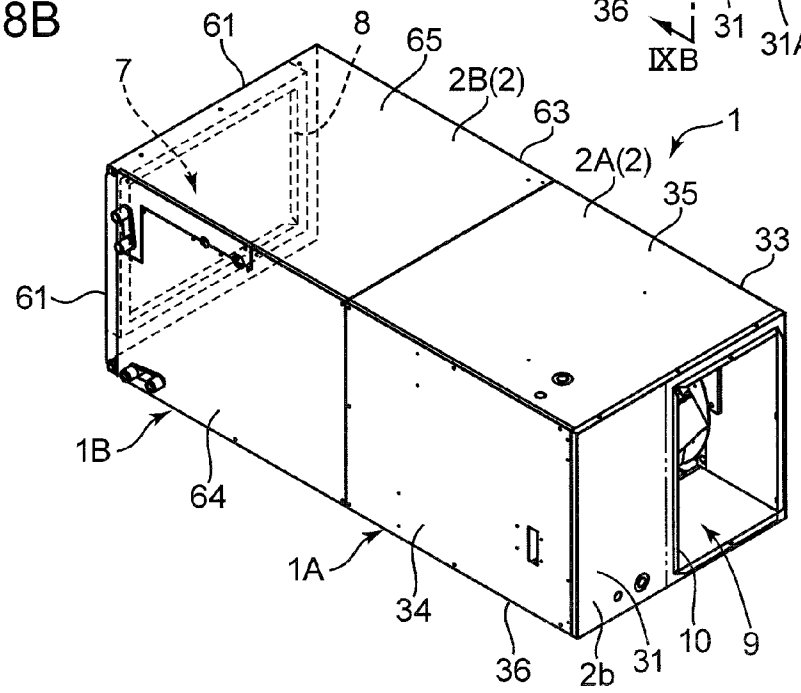

61
8
65
7
2B(2)
63
1
2A(2)
35
33
61
1B
64
1A
34
36
2b
31
10
9

FIG.9A

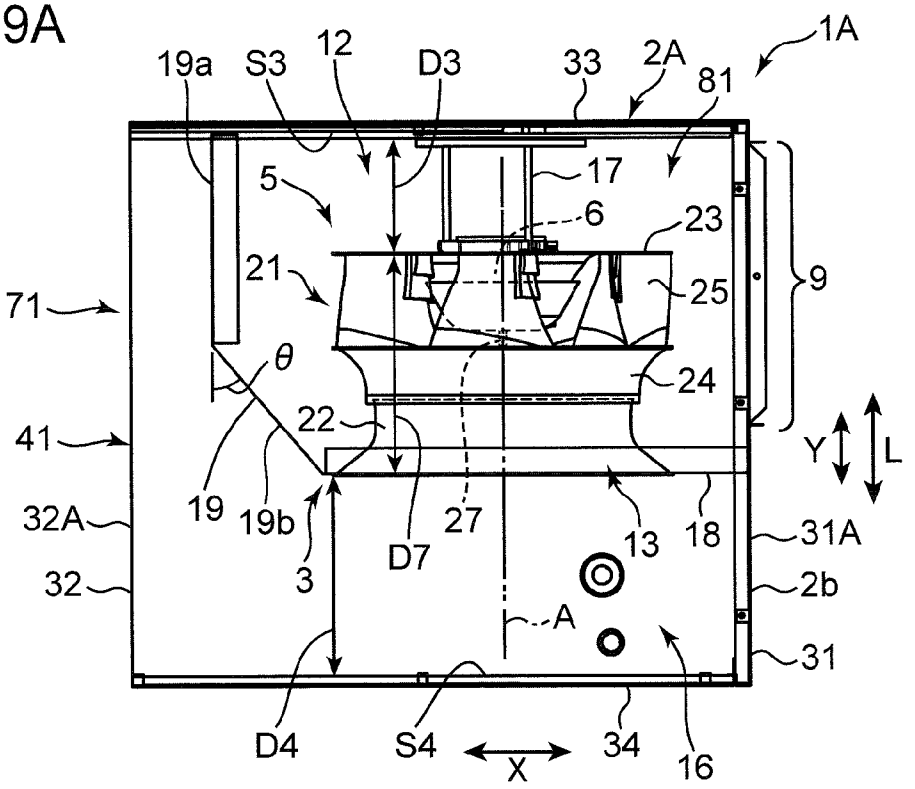
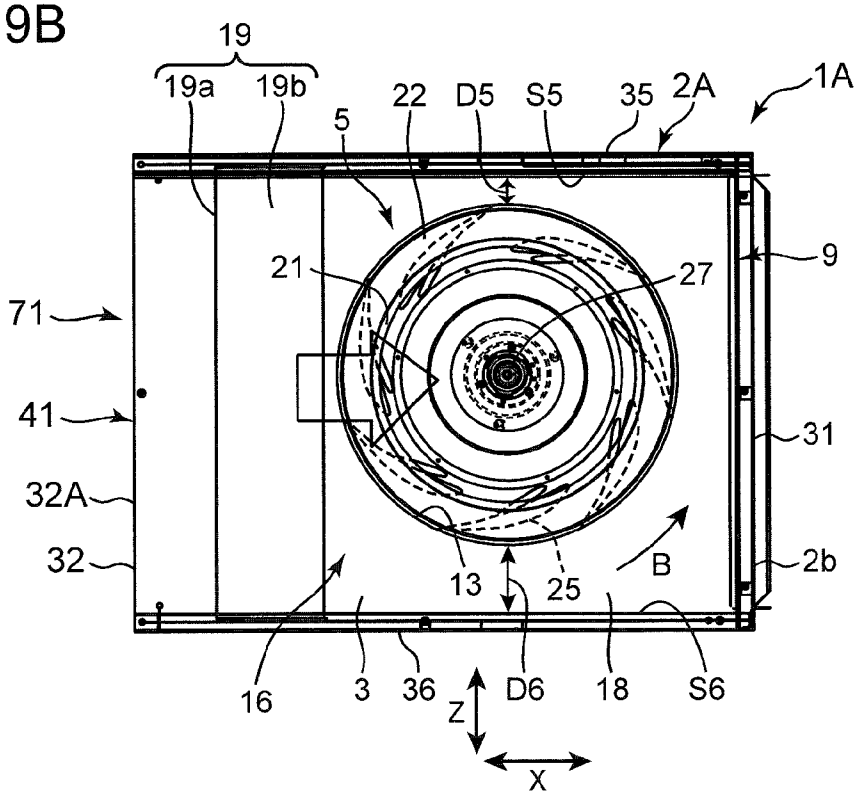

19a
S3
12
D3
33
2A
81
1A
5
17
6
23
21
25
9
71
θ
24
22
41
Y
L
19
19b
27
13
18
31A
32A
3
D7
32
2b
A
31
D4
S4
X
34
16

FIG.9B


19
19a
19b
5
22
D5
S5
35
2A
1A
21
27
9
71
41
31
32A
32
13
25
B
2b
16
3
36
Z
D6
18
S6
X

FAN UNIT AND AIR CONDITIONER

TECHNICAL FIELD

[0001] The present invention relates to a fan unit to be connected to a heat exchange unit in which a heat exchanger is housed, and relates to an air conditioner.

BACKGROUND ART

[0002] Japanese Unexamined Patent Publication No. H6-281194 discloses an air conditioner including a blowing unit. A turbo fan is housed in a case of the blowing unit. In the blower unit, a rotating shaft of the turbo fan is directed in the up-down direction, an air inflow port is provided in a lower part of the case of the blowing unit, and an air blowout port is provided in an upper part of the case of the blowing unit. Therefore, the air having passed through the heat exchange unit flows into the case from the inflow port in the lower part of the case of the blowing unit and is discharged to the outer side in the radial direction of the turbo fan in the case. The air discharged from the turbo fan in the horizontal direction changes its direction upward in the case and is blown out from the blowout port in the upper part of the case.

[0003] In the blowing unit disclosed in Japanese Unexamined Patent Publication No. H6-281194, a wind guide plate arranged to gradually decrease in opening width toward the blowout port is necessary so that the air discharged from the turbo fan in the horizontal direction in the case changes its direction upward and is blown out from the blowout port in the upper part of the case. Therefore, in the blowing unit disclosed in Japanese Unexamined Patent Publication No. H6-281194, the number of components increases and airflow resistance increases.

SUMMARY OF INVENTION

[0004] It is an object of the present invention to provide a fan unit and an air conditioner that can smoothly blow out, from a blowout port, the air discharged from a centrifugal fan including backward curved blades and can suppress an increase in the number of components and an increase in airflow resistance.

[0005] The fan unit of the present invention is configured to be connected to a heat exchange unit in which a heat exchanger is housed. The fan unit includes a fan case, a partition member, and a centrifugal fan. The fan case has an air inflow port and an air blowout port. The fan case has, in a side section of the fan case on the inflow port side, a unit connecting portion for connecting the heat exchange unit. The partition member partitions an inside of the fan case into an upstream side space on the inflow port side and a downstream side space on the blowout port side. The partition member has an opening for allowing the upstream side space and the downstream side space to communicate with each other. The centrifugal fan includes an impeller including a plurality of backward curved blades. The centrifugal fan is arranged such that the impeller is located in the downstream side space and sucks air in the upstream side space through the opening. The blowout port is located on an outer side in a radial direction of the impeller in the downstream side space.

[0006] An air conditioner of the present invention includes a casing, a partition member, a heat exchanger, and a centrifugal fan. The casing has an air suction port and an air blowout port. The partition member partitions an inside of the casing into a first space on the suction port side and a second space on the blowout port side. The partition member has an opening for allowing the first space and the second space to communicate with each other. The heat exchanger is arranged in the first space. The centrifugal fan includes an impeller including a plurality of backward curved blades. The centrifugal fan is arranged such that the impeller is located in the second space and sucks air in the first space through the opening. The blowout port is located on an outer side in a radial direction of the impeller in the second space.

BRIEF DESCRIPTION OF DRAWINGS

[0007] FIG. **1** is a perspective view showing the external appearance of a duct-type indoor unit of an air conditioner according to an embodiment of the present invention;

[0008] FIG. **2** is a cutout perspective view showing the internal structure of the duct-type indoor unit shown in FIG. **1**;

[0009] FIG. **3** is a top plan view of the duct-type indoor unit shown in FIG. **2**;

[0010] FIG. **4** is a front view of the duct-type indoor unit shown in FIG. **2**;

[0011] FIG. **5** is an enlarged view of a partition member and the inside of a second space shown in FIG. **3**;

[0012] FIG. **6** is an enlarged view of the partition member and a centrifugal fan shown in FIG. **4**;

[0013] FIG. **7** is an internal configuration diagram of a duct-type indoor unit according to a modification of the embodiment of the present invention;

[0014] FIG. **8**A is a perspective view showing a fan unit according to an embodiment of the present invention and a heat exchange unit connected to the fan unit;

[0015] FIG. **8**B is a perspective view showing a state in which the fan unit and the heat exchange unit are coupled to each other;

[0016] FIG. **9**A is an IXA-IXA line sectional view of the fan unit shown in FIG. **8**A; and

[0017] FIG. **9**B is an IXB-IXB line sectional view of the fan unit shown in FIG. **8**A.

DESCRIPTION OF EMBODIMENTS

[0018] An air conditioner according to an embodiment of the present invention is explained with reference to the drawings. In this embodiment, a duct-type indoor unit is explained as a specific example of the air conditioner. Further, a fan unit according to an embodiment of the present invention and a heat exchange unit connected to the fan unit are explained. First, the duct-type indoor unit in the embodiment is explained, and the fan unit and the heat exchange unit are explained after the explanation of the duct-type indoor unit.

[Duct-Type Indoor Unit]

[0019] A duct-type indoor unit **1** shown in FIGS. **1** to **4** includes a casing **2**, a partition member **3** that partitions the inside of the casing **2** into two spaces (i.e., a first space **11** and a second space **12**), a pair of heat exchangers **4** housed in the first space **11** (more specifically, a heat exchange chamber **15** of the first space **11**), and a centrifugal fan **5** housed in the second space **12**. The centrifugal fan **5** includes an impeller **21** and a fan motor **6**. The fan motor **6** drives to rotate the impeller **21** of the centrifugal fan **5**.

[0020] The casing **2** includes a first side section **31** (a rear plate **31**), a second side section **32** (a front plate **32**), a third side section **33** (a side plate **33**), a fourth side section **34** (a

side plate **34**), a fifth side section **35** (an upper plate **35**), and a sixth side section **36** (a lower plate **36**). The casing **2** having a long rectangular parallelepiped shape is formed by the side sections **31** to **36**. The first side section **31** (the rear plate **31**) and the second side section **32** (the front plate **32**) are arranged to be spaced apart from each other in the longitudinal direction of the casing **2** (a direction of an arrow X in FIGS. **2** to **4**). The fifth side section **35** (the upper plate **35**) and the sixth side section **36** (the lower plate **36**) are arranged to be spaced apart from each other in the up-down direction (a direction of an arrow Z in FIGS. **2** and **4**) orthogonal to the longitudinal direction of the casing **2**. The third side section **33** (the side plate **33**) and the fourth side section **34** (the side plate **34**) are arranged to be spaced apart from each other in a width direction Y of the casing **2** orthogonal to the longitudinal direction of the casing **2**.

[0021] As shown in FIGS. **2** and **3**, an axial direction A of a rotating shaft **27** for rotating the impeller **21** extends in parallel to the width direction Y of the casing **2**. The direction X and the direction Y are orthogonal to each other. The direction X and the direction Z are orthogonal to each other. The direction Y and the direction Z are orthogonal to each other. In this embodiment, as shown in FIGS. **2** and **3**, the width direction Y of the casing coincides with the direction of an imaginary straight line L. That is, the axial direction A of the rotating shaft **27** for rotating the impeller **21** is parallel to the imaginary straight line L. In this embodiment, the first side section **31** and the second side section **32** are parallel to the imaginary straight line L. The third side section **33** and the fourth side section **34** are perpendicular to the imaginary straight line L. The fifth side section **35** and the sixth side section **36** are parallel to the imaginary straight line L.

[0022] The casing **2** has a pair of surfaces formed by the first side section **31** (the rear plate **31**) and the second side section **32** (the front plate **32**) and opposed to each other in the front-back direction, that is, an upstream side surface **2***a* and a downstream side surface **2***b*. The upstream side surface **2***a* has a suction port **7** and a suction-duct connecting portion **8** that forms the outer edge of the suction port **7** and to which a suction duct DC1 is connected (see FIG. **1**). The downstream side surface **2***b* has a blowout port **9** and a blowout-duct connecting portion **10** that forms the outer edge of the blowout port **9** and to which a blowout duct DC2 is connected (see FIG. **1**).

[0023] In this embodiment, each of the third side section **33**, the fourth side section **34**, the fifth side section **35**, and the sixth side section **36** forms a sidewall without an opening formed therein. As shown in FIGS. **5** and **6**, the third side section **33** has an inner surface S3 (a hub side inner surface S3). The fourth side section **34** has an inner surface S4 (an opening side inner surface S4). The fifth side section **35** has an inner surface S5 (an upstream side inner surface S5). The sixth side section **36** has an inner surface S6 (a downstream side inner surface S6). The partition member **3** has an inner surface S (a partition inner surface S).

[0024] The blowout-duct connecting portion **10** shown in FIGS. **1** and **2** includes, for example, a plurality of ridges that project to the downstream side of an air flow F0 from the downstream side surface **2***b* in such a way as to surround the blowout port **9**. The blowout duct DC2 is fixed to the ridges by screwing or the like in a state in which the blowout duct DC2 is laid on the ridges. The suction-duct connecting portion **8** has a configuration same as the configuration of the blowout-duct connecting portion **10**.

[0025] Note that, in the present invention, the suction duct DC1 and the blowout duct DC2 are not particularly limited as long as the suction duct DC1 and the blowout duct DC2 are tubular bodies that can respectively communicate with the suction port **7** and the blowout port **9**. Square tubes and tubular bodies having other various shapes can be adopted. The suction-duct connecting portion **8** and the blowout-duct connecting portion **10** only have to be configured such that the suction duct DC1 and the blowout duct DC2 can be respectively connected thereto. Therefore, in the present invention, the structures of the suction-duct connecting portion **8** and the blowout-duct connecting portion **10** are not particularly limited.

[0026] The partition member **3** partitions the inside of the casing **2** into the first space **11** on the suction port **7** side and the second space **12** on the blowout port **9** side. The suction port **7** is opened in the first space **11**. The blowout port **9** is opened in the second space **12**.

[0027] Specifically, as shown in FIGS. **3** to **6**, the partition member (the partition plate) **3** includes a first portion **18** (a first partition plate **18**) and a second portion **19** (a second partition plate **19**) that is contiguous to the first portion **18**.

[0028] The first portion **18** is a flat portion and extends perpendicularly to the rotating shaft **27** for rotating the impeller **21** and extends perpendicularly to the upstream side surface **2***a*. That is, the first portion **18** extends in parallel to the longitudinal direction X of the casing **2**.

[0029] The first portion **18** partitions the second space **12** and the first space **11** (specifically, an airflow passage **16** of the first space **11** explained below). In the first portion **18**, an opening **13** for allowing the second space **12** and the airflow passage **16** of the first space **11** to communicate with each other is formed. That is, the first space **11** and the second space **12** communicate with each other through the opening **13**.

[0030] The second portion **19** is a portion that is contiguous to the first portion **18** and is a portion that partitions the second space **12** and an arrangement space for heat exchangers **4** in the first space **11** (specifically, a heat exchange chamber **15** explained below). Specifically, the second portion **19** includes a parallel portion **19***a* extending in parallel to the axial direction A of the rotating shaft **27** and an inclined portion **19***b* inclined toward the opening **13** side of the first portion **18** with respect to the axial direction A of the rotating shaft **27**. One end of the inclined portion **19***b* is connected to an end of the first partition plate **18** on the suction port **7** side (the heat exchangers **4** side). The other end of the inclined portion **19***h* is located further on the impeller **21** side (the third side section **33** side) than the first partition plate **18** in the axial direction A of the rotating shaft **27**. The other end of the inclined portion **19***b* is connected to the parallel portion **19***a*.

[0031] An inclination angle θ (see FIG. **3**) of the inclined portion **19***b* with respect to the axial direction A is set to be an angle at which the air in the heat exchange chamber **15** is smoothly guided to the opening **13**. Consequently, it is possible to suppress occurrence of a turbulent flow near the inclined portion **19***b*. As shown in FIGS. **3** and **5**, a space surrounded by a shroud **24** and a bell mouth **22** explained below and the partition member **3** is a space that tends to be a dead space. Therefore, since the dead space can be reduced by providing the inclined portion **19***b*, it is possible to effectively use a space.

[0032] Since the parallel portion **19***a* is present, it is possible to limit an amount of projection of the inclined portion

19*b* toward the heat exchange chamber **15** side and it is therefore possible to secure a space of the heat exchange chamber **15**. Moreover, it is possible to guide the blowout air of the centrifugal fan **5** housed in the second space **12** to the blowout port **9** side. Note that the parallel portion **19***a* can be omitted.

[0033] As shown in FIG. **5**, both ends of the partition member **3** are respectively connected to inner walls of the casing **2**. That is, the parallel portion **19***a* of the second portion **19** of the partition member **3** is connected to the third side section **33**. The first portion **18** of the partition member **3** is connected to the first side section **31**.

[0034] As shown in FIGS. **3** to **5**, the first space **11** includes the heat exchange chamber **15** in which the heat exchangers **4** are housed and the airflow passage **16** on the downstream side of the heat exchange chamber **15**. The airflow passage **16** is formed between the first portion **18** and the inner surface S4 (the opening side inner surface S4) of the fourth side section **34** of the casing **2** opposed to the first portion **18**. The airflow passage **16** is a space extending in parallel to the first portion **18** and guides the air having passed through the heat exchangers **4** housed in the heat exchange chamber **15** to the opening **13**.

[0035] In a relation between the airflow passage **16** and the second space **12**, the airflow passage **16** is an upstream side space **16** and the second space **12** is a downstream side space **12**.

[0036] In the second space **12** (the downstream side space **12**), as shown in FIGS. **3** and **5**, the centrifugal fan **5** is housed sideways such that the axial direction A of the rotating shaft **27** for rotating the impeller **21** is parallel to each of the upstream side surface **2***a* and the downstream side surface **2***b*. In such sideway arrangement of the centrifugal fan **5**, the blowout port **9** of the casing **2** is located on the outer side in the radial direction of the impeller **21**. In the second space **12**, the fan motor **6** is housed sideways to be coaxial with the impeller **21**. The fan motor **6** is fixed to the third side section **33** of the casing **2** via a support stand **17**. Note that the fan motor **6** may be directly fixed to the casing **2**.

[0037] The centrifugal fan **5** is a turbo fan. The centrifugal fan **5** includes the impeller **21** and the bell mouth **22**. The centrifugal fan **5** is located in the second space **12** and sucks the air in the first space **11** through the opening **13**.

[0038] As shown in FIGS. **5** to **6**, the impeller **21** includes a hub **23**, the shroud **24**, and a plurality of blades **25** arranged between the hub **23** and the shroud **24**. The hub **23** includes, in the center thereof, a projecting section **23***a* that projects to the shroud **24** side. The projecting section **23***a* is fixed to the rotating shaft **27** of the fan motor **6**. The rotating shaft **27** functions as the rotating shaft **27** in order to rotate the impeller **21**.

[0039] The shroud **24** is arranged on a front side F of the rotating shaft **27** in the axial direction A so as to be opposed to the hub **23**. The shroud **24** has an air suction port **24***a* circularly opened centering on the rotating shaft **27**. The outer diameter of the shroud **24** increases toward a rear side R.

[0040] The plurality of blades **25** are arrayed at a predetermined interval along the circumferential direction of the rotating shaft **27** between the hub **23** and the shroud **24**. Ends on the front side F of the blades **25** are joined to the inner surface of the shroud **24**. Ends on the rear side R of the blades **25** are joined to the hub **23**. The blades **25** are backward curved blades (backward oriented blades) inclined in the opposite direction (a backward direction) of a rotating direction B (see FIG. **6**) with respect to the radial direction of the hub **23**.

[0041] The bell mouth **22** is arranged on the front side F in the axial direction A so as to be opposed to the shroud **24**. An end on the front side F of the bell mouth **22** is arranged to coincide with the edge of the opening **13** of the first portion **18** of the partition member **3**. The bell mouth **22** has a curved shape, the outer diameter of which decreases toward the rear side R.

[0042] As shown in FIGS. **3** and **5**, an air guide passage **81** is provided between the hub **23** and the inner surface S3 (the hub side inner surface S3) of the third side section **33**. The air guide passage **81** guides, to the blowout port **9** side, a part of the air discharged in a direction different from the blowout port **9** side, out of the air discharged from the impeller **21**. The air guide passage **81** functions as an air flow returning section **81** that returns, to the blowout port **9** side, a part of the air discharged in the direction different from the blowout port **9** side, out of the air discharged from the impeller **21**.

[0043] Specifically, in FIG. **6**, the air guide passage **81** guides, to the blowout port **9** side as indicated by an arrow of an alternate long and two short dashes line in FIG. **5**, the air discharged from the impeller **21** toward the inner surface S5 side of the fifth side section **35**, the air discharged from the impeller **21** toward the second partition plate **19** side, and the like. Consequently, the air discharged from the impeller **21** to the outer side in the radial direction can not only flow in the circumferential direction in an air passage around the impeller **21** in the downstream side space **12** but also flow toward the blowout port **9** through the air guide passage **81** between the hub **23** and the inner surface S3 of the third side section **33**. Therefore, it is possible to reduce airflow resistance in the downstream side space **12**.

[0044] As shown in FIG. **5**, a distance D4 between the inner surface S4 of the fourth side section **34** and the peripheral edge portion of the opening **13** is larger than a distance D3 between the inner surface S3 of the third side section **33** and the hub **23**. An amount of the air flowing into the impeller **21** through the opening **13** is larger than an amount of the air passing through the air guide passage **81** between the hub **23** and the inner surface S3 of the third side section **33**. Therefore, when the distance D4 is larger than the distance D3, the amount of the air and the size of the passage can be well balanced. Consequently, it is possible to further reduce the airflow resistance.

[0045] A total distance of a distance D7 from the hub **23** to the peripheral edge portion of the opening **13** and the distance D3 is preferably larger than the distance D4. Consequently, since the capacity of the downstream side space **12** can be sufficiently secured, it is possible to suppress the airflow resistance from increasing in the downstream side space **12**. The total distance of the distance D3 and the distance D7 is a partition height of the upstream side space **16** (the airflow passage **16**) and the downstream side space **12** partitioned in the width direction Y of the casing **2** by the partition member **3**.

[0046] As shown in FIG. **6**, the impeller **21** rotates in the rotating direction B in which the blades **25** are opposed to the upstream side inner surface S5 of the fifth side section **35**, the inner surface S (the partition inner surface S) of the second partition plate **19** of the partition member **3**, the downstream side inner surface S6 of the sixth side section **36**, and the blowout port **9** in this order. That is, the upstream side inner

surface S5, the partition inner surface S, the downstream side inner surface S6, and the blowout port **9** are provided side by side in this order in the rotating direction B of the impeller **21**. The upstream side inner surface S5, the partition inner surface S, and the downstream side inner surface S6 surround the circumference of the impeller **21** excluding an area of the blowout port **9**.

[0047] A distance D6 between the inner surface S6 (the downstream side inner surface S6) of the sixth side section **36** and the impeller **21** is larger than a distance D5 between the inner surface S5 (the upstream side inner surface S5) of the fifth side section **35** and the impeller **21**. That is, in the second space **12**, the rotation center of the impeller **21** (the center of the rotating shaft **27**) is present in a position further deviating to the inner surface S5 side than the center between the inner surface S5 and the inner surface S6. Since the distance D6 is larger than the distance D5, it is possible to efficiently convert a dynamic pressure obtained by the rotation of the impeller **21** into a static pressure.

[0048] The centrifugal fan **5** explained above is housed in the second space **12** of the casing **2**. Consequently, the air blown out from the impeller **21** is guided to the blowout port **9** by members surrounding the outer side in the radial direction of the impeller **21**, that is, the second portion **19** of the partition member **3** and the fifth side section **35** (the upper plate **35**), the sixth side section **36** (the lower plate **36**), and the third side section **33** of the casing **2**. In other words, the second portion **19** of the partition member **3** and the fifth side section **35** (the upper plate **35**), the sixth side section **36** (the lower plate **36**), and the third side section **33** of the casing **2** function as a fan casing of the centrifugal fan **5**. Therefore, a fan casing is unnecessary in the centrifugal fan **5** itself.

[0049] As shown in FIG. **4**, the pair of heat exchangers **4** is arranged in the heat exchange chamber **15** of the first space **11** of the casing **2**, in a V shape in side view to be further spaced away from each other in the up-down direction Z (i.e., the vertical direction) of the casing **2** toward the suction port **7** of the casing **2**.

[0050] Further, as shown in FIG. **4**, the pair of heat exchangers **4** is arranged such that an edge **4***c* forming the vertex of the V shape in the heat exchangers **4** is parallel to the rotating shaft **27** of the impeller **21**. Further, edges **4***d* on the upstream side surface **2***a* side in the pair of heat exchangers **4** are also arranged in parallel to the rotating shaft **27**. The edges **4***d* extend along the edge of the suction port **7** of the casing **2**. All of the edges **4***c* and **4***d* of the heat exchangers **4** extend in a direction orthogonal to the first portion **18** of the partition member **3**.

[0051] Specifically, as shown in FIGS. **3** to **4**, the heat exchangers **4** include a large number of fins **4***a* arranged to be spaced apart from one another and a plurality of heat transfer tubes **4***b* that pierce through the fins **4***a*. The heat transfer tubes **4***b* include a plurality of straight tube portions **4***b***1** extending linearly and U-shape tube portions **4***b***2**, which are end communication sections that allow ends of the straight tube portions **4***b***1** to communicate with each other. Note that, in FIG. **3**, the fins **4***a* are shown in a smaller number such that the heat transfer tubes **4***b* are easily visually recognized.

[0052] The straight tube portions **4***b***1** extend along a surface parallel to a plane including the rotating shaft **27**. Specifically, the straight tube portions **4***b***1** of the heat transfer tubes **4***b* are parallel to the axial direction A of the rotating shaft **27**. The plurality of straight tube portions **4***b***1** are arranged to be parallel to each other. Ends of the heat transfer tubes **4***b* adjacent to each other are connected to each other via the U-shape tube portion **4***b***2**. The heat exchangers **4** have a plurality of paths (refrigerant channels). The fins **4***a* are joined by, for example, brazing to the straight tube portions **4***b***1** of the heat transfer tubes **4***b* in a state in which the fins **4***a* are spaced apart from one another. In the heat exchangers **4**, heat exchange is performed between the refrigerant passing through the heat transfer tubes **4***b* and the air around the fins **4***a*.

[0053] In the duct-type indoor unit **1** configured as explained above, as shown in FIG. **1**, the suction duct DC **1** is connected to the suction-duct connecting portion **8** of the casing **2** and the blowout duct DC2 is connected to the blowout-duct connecting portion **10**. In that state, the impeller **21** of the centrifugal fan **5** rotates by the driving of the fan motor **6**. Consequently, as shown in FIGS. **2** to **4**, it is possible to generate a series of air flows F0 that flow from the suction duct DC1 to the blowout duct DC2 through the duct-type indoor unit **1**.

[0054] In this case, the air flows through a route explained below inside the casing **2** of the duct-type indoor unit **1**. First, the air sucked into the inside of the casing **2** from the suction duct DC **1** through the suction port **7** passes through the heat exchangers **4** in the heat exchange chamber **15** of the first space **11**. Consequently, the air is subjected to heat exchange with the refrigerant when the air passes through the heat exchangers **4** and cooled or heated. Thereafter, the air subjected to the heat exchange is once collected in the airflow passage **16** of the first space **11** and rectified in the longitudinal direction X of the casing **2**. In this case, a part of the air subjected to the heat exchange is guided to the airflow passage **16** by the inclined portion **19***b* of the second portion **19** of the partition member **3** when the air flows from the heat exchange chamber **15** to the airflow passage **16**.

[0055] Thereafter, the air reaching the airflow passage **16** is introduced into the second space **12** through the opening **13** of the first portion **18** of the partition member **3**. The air introduced into the second space **12** flows to the impeller **21** through the inside of the bell mouth **22** of the centrifugal fan **5**. The air reaching the impeller **21** is blown out to the outer side in the radial direction of the impeller **21**. The air blown out from the impeller **21** smoothly flows from the casing **2** to the blowout duct DC2 through the blowout port **9** located on the outer side in the radial direction of the impeller **21**.

[0056] As explained above, in the duct-type indoor unit **1** in this embodiment, the centrifugal fan **5** is adopted. Therefore, unlike a multiblade fan that has been used in a duct-type indoor unit in the past, a fan casing is unnecessary. It is possible to reduce the number of components and reduce a setting space for the fan. Since the centrifugal fan **5** is used, compared with the multiblade fan, fan efficiency is improved. It is possible to reduce fan power while securing a necessary static pressure and a necessary amount of the air.

[0057] Further, in the duct-type indoor unit **1**, the suction-duct connecting portion **8** and the blowout-duct connecting portion **10** are arranged on the upstream side surface **2***a* and the downstream side surface **2***b* of the casing **2** opposed to each other. Therefore, it is possible to linearly arrange the suction duct DC1 and the blowout duct DC2.

[0058] Moreover, the rotating shaft **27** of the impeller **21** is parallel to the upstream side surface **2***a* on which the suction-duct connecting portion **8** is formed. Therefore, it is easy to

secure a channel that guides the air sucked from the suction port **7** formed on the upstream side surface **2***a* to the opening **13**.

[0059] In the duct-type indoor unit **1**, the suction port **7**, the heat exchangers **4**, the centrifugal fan **5**, and the blowout port **9** are arranged in a row in a direction (in this embodiment, the X direction) orthogonal to the axial direction A of the impeller **21**. Since the suction port **7**, the heat exchangers **4**, the centrifugal fan **5**, and the blowout port **9** are linearly arrayed in the X direction, it is possible to reduce the dimension in the width direction Y and the dimension in the height direction Z of the casing **2**. In this configuration, as shown in FIG. **1**, it is possible to linearly arrange the suction duct DC **1** and the blowout duct DC2 along the above array direction (the X direction).

[0060] In the duct-type indoor unit **1** in this embodiment, the straight tube portions **4***b***1** of the heat transfer tubes **4***b* in the heat exchangers **4** extend along a surface parallel to a plane including the rotating shaft **27**. Therefore, the air introduced into the inside of the casing **2** from the suction port **7** formed on the upstream side surface **2***a* parallel to the rotating shaft **27** can flow while being in contact with the all straight tube portions **4***b***1** of the heat transfer tubes **4***b* when the air passes through the heat exchangers **4**. Therefore, even if velocity distribution of the air flows F0 passing through the heat exchangers **4** fluctuates in the direction of the rotating shaft **27** (the Y direction), it is possible to uniformly cool or heat the plurality of heat transfer tubes **4***b* with the air. Therefore, even in a structure in which the plurality of heat transfer tubes **4***b* form a plurality of paths and the refrigerant flows to the paths, it is possible to suppress a difference in cooling or heating performance of the refrigerant among the paths from increasing.

[0061] In the duct-type indoor unit **1** in this embodiment, the airflow passage **16** is formed between the first portion **18** extending perpendicularly to the rotating shaft **27** in the partition member **3** and the inner surface S4 of the fourth side section **34** of the casing **2** opposed to the first portion **18**. Therefore, it is possible to secure the airflow passage **16** wide. It is possible to smoothly guide, with the airflow passage **16**, the air having passed through the heat exchangers **4** to the opening **13** while rectifying the air.

[0062] In the duct-type indoor unit **1** in this embodiment, the second portion **19** of the partition member **3** that partitions the second space **12**, in which the centrifugal fan **5** is housed, and the heat exchange chamber **15**, which is the arrangement space for the heat exchangers **4**, includes the inclined portion **19***b* inclined toward the opening **13** side of the first portion **18** with respect to the direction of the rotating shaft **27**. Therefore, the air flowing out from the heat exchange chamber **15** flows along the inclined portion **19***b* to be smoothly guided to the airflow passage **16**.

[0063] In the duct-type indoor unit **1** in this embodiment, the pair of heat exchangers **4** is arranged so as to open in the V shape in section to be further spaced away from each other in the up-down direction Z of the casing **2** toward the suction port **7** of the casing **2**. In this configuration, compared with when the heat exchangers **4** are arranged parallel to the surface on which the suction port **7** is formed, it is possible to house the heat exchangers **4** having a wider area in the first space **11** of the casing **2**. Since the heat exchangers **4** are arranged in the V cross-sectional shape opening toward the suction port **7**, it is possible to introduce the air into the first space **11** from the entire suction port **7**. Moreover, the air introduced into the first space **11** from the suction port **7** can uniformly pass through the entire heat exchangers **4**.

[0064] In the duct-type indoor unit **1** in this embodiment, the edge **4***c* forming the vertex of the V shape in the heat exchangers **4** is parallel to the rotating shaft **27** of the impeller **21**. Therefore, it is possible to reduce deviation of the air passing through the heat exchangers **4** while securing the area of the heat exchangers **4**.

[0065] In the duct-type indoor unit **1** in this embodiment, the rotating shaft **27** of the impeller **21** of the centrifugal fan **5** is parallel to the downstream side surface **2***b* of the casing **2** in which the blowout-duct connecting portion **10** is formed. In such a configuration, since the blowout port **9** of the casing **2** is located on the outer side in the radial direction of the impeller **21**, it is possible to smoothly blow out, from the blowout port **9**, the air blown out to the outer side in the radial direction from the impeller **21**. Therefore, in forming an air flow in one direction flowing to the blowout duct DC2, it is possible to suppress the airflow resistance even if a member such as a guide plate for guiding the air flow from the impeller **21** to the blowout port **9** is not provided.

[0066] In the duct-type indoor unit **1** in this embodiment, the blowout port **9** is located on the outer side in the radial direction of the impeller **21** in the second space **12**. Therefore, it is possible to smoothly blow out, from the blowout port **9**, the air discharged from the impeller **21**. Therefore, in this configuration, since the wind guide plate described in Japanese Unexamined Patent Publication No. H6-281194 is unnecessary, it is possible to suppress an increase in the airflow resistance while suppressing an increase in the number of components.

[0067] In the duct-type indoor unit **1** in this embodiment, the impeller **21** includes the shroud **24** located on the opening **13** side in the radial direction A of the rotating shaft **27** for rotating the impeller **21** and the hub **23** located on the opposite side to the shroud **24** in the axial direction A. The casing **2** has the hub side inner surface S3 present in the position on the opposite side to the opening **13** with respect to the impeller **21** in the axial direction A and opposed to the hub **23** in the axial direction A. The air guide passage **81** is provided between the hub **23** and the hub side inner surface S3. The air guide passage **81** that guides, to the blowout port **9** side, a part of the air discharged in the direction different from the blowout port **9** side, out of the air discharged from the impeller **21**. Therefore, it is possible to reduce the airflow resistance in the second space **12**.

[0068] In the duct-type indoor unit **1** in this embodiment, the casing **2** has the opening side inner surface S4 present in the position on the opposite side to the hub side inner surface S3 with respect to the impeller **21** and the opening **13** in the axial direction A and opposed to the opening **13** in the axial direction A. The distance D4 between the opening side inner surface S4 and the peripheral edge portion of the opening **13** is larger than the distance D3 between the hub side inner surface S3 and the hub **23**. An amount of the air flowing into the impeller **21** through the opening **13** is larger than an amount of the air passing through the air guide passage **81** between the hub **23** and the hub side inner surface S3. Therefore, as in this embodiment, when the distance D4 between the opening side inner surface S4 and the peripheral edge portion of the opening **13** is larger than the distance D3 between the hub side inner surface S3 and the hub **23**, the

amount of the air and the size of the passage can be well balanced. Consequently, it is possible to further reduce the airflow resistance.

[0069] In the duct-type indoor unit **1** in this embodiment, the casing **2** has the upstream side inner surface S5 and the downstream side inner surface S6 located on the outer side in the radial direction with respect to the impeller **21**. The upstream side inner surface S5 is located on the opposite side to the downstream side inner surface S6 with respect to the impeller **21** in the radial direction. The partition member **3** has the partition inner surface S located on the outer side in the radial direction with respect to the impeller **21**. The partition inner surface S is present in the position on the opposite side to the blowout port **9** with respect to the impeller **21** in the radial direction. The upstream side inner surface S5, the partition inner surface S, and the downstream side inner surface S6 are provided side by side in this order in the rotating direction B of the impeller **21**. The distance D6 between the downstream side inner surface S6 and the impeller **21** is larger than the distance D5 between the upstream side inner surface S5 and the impeller **21**. Therefore, it is possible to efficiently convert a dynamic pressure obtained by the rotation of the impeller **21** into a static pressure.

[0070] In the duct-type indoor unit **1** in this embodiment, the partition member **3** includes the first partition plate **18** that is provided in the position opposed to the impeller **21** in the axial direction A of the rotating shaft **27** and in which the opening **13** is formed and the second partition plate **19** that is provided on the suction port **7** side with respect to the impeller **21** and closes the suction port **7** side in the second space **12**. The second partition plate **19** includes the inclined portion **19***b* inclined toward the first partition plate **18** side with respect to the axial direction A. One end of the inclined portion **19***b* is connected to the end on the suction port **7** side in the first partition plate **18**. The other end of the inclined portion **19***b* is located further on the impeller **21** side than the first partition plate **18** in the axial direction A. Therefore, in this configuration, since the air having passed through the heat exchangers **4** is smoothly guided to the opening **13** side along the inclined portion **19***b*, it is possible to reduce the airflow resistance.

[Fan Unit and Heat Exchange Unit]

[0071] A fan unit **1**A according to the embodiment of the present invention and a heat exchange unit **1**B connected to the fan unit **1**A are explained.

[0072] FIG. **8**A is a perspective view of the fan unit **1**A according to the embodiment of the present invention and the heat exchange unit **1**B connected to the fan unit **1**A. FIG. **8**B is a perspective view showing a state in which the fan unit **1**A and the heat exchange unit **1**B are coupled to each other. FIG. **9**A is an IXA-IXA line sectional view of the fan unit shown in FIG. **8**A. FIG. **9**B is an IXB-IXB line sectional view of the fan unit shown in FIG. **8**A.

[0073] The fan unit **1**A and the heat exchange unit **1**B shown in FIG. **8**A are separately assembled and then coupled to each other. The fan unit **1**A and the heat exchange unit **1**B coupled to each other configures the duct-type indoor unit **1** shown in FIG. **8**B. The fan unit **1**A in this embodiment can also be sold in the market as a fan unit alone. The fan unit **1**A is coupled to the heat exchange unit **1**B already set or set anew.

[0074] As shown in FIGS. **8**A and **8**B and FIGS. **9**A and **9**B, the fan unit **1**A includes the partition member **3**, the centrifugal fan **5**, and a fan case **2**A that houses the partition member **3** and the centrifugal fan **5**. As shown in FIG. **8**A, a heat exchange unit **1**B includes the heat exchanger **4** and a heat exchanger case **2**B that houses the heat exchanger **4**. The fan case **2**A and the heat exchanger case **2**B are coupled to each other to configure the casing **2** of the duct-type indoor unit **1**.

[0075] The duct-type indoor unit **1** shown in FIGS. **8**A and **8**B configured by the fan unit **1**A in this embodiment and the heat exchange unit **1**B connected to the fan unit **1**A has a configuration same as the configuration of the duct-type indoor unit **1** shown in FIGS. **1** to **6** except that the fan unit **1**A and the heat exchange unit **1**B are detachably attachable to each other. Therefore, concerning the internal structure of the duct-type indoor unit **1** shown in FIGS. **8**A and **8**B, detailed explanation is omitted. Only main characteristics of the fan unit **1**A in this embodiment and the heat exchange unit **1**B connected to the fan unit **1**A are briefly explained below.

[0076] Each of the fan case **2**A and the heat exchanger case **2**B has a rectangular parallelepiped shape. The fan case **2**A includes the first side section **31** to the sixth side section **36** present in positions corresponding to the six surfaces of the rectangular parallelepiped. In the fan case **2**A, the blowout port **9** is formed in the first side section **31** among the six side sections. An inflow port **71** is formed in the second side section **32** present in a position opposed to the first side section **31**. In this embodiment, each of the third side section **33**, the fourth side section **34**, the fifth side section **35**, and the sixth side section **36** forms a sidewall without an opening formed therein.

[0077] In this embodiment, the inflow port **71** is formed by opening almost the entire second side section **32**. That is, the inflow port **71** is defined by an edge portion **32**A of the second side section **32**. The blowout port **9** is formed by opening a part of the first side section **31**. Therefore, the first side section **31** includes a flat portion **31**A and the blowout port **9**. As shown in FIG. **9**A, the flat portion **31**A of the first side section **31** is parallel to the imaginary straight line L. The edge portion **32**A of the second side section **32** is parallel to or perpendicular to the imaginary straight line L.

[0078] The heat exchanger case **2**B has a rectangular parallelepiped shape. The heat exchanger case **2**B includes a first side section **61** to a sixth side section **66** present in positions corresponding to the six surfaces of the rectangular parallelepiped. In the heat exchanger case **2**B, the suction port **7** is formed in the first side section **61** among the six side sections. An outflow port **72** is formed in the second side section **62** present in a position opposed to the first side section **61**. In this embodiment, each of the third side section **63**, the fourth side section **64**, the fifth side section **65**, and the sixth side section **66** of the heat exchanger case **2**B forms a sidewall without an opening formed therein.

[0079] In this embodiment, the outflow port **72** is formed by opening almost the entire second side section **62**. That is, the outflow port **72** is defined by an edge portion **62**A of the second side section **62**. The suction port **7** is formed by opening a part of all of the first side section **61**. The first side section **61** includes an edge portion **61**A and the suction port **7**. The edge portion **61**A of the first side section **61** is parallel to the Y direction or the Z direction. The edge portion **62**A of the second side section **62** is parallel to the Y direction or the Z direction.

[0080] In the fan unit **1**A in this embodiment, the axial direction A of the rotating shaft **27** for rotating the impeller **21**

is parallel to the Y direction (the imaginary straight line L). The blowout port **9** is located on the outer side in the radial direction of the impeller **21**.

[0081] The fan case **2**A includes a unit connecting portion **41** connected to the heat exchanger case **2**B. Specifically, the fan case **2**A includes the unit connecting portion **41** for connecting the heat exchange unit **1**B to the second side section **32** on the inflow port **71** side. The heat exchanger case **2**B includes a unit connecting portion **42** connected to the unit connecting portion **41** of the fan case **2**A.

[0082] In this embodiment, the unit connecting portion **41** of the fan case **2**A includes the edge portion **32**A of the second side section **32**. The unit connecting portion **42** of the heat exchanger case **2**B includes the edge portion **62**A of the second side section **62**. That is, the edge portion **32**A having a frame-like square shape defining the inflow port **71** of the second side section **32** of the fan case **2**A functions as the unit connecting portion **41** of the case **2**A. The edge portion **62**A having a frame-like square shape defining the outflow port **72** of the second side section **62** of the heat exchanger case **2**B functions as the unit connecting portion **42** of the heat exchanger case **2**B. Specifically, the edge portion **62**A of the heat exchanger case **2**B includes one or a plurality of ridges projecting to the edge **32**A side of the fan case **2**A. The edge portion **32**A of the fan case **2**A includes a plurality of screw holes. In a state in which the edge portion **32**A of the fan case **2**A is laid on the ridges of the edge portion **62**A of the heat exchanger case **2**B, the edge portion **32**A is screwed and fixed to the ridges by screws inserted through the screw holes. Consequently, the edge portions **32**A and **62**A are connected and the fan unit **1**A and the heat exchange unit **1**B are coupled.

[0083] In the fan unit **1**A in this embodiment, as shown in FIG. **9**A, the air guide passage **81** is provided between the hub **23** and the inner surface S3 of the third side section **33**. Therefore, it is possible to reduce the airflow resistance in the downstream side space **12**.

[0084] In the fan unit **1**A in this embodiment, as shown in FIG. **9**A, the distance D4 between the inner surface S4 (the opening side inner surface S4) of the fourth side section **34** and the peripheral edge portion of the opening **13** is larger than the distance D3 between the inner surface S3 (the hub side inner surface S3) of the third side section **33** and the hub **23**. Therefore, the amount of the air and the size of the passage can be well balanced. Consequently, it is possible to reduce the airflow resistance.

[0085] In the fan unit **1**A in this embodiment, as shown in FIG. **9**B, the distance D6 between the inner surface S6 (the downstream side inner surface S6) of the sixth side section **36** present on the downstream side in the rotating direction of the impeller **21** and the impeller **21** is larger than the distance D5 between the inner surface S5 (the upstream side inner surface S5) of the fifth side section **35** present on the upstream side in the rotating direction B and the impeller **21**. Therefore, it is possible to efficiently convert a dynamic pressure obtained by the rotation of the impeller **21** into a static pressure.

[0086] In the fan unit **1**A in this embodiment, the air flowing into the fan unit **1**A from the inflow port **71** is smoothly guided to the opening **13** side along the inclined portion **19***b*. Therefore, it is possible to reduce the airflow resistance.

[Other Modifications]

[0087] Note that, in the example explained in the embodiment, the pair of heat exchangers **4** are arranged to open in the V cross-sectional shape. However, the present invention is not limited to this. Heat exchangers having various shapes and arranged in various ways may be adopted. For example, as a modification of the embodiment of the present invention, as shown in FIG. **7**, one large heat exchanger **4** may be arranged inside the heat exchange chamber **15** in an inclined toward the suction port **7** of the casing **2** with respect to the width direction Y of the casing **2**. In this heat exchanger **4**, the straight tube portions **4***b***1** of the heat transfer tubes **4***b* are arranged side by side in a direction from an edge **4***e* on the upstream side of the heat exchanger **4** toward an edge **4***f* on the downstream side of the heat exchanger **4**. The straight tube portions **4***b***1** are arranged to be parallel to one another. That is, each of the straight tube portions **4***b***1** extends along a direction (i.e., the direction Z) perpendicular to the direction X and the direction Y. The direction Y is parallel to the rotating shaft **27** (the axial direction A). The edge **4***e* on the upstream side of the heat exchanger **4** extends along the edge of the suction port **7** of the casing **2** in the direction Z. When the heat exchanger **4** is arranged in this way, as in the embodiment, the air introduced into the casing **2** from the suction port **7** can flow while being in contact with the all straight tube portions **4***b***1** of the heat transfer tube **4***b* when the air passes through the heat exchanger **4**. It is possible to uniformly cool or heat the plurality of heat transfer tubes **4***b* with the air. Therefore, a difference in cooling or heating performance of the refrigerant among the paths is eliminated.

[0088] In the example explained in the embodiment, the air conditioner is the duct-type indoor unit **1**. However, the present invention is not limited to the duct-type indoor unit **1** and can also be applied to an air conditioner not connected to a duct.

[0089] In the example explained in the embodiment, the blowout port **9** is provided in the first side section **31** and the suction port **7** is provided in the second side section **32** (the blowout port **9** is provided in the position opposed to the suction port **7**). However, the present invention is not limited to this. The blowout port **9** may be provided, for example, in any one of the third side section **33**, the fourth side section **34**, the fifth side section **35**, and the sixth side section **36**.

[0090] Note that the embodiment is outlined below.

[0091] The fan unit in the embodiment is a fan unit to be connected to a heat exchange unit in which a heat exchanger is housed. The fan unit includes a fan case, a partition member, and a centrifugal fan. The fan case has an air inflow port and an air blowout port. The fan case includes, in a side section on the inflow port side, a unit connecting portion for connecting the heat exchange unit. The partition member partitions an inside of the fan case into an upstream side space on the inflow port side and a downstream side space on the blowout port side. The partition member has an opening for allowing the upstream side space and the downstream side space to communicate with each other. The centrifugal fan includes an impeller including a plurality of backward curved blades. The centrifugal fan is arranged such that the impeller is located in the downstream side space and sucks air in the upstream side space through the opening. The blowout port is located on the outer side in a radial direction of the impeller in the downstream side space.

[0092] In this configuration, since the blowout port is located on the outer side in the radial direction of the impeller, it is possible to smoothly blow out, from the blowout port **9**, the air discharged from the impeller. Therefore, in this configuration, since the wind guide plate described in Japanese Unexamined Patent Publication No. H6-281194 is unneces-

sary, it is possible to suppress an increase in the airflow resistance while suppressing an increase in the number of components.

[0093] In the fan unit, it is preferable that the impeller includes a shroud located on the opening side in an axial direction of a rotating shaft for rotating the impeller, and a hub located on the opposite side to the shroud in the axial direction, the fan case has a hub side inner surface present in a position on the opposite side to the opening with respect to the impeller in the axial direction so as to be opposed to the hub in the axial direction, and an air guide passage is provided between the hub and the hub side inner surface, the air guide passage is configured to guide, to the blowout port side, a part of air discharged in a direction different from the blowout port side, out of air discharged from the impeller.

[0094] In this configuration, since the air guide passage is provided between the hub and the hub side inner surface, it is possible to reduce the airflow resistance in the downstream side space.

[0095] In the fan unit, it is preferable that the fan case has an opening side inner surface present in a position on the opposite side to the hub side inner surface with respect to the impeller and the opening in the axial direction so as to be opposed to the opening in the axial direction, and a distance between the opening side inner surface and a peripheral edge portion of the opening is larger than a distance between the hub side inner surface and the hub.

[0096] An amount of the air flowing into the impeller through the opening is larger than an amount of the air passing through the air guide passage between the hub and the hub side inner surface. Therefore, when the distance between the opening side inner surface and the peripheral edge portion of the opening is larger than the distance between the hub side inner surface and the hub as in this configuration, the amount of the air and the size of the passage can be well balanced. Consequently, it is possible to further reduce the airflow resistance.

[0097] In the fan unit, it is preferable that the fan case has an upstream side inner surface and a downstream side inner surface located on the outer side in the radial direction with respect to the impeller and the upstream side inner surface is located in a position on the opposite side to the downstream side inner surface with respect to the impeller in the radial direction, the partition member has a partition inner surface located on the outer side in the radial direction with respect to the impeller and the partition inner surface is present in a position on the opposite side to the blowout port with respect to the impeller in the radial direction, the upstream side inner surface, the partition inner surface, and the downstream side inner surface are provided side by side in this order in a rotating direction of the impeller, and a distance between the downstream side inner surface and the impeller is larger than a distance between the upstream side inner surface and the impeller.

[0098] In this configuration, since the distance between the downstream side inner surface present on the downstream side in the rotating direction of the impeller and the impeller is larger than the distance between the upstream side inner surface present on the upstream side in the rotating direction and the impeller, it is possible to efficiently convert a dynamic pressure obtained by the rotation of the impeller into a static pressure.

[0099] In the fan unit, it is preferable that the partition member includes a first partition plate provided in a position opposed to the impeller in the axial direction of a rotating shaft for rotating the impeller, the opening being formed in the first partition plate, and a second partition plate provided on the inflow port side with respect to the impeller, and closing the inflow port side in the downstream side space, the second partition plate includes an inclined portion inclined toward the first partition plate side with respect to the axial direction, one end of the inclined portion is connected to an end of the first partition plate on the inflow port side, and the other end of the inclined portion is located further on the impeller side than the first partition plate in the axial direction.

[0100] In this configuration, since the air flowing into the fan unit from the inflow port is smoothly guided to the opening side along the inclined portion, it is possible to reduce the airflow resistance.

[0101] The air conditioner of the present invention includes a casing, a partition member, a heat exchanger, and a centrifugal fan. The casing has an air suction port and an air blowout port. The partition member partitions an inside of the casing into a first space on the suction port side and a second space on the blowout port side. The partition member has an opening for allowing the first space and the second space to communicate with each other. The heat exchanger is arranged in the first space. The centrifugal fan includes an impeller including a plurality of backward curved blades. The centrifugal fan is arranged such that the impeller is located in the second space and sucks the air in the first space through the opening. The blowout port is located on the outer side in a radial direction of the impeller in the second space.

[0102] In this configuration, since the blowout port is located on the outer side in the radial direction of the impeller in the second space, it is possible to smoothly blowout, from the blowout port, the air discharged from the impeller. Therefore, in this configuration, since the wind guide plate described in Japanese Unexamined Patent Publication No. H6-281194 is unnecessary, it is possible to suppress an increase in the airflow resistance while suppressing an increase in the number of components.

[0103] In the air conditioner, it is preferable that the impeller includes a shroud located on the opening side in the axial direction of a rotating shaft for rotating the impeller, and a hub located on the opposite side to the shroud in the axial direction, the casing has a hub side inner surface present in a position on the opposite side to the opening with respect to the impeller in the axial direction so as to be opposed to the hub in the axial direction, and an air guide passage is provided between the hub and the hub side inner surface, an air guide passage is configured to guide, to the blowout port side, a part of air discharged in a direction different from the blowout port side, out of air discharged from the impeller.

[0104] In this configuration, since the air guide passage is provided between the hub and the hub side inner surface, it is possible to reduce the airflow resistance in the second space.

[0105] In the air conditioner, it is preferable that the casing has an opening side inner surface present in a position on the opposite side to the hub side inner surface with respect to the impeller and the opening in the axial direction so as to be opposed to the opening in the axial direction, and a distance between the opening side inner surface and a peripheral edge portion of the opening is larger than a distance between the hub side inner surface and the hub.

[0106] An amount of the air flowing into the impeller through the opening is larger than an amount of the air passing

through the air guide passage between the hub and the hub side inner surface. Therefore, when the distance between the opening side inner surface and the peripheral edge portion of the opening is larger than the distance between the hub side inner surface and the hub as in this configuration, the amount of the air and the size of the passage can be well balanced. Consequently, it is possible to further reduce the airflow resistance.

[0107] In the air conditioner, it is preferable that the casing has an upstream side inner surface and a downstream side inner surface located on the outer side in the radial direction with respect to the impeller and the upstream side inner surface is located in a position on the opposite side to the downstream side inner surface with respect to the impeller in the radial direction, the partition member has a partition inner surface located on the outer side in the radial direction with respect to the impeller and the partition inner surface is present in a position on the opposite side to the blowout port with respect to the impeller in the radial direction, the upstream side inner surface, the partition inner surface, and the downstream side inner surface are provided side by side in this order in a rotating direction of the impeller, and a distance between the downstream side inner surface and the impeller is larger than a distance between the upstream side inner surface and the impeller.

[0108] In this configuration, since the distance between the downstream side inner surface present on the downstream side in the rotating direction of the impeller and the impeller is larger than the distance between the upstream side inner surface present on the upstream side in the rotating direction and the impeller, it is possible to efficiently convert a dynamic pressure obtained by the rotation of the impeller into a static pressure.

[0109] In the air conditioner, it is preferable that the partition member includes a first partition plate provided in a position opposed to the impeller in the axial direction of a rotating shaft for rotating the impeller, the opening being formed in the first partition plate, and a second partition plate provided on the suction port side with respect to the impeller, and closing the suction port side in the second space, the second partition plate includes an inclined portion inclined toward the first partition plate side with respect to the axial direction, one end of the inclined portion is connected to an end of the first partition plate on the suction port side, and the other end of the inclined portion is located further on the impeller side than the first partition plate in the axial direction.

[0110] In this configuration, since the air having passed through the heat exchanger is smoothly guided to the opening side along the inclined portion, it is possible to reduce the airflow resistance.

[0111] In the air conditioner, it is preferable that the suction port, the heat exchanger, the centrifugal fan, and the blowout port are arrayed in a row in a direction orthogonal to the axial direction of the impeller.

[0112] In this configuration, since the suction port, the heat exchanger, the centrifugal fan, and the blowout port is linearly arrayed in the direction (the X direction in FIG. **2**) orthogonal to the axial direction, it is possible to reduce the dimension in the width direction and the dimension in the height direction of the casing. In this configuration, it is possible to linearly arrange a suction duct and a blowout duct along the array direction (see FIG. **1**).

[0113] This application is based on Japanese Patent application No. 2013-188510 filed in Japan Patent Office on Sep. 11, 2013, the contents of which are hereby incorporated by reference.

[0114] Although the present invention has been fully described by way of example with reference to the accompanying drawings, it is to be understood that various changes and modifications will be apparent to those skilled in the art. Therefore, unless otherwise such changes and modifications depart from the scope of the present invention hereinafter defined, they should be construed as being included therein.

1. A fan unit to be connected to a heat exchange unit in which a heat exchanger is housed, the fan unit comprising:

a fan case having an air inflow port and an air blowout port and including, in a side section of the fan case on the inflow port side, a unit connecting portion for connecting the heat exchange unit;

a partition member that partitions an inside of the fan case into an upstream side space on the inflow port side and a downstream side space on the blowout port side, the partition member having an opening for allowing the upstream side space and the downstream side space to communicate with each other; and

a centrifugal fan including an impeller including a plurality of backward curved blades, the centrifugal fan being arranged such that the impeller is located in the downstream side space and sucks air in the upstream side space through the opening, wherein

the blowout port is located on an outer side in a radial direction of the impeller in the downstream side space.

2. The fan unit according to claim **1**, wherein

the impeller includes a shroud located on the opening side in an axial direction of a rotating shaft for rotating the impeller, and a hub located on an opposite side to the shroud in the axial direction,

the fan case has a hub side inner surface present in a position on an opposite side to the opening with respect to the impeller in the axial direction so as to be opposed to the hub in the axial direction, and

an air guide passage is provided between the hub and the hub side inner surface, the air guide passage being configured to guide, to the blowout port side, a part of air discharged in a direction different from the blowout port side, out of air discharged from the impeller.

3. The fan unit according to claim **2**, wherein

the fan case has an opening side inner surface present in a position on an opposite side to the hub side inner surface with respect to the impeller and the opening in the axial direction so as to be opposed to the opening in the axial direction, and

a distance between the opening side inner surface and a peripheral edge portion of the opening is larger than a distance between the hub side inner surface and the hub.

4. The fan unit according to claim **1**, wherein

the fan case has an upstream side inner surface and a downstream side inner surface located on the outer side in the radial direction with respect to the impeller, and the upstream side inner surface is located in a position on an opposite side to the downstream side inner surface with respect to the impeller in the radial direction,

the partition member has a partition inner surface located on the outer side in the radial direction with respect to the impeller, and the partition inner surface is present in a

position on an opposite side to the blowout port with respect to the impeller in the radial direction,

the upstream side inner surface, the partition inner surface, and the downstream side inner surface are provided side by side in this order in a rotating direction of the impeller, and

a distance between the downstream side inner surface and the impeller is larger than a distance between the upstream side inner surface and the impeller.

5. The fan unit according to claim **1**, wherein

the partition member includes:

a first partition plate provided in a position opposed to the impeller in an axial direction of a rotating shaft for rotating the impeller, the opening being formed in the first partition plate; and

a second partition plate provided on the inflow port side with respect to the impeller, and closing the inflow port side in the downstream side space,

the second partition plate includes an inclined portion inclined toward the first partition plate side with respect to the axial direction, and

one end of the inclined portion is connected to an end of the first partition plate on the inflow port side, and the other end of the inclined portion is located further on the impeller side than the first partition plate in the axial direction.

6. An air conditioner comprising:

a casing having an air suction port and an air blowout port;

a partition member that partitions an inside of the casing into a first space on the suction port side and a second space on the blowout port side, the partition member having an opening for allowing the first space and the second space to communicate with each other;

a heat exchanger arranged in the first space; and

a centrifugal fan including an impeller including a plurality of backward curved blades, the centrifugal fan being arranged such that the impeller is located in the second space and sucks air in the first space through the opening, wherein

the blowout port is located on an outer side in a radial direction of the impeller in the second space.

7. The air conditioner according to claim **6**, wherein

the impeller includes a shroud located on the opening side in an axial direction of a rotating shaft for rotating the impeller, and a hub located on an opposite side to the shroud in the axial direction,

the casing has a hub side inner surface present in a position on an opposite side to the opening with respect to the impeller in the axial direction so as to be opposed to the hub in the axial direction, and

an air guide passage is provided between the hub and the hub side inner surface, the air guide passage being configured to guide, to the blowout port side, a part of air discharged in a direction different from the blowout port side, out of air discharged from the impeller.

8. The air conditioner according to claim **7**, wherein

the casing has an opening side inner surface present in a position on an opposite side to the hub side inner surface with respect to the impeller and the opening in the axial direction so as to be opposed to the opening in the axial direction, and

a distance between the opening side inner surface and a peripheral edge portion of the opening is larger than a distance between the hub side inner surface and the hub.

9. The air conditioner according to claim **6**, wherein

the casing has an upstream side inner surface and a downstream side inner surface located on the outer side in the radial direction with respect to the impeller, and the upstream side inner surface is located in a position on an opposite side to the downstream side inner surface with respect to the impeller in the radial direction,

the partition member has a partition inner surface located on the outer side in the radial direction with respect to the impeller, and the partition inner surface is present in a position on an opposite side to the blowout port with respect to the impeller in the radial direction,

the upstream side inner surface, the partition inner surface, and the downstream side inner surface are provided side by side in this order in a rotating direction of the impeller, and

a distance between the downstream side inner surface and the impeller is larger than a distance between the upstream side inner surface and the impeller.

10. The air conditioner according to claim **6**, wherein

the partition member includes:

a first partition plate provided in a position opposed to the impeller in an axial direction of a rotating shaft for rotating the impeller, the opening being formed in the first partition plate; and

a second partition plate provided on the suction port side with respect to the impeller, and closing the suction port side in the second space,

the second partition plate includes an inclined portion inclined toward the first partition plate side with respect to the axial direction, and

one end of the inclined portion is connected to an end of the first partition plate on the suction port side, and the other end of the inclined portion is located further on the impeller side than the first partition plate in the axial direction.

11. The air conditioner according to claim **6**, wherein the suction port, the heat exchanger, the centrifugal fan, and the blowout port are arrayed in a row in a direction orthogonal to the axial direction of the impeller.

* * * * *