

(43) International Publication Date
11 August 2016 (11.08.2016)

(51) International Patent Classification:

B01J 29/40 (2006.01) **B01J 29/18** (2006.01)
B01J 29/65 (2006.01)

(21) International Application Number:

PCT/US2016/014591

(22) International Filing Date:

22 January 2016 (22.01.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/111,730 4 February 2015 (04.02.2015) US
14/870,848 30 September 2015 (30.09.2015) US(71) Applicant: **EXXONMOBIL CHEMICAL PATENTS INC.** [US/US]; 5200 Bayway Drive, Baytown, TX 77520 (US).(72) Inventors: **ELIA, Christine, N.**; 900 Ardsley Lane, Bridgewater, NJ 08807 (US). **LUO, Shifang, L.**; 7 Pinehurst Circle, Ammandale, NJ 08801 (US). **NAIR, Hari**; 125 W. Main St., Apt. 325, Somerville, NJ 08876 (US). **LAI, Wenyih, F.**; 656 Bellerive Court, Bridgewater, NJ 08807 (US). **TINGER, Robert, G.**; 903 Murphy Lane, Friendswood, TX 77546 (US).(74) Agents: **JENKINS, Amanda, K.** et al.; ExxonMobil Chemical Company, Law Department, P.O. Box 2149, Baytown, TX 77522-2149 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: CATALYST SYSTEM AND USE IN HEAVY AROMATICS CONVERSION PROCESSES

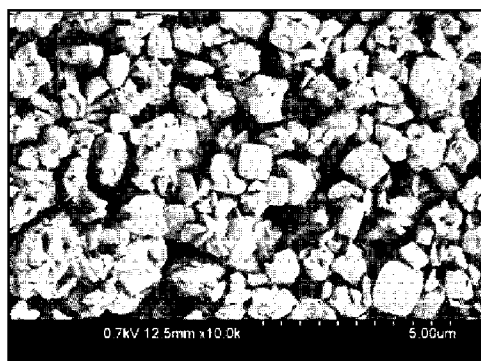**FIG. 1**

SEM for Example 1

(57) **Abstract:** Disclosed are a catalyst system and its use in a process for the conversion of a feedstock containing C₈+ aromatic hydrocarbons to produce light aromatic products, comprising benzene, toluene and xylene. The catalyst system comprises (a) a first catalyst bed comprising a first catalyst composition, said first catalyst composition comprising a zeolite having a constraint index of 3 to 12 combined (i) optionally with at least one first metal of Group 10 of the IUPAC Periodic Table, and (ii) optionally with at least one second metal of Group 11 to 15 of the IUPAC Periodic Table; and (b) a second catalyst bed comprising a second catalyst composition, said second catalyst composition comprising (i) a meso-mordenite zeolite, combined (ii) optionally with at least one first metal of Group 10 of the IUPAC Periodic Table, and (iii) optionally with at least one second metal of Group 11 to 15 of the IUPAC Periodic Table, wherein said meso-mordenite zeolite is synthesized from TEA or MTEA and having a mesopore surface area of greater than 30 m²/g and said meso-mordenite zeolite comprises agglomerates composed of primary crystallites, wherein said primary crystallites have an average primary crystal size as measured by TEM of less than 80 nm and an aspect ratio of less than 2.



CATALYST SYSTEM AND
USE IN HEAVY AROMATICS CONVERSION PROCESSES

5

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of and priority to U.S. Serial No. 62/111,730, filed 4 February 2015, the disclosure of which is incorporated by reference in its entirety, and
10 this application is a continuation of U.S. Serial No. 14/870,848, filed 30 September 2015.

FIELD

[0002] The invention relates to a catalyst system useful for converting heavy aromatics, specifically C₈+ aromatics, to lighter aromatic products, particularly benzene, toluene and xylenes (hereinafter collectively referred to as BTX), to a process for producing the
15 composition and to a process for using the composition in a heavy aromatics conversion process.

BACKGROUND

[0003] A source of benzene and xylenes is catalytic reformat, which is prepared by contacting a mixture of petroleum naphtha and hydrogen with a strong
20 hydrogenation/dehydrogenation catalyst, such as platinum, on a moderately acidic support, such as a halogen-treated alumina. Usually, a C₆ to C₈ fraction is separated from the reformat and extracted with a solvent selective for aromatics or aliphatics to produce a mixture of aromatic compounds that is relatively free of aliphatics. This mixture of aromatic compounds usually contains BTX, along with ethylbenzene.

25 [0004] Refineries have also focused on the production of benzene and xylenes by transalkylation of lower value C₉+ aromatics with benzene or toluene to produce xylenes as increasingly important process. Chemical plants would ideally like to process as much of the heavy C₉+ aromatics as possible while minimizing and potentially removing the toluene/benzene co-feed. Both transalkylation activity and dealkylation activity are
30 important for a successful catalyst system. Transalkylation is the ability to transalkylate methyl groups to form xylenes. Dealkylation activity is the ability to dealkylate ethyl and propyl groups present on the C₉+ aromatics to allow the formation of lower methyl/ring species that may transalkylate with higher methyl/ring species to form xylenes. Metal

function is required to saturate olefins formed during dealkylation while maintaining the integrity of the aromatic saturations. As plants move to increased amounts of C₉+ in the feed, acceptable activity and catalyst life become challenging.

[0005] It has been shown that decoupling the dealkylation activity and transalkylation activity through use of a stacked bed system improves performance dramatically. One stacked bed catalyst system is disclosed in U.S. Patent No. 5,942,651 and involves the steps of contacting a feed comprising C₉+ aromatic hydrocarbons and toluene under transalkylation reaction conditions with a first catalyst composition comprising a zeolite having a constraint index ranging from 0.5 to 3, such as ZSM-12, and a hydrogenation component. The effluent resulting from the first contacting step is then contacted with a second catalyst composition which comprises a zeolite having a constraint index ranging from 3 to 12, such as ZSM-5, and which may be in a separate bed or a separate reactor from the first catalyst composition to produce a transalkylation reaction product comprising benzene and xylene. The ethylbenzene in the feed and/or the ethylbenzene formed during transalkylation process are partially destroyed by dealkylation of ethylbenzene to benzene and ethylene.

[0006] Another stacked bed catalyst system is disclosed in U.S. Patent No. 5,905,051 for a process for converting a hydrocarbon stream such as, for example, a C₉+ aromatic compound to C₆ to C₈ aromatic hydrocarbons, such as xylenes, by contacting the stream with a catalyst system comprising a first catalyst composition and a second catalyst composition, wherein said catalyst compositions are present in separate stages and are not physically mixed or blended and wherein said first catalyst composition is a metal-promoted, alumina- or silica-bound zeolite beta, and said second catalyst composition is ZSM-5 having incorporated therein an activity promoter selected from the group consisting of silicon, phosphorus, sulfur, and combinations thereof. According to the '051 patent, the use of the separate catalytic stages improves the conversion of C₉+ aromatic compounds and naphthalenes to xylenes and decreases the amount of undesirable ethylbenzene in the product. The ethylbenzene in the '051 product is about 3-7 wt.% of ethylbenzene based on the weight of C₈ aromatics fraction of the resulting product.

[0007] U.S. Patent Nos. 8,183,424, 8,481,443, and 9,006,125 discloses improved performance with a stacked bed system in a process for producing xylene by transalkylation of a C₉+ aromatic hydrocarbon feedstock contacted with a C₆ and/or C₇ aromatic hydrocarbon and hydrogen with a first catalyst comprising (i) a first molecular sieve having a Constraint Index in the range of 3 to 12 and (ii) at least first and second different metals or

compounds thereof of Groups 6 to 12 of the IUPAC Periodic Table of the Elements under conditions effective to dealkylate aromatic hydrocarbons and to saturate C₂+ olefins formed so as to produce a first effluent. At least a portion of the first effluent is then contacted with a second catalyst comprising a second molecular sieve having a Constraint Index less than 3 under conditions effective to transalkylate C₉+ aromatic hydrocarbons with said C₆/C₇ aromatic hydrocarbon to form a second effluent comprising xylene.

[0008] Stacked beds using at least one zeolite having MWW framework is disclosed in U.S. Patent No. 8,163,966 in a process to produce a product containing xylenes comprising contacting a C₉+ aromatic feedstock, hydrogen, and a C₆-C₇ aromatic feedstock with a first catalyst comprising a first molecular sieve selected from the group consisting of MCM-22 and MCM-49 and 0.01 to 5 wt.% of a first metal element of Groups 6-10 under first conditions to form a first product, then contacting at least a portion of said first product with a second catalyst comprising a second molecular sieve selected from the group consisting of ZSM-12 and mordenite and 0 to 5 wt.% of a second metal element of Groups 6-10 and under second conditions to form a second product comprising xylenes.

[0009] Others have disclosed catalysts and processes for single bed systems. U.S. Patent No. 6,867,340 discloses a catalyst for the disproportionation/transalkylation of various hydrocarbons that consists of a carrier and a metal component supported on the carrier. The carrier comprises 10 to 80 wt.% of mordenite and/or beta type zeolite with a mole ratio of silica/alumina ranging from 10 to 200; 0 to 70 wt.% of ZSM-5 type zeolite with a mole ratio of silica/alumina ranging from 30 to 500; and 5 to 90 wt.% of at least one inorganic binder selected from the group consisting of gamma-alumina, silica, silica alumina, bentonite, kaolin, clinoptilolite, and montmorillonite. The metal component comprises platinum and either tin or lead. The catalyst enables mixed xylenes to be produced at remarkably high yields from benzene, toluene and C₉ or higher aromatic compounds through disproportionation/transalkylation with a great reduction in aromatic loss. In addition, the catalyst can maintain its catalytic activity for a long period of time without deactivation.

[0010] U.S. Patent No. 7,626,064 discloses a catalyst and a process for transalkylation of C₇, C₉, and C₁₀ aromatics to obtain a high yield of xylenes. The catalyst comprises a novel UZM-14 catalytic material comprising globular aggregates of crystallites having a MOR framework type with a mean crystallite length parallel to the direction of the 12-ring channels of about 60 nm or less and a mesopore volume of at least about 0.10 cc/gram. The UZM-14 catalyst is particularly active and stable in a transalkylation process.

[0011] U.S. Patent No. 7,553,791 discloses a catalyst composition, a process for producing the composition and a process for the conversion of a feedstock containing C₉+ aromatic hydrocarbons to produce a resulting product containing lighter aromatic products and less than about 0.5 wt.% of ethylbenzene based on the weight of C₈ aromatics fraction of the resulting product. The C₉+ aromatic hydrocarbons are converted under the transalkylation reaction conditions to a reaction product containing xylene. The catalyst composition comprises (i) an acidity component having an alpha value of at least 300; and (ii) a hydrogenation component having hydrogenation activity of at least 300. The composition can be produced by incorporating at least one hydrogenation component into an acidity component having an alpha value of at least 300.

[0012] Even with these advances in transalkylation technology, there is a need for improved performance, particularly in a process for conversion of C₈+ aromatic hydrocarbons to lighter aromatic products.

SUMMARY

[0013] It has now been found that a catalyst system comprising a first catalyst bed comprising a first catalyst composition and a second catalyst bed comprising a second catalyst composition exhibits improved C₉+ conversion and reduced aromatic ring loss. Preferably, the catalyst system is employed in the conversion of C₈+ aromatic hydrocarbons to lighter aromatic products.

[0014] The first catalyst composition comprises a medium pore zeolite having a constraint index of 3 to 12 combined optionally with at least one first metal of Group 10 and optionally with at least one second metal of Group 11 to 15 of the IUPAC Periodic Table. In one or more embodiments, the zeolite has a constraint index of 3 to 12 is selected from the group consisting of ZSM-5, ZSM-11, ZSM-22, ZSM-23, ZSM-35, ZSM-48, ZSM-50, ZSM-57, ZSM-58, a MCM-22 family material and mixtures of two or more thereof.

[0015] The second catalyst composition comprises a high activity meso-mordenite zeolite (defined herein) combined optionally with at least one first metal of Group 10 and optionally with at least one second metal of Group 11 to 15 of the IUPAC Periodic Table.

[0016] The meso-mordenite zeolite is synthesized from tetraethylammonium cation (TEA) or methyltriethylammonium cation (MTEA) and has a mesopore surface area of greater than 30 m²/g and said meso-mordenite zeolite comprises agglomerates composed of primary crystallites. The primary crystallites have an average primary crystal size as measured by TEM of less than 80 nm and an aspect ratio of less than 2.

[0017] In one or more embodiments, the invention more particularly relates to a catalyst system comprising a first catalyst bed and a second catalyst bed. The first catalyst bed comprises a first catalyst composition comprising ZSM-5 or ZSM-11 combined (i) optionally with at least one first metal of Group 10, and (ii) optionally with at least one second metal of Group 11 to 15 of the IUPAC Periodic Table. The second catalyst bed comprises a second catalyst composition. The second catalyst composition comprises (i) a meso-mordenite zeolite, combined (ii) optionally with 0.005 to 5.0 wt.% of platinum, based on the weight of said second catalyst composition, and (iii) optionally with 0.01 to 5.0 wt.% of gallium, copper or tin, based on the weight of said second catalyst composition. The meso-mordenite zeolite is synthesized from TEA or MTEA and has a mesopore surface area of greater than 30 m²/g and comprising agglomerates of primary crystallites. The primary crystallites have an average primary crystal size as measured by TEM of less than 80 nm and an aspect ratio of less than 2.

[0018] In addition, the invention relates to a process for the conversion of a feedstock comprising C₈₊ aromatic hydrocarbons to lighter aromatic products. The process comprises the steps of contacting said feedstock and optionally hydrogen in the presence of any one of the catalyst compositions of this invention under suitable conversion conditions to produce said lighter aromatic products comprising benzene, toluene and xylene.

[0019] Typically, the C₈₊ aromatic hydrocarbons in the feedstock comprise aromatic compounds having a boiling point in the range of about 135°C to about 260°C, preferably a boiling point in the range of about 135°C to about 230°C at atmospheric pressure. Typically, the feedstock further comprises benzene or toluene or a mixture thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] Figure 1 shows a SEM of TEA-mordenite zeolite crystals of Example 1.

[0021] Figure 2 shows a SEM of the meso-mordenite zeolite crystals of Example 2.

[0022] Figure 3 shows a SEM of the meso-mordenite zeolite crystals of Example 3.

[0023] Figure 4 shows a SEM of the meso-mordenite zeolite crystals of Example 4.

[0024] Figure 5 shows a SEM of the meso-mordenite zeolite crystals of Example 5.

[0025] Figures 6 to 9 show the performance of the catalysts of Examples 10 (star), 11 (diamond), 13 (circle), 14 (triangle) and 15 (cross) in a stacked bed configuration using Feed Blend #1 (defined below) in a process for conversion of a C₉₊ aromatic hydrocarbon of Example 19.

[0026] Figures 10 to 13 show the performance of the catalysts of Examples 13 (diamond) and 16 (triangle) in a single bed configuration, and Examples 13 (square) and 16 (cross) in a stacked bed configuration using Feed Blend #2 (defined below) in a process for conversion of a C₉₊ aromatic hydrocarbon of Examples 19 and 20.

5 [0027] Figures 14 to 18 show the performance of the catalysts of Example 12 (square) in a single bed configuration, and Examples 12 (diamond), 13 (cross) and 17 (triangle) in a stacked bed configuration using Feed Blend #3 (defined below) in a process for conversion of a C₉₊ aromatic hydrocarbon of Examples 19 and 20.

DETAILED DESCRIPTION OF THE EMBODIMENTS

10 **Definitions**

[0028] For the purpose of this specification and appended claims, the following terms are defined.

[0029] As used herein, the term "C_n aromatic hydrocarbon" means an aromatic hydrocarbon having n carbon atom(s) per molecule, wherein n is a positive integer. The term
15 "C_{n+} aromatic hydrocarbon" means an aromatic hydrocarbon having at least n carbon atom(s) per molecule. The term "C_{n-} aromatic hydrocarbon" means an aromatic hydrocarbon having no more than n carbon atom(s) per molecule.

[0030] As used herein, the term "aromatic" means substituted and unsubstituted mono- and poly-nuclear ring compounds. Compounds of the benzene series, as well as compounds
20 of an aromatic character which are or contain a heterocyclic ring, are examples of aromatic compounds. These substituted aromatic compounds must, however, contain at least 1 hydrogen attached to the aromatic nucleus. The aromatic rings may be substituted with alkyl groups, aryl groups, alkaryl groups, hydroxy groups, amine groups, alkoxy groups, aryloxy groups, cycloalkyl groups, halide groups, and mixtures of these groups and other radicals
25 which do not prevent the desired reaction.

[0031] The term "hydrocarbon" means a class of compounds containing hydrogen bound to carbon, and encompasses (i) saturated hydrocarbon compounds, (ii) unsaturated hydrocarbon compounds, and (iii) mixtures of hydrocarbon compounds (saturated and/or unsaturated), including mixtures of hydrocarbon compounds having different values of n.

30 [0032] As used herein, the term "lighter aromatic products" is defined to mean that the aromatic molecules in the products have fewer carbon atoms than the carbon atoms of the aromatic molecules in the feedstock. For example, para-xylene, one of the resulting products

of C₉+ transalkylation with toluene and/or benzene, has 8 carbon atoms which are less than 9 or more carbon atoms in C₉+ aromatic molecules.

[0033] As used herein, the term “IUPAC Periodic Table” means the Periodic Table of the Elements of the International Union of Pure and Applied Chemistry, dated 1 May 2013, as it appears on the inside cover of The Merck Index, Twelfth Edition, Merck & Co., Inc., 1996.

[0034] As used herein, the term “meso-mordenite” means a mordenite zeolite synthesized from TEA or MTEA, having a mesopore surface area of greater than 30 m²/g and said meso-mordenite zeolite comprising agglomerates composed of primary crystallites, wherein said primary crystallites have an average primary crystal size as measured by TEM of less than 80 nm and an aspect ratio of less than 2, as disclosed in U.S. Serial No. 62/111,730, incorporated by reference herein. The mordenite zeolite of this invention and recited in the claims is referred to as meso-mordenite zeolite due to its high mesopore surface area.

[0035] As used herein, the term “medium pore zeolite” means a zeolite having a constraint index of 3 to 12.

[0036] As used herein, the term “constraint index” is defined in U.S. Patent Nos. 3,972,832 and 4,016,218, both of which are incorporated herein by reference.

[0037] As used herein, the term “TEA” means tetraethylammonium cation.

[0038] As used herein, the term “MTEA” means methyltriethylammonium cation.

[0039] As used herein, the term “molecular sieve of the MCM-22 family” (or “material of the MCM-22 family” or “MCM-22 family material” or “MCM-22 family zeolite”) includes one or more of:

[0040] molecular sieves made from a common first degree crystalline building block unit cell, which unit cell has the MWW framework topology. (A unit cell is a spatial arrangement of atoms which if tiled in three-dimensional space describes the crystal structure. Such crystal structures are discussed in the “Atlas of Zeolite Framework Types”, Fifth edition, 2001, the entire content of which is incorporated as reference);

[0041] molecular sieves made from a common second degree building block, being a 2-dimensional tiling of such MWW framework topology unit cells, forming a monolayer of one unit cell thickness, preferably one c-unit cell thickness;

[0042] molecular sieves made from common second degree building blocks, being layers of one or more than one unit cell thickness, wherein the layer of more than one unit cell thickness is made from stacking, packing, or binding at least two monolayers of one unit cell

thickness. The stacking of such second degree building blocks may be in a regular fashion, an irregular fashion, a random fashion, or any combination thereof; and

[0043] molecular sieves made by any regular or random 2-dimensional or 3-dimensional combination of unit cells having the MWW framework topology.

5 [0044] The MCM-22 family includes those molecular sieves having an X-ray diffraction pattern including d-spacing maxima at 12.4 ± 0.25 , 6.9 ± 0.15 , 3.57 ± 0.07 and 3.42 ± 0.07 Angstrom. The X-ray diffraction data used to characterize the material are obtained by standard techniques using the K-alpha doublet of copper as incident radiation and a diffractometer equipped with a scintillation counter and associated computer as the collection
10 system.

[0045] As used herein, the term “molecular sieve” is used synonymously with the term “zeolite”.

[0046] The term “aspect ratio” when used in reference to the primary crystals is defined as the longest dimension of the crystallite divided by the width of the crystallite, where the
15 width of the crystallite is defined as the dimension of the crystallite in the middle of that longest dimension in a direction orthogonal to that longest dimension, as measured by TEM, is relatively low, for example, less than 2.0. Typically, the primary crystals are not elongated crystals having an aspect ratio greater than 2.0, or platelets.

[0047] As used herein, the term “primary crystal” denotes a single, indivisible crystal in
20 contrast to an agglomerate. Primary crystals typically adhere together through weak physical interactions (rather than chemical bonds) to form agglomerates. The words “crystal” and “crystallite” are used herein interchangeably.

Catalyst System

[0048] The catalyst system composition employed in the process of the invention
25 comprises (a) a first catalyst bed comprising a first catalyst composition, said first catalyst composition comprising a zeolite having a constraint index of 3 to 12 combined (i) optionally with at least one first metal of Group 10, and (ii) optionally with at least one second metal of Group 11 to 15 of the IUPAC Periodic Table; and (b) a second catalyst bed comprising a second catalyst composition, said second catalyst composition comprising (i) a meso-
30 mordenite zeolite, combined (ii) optionally with at least one first metal of Group 10 of the IUPAC Periodic Table, and (iii) optionally with at least one second metal of Group 11 to 15 of the IUPAC Periodic Table, wherein said meso-mordenite zeolite is synthesized from TEA or MTEA and having a mesopore surface area of greater than $30 \text{ m}^2/\text{g}$ and comprising

agglomerates of primary crystallites, wherein said primary crystallites have an average primary crystal size as measured by TEM of less than 80 nm and an aspect ratio of less than 2.

[0049] The first catalyst composition zeolite comprises a zeolite having a constraint index of 3 to 12. Suitable materials include and are selected from the group consisting of ZSM-5, ZSM-11, ZSM-22, ZSM-23, ZSM-35, ZSM-48, ZSM-50, ZSM-57, ZSM-58, a MCM-22 family material and mixtures of two or more thereof.

[0050] ZSM-5 is described in U.S. Patent No. 3,702,886. ZSM-11 is described in U.S. Patent No. 3,709,979. ZSM-22 is described in U.S. Patent No. 5,336,478. ZSM-23 is described in U.S. Patent No. 4,076,842. ZSM-35 is described in U.S. Patent No. 4,016,245. ZSM-48 is described in U.S. Patent No. 4,375,573. ZSM-50 is described in U.S. Patent No. 4,640,829, and ZSM-57 is described in U.S. Patent No. 4,873,067. ZSM-58 is described in U.S. Patent No. 4,698,217. Constraint index and a method for its determination are described in U.S. Patent No. 4,016,218, referenced above. The entire contents of each of the aforementioned patents are incorporated herein by reference.

[0051] The MCM-22 family material is selected from the group consisting of MCM-22, PSH-3, SSZ-25, MCM-36, MCM-49, MCM-56, ERB-1, EMM-10, EMM-10-P, EMM-12, EMM-13, UZM-8, UZM-8HS, ITQ-1, ITQ-2, ITQ-30 and mixtures of two or more thereof.

[0052] Materials of the MCM-22 family include MCM-22 (described in U.S. Patent No. 4,954,325), PSH-3 (described in U.S. Patent No. 4,439,409), SSZ-25 (described in U.S. Patent No. 4,826,667), ERB-1 (described in European Patent No. 0293032), ITQ-1 (described in U.S. Patent No. 6,077,498), ITQ-2 (described in International Patent Publication No. WO97/17290), MCM-36 (described in U.S. Patent No. 5,250,277), MCM-49 (described in U.S. Patent No. 5,236,575), and MCM-56 (described in U.S. Patent No. 5,362,697) and mixtures of two or more thereof. Related zeolites to be included in the MCM-22 family are UZM-8 (described in U.S. Patent No. 6,756,030) and UZM-8HS (described in U.S. Patent No. 7,713,513), both of which are also suitable for use as the molecular sieve of the MCM-22 family. Typically, the molecular sieve of the MCM-22 family is in the hydrogen form and having hydrogen ions, for example, acidic. The entire contents of each of the aforementioned patents are incorporated herein by reference.

[0053] For the first catalyst composition, the first metal of Group 10 metal includes, but is not limited to, one or more of nickel (Ni), palladium (Pd), platinum (Pt), and compounds containing neutral metals or ions thereof, preferably platinum or palladium. The second metal

of Group 11 to Group 15 includes, but is not limited to, one or more of copper (Cu), silver (Ag), gold (Au), zinc (Zn), cadmium (Cd), gallium (Ga), indium (In), tin (Sn), bismuth (Bi), and compounds containing netural metals or ions thereof, preferably copper, gallium or tin.

[0054] The first catalyst composition comprises from at least about 0.005 wt.%, or 0.01 wt.%, or 0.05 wt.%, or 0.10 wt.% up to about 1.0 wt.%, 2.0 wt.%, 3.0 wt.%, or 4.0 wt.%, or 5.0 wt.%, of the first metal of Group 10 of the IUPAC Periodic Table, based on the weight of the first catalyst composition. The first catalyst composition may comprise from about 0.01 wt.% of the first metal, such as greater than or equal to 0.02 wt.% up to 0.5 wt.%, 1.0 wt.%, 2.0 wt.%, or 3.0 wt.%, or 4.0 wt.%, or 5.0 wt.% of such first metal. In one or more embodiments of the invention, the first catalyst composition has at least one first metal of Group 10 in the range of about 0.005 wt.% to about 5.0 wt.%, based on the weight of the first catalyst composition.

[0055] The first catalyst composition comprises from at least about 0.005 wt.%, or 0.01 wt.%, or 0.05 wt.%, or 0.10 wt.% up to about 0.50 wt.%, 0.75 wt.%, 1.0 wt.%, or 1.25 wt.%, or 1.5 wt.%, or 2.0 wt.% of the second metal of Group 11 to Group 15 of the IUPAC Periodic Table, based on the weight of the first catalyst composition. The first catalyst composition may comprise from about 0.005 wt.% of the second metal, such as greater than or equal to 0.01 wt.% up to 0.5 wt.%, 0.75 wt.%, 1.0 wt.%, or 1.25 wt.%, or 1.5 wt.%, or 2.0 wt.% of such second metal, based on the weight of the first catalyst composition. In one or more alternatives of the invention, the second catalyst composition has at least one second metal of Group 11 to Group 15 in the range of about 0.01 to about 1.5 wt.%, based on the weight of the first catalyst composition.

[0056] The second catalyst composition comprises a meso-mordenite zeolite having a very small crystal size and a high mesopore surface area, in particular by the selection of the synthesis mixture composition. The very small primary crystal size promotes access of reactant compounds to the active sites within the pores of the mordenite, thereby increasing catalytic efficiency. Typically, the meso-mordenite zeolite is present in an amount from about 1 to about 99 wt.%, such as from about 20 up to about 80 wt.% based on the total weight of the second catalyst composition.

[0057] The meso-mordenite zeolite is synthesized from TEA or MTEA structure directing agents and has a mesopore surface area of greater than 30 m²/g and said meso-mordenite zeolite comprising agglomerates composed of primary crystallites, wherein said primary crystallites have an average primary crystal size as measured by TEM of less than 80

nm and an aspect ratio of less than 2. The meso-mordenite zeolite of this invention is also referred to as meso-mordenite zeolite due to its high mesopore surface area.

[0058] The meso-mordenite zeolite comprises agglomerates, typically irregular agglomerates. The agglomerates are composed of primary crystallites which have an average
5 primary crystal size as measured by TEM of less than 80 nm, preferably less than 70 nm and more preferably less than 60 nm, for example, less than 50 nm. The primary crystallites may have an average primary crystal size as measured by TEM of, for example, greater than 20 nm, optionally greater than 30 nm.

[0059] Optionally, the primary crystals of the meso-mordenite zeolite have an average
10 primary crystal size of less than 80 nm, preferably less than 70 nm, and in some cases less than 60 nm, in each of the a, b and c crystal vectors as measured by X-ray diffraction. The primary crystallites may optionally have an average primary crystal size of greater than 20 nm, optionally greater than 30 nm, in each of the a, b and c crystal vectors, as measured by X-ray diffraction.

[0060] The meso-mordenite zeolite will generally comprise a mixture of agglomerates of
15 the primary crystals together with some unagglomerated primary crystals. The majority of the meso-mordenite zeolite, for example, greater than 80 weight % or greater than 90 weight % will be present as agglomerates of primary crystals. The agglomerates are typically of irregular form. For more information on agglomerates please see Walter, D. (2013) Primary
20 Particles – Agglomerates – Aggregates, in Nanomaterials (ed. Deutsche Forschungsgemeinschaft (DFG)), Wiley-VCH Verlag GmbH & Co. KGaA, Weinheim, Germany. doi: 10.1002/9783527673919, pages 1-24. Usefully, the meso-mordenite zeolite is not an aggregate.

[0061] Optionally, the meso-mordenite zeolite comprises at least 50% by weight,
25 preferably at least 70% by weight, advantageously at least 80% by weight, more preferably at least 90% by weight and optionally substantially consists of said irregular agglomerates composed of primary crystallites having a primary crystal size of less than 80 nm, preferably less than 70 nm, and more preferably less than 60 nm, for example, less than 50 nm. Preferably, the meso-mordenite zeolite of the invention comprises less than 10% by weight of
30 primary crystallites having a size of more than 80 nm as assessed by TEM. Preferably, the meso-mordenite zeolite of the invention is composed of said irregular agglomerates composed of crystallites having a crystal size as measured by TEM of less than 80 nm.

Preferably, the meso-mordenite zeolite of the invention is substantially free, for example, contains less than 10% by number as assessed by TEM, of needle or platelet crystals.

[0062] Preferably, said primary crystallites of the meso-mordenite zeolite of the invention have an aspect ratio of less than 3.0, more preferably less than 2.0, wherein the aspect ratio is defined as the longest dimension of the crystallite divided by the width of the crystallite, where the width of the crystallite is defined as the dimension of the crystallite in the middle of that longest dimension in a direction orthogonal to that longest dimension, as measured by TEM.

[0063] Said agglomerates of said primary crystallites are typically of irregular form and may be referred to as being “secondary” particles because they are formed of agglomerates of the crystallites, which are the “primary” particles.

[0064] The primary crystallites may have a narrow particle size distribution such that at least 90% of the primary crystallites by number have a primary crystal size in the range of from 20 to 80 nm, preferably in the range of from 20 to 60 nm, as measured by TEM.

[0065] The meso-mordenite zeolite has a mesopore surface area as measured by BET of greater than 30 m²/g, preferably greater than 40 m²/g, and in some cases greater than 45 m²/g.

[0066] The meso-mordenite zeolite preferably has a total surface area of greater than 500 m²/g, more preferably greater than 550 m²/g, and in some cases greater than 600 m²/g. The total surface area includes the surface area of the internal pores (zeolite surface area) and also the surface area on the outside of the crystals (the external surface area). The total surface area is measured by BET.

[0067] Preferably, the ratio of the meso-mesopore surface area to the total surface area for the meso-mordenite zeolite is greater than 0.05.

[0068] The meso-mordenite zeolite preferably has a mesopore volume of greater than 0.1 mL/g, more preferably greater than 0.12 mL/g, and in some cases greater than 0.15 mL/g.

[0069] The ratio Si:Al₂ of the meso-mordenite zeolite of the invention is preferably greater than 10 and may be in the range of, for example, from 10 to 60, preferably from 15 to 40. The ratio Si:Al₂ of the post-treated meso-mordenite zeolite is preferably in the range of from 40 to 300, more preferably from 60 to 150.

[0070] The meso-mordenite zeolite may be prepared by the method comprising the steps of:

- a) providing a synthesis mixture comprising a silicon source, an aluminum source, an alkali metal (M) hydroxide, a source of a structure directing agent (SDA) selected from

the group consisting of tetraethylammonium cation (TEA), methyltriethylammonium cation (MTEA) and mixtures thereof, optional seed crystals and water, said synthesis mixture having a composition including the following molar ratios:

	Si : Al ₂	15 – 40
5	OH ⁻ : Si	≤ 0.32
	M ⁺ : Si	≤ 0.32
	SDA : Si	≤ 0.10
	H ₂ O : Si	< 20

b) subjecting said synthesis mixture to crystallization conditions to form crystals of a meso-mordenite zeolite comprising the structure directing agent (SDA) within its pores. The components of the synthesis mixture are combined and maintained under crystallization conditions.

[0071] Suitable sources of silicon (Si) include silica, colloidal suspensions of silica, precipitated silica, alkali metal silicates such as potassium silicate and sodium silicate, tetraalkyl orthosilicates, and fumed silicas such as Aerosil and Cabosil. Preferably, the source of Si is a precipitated silica such as UltrasilTM (available from Evonik Degussa) or HiSil (available from PPG Industries).

[0072] Suitable sources of aluminum (Al) include aluminum sulfate, aluminum nitrate, aluminum hydroxide, hydrated alumina such as boehmite, gibbsite and/or pseudoboehmite, sodium aluminate and mixtures thereof. Other aluminum sources include, but are not limited to, water-soluble aluminum salts, or an aluminum alkoxide, such as aluminum isopropoxide, or an aluminum metal, such as aluminum in the form of chips. Preferably, the aluminum source is sodium aluminate, for example an aqueous solution of sodium aluminate with a concentration in the range of 40 to 45%, or aluminum sulfate, for example an aluminum sulfate solution with a concentration in the range of from 45 to 50%.

[0073] Alternatively or in addition to previously mentioned sources of Si and Al, aluminosilicates may also be used as a source of both Si and Al.

[0074] Preferably, the Si:Al₂ ratio in the synthesis mixture is in the range of from 15 to 40, more preferably from 20 to 30.

[0075] The synthesis mixture also contains a source of alkali metal cation M⁺. The alkali metal cation M⁺ is preferably selected from the group consisting of sodium, potassium and mixtures of sodium and potassium cations. Sodium cation is preferred. Suitable sodium sources may be, for example, a sodium salt such as NaCl, NaBr or NaNO₃, sodium hydroxide

or sodium aluminate, preferably sodium hydroxide or sodium aluminate. Suitable potassium sources may be, for example, potassium hydroxide or potassium halide such as KCl or KBr, or potassium nitrate. Preferably, the ratio $M^+ : Si$ in the synthesis mixture is in the range of from 0.15 to 0.32, more preferably from 0.20 to 0.32. Optionally, the ratio $M^+ : Si$ is less than 0.30.

[0076] The synthesis mixture also contains a source of hydroxide ions, for example, an alkali metal hydroxide such as sodium hydroxide or potassium hydroxide. Hydroxide can also be present as a counter ion of the structure directing agent or by the use of aluminum hydroxide as a source of Al. Preferably the range $OH^- : Si$ is greater than 0.13, and may, for example, be in the range of from 0.15 to 0.32, preferably from 0.20 to 0.32. Optionally, the $OH^- : Si$ ratio is less than 0.30.

[0077] The synthesis mixture optionally comprises seeds. The seeds may be any suitable zeolite seed crystals, such as, for example, ZSM-5 seed crystals, ZSM-11 seed crystals, or mordenite seed crystals. Preferably, the seeds are meso-mordenite crystals. The seeds may, for example, be present in an amount from about 0 to 20 wt.%, in particular from 0 wt.% to 10 wt.%, preferably from 0.01 wt.% to 10 wt.% such as from 0.1 wt.% to 5.0 wt.% of the synthesis mixture. In a preferred embodiment, the synthesis mixture comprises seeds.

[0078] The structure directing agent, also referred to as SDA, is TEA and/or MTEA, preferably TEA, and may be present in any suitable form, for example as a halide, but is preferably present in its hydroxide form. Suitable sources of the structure directing agent include TEABr, TEAOH, MTEACl, MTEABr and MTEAOH. A preferred source of structure directing agent is TEABr. Preferably, the ratio SDA:Si is in the range of from 0.005 to 0.10, more preferably from 0.02 to 0.10, especially from 0.02 to 0.05.

[0079] The synthesis of small crystal meso-mordenite is favored by having a relatively high solids content in the synthesis mixture. Preferably, the $H_2O : Si$ ratio is no more than 20, for example, in the range of from 5 to 20, preferably from 5 to 17, especially from 10 to 17.

[0080] The synthesis mixture may, for example, have a composition, expressed in terms of mole ratios, as indicated in the following Table 1:

Table 1

Mole ratio	Preferred	More preferred	Especially preferred
Si : Al ₂	15 to 40	20 to 35	20 to 30
OH ⁻ : Si	0.15 to 0.32	0.20 to 0.32	0.20 to < 0.30
M ⁺ : Si	0.15 to 0.32	0.20 to 0.32	0.20 to < 0.30
SDA : Si	0.005 to 0.10	0.02 to 0.10	0.02 to 0.05
H ₂ O : Si	5 to 20	5 to 17	10 to 17

[0081] Crystallization can be carried out under either static or stirred conditions in a suitable reactor vessel, such as for example, polypropylene jars or Teflon® lined or stainless steel autoclaves. Suitable crystallization conditions include a temperature of about 100°C to about 200°C, such as about 135°C to about 160°C. Preferably, the temperature is less than 145°C. The synthesis mixture may be held at the elevated temperature for a time sufficient for crystallization to occur at the temperature used, for example, from about 1 day to about 100 days, optionally from 1 to 50 days for example about 2 days to about 40 days. The synthesis mixture may in some cases be maintained at a first temperature for a first period of from 1 hour to 10 days and then raised to a second, higher temperature for a period of from 1 hour to 40 days. After the crystallization step, the synthesized crystals are separated from the liquid and recovered.

[0082] In its as-synthesized form, the meso-mordenite zeolite typically has a chemical composition having the following molar relationship:



wherein

$$0.001 \leq m/n \leq 0.1, \text{ for example } 0.001 \leq m/n \leq 0.05,$$

n is at least 10, for instance from 10 to 60, preferably from 15 to 40, and

Q is the structure directing agent.

[0083] Since the as-synthesized meso-mordenite zeolite contains the structure directing agent within its pore structure, the product is usually activated before use in such a manner that the organic part of the structure directing agent, i.e., TEA and/or MTEA, is at least partially removed from the zeolite.

[0084] The calcined meso-mordenite zeolite is optionally prepared by calcining the meso-mordenite zeolite to remove the structure directing agent. The meso-mordenite zeolite may also be subjected to an ion-exchange step to replace the alkali or alkaline earth metal ions present in the as-synthesized product with other cations. Preferred replacing cations include

metal ions, hydrogen ions, hydrogen precursor such as ammonium ions and mixtures thereof, more preferably hydrogen ions or hydrogen precursors. For instance, the meso-mordenite zeolite may be subjected to an ion-exchange step to replace the alkali or alkaline earth metal ions with ammonium cations, followed by calcination to convert the meso-mordenite zeolite in ammonium form to a meso-mordenite zeolite in hydrogen form. In one embodiment, the meso-mordenite zeolite is first subjected to a calcination step, sometimes referred to as a “pre-calcination” to remove the structure directing agent from the pores of the meso-mordenite zeolite, followed by an ion-exchange treatment, followed by a further calcination step. However, it has been found that for the meso-mordenite zeolite of the present invention, a pre-calcination step is not always required. In an alternative embodiment, the meso-mordenite zeolite is thus subjected to an ion-exchange treatment without being subjected to a prior calcination step (or pre-calcination), and, following the ion exchange treatment, is calcined to remove the structure directing agent from the pores, thereby providing the calcined meso-mordenite zeolite used in this invention.

[0085] The ion-exchange step may involve, for example, contacting the meso-mordenite zeolite with an aqueous ion exchange solution. Such contact may be take place, for example, from 1 to 5 times. The contacting with the ion exchange solution is optionally at ambient temperature, or alternatively may be at an elevated temperature. For example, the meso-mordenite zeolite may be ion exchanged by contact with aqueous ammonium nitrate solution at room temperature followed by drying and calcination.

[0086] Suitable calcination conditions include heating at a temperature of at least about 300°C, preferably at least about 370°C for at least 1 minute and generally not longer than 20 hours, for example, for a period of from 1 hour to 12 hours. While subatmospheric pressure can be employed for the thermal treatment, atmospheric pressure is desired for reasons of convenience. The thermal treatment can be performed at a temperature up to about 925°C. For instance, the thermal treatment can be conducted at a temperature of from 400°C to 600°C, for instance from 500°C to 550°C, in the presence of an oxygen-containing gas.

[0087] The calcined meso-mordenite zeolite typically has a chemical composition having the following molar relationship:

30
$$n\text{SiO}_2 : \text{Al}_2\text{O}_3$$

wherein n is at least 10, for example 10 to 60, more particularly 15 to 40.

[0088] The second catalyst composition of this invention comprises a meso-mordenite zeolite, combined (ii) optionally with at least one first metal of Group 10 of the IUPAC

Periodic Table, and (iii) optionally with at least one second metal of Group 11 to 15 of the IUPAC Periodic Table.

[0089] The first metal of Group 10 metal includes, but is not limited to, one or more of nickel (Ni), palladium (Pd), platinum (Pt), and compounds containing neutral metals or ions thereof, preferably platinum or palladium. The second metal of Group 11 to Group 15 includes, but is not limited to, one or more of copper (Cu), silver (Ag), gold (Au), zinc (Zn), cadmium (Cd), gallium (Ga), indium (In), tin (Sn), bismuth (Bi), and compounds containing neutral metals or ions thereof, preferably copper, gallium or tin.

[0090] The second catalyst composition comprises from at least about 0.005 wt.%, or 0.01 wt.%, or 0.05 wt.%, or 0.10 wt.% up to about 1.0 wt.%, 2.0 wt.%, 3.0 wt.%, or 4.0 wt.%, or 5.0 wt.%, of the first metal of Group 10 of the IUPAC Periodic Table, based on the weight of the second catalyst composition. The second catalyst composition may comprise from about 0.01 wt.% of the first metal, such as greater than or equal to 0.02 wt.% up to 0.5 wt.%, 1.0 wt.%, 2.0 wt.%, or 3.0 wt.%, or 4.0 wt.%, or 0.5 wt.% of such first metal. In one or more embodiments of the invention, the second catalyst composition has at least one first metal of Group 10 in the range of about 0.005 wt.% to about 5.0 wt.%, based on the weight of the second catalyst composition.

[0091] The second catalyst composition comprises from at least about 0.005 wt.%, or 0.01 wt.%, or 0.05 wt.%, or 0.10 wt.% up to about 0.50 wt.%, 0.75 wt.%, 1.0 wt.%, or 1.25 wt.%, or 1.5 wt.%, 2.0 wt.%, 2.5 wt.%, 3.0 wt.%, 3.5 wt.%, 4.0 wt.%, 4.5 wt.%, or 5.0 wt.% of the second metal of Group 11 to Group 15 of the IUPAC Periodic Table, based on the weight of the second catalyst composition. The second catalyst composition may comprise from about 0.005 wt.% of the second metal, such as greater than or equal to 0.01 wt.% up to 0.5 wt.%, 0.75 wt.%, 1.0 wt.%, or 1.25 wt.%, or 1.5 wt.%, 2.5 wt.%, 3.0 wt.%, 3.5 wt.%, 4.0 wt.%, 4.5 wt.%, or 5.0 wt.% of such second metal, based on the weight of the second catalyst composition. In one or more alternatives of the invention, the second catalyst composition has at least one second metal of Group 11 to Group 15 in the range of about 0.01 to about 5.0 wt.%, based on the weight of the second catalyst composition. Typically, the at least one second metal of Group 11 to Group 15 of the IUPAC Periodic Table is in molar excess as compared to the first metal of Group 10 of the IUPAC Periodic Table.

[0092] Those skilled in the art will appreciate that the first metal comprises one or more metals of greater catalytic hydrogenation activity, for example, Pt, and/or Pd, a lesser amount of the first metal may be needed, for example, in the range of about 0.005 wt.% to about 0.1

wt.%, based on the weight of the first catalyst composition and/or the second catalyst composition, such as for example, in the range of about 0.01 wt.% to about 0.6 wt.%, or about 0.01 wt.% to about 0.05 wt.%, based on the weight of the first catalyst composition and/or the second catalyst composition.

5 **[0093]** When the metal component comprises one or more metals of lesser hydrogenation activity, for example, one or more of Ga, In, Zn, Cu, and Sn, a greater amount of the second metal may be needed, for example, in the range of about 0.005 wt.% to about 5 wt.%, based on the weight of the first catalyst composition and/or the second catalyst composition, such as about 0.01 wt.% to about 1.5 wt.%, or about 0.1 wt.% to about 1 wt.%,
10 based on the weight of the first catalyst composition and/or the second catalyst composition. When the first or second catalyst composition comprises two metals, for example, the two metals may be present either as distinct metals, or as an alloy of the two metals. When two metals form an alloy, the alloy may have hydrogenation activity different to the hydrogenation activity of either of the individual metals.

15 **[0094]** The metal component, for example, the first metal and/or the second metal, may be provided on the zeolite, for example, of the first catalyst composition and/or the meso-mordenite zeolite, for example, of the second catalyst composition in any manner, for example, by conventional methods such as impregnation or ion exchange of the zeolite and/or the meso-mordenite zeolite with a solution of a compound of the relevant metal before or after
20 forming the catalyst particle.

[0095] It may be desirable to incorporate another material into the first catalyst composition and/or the second catalyst composition that is resistant to the temperatures and other conditions employed in the process of the invention. Such materials include active and inactive materials and synthetic or naturally occurring zeolites, as well as inorganic materials
25 such as clays, silica and/or metal oxides such as alumina. The inorganic material may be either naturally occurring, or in the form of gelatinous precipitates or gels including mixtures of silica and metal oxides.

[0096] The first catalyst composition and/or the second catalyst composition of this invention further comprising at least one binder selected from the group consisting of
30 alumina, silica, clay, titania, zirconia and a mixture of two or more thereof. Use of a material in conjunction with the first catalyst composition and/or the second catalyst composition, i.e. combined therewith or present during its synthesis, which itself is catalytically active, may change the conversion and/or selectivity of the first catalyst composition and/or the second

catalyst composition. Inactive materials suitably serve as diluents to control the amount of conversion so that transalkylated products can be obtained in an economical and orderly manner without employing other means for controlling the rate of reaction. These catalytically active or inactive materials may be incorporated into, for example, naturally occurring clays, for example bentonite and kaolin, to improve the crush strength of the catalyst composition under commercial operating conditions. It is desirable to provide a first catalyst composition and/or the second catalyst composition having good crush strength because in commercial use, it is desirable to prevent the first catalyst composition and/or the second catalyst composition from breaking down into powder-like materials.

10 **[0097]** Naturally occurring clays that can be composited with the first catalyst composition and/or the second catalyst composition as a binder include the montmorillonite and kaolin family, which families include the subbentonites, and the kaolins commonly known as Dixie, McNamee, Georgia and Florida clays or others in which the main mineral constituent is halloysite, kaolinite, dickite, nacrite or anauxite. Such clays can be used in the raw state as originally mined or initially subjected to calcination, acid treatment or chemical modification.

[0098] In addition to the foregoing materials, the first catalyst composition and/or the second catalyst composition may be composited with a porous matrix binder material, such as an inorganic oxide selected from the group consisting of silica, alumina, zirconia, titania, thoria, beryllia, magnesia, and combinations thereof, such as silica-alumina, silica-magnesia, silica-zirconia, silica-thoria, silica-beryllia, silica-titania, as well as ternary compositions such as silica-alumina-thoria, silica-alumina-zirconia, silica-alumina-magnesia and silica-magnesia-zirconia. It may also be advantageous to provide at least a part of the foregoing porous matrix binder material in colloidal form to facilitate extrusion of the catalyst composition.

25 **[0099]** Each of the first catalyst composition and/or the second catalyst composition is usually admixed with the binder or matrix material so that the final catalyst composition contains the binder or matrix material in an amount ranging from 5 to 90 wt.%, and typically from 10 to 60 wt.%, based on the weight of the first catalyst composition and/or the second catalyst composition.

30 **[00100]** Prior to use, steam treatment of the first catalyst composition and/or the second catalyst composition may be employed to minimize the aromatic hydrogenation activity of the catalyst composition. In the steaming process, the first catalyst composition and/or the

second catalyst composition is usually contacted with from 5% to 100% steam, at a temperature of at least 260°C to 650°C for at least one hour, specifically 1 to 20 hours, at a pressure of 100 to 2590 kPa-a and a WHSV of about 0.002 hr⁻¹ to about 20 hr⁻¹.

[00101] In addition, prior to contacting the first catalyst composition and/or the second catalyst composition with the hydrocarbon feed, the hydrogenation component can be sulfided. This is conveniently accomplished by contacting the first catalyst composition and/or the second catalyst composition with a source of sulfur, such as hydrogen sulfide, at a temperature ranging from about 320°C to 480°C. The source of sulfur can be contacted with the catalyst via a carrier gas, such as hydrogen or nitrogen.

[00102] After contacting the first catalyst composition and/or the second catalyst composition with the hydrocarbon feed, the first catalyst composition and/or the second catalyst composition may be deactivated due to coking or metal agglomeration. The deactivated first catalyst composition and/or the second catalyst composition can be regenerated conveniently by coke burning with a stream comprising oxygen or oxygen containing compounds, such as, ozone, oxochlorine, carbon dioxide or the like, metal re-dispersing using oxidation-reduction cycle, oxochloride treatment or the like, washing with liquid hydrocarbons or aqueous solution of inorganic and/or organic chemical compounds, such as, water, ethanol, acetone, or the like, or rejuvenation with a stream comprising hydrogen. Regeneration or rejuvenation can be performed at a temperature range from ambient to about 600°C, a pressure range of about 100 kPa-a to about 5000 kPa-a, and WHSV of about 0.2 hr⁻¹ to about 100 hr⁻¹.

Feedstock

[00103] The feedstock used in the process of the invention comprises one or more aromatic compounds containing at least 8 carbon atoms, for example, C₈₊ aromatic hydrocarbons. Specific comprising C₈₊ aromatic hydrocarbons include ethylbenzene and dimethylbenzene isomers. Typically, such C₈₊ aromatic hydrocarbons comprise aromatic compounds having a boiling point in the range of about 135°C to about 260°C, and in some embodiments in the range of about 135°C to about 230°C at atmospheric pressure.

[00104] In one or more embodiments, such feedstock comprises aromatic compounds having 9 or more carbon atoms, for example, C₉₊ aromatic hydrocarbons. Specific C₉₊ aromatic compounds found in a typical feed include mesitylene (1,3,5-trimethylbenzene), durene (1,2,4,5-tetramethylbenzene), hemimellitene (1,2,3-trimethylbenzene), pseudocumene (1,2,4-trimethylbenzene), ethyltoluene, ethylxylene, 1,2-methylethylbenzene, 1,3-

methylethylbenzene, 1,4-methylethylbenzene, propyl-substituted benzenes, butyl-substituted benzenes, dimethylethylbenzenes, methylpropylbenzene, methylbutylbenzene, and a mixture of two or more thereof.

[00105] Suitable sources of the C₉+ aromatics are any C₉+ fractions from any refinery process that is rich in aromatics. This aromatics fraction contains a substantial proportion of C₉+ aromatics, for example, at least 80 wt.% C₉+ aromatics, wherein preferably at least 80 wt.%, and more preferably more than 90 wt.%, of the hydrocarbons will range from C₉ to C₁₂. Typical refinery fractions which may be useful include catalytic reformat, fluidized catalytic cracking (FCC) naphtha or thermoform catalytic cracking (TCC) naphtha.

[00106] The feedstock may also comprise benzene or toluene or a mixture of benzene and toluene. Thus, in one practical embodiment, the feed to the reactor for transalkylation comprises ethylbenzene, C₉+ aromatics hydrocarbons and toluene. The feedstock may also include recycled/unreacted/produced benzene, toluene, ethylbenzene, and C₉+ aromatics that is obtained by distillation of the effluent product of the transalkylation reaction itself. Typically, toluene constitutes from about 5 wt.% to about 90 wt.% and C₉+ constitutes from about 10 to about 95 wt.% of the feedstock. In a typical light feedstock, toluene constitutes from about 40 wt.% to about 90 wt.%, such as from 50 wt.% to 70 wt.% of the entire feed, whereas the C₉+ aromatics component constitutes from 10 to 60 wt.%, such as from 30 to 50 wt.%, of the entire feedstock to the reactor. In a typical heavy feed, toluene constitutes from about 15 wt.% to about 50 wt.%, such as from 25 to 40 wt.% of the entire feed, whereas the C₉+ aromatics component constitutes from 50 to 85 wt.%, such as from 60 to 75 wt.%, of the entire feed to the reactor.

Hydrocarbon Conversion Process

[00107] The process for the conversion of C₈+ aromatic hydrocarbons to lighter aromatic products comprising the steps of contacting a first feedstock comprising said C₈+ aromatic hydrocarbons and optionally hydrogen in the presence of any one of the first catalyst compositions of this invention under suitable conversion conditions to produce a second feedstock, said first catalyst composition comprising a zeolite having a constraint index of 3 to 12; and contacting said second feedstock with any one of the second catalyst composition to produce said lighter aromatic products comprising xylenes, benzene, toluene and mixtures of two or more thereof. Preferably, said zeolite having a constraint index of 3 to 12 is selected from the group consisting of ZSM-5, ZSM-11, ZSM-22, ZSM-23, ZSM-35, ZSM-48, ZSM-50, ZSM-57, ZSM-58, a MCM-22 family material and mixtures of two or more

thereof; more preferably, said zeolite is ZSM-5 or ZSM-11. Preferably, said second catalyst composition comprising: (i) a meso-mordenite zeolite synthesized from TEA or MTEA and having a mesopore surface area of greater than 30 m²/g and comprising agglomerates of primary crystallites, wherein said primary crystallites have an average primary crystal size as measured by TEM of less than 80 nm and an aspect ratio of less than 2, combined (ii) optionally with at least one first metal of Group 10 of the IUPAC Periodic Table, and (iii) optionally with at least one second metal of Group 11 to 15 of the IUPAC Periodic Table.

[00108] The process can be conducted in a reactor for contacting a first feedstock and a second feedstock, preferably the reactor is a single fixed bed reactor comprising a first catalyst bed having the first catalyst which is in fluid communication with a second catalyst bed having the second catalyst, preferably, the first catalyst bed is upstream from the second catalyst bed.

[00109] Alternatively, in one or more embodiments, the process may be conducted in two or more fixed bed reactors wherein, preferably, a first fixed bed reactor is in fluid communication with a second fixed bed reactor. The first fixed bed reactor has the first catalyst and the second fixed bed reactor has the second catalyst; preferably, the first fixed bed reactor is upstream from the second fixed bed reactor.

[00110] The conversion conditions typically include a temperature ranging from about 340°C to about 515°C, such as from about 400°C to about 454°C; a pressure from about 380 to kPa-a about 4240 kPa-a, such as from about 1480 kPa-a to about 3550 kPa-a; a hydrogen to hydrocarbon molar ratio from about 1 to about 5, such as from about 1 to about 3 and a WHSV of about 0.2 hr⁻¹ to about 100 hr⁻¹, such as from 1 hr⁻¹ to about 100 hr⁻¹. The conversion conditions are sufficient to convert the heavy aromatic feed to a product containing substantial quantities of C₆-C₈ aromatic compounds, such as benzene, toluene and xylenes, especially benzene and xylene. The conversion conditions also are sufficient to convert the ethylbenzene in the feed to benzene and ethane.

EXAMPLES

[00111] The following examples illustrate the present invention. Numerous modifications and variations are possible and it is to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specifically described herein.

EXPERIMENTAL

Measurement of average primary particle size and primary particle size distribution

[00112] The measurement of average primary particle size and primary particle size distribution was carried out as follows. Several TEM photographs of the zeolite sample were taken; primary particles were identified and measured. For each primary particle having an aspect ratio greater than 1, the longest dimension was identified by drawing a line between the two points at the edge of the particle which were the furthest apart. Then the length of the primary particle along a 45° diagonal to that longest dimension and passing through the mid-point of that longest dimension was measured as the particle size. Each measurement was grouped by being assigned to one of about 10 particle size ranges covering the range of sizes found in the sample. More than 300 primary particles were measured and then the numbers in each particle size range were plotted to show the particle size distribution, as shown in Figure 10. For example, size ranges centered around 187.5, 250, 312.5, 375, 437.5, 500, 562.5 and 625 Angstroms could be used. The percent (%) crystals value on the y-axis was calculated from: Number of particles in each group / total number of particles measured multiplied by 100. The average particle size was calculated as the arithmetical mean based on the grouped results.

Measurement of Total Surface Area and Mesopore Surface Area by BET

[00113] The total BET and the t-Plot micropore surface area were measured by nitrogen adsorption / desorption with a Micromeritics Tristar II 3020 instrument after degassing of the calcined zeolite powders for 4 hrs. at 350°C. The mesopore surface area was obtained by the subtraction of the t-plot micropore from the total BET surface area. The mesopore volume was derived from the same data set. More information regarding the method can be found, for example, in “Characterization of Porous Solids and Powders: Surface Area, Pore Size and Density”, S. Lowell et al., Springer, 2004.

X-ray diffraction patterns

[00114] The X-ray diffraction data (powder XRD or XRD) were collected with a Bruker D4 Endeavor diffraction system with a VÅNTEC multichannel detector using copper K-alpha radiation. The diffraction data were recorded by scanning mode with 0.018 degrees two-theta, where theta is the Bragg angle, and using an effective counting time of about 30 seconds for each step.

Measurement of the Crystal Sizes in the a, b and c vectors

[00115] The crystal sizes in the a, b and c crystal vectors were calculated based on the three (200), (020) and (002) peaks in the X-ray diffraction patterns using the Scherrer equation (P. Scherrer, N.G.W. Gottingen, Math-Pys., 2, p. 96-100 (1918)). The method and its application to zeolites are also described in A. W. Burton, K. Ong, T. Rea, I. Y. Chan, Microporous and Mesoporous Materials, 117, p. 75-90 (2009). For the measurements described herein the Jade version 9.5.1 X-ray diffraction analysis software by Materials Data, Inc., was used to perform the calculation.

Alpha Value

[00116] The alpha value is a measure of the cracking activity of a catalyst and is described in U.S. Patent No. 3,354,078 and in the Journal of Catalysis, Vol. 4, p. 527 (1965); Vol. 6, p. 278 (1966) and Vol. 61, p. 395 (1980), each incorporated herein by reference. The experimental conditions of the test used herein included a constant temperature of 538°C and a variable flow rate as described in detail in the Journal of Catalysis, Vol. 61, p. 395 (1980).

Example 1 – TEA-Mordenite Crystals (NaOH/Si of 0.37 molar) (Comparative)

[00117] TEA-Mordenite crystals were synthesized from a mixture prepared from water, a 47% Aluminum sulfate solution, a 50% TEABr solution, Ultrasil™ silica (obtainable from Evonik Ind. AG), and a 50% sodium hydroxide solution. The mixture had the following molar composition:

20	SiO ₂ / Al ₂ O ₃	-	40
	H ₂ O/ SiO ₂	-	9.33
	OH ⁻ / SiO ₂	-	0.22
	Na ⁺ / SiO ₂	-	0.37
	TEA/ SiO ₂	-	0.31

[00118] The mixture was reacted at 300°F (150°C) in an autoclave for 48 hours. The product was filtered, washed with deionized (DI) water and dried at 250°F (121°C). The X-ray diffraction (XRD) pattern of the as-synthesized material showed the typical pure phase of mordenite topology. The scanning electron microscope image (SEM), Figure 1, of the as-synthesized material showed that the material was composed of large micron-sized, 0.2 μm to 1.0 μm, crystals.

[00119] The as-synthesized mordenite crystals were converted into the hydrogen form by three ion exchanges with ammonium nitrate solution at room temperature, followed by drying at 250°F (121°C) and calcination at 1000°F (538°C) for 6 hours. The resulting H-form,

mordenite crystals had a total surface area (SA), i.e., a micro pore SA + mesopore SA, of $625/(616+9) \text{ m}^2/\text{g}$, and a mesopore volume of 0.0574 cc/g . The $\text{SiO}_2/\text{Al}_2\text{O}_3$ molar ratio was 33.4, and the Alpha Value was 610.

Example 2: TEA-Mordenite Crystals (NaOH/Si of 0.40 molar) (Comparative)

5 [00120] Meso-mordenite crystals were synthesized from a mixture prepared from 1,030 g of water, 67 g of TEABr (50% solution), 212 g of Ultrasil™ silica, 48.7 g of sodium aluminate solution (45%), and 80 g of 50% sodium hydroxide solution. After preparing this mixture, 10 g of mordenite seeds was added to the mixture. The mixture had the following molar composition:

10	$\text{SiO}_2/\text{Al}_2\text{O}_3$	~	26.08
	$\text{H}_2\text{O}/\text{SiO}_2$	~	19.78
	OH^-/SiO_2	~	0.40
	Na^+/SiO_2	~	0.40
	TEA/SiO_2	~	0.05

15 [00121] The mixture was reacted at 300°F (150°C) in an autoclave with stirring at 250 RPM for 72 hours. The product was filtered, washed with deionized (DI) water and dried at 250°F (120°C). The XRD pattern of the as-synthesized material showed the typical pure phase of mordenite topology. The SEM, Figure 2, of the as-synthesized material showed that the material was composed of large crystallites.

20 [00122] The as-synthesized mordenite crystals were converted into the hydrogen form by three ion exchanges with ammonium nitrate solution at room temperature, followed by drying at 250°F (121°C) and calcination at 1000°F (538°C) for 6 hours. The resulting H-form, mordenite crystals had a $\text{SiO}_2/\text{Al}_2\text{O}_3$ molar ratio of ~17, a total(micro + meso) surface area of $612(598 + 14) \text{ m}^2/\text{g}$ and a mesopore volume of 0.043 cc/g , hexane sorption of 63.5 mg/g and
25 an Alpha value of 640.

Example 3: TEA-Mordenite Crystals (NaOH/Si of 0.35 molar) (Comparative)

[00123] Meso-mordenite crystals were synthesized from a mixture was prepared from 1,030 g of water, 67 g of TEABr (50% solution), 212 g of Ultrasil™ silica, 48.7 g of sodium aluminate solution (45%), and 65 g of 50% sodium hydroxide solution. After preparing the
30 mixture, 10 g of mordenite seeds was added to the mixture. The mixture had the following molar composition:

	SiO ₂ / Al ₂ O ₃	~	26.08
	H ₂ O/ SiO ₂	~	19.62
	OH ⁻ / SiO ₂	~	0.35
	Na ⁺ / SiO ₂	~	0.35
5	TEA/SiO ₂	~	0.05

[00124] The mixture was reacted at 300°F (150°C) in an autoclave with stirring at 250 RPM for 72 hours. The product was filtered, washed with deionized (DI) water and dried at 250°F (121°C). The XRD pattern of the as-synthesized material showed the typical pure phase of mordenite topology. The SEM, Figure 3, of the as-synthesized material showed mixed large and small crystallites. The as-synthesized crystals were converted into the hydrogen form by three ion exchanges with ammonium nitrate solution at room temperature, followed by drying at 250°F (121°C) and calcination at 1000°F (538°C) for 6 hours. The resulting mordenite crystals had a SiO₂/Al₂O₃ molar ratio of ~19, a total(micro + meso) surface area of 609(579 + 30) m²/g, a mesopore volume of 0.102 cc/g, hexane sorption of 64.3 mg/g and an Alpha value of 550. Mesopore volume was improved on this product synthesized at lower NaOH/Si ratio.

Example 4 – Meso-Mordenite Crystals (NaOH/Si of 0.29 molar)

[00125] Meso-mordenite crystals were synthesized from a mixture prepared from 10,300 g of water, 670 g of TEABr (50% solution), 2,120 g of UltrasilTM PM Modified silica, 487 g of sodium aluminate solution (45%), and 510 g of 50% sodium hydroxide solution. After preparing this mixture, 20 g of mordenite seeds was then added to the mixture. The mixture had the following molar composition:

	SiO ₂ /Al ₂ O ₃	~26.08
	H ₂ O/ SiO ₂	~ 19.48
25	OH ⁻ / SiO ₂	~ 0.29
	Na ⁺ / SiO ₂	~ 0.29
	TEA/SiO ₂	~ 0.05

[00126] The mixture was reacted at 300°F (150°C) in a 5-gal autoclave with stirring at 250 RPM for 72 hours. The product was filtered, washed with deionized (DI) water and dried at 250°F (121°C). The XRD pattern of the as-synthesized material showed the typical pure phase of mordenite topology. The SEM, Figure 4, of the as-synthesized material showed a morphology of irregularly-shaped aggregates composed of small crystallites of ≤ 0.05 μm. More uniform crystal size and morphology were produced from 5-gal reaction.

The as-synthesized crystals were converted into the hydrogen form by three ion exchanges with ammonium nitrate solution at room temperature, followed by drying at 250°F (121°C) and calcination at 1000°F (538°C) for 6 hours. The resulting meso-mordenite crystals had a $\text{SiO}_2/\text{Al}_2\text{O}_3$ molar ratio of ~21, a total (micro + meso) surface area of 624 (579 + 44) m^2/g and a mesopore volume of 0.243 cc/g. The hexane sorption was 61.8 mg/g, and the Alpha Value was 780. Based on the outcome of this example, it was concluded that small meso-mordenite crystals with high mesopore volume and surface area could be synthesized from reaction mixtures with NaOH/Si of < 0.30 molar.

Example 5 - Meso-Mordenite Crystals (NaOH/Si of 0.29 molar)

[00127] Meso-mordenite crystals were synthesized from a mixture prepared from 9,300 g of water, 804 g of tetraethylammonium bromide (TEABr) (50% solution), 2,544 g of Ultrasil™ silica, 584 g of sodium aluminate solution (45%), and 612 g of 50% sodium hydroxide solution. Then, 30 g of mordenite seeds was added to the mixture. The mixture had the following molar composition:

15	$\text{SiO}_2/\text{Al}_2\text{O}_3$	~	26.1
	$\text{H}_2\text{O}/\text{SiO}_2$	~	15.11
	OH^-/SiO_2	~	0.29
	Na^+/SiO_2	~	0.29
	TEA/SiO_2	~	0.05

[00128] The mixture was reacted at 290°F (143.3°C) in a 5-gal autoclave with stirring at 250 RPM for 72 hours. The product was filtered, washed with deionized (DI) water and dried at 250°F (121°C). The XRD pattern of the as-synthesized material showed the typical pure phase of mordenite topology. The SEM, Figure 5, of the as-synthesized material showed morphology of irregularly-shaped agglomerates composed of small crystallites of $\leq$ 0.05 μm . Smaller and more uniform crystals were produced from this improved synthesis as compared to prior art lower porosity mordenite crystals. The resulting as-synthesized meso-mordenite crystals showed a $\text{SiO}_2/\text{Al}_2\text{O}_3$ molar ratio of about 20.7.

[00129] The as-synthesized crystals meso-mordenite were converted into the hydrogen form by three ion exchanges with ammonium nitrate solution at room temperature, followed by drying at 250°F (121°C) and calcination at 1000°F (538°C) for 6 hours. The resulting H-form, meso-mordenite crystals had a total (micro + meso) surface area of 637(580 + 56) m^2/g and a mesopore volume of 0.43 cc/g. The hexane sorption was 53.3 mg/g and the Alpha Value was 1,200.

Example 6 – 65/35 TEA-Mordenite/Alumina Catalyst (Comparative)

[00130] A catalyst was made from a mixture of 65 parts (basis: calcined 538°C) of the TEA-mordenite crystal from Example 1 and 35 parts of pseudoboehmite alumina of Versal™ 300 (obtainable from UOP LLC; basis: calcined 538°C) in a muller. Sufficient water was added to produce an extrudable paste on an extruder. The mixture of TEA-mordenite, pseudoboehmite alumina, and water was extruded into an extrudate, and then dried at 121°C. The dried extrudate was calcined in nitrogen (N₂) at 538°C to decompose and remove the organic template. The N₂-calcined extrudate was humidified with saturated air and exchanged with 1 N ammonium nitrate to remove sodium. After ammonium nitrate exchange, the extrudate was washed with deionized water to remove residual nitrate ions prior to drying. The ammonium-exchanged extrudate was dried at 116°C and calcined in air at 534°C. After air calcination, properties of the resulting catalyst were: Alpha Value = 640; hexane sorption: 62 mg/g; BET surface area, and a total(micro + meso) of 468/(296 + 172) m²/g.

Example 7 – 65/35 Meso-Mordenite/Alumina Catalyst

[00131] A catalyst was made from a mixture of 65 parts (basis: calcined 538°C) of small meso-mordenite crystal from Example 4 and 35 parts of pseudoboehmite alumina of Versal™ 300; basis: calcined 538°C) in a muller. Sufficient water was added to produce an extrudable paste on an extruder. The mixture of meso-mordenite, pseudoboehmite alumina, and water was extruded into an extrudate, and then dried at 121°C. The crush strength of the resulting extrudates was measured and showed to be 108 lbs/in (19 kg/cm). The dried extrudate was calcined in nitrogen (N₂) at 538°C to decompose and remove the organic template. The N₂-calcined extrudate was humidified with saturated air and exchanged with 1 N ammonium nitrate to remove sodium. After ammonium nitrate exchange, the extrudate was washed with deionized water to remove residual nitrate ions prior to drying. The ammonium-exchanged extrudate was dried at 121°C and calcined in air at 538°C. After air calcination, properties of the resulting catalyst were: Alpha Value = 500; hexane sorption: 53.8 mg/g; BET surface area, total(micro + meso) of 479/(312 + 168) m²/g; and mesopore volume = 0.427 cc/g.

Example 8 – 65/35 Meso-Mordenite/Silica Catalyst

[00132] A catalyst was made from a mixture of 65 parts (basis: calcined 538°C) of the small meso-mordenite crystal from Example 4 and 35 parts of Ultrasil™ silica/colloidal silica (basis: calcined 538°C) in a muller. Sufficient water was added to produce an extrudable paste on an extruder. The mixture of meso-mordenite, the silicas, and water was extruded

into an extrudate, and then dried at 121°C. The crush strength of the resulting extrudates was measured and showed to be 73 lbs/in (13 kg/cm). The dried extrudate was calcined in nitrogen (N₂) at 538°C to decompose and remove the organic template. The N₂-calcined extrudate was humidified with saturated air and exchanged with 1 N ammonium nitrate to remove sodium. After ammonium nitrate exchange, the extrudate was washed with deionized water to remove residual nitrate ions prior to drying. The ammonium-exchanged extrudate was dried at 121°C and calcined in air at 538°C. After air calcination, properties of the resulting catalyst were: Alpha Value = 730; hexane sorption: 41.5 mg/g; BET surface area, total(micro + meso) of 446 (344 + 102) m²/g; and mesopore volume = 0.37 cc/g.

10 **Example 9 – 65/35 Meso-Mordenite/Silica Catalyst**

[00133] A catalyst was made from a mixture of 65 parts (basis: calcined 538°C) of small meso-mordenite crystals from Example 5 and 35 parts of UltrasilTM silica/colloidal silica (basis: calcined 538°C) in a muller. Sufficient water was added to produce an extrudable paste on an extruder. The mixture of meso-mordenite, silica, and water was extruded into an extrudate, and then dried at 121°C. The dried extrudate was calcined in nitrogen (N₂) at 538°C to decompose and remove the organic template. The N₂-calcined extrudate was humidified with saturated air and exchanged with 1 N ammonium nitrate to remove sodium. After ammonium nitrate exchange, the extrudate was washed with deionized water to remove residual nitrate ions prior to drying. The ammonium-exchanged extrudate was dried at 121°C and calcined in air at 538°C. After air calcination, properties of the resulting catalyst are: Alpha Value = 800; hexane sorption: 46.8 mg/g; BET surface area, total(micro + meso) of 462(360 + 102) m²/g; Mesopore volume = 0.46 cc/g.

Example 10 - Pt/Sn on 65/35 Meso-Mordenite/Alumina Catalyst

[00134] The extrudate of Example 7 was co-impregnated via incipient wetness with 0.05 wt.% Pt tetraammonium platinum nitrate and 0.12 wt.% Sn as Sn(II) chloride salt. The catalyst was calcined in air at 680°F (360°C) for 3 hours.

Example 11 - Pt/Sn on 65/35 Meso-Mordenite/Silica Catalyst

[00135] The extrudate of Example 8 was co-impregnated via incipient wetness with 0.05 wt.% Pt as tetraammonium platinum nitrate and 0.12 wt.% Sn as Sn(II) chloride salt. The catalyst was calcined in air at 680°F (360°C) for 3 hours.

Example 12 - Pt/Sn on 65/35 TEA-Mordenite/Alumina Catalyst (Comparative)

[00136] The extrudate of Example 6 was co-impregnated via incipient wetness with 0.1 wt.% Pt as tetraammonium platinum nitrate and 0.24 wt.% Sn as Sn(II) chloride salt. The

catalyst was calcined in air at 680°F (360°C) for 3 hours. Characteristics of the extrudate prior to metal incorporation: Alpha Value = 640; hexane sorption: 62 mg/g.

Example 13 - Pt/Sn on Steamed 65/35 ZSM-12/Alumina Catalyst (Comparative)

[00137] An extrudate of 65/35 ZSM-12/Alumina was steamed for about 5 hours at 900°F (482°C), where the ZSM-12 (made according to US Patent No. 3,832,449) has a Si/Al₂ ratio of 200/1 was co-impregnated via incipient wetness with 0.1wt.% Pt as tetraammonium platinum nitrate and 0.24 wt.% Sn as Sn(II) chloride salt. The catalyst was calcined in air at 680°F (360°C) for 3 hours. Characteristics of the extrudate prior to metal incorporation: Alpha Value = 100; hexane sorption: 37 mg/g.

10 **Example 14 - Pt/Sn on 65/35 High Activity ZSM-12/Alumina Catalyst (Comparative)**

[00138] An extrudate of 65/35 high activity ZSM-12/Alumina where the ZSM-12 has a Si/Al₂ ratio of 45/1 was co-impregnated via incipient wetness with 0.1 wt.% Pt as tetraammonium platinum nitrate and 0.24 wt.% Sn as Sn(II) chloride salt onto. The catalyst was calcined in air at 680°F (360°C) for 3 hours. Characteristics of the extrudate prior to metal incorporation: Alpha Value = 290.

Example 15 - Pt on 65/35 High Activity ZSM-12/Silica Catalyst (Comparative)

[00139] An extrudate of 65/35 High Activity ZSM-12/Silica where the ZSM-12 has a Si/Al₂ ratio of 45/1 was impregnated via incipient wetness with 0.05 wt.% Pt as tetraammonium platinum nitrate. The catalyst was calcined in air at 680°F (360°C) for 3 hours. Characteristics of the extrudate prior to metal incorporation: Alpha Value = 710; Hexane sorption: 38.6 mg/g; BET surface area 324 (211 + 111).

Example 16 - Pt/Sn on Steamed 65/35 Meso-Mordenite/Alumina Catalyst

[00140] The extrudate from Example 8 was steamed for 4 hours at 800°F (427°C) in full steam at atmospheric pressure. This steamed catalyst was co-impregnated with 0.1 wt.% Pt as tetraammonium platinum nitrate and 0.24 wt.% Sn as Sn(II) chloride via incipient wetness. The catalyst was calcined in air at 680°F (360°C) for 3 hours. Characteristics of the extrudate prior to metal incorporation: Alpha Value = 210; hexane sorption: 20 mg/g.

Example 17 - Pt/Sn on 65/35 Meso-Mordenite/Silica Catalyst

[00141] The extrudate from Example 9 was co-impregnated with 0.1 wt.% Pt as tetraammonium platinum nitrate and 0.24 wt.% Sn as Sn(II) chloride via incipient wetness. The catalyst was calcined in air at 680°F (360°C) for 3 hours. Characteristics of the extrudate prior to metal incorporation: Alpha Value = 800; hexane sorption: 46.8 mg/g.

Example 18 - Pt/Sn on Steamed 50/50 ZSM-5B/Silica Catalyst

[00142] A steamed extrudate of 50/50 ZSM-5B/Silica was co-impregnated via incipient wetness with 0.05 wt.% Pt as tetraammonium platinum nitrate and 0.12 wt.% Sn as Sn(II) chloride salt. The catalyst was calcined in air at 680°F (360°C) for 3 hours. Characteristics of the extrudate prior to metal incorporation: Alpha Value = 300; hexane sorption: 65 mg/g; BET SA: 339 (233 + 106).

Example 19 - Performance Evaluation of Catalyst from Examples 10, 11, 13 to 15 and 18 in Stacked Bed Reactor

[00143] The meso-mordenite and comparative examples were evaluated in a stacked bed configuration in a fixed bed pilot plant using a feed blend of 85% C₉₊ as A100 Fluid and 15% toluene in a transalkylation reaction. The feed blend is identified as “Feed Blend #1”, “Feed Blend #2”, or “Feed Blend #3”. The performance of a reference catalyst system shifted depending on the feed blend. Therefore, only catalysts run on the same feed blend can be compared. Feed data for these Feed Blends are provided in Table 2, below.

Table 2

Component	Feed Blend #1	Feed Blend #2	Feed Blend #3
Benzene	0.01	0.00	0.01
Toluene	15.01	15.42	15.07
Ethylbenzene	0.00	0.00	0.00
o-Xylene	0.05	0.05	0.12
m-Xylene	0.00	0.00	0.00
Other C ₉ Paraffins	0.03	0.04	0.11
n-Propylbenzene	3.19	3.18	2.13
Isopropylbenzene	1.01	1.01	0.52
1-Methyl-2-Ethylbenzene	5.63	5.59	4.66
1-methyl-3-Ethylbenzene	14.00	13.76	11.45
1-Methyl-4-Ethylbenzene	6.64	6.76	4.92
1,2,3-Trimethylbenzene	5.78	5.75	6.45
1,2,4-Trimethylbenzene	28.82	28.57	32.86
1,3,5-Trimethylbenzene	8.16	8.27	10.09
Indane	0.76	0.74	0.78
Other C ₁₀ Paraffins	0.00	1.33	
1-Methyl-3-N-Propylbenzene	1.04	1.03	1.06
1-Methyl-4 N-Propylbenzene	0.40	0.40	0.42
1-Methyl-3-Isopropylbenzene	0.46	0.46	
1-Methyl-4-Isopropylbenzene	0.14	0.15	0.16
1,2-Diethylbenzene	0.17	0.09	0.09
1,3-Diethylbenzene	0.61	0.61	0.58
1,4-Diethylbenzene	0.23	0.23	0.20
1,2-Dimethyl-3-Ethylbenzene	0.22	0.24	0.24
1,2-Dimethyl-4-Ethylbenzene	1.52	1.52	0.93
1,3-Dimethyl-2-Ethylbenzene	0.09	0.09	0.07
1,3-Dimethyl-4-Ethylbenzene	0.86	0.86	1.62
1,3-Dimethyl-5-Ethylbenzene	1.84	1.84	2.05
1,4-Dimethyl-2-Ethylbenzene	0.99	0.00	1.07
1,2,3,4-Tetramethylbenzene	0.14	0.14	0.14
1,2,3,5-Tetramethylbenzene	0.78	0.77	0.81

Table 2 (continued)

Component	Feed Blend #1	Feed Blend #2	Feed Blend #3
1,2,4,5-Tetramethylbenzene	0.62	0.61	0.64
Naphthalene	0.05	0.05	0.05
m-Indanes	0.06	0.06	0.09
Other C ₁₀ Aromatics	0.72	0.31	0.59
1-Methyl-Naphthalene	0.00	0.00	0.00
2-Methyl-Naphthalene	0.00	0.00	0.00
Other C ₁₁ Aromatics	0.00	0.05	0.01
Total	100.00	100.00	100.0

[00144] The top bed catalyst that was used in each run was 1 gram of the ZSM-5B catalyst from Example 18. 2.4 grams of the catalysts based on meso-mordenite or ZSM-12 (steamed or High Activity) was loaded as the bottom bed. The catalysts were heated in hydrogen and activated at 752°F (400°C) for 1 hour. The temperature was then increased to 806°F (430°C) and liquid feed was introduced for a 12 hour de-edging period. Following the de-edging period, conditions were modified and a temperature scan was performed. Conditions of the de-edging and temperature scans were: De-edging Conditions: WHSV = 4.4 hr⁻¹, H₂/HC = 1, temperature = 806°F (430°C) for 12 hours, and pressure = 350 psig (2413 kPa). Temperature Scan Conditions: WHSV = 4.4 hr⁻¹, H₂/HC = 2, temperature = 12 hours at 734°F (390°C), 752°F (400°C), 770°F (410°C), 788°F (420°C), and a return to 734°F (390°C), and pressure = 350 psig (2413 kPa). The product was analyzed by on-line GC. Performance comparisons between the catalysts in a stacked bed configuration may be found in Figures 6 to 9.

[00145] Figures 6 through 9 show the benefit in performance of the meso-mordenite zeolite over our ZSM-12 and high activity ZSM-12. Both alumina-bound and silica-bound meso-mordenite formulations show higher activity than any of the ZSM-12 versions tested. The traditional TEA-mordenite is known not to perform as well as ZSM-12, as can be seen in Figures 10 to 13, discussed below. A catalyst based on the small crystal, meso-mordenite outperforms even a very high activity version of ZSM-12. As shown in Figures 6 and 8, both the transalkylation activity (based on C₉₊ conversion and trimethylbenzene conversion) and the de-alkylation activity (based on Et-Ar conversion) are higher for the meso-mordenite. As

a result, there is an increased generation of the desired xylenes product at lower temperatures. The meso-mordenite is superior to the ZSM-12 with similar Alpha activity.

[00146] Interestingly, Example 8 (65/35 Meso-Mordenite/Silica, Alpha=730) and Comparative Example 15 (Pt/Sn on 65/35 High Activity ZSM-12 /Silica Catalyst, Alpha
5 Valu+710) show that two catalysts with essential the same Alpha value (n-hexane cracking, a measure of activity), show different activity in real feed testing.

Example 20 - Performance Evaluation of Catalysts from Examples 6, 13 and 16 in Single Bed Reactor

[00147] The ZSM-12 from comparative Example 13 (Pt/Sn on Steamed 65/35 ZSM-
10 12/Alumina), and the meso-mordenite catalysts from Example 16 (Pt/Sn on 65/35 Meso-Mordenite/Silica) were evaluated in a single bed in a fixed bed pilot plant using a blend of 85% C₉₊ as A100 Fluid and 15% Toluene. The feed blend is identified as "Feed Blend #1", "Feed Blend #2", or "Feed Blend #3" as multiple blends were needed due to availability of A100 fluid and timing. Performance of a reference catalyst system shifted depending on the
15 feed blend. Therefore only catalysts run on the same feed blend can be compared. Feed data for all three blends are provided in Table 2, above. No top bed catalyst was used. 3.4 grams of the catalyst was loaded into the reactor. The catalyst was heated in hydrogen and activated at 752°F (400°C) for 1 hour. The temperature was then increased to 806°F (430°C) and liquid feed was introduced for a 12 hour de-edging period. Following the de-edging period,
20 conditions were modified and a temperature scan was performed. Conditions of the de-edging and temperature scans were: De-edging Conditions: WHSV = 4.4 hr⁻¹, H₂/HC = 1, temperature = 806°F (430°C) for 12 hours, and pressure = 350 psig (2413 kPa). Temperature Scan Conditions: WHSV = 4.4 hr⁻¹, H₂/HC = 2, temperature = 12 hours at 734°F (390°C), 752°F (400°C), 770°F (410°C), 788°F (420°C), and a return to 734°F (390°C), and pressure
25 = 350 psig (2413 kPa). The product was analyzed by on-line GC. Performance comparisons between the catalysts in stacked bed and single bed configurations may be found in Figures 10 thru 13 and Figures 14 to 18.

[00148] Figures 10 through 13 show the benefit in performance of a stacked bed configuration over a single bed configuration, and also highlights the benefit of the meso-mordenite zeolite over our ZSM-12-based catalysts. The stacked bed systems, with a top bed
30 of ZSM-5B catalyst, show significantly higher de-alkylation activity than the single bed systems. The stacked bed systems also show higher xylenes yield vs. temperature than the

single bed systems. Interestingly, the single bed of meso-mordenite outperforms even the stacked bed of ZSM-12 in regards to xylenes yields vs. temperature.

[00149] Figures 14 through 18 show the significant benefit in performance of our novel meso-mordenite zeolites (Example 17) over a more traditional TEA-mordenite recipe (Example 6) and ZSM-12 (Example 13). ZSM-12 outperforms TEA-mordenite in terms of product yields and activity, even though the n-hexane cracking activity of TEA-Mordenite (i.e., Alpha Value) is significantly higher (Alpha Value of 640 for TEA-Mordenite vs. Alpha Value of 100 for comparative ZSM-12). Interestingly, the TEA-Mordenite appears to show some aging in these short runs. When we return to the starting temperature of 390°C, xylenes yield has decreased for Example 6. It also shows a stacked bed configuration shows benefits for a broad range of zeolites and activities. When a top bed of ZSM-5B based catalyst is present for TEA-Mordenite (Example 6), the stacked bed system shows higher BTX yields and slightly higher activity than a single bed of TEA-Mordenite based catalyst.

[00150] All patents, patent applications, test procedures, priority documents, articles, publications, manuals, and other documents cited herein are fully incorporated by reference to the extent such disclosure is not inconsistent with this invention and for all jurisdictions in which such incorporation is permitted.

[00151] When numerical lower limits and numerical upper limits are listed herein, ranges from any lower limit to any upper limit are contemplated.

[00152] While the illustrative embodiments of the invention have been described with particularity, it will be understood that various other modifications will be apparent to and can be readily made by those skilled in the art without departing from the spirit and scope of the invention. Accordingly, it is not intended that the scope of the claims appended hereto be limited to the examples and descriptions set forth herein but rather that the claims be construed as encompassing all the features of patentable novelty which reside in the present invention, including all features which would be treated as equivalents thereof by those skilled in the art to which the invention pertains.

CLAIMS

1. A catalyst system for conversion of C₈₊ aromatic hydrocarbons to lighter aromatic products, said catalyst system comprising:
- (a) a first catalyst bed comprising a first catalyst composition, said first catalyst composition comprising a zeolite having a constraint index of 3 to 12 ; and
- (b) a second catalyst bed comprising a second catalyst composition, said second catalyst composition comprising (i) a meso-mordenite zeolite, wherein said meso-mordenite zeolite is synthesized from tetraethylammonium cation (TEA) or methyltriethylammonium cation (MTEA) and has a mesopore surface area of greater than 30 m²/g and comprises agglomerates of primary crystallites, wherein said primary crystallites have an average primary crystal size as measured by TEM of less than 80 nm and an aspect ratio of less than 2.
2. The catalyst system of claim 1, wherein said zeolite has a constraint index of 3 to 12 is selected from the group consisting of ZSM-5, ZSM-11, ZSM-22, ZSM-23, ZSM-35, ZSM-48, ZSM-50, ZSM-57, ZSM-58, a MCM-22 family material and mixtures of two or more thereof.
3. The catalyst system of claim 2, wherein said MCM-22 family material is selected from the group consisting of MCM-22, PSH-3, SSZ-25, MCM-36, MCM-49, MCM-56, ERB-1, EMM-10, EMM-10-P, EMM-12, EMM-13, UZM-8, UZM-8HS, ITQ-1, ITQ-2, ITQ-30 and mixtures of two or more thereof.
4. The catalyst system of claim 1, wherein said first catalyst composition and/or said second catalyst composition further comprises 0.005 to 5.0 wt.% of at least one first metal of Group 10 of the IUPAC Periodic Table, based on the weight of said first catalyst composition and/or said second catalyst composition, respectively.
5. The catalyst system of claim 1, wherein said first catalyst composition and/or said second catalyst composition further comprises 0.01 to 5.0 wt.% of at least one second metal of Group 11 to 15 of the IUPAC Periodic Table, based on the weight of said first catalyst composition and/or said second catalyst composition, respectively.

6. The catalyst system of claim 1, wherein said at least first metal of Group 10 is selected from the group consisting of nickel, platinum, palladium and mixtures thereof.
7. The catalyst system of claim 6, wherein said first metal is platinum.
- 5 8. The catalyst system of claim 1, wherein said at least one second metal of Group 11 to 15 is selected from the group consisting of copper, zinc, silver, gallium, indium, tin, bismuth and a mixture of two or more thereof.
- 10 9. The catalyst system of claim 8, wherein said second metal is gallium.
10. The catalyst system of claim 8, wherein said second metal is copper.
11. The catalyst system of claim 1, wherein said average primary crystal size of less than
15 80 nm is in each of the a, b and c crystal vectors as measured by X-ray diffraction.
12. The catalyst system of claim 1, wherein at least 90% by number of said primary crystallites have a primary crystal size of less than 80 nm as measured by TEM.
- 20 13. The catalyst system of claim 1, wherein said meso-mordenite zeolite has a total surface area of greater than 500 m²/g.
14. The catalyst system of claim 1, wherein said first catalyst composition and/or said second catalyst composition further comprises at least one binder selected from the group
25 consisting of alumina, silica, clay, titania, zirconia and a mixture of two or more thereof.
15. A catalyst system comprising (a) a first catalyst bed comprising a first catalyst composition, said first catalyst composition comprising ZSM-5 or ZSM-11 combined with (i)
30 0.005 to 5.0 wt.% of platinum, based on the weight of said first catalyst composition, and/or (ii) 0.01 to 5.0 wt.% of gallium, copper or tin, based on the weight of said first catalyst composition, and (b) a second catalyst bed comprising a second catalyst composition, said second catalyst composition comprising (i) a meso-mordenite zeolite, combined with (ii) 0.005 to 5.0 wt.% of platinum, based on the weight of said second catalyst composition,

and/or (iii) 0.01 to 5.0 wt.% of gallium, copper or tin, based on the weight of said second catalyst composition, said meso-mordenite zeolite synthesized from TEA or MTEA and having a mesopore surface area of greater than 30 m²/g and comprising agglomerates of primary crystallites, wherein said primary crystallites have an average primary crystal size as measured by TEM of less than 80 nm and an aspect ratio of less than 2.

16. A process for conversion of C₈₊ aromatic hydrocarbons to lighter aromatic products, the process comprising the steps of:
- a) contacting a first feedstock comprising said C₈₊ aromatic hydrocarbons and optionally hydrogen in the presence of a first catalyst composition under suitable conversion conditions to produce a second feedstock, said first catalyst composition comprising a zeolite having a constraint index of 3 to 12 combined (i) optionally with at least one first metal of Group 10 of the IUPAC Periodic Table, and (ii) optionally with at least one second metal of Group 11 to 15 of the IUPAC Periodic Table; and
 - b) contacting said second feedstock with a second catalyst composition to produce said lighter aromatic products comprising xylenes, benzene, toluene and mixtures of two or more thereof, said second catalyst composition comprising:
 - (i) a meso-mordenite zeolite synthesized from TEA or MTEA and having a mesopore surface area of greater than 30 m²/g and comprising agglomerates of primary crystallites, wherein said primary crystallites have an average primary crystal size as measured by TEM of less than 80 nm and an aspect ratio of less than 2, combined
 - (ii) at least one first metal of Group 10 of the IUPAC Periodic Table, and/or
 - (iii) at least one second metal of Group 11 to 15 of the IUPAC Periodic Table.

17. The process of claim 16, wherein said zeolite having a constraint index of 3 to 12 is selected from the group consisting of ZSM-5, ZSM-11, ZSM-22, ZSM-23, ZSM-35, ZSM-48, ZSM-50, ZSM-57, ZSM-58, a MCM-22 family material and mixtures of two or more thereof.

18. The process of claim 17, wherein said MCM-22 family material is selected from the group consisting of MCM-22, PSH-3, SSZ-25, MCM-36, MCM-49, MCM-56, ERB-1,

EMM-10, EMM-10-P, EMM-12, EMM-13, UZM-8, UZM-8HS, ITQ-1, ITQ-2, ITQ-30 and mixtures of two or more thereof.

19. The process of claim 16, wherein said at least first metal of Group 10 is selected from
5 the group consisting of nickel, platinum, palladium and mixtures thereof.

20. The process of claim 16, wherein said at least one second metal of Group 11 to 15 is selected from the group consisting of copper, zinc, silver, gallium, indium, tin, bismuth and a mixture of two or more thereof.

10

21. The process of claim 16, wherein said C₈₊ aromatic hydrocarbons comprises aromatic compounds having nine or more carbon atoms.

22. The process of claim 16, wherein said feedstock further comprises benzene, toluene or
15 a mixture thereof.

23. The process of claim 16, wherein said C₈₊ aromatic hydrocarbons comprises aromatic compounds having a boiling point in the range of 135°C to 260°C at atmospheric pressure.

20 24. The process of claim 16, wherein said suitable conversion conditions include at least a temperature of 340°C to 515°C, a pressure from 380 kPa (55 psia) to 4240 kPa (615 psia) and a weight hourly space velocity (WHSV) in the range of 1 to 100 hr⁻¹ based on the weight of said feedstock.

25 25. The process of claim 16, further comprising a reactor for contacting said first feedstock and said feedstock, said reactor comprising at least one first catalyst bed in fluid communication with a second catalyst bed, said first catalyst bed having said first catalyst composition and said second catalyst bed having said second catalyst composition.

1/15

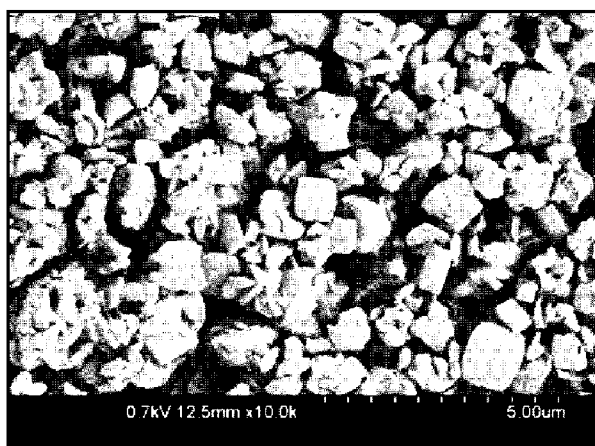


FIG. 1
SEM for Example 1



FIG. 2
SEM for Example 2



FIG. 3
SEM for Example 3

2/15

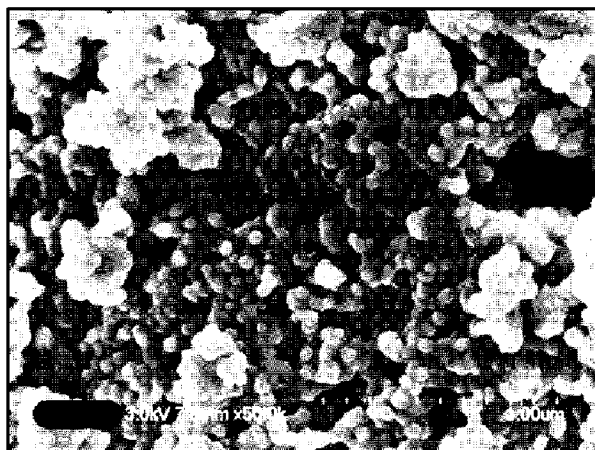


FIG. 4
SEM for Example 4

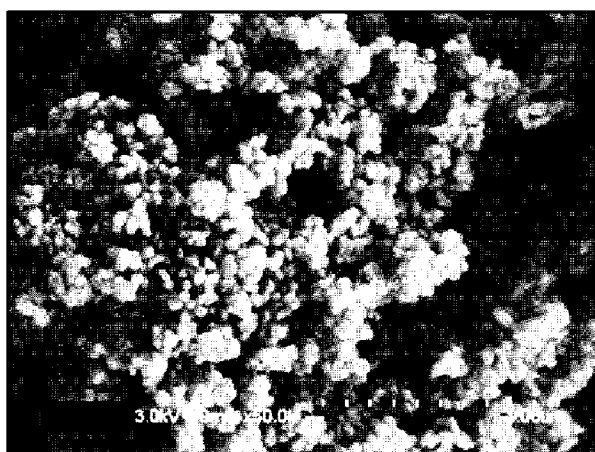


FIG. 5
SEM for Example 5

3/15

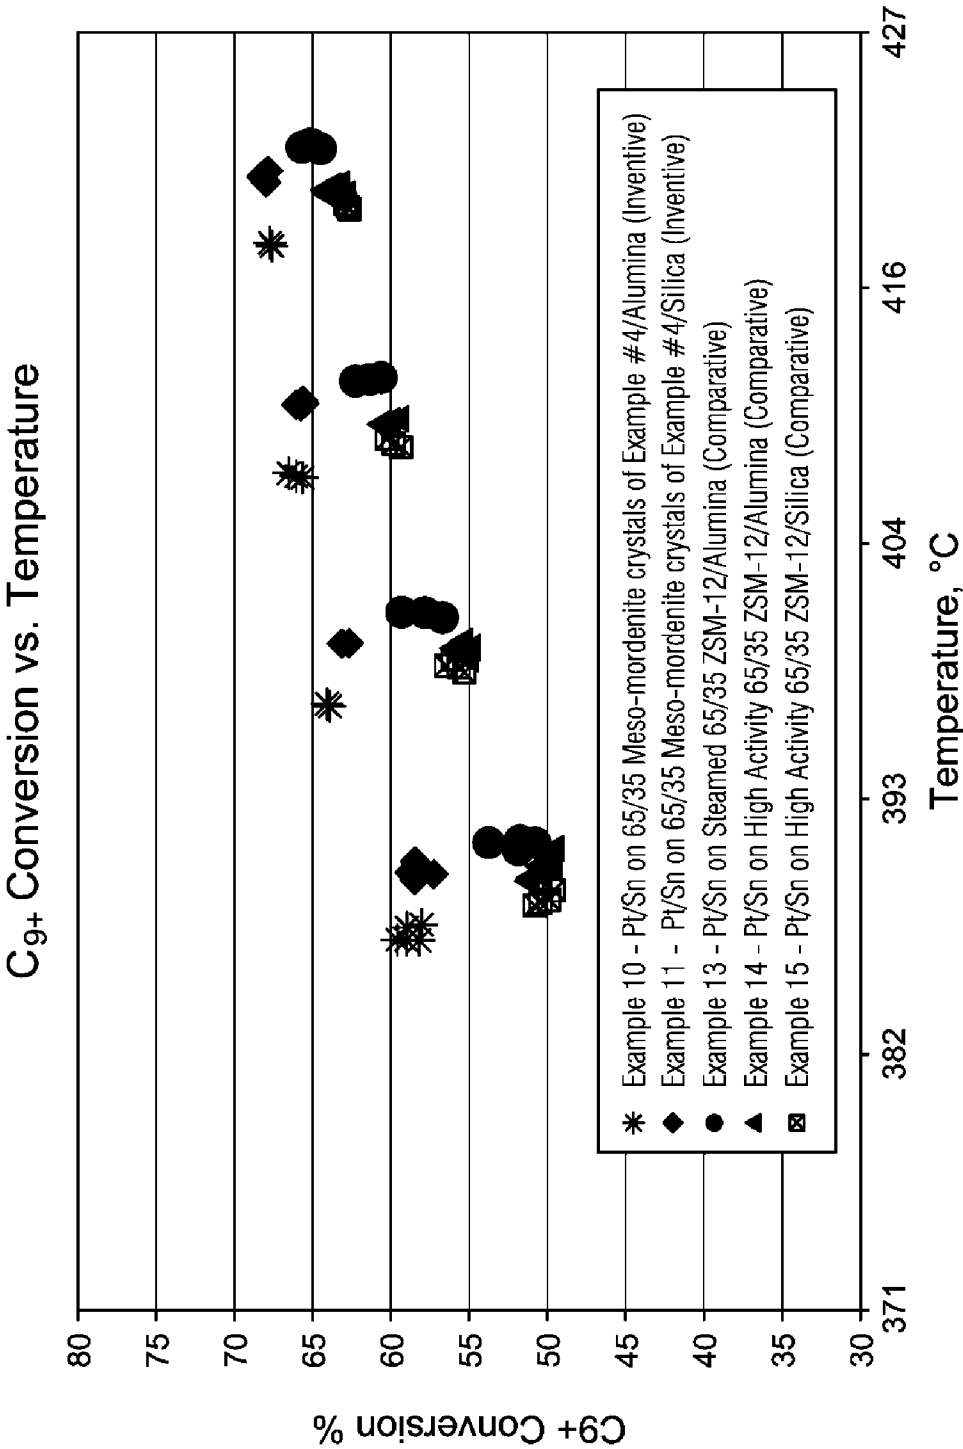


FIG. 6

4/15

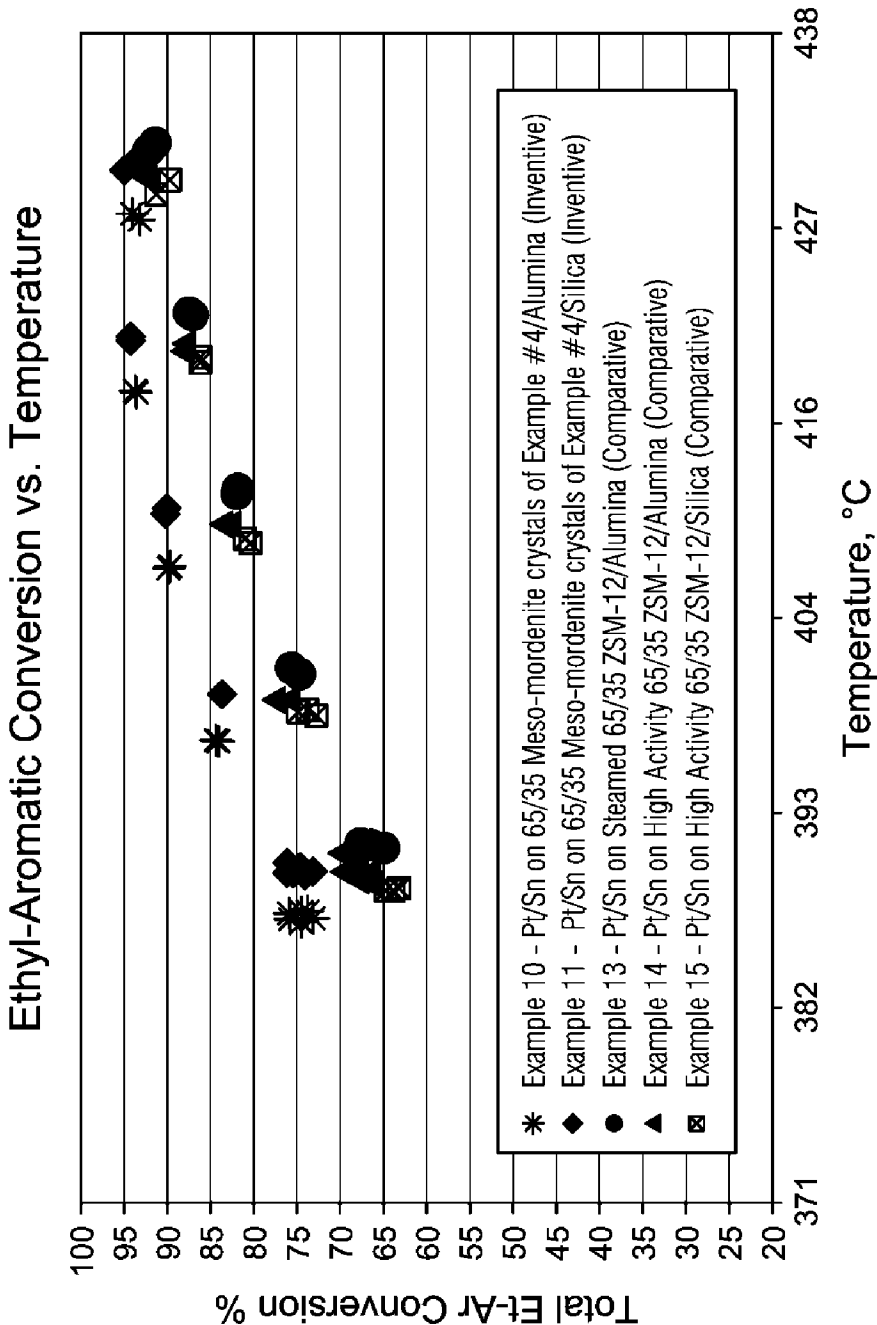


FIG. 7

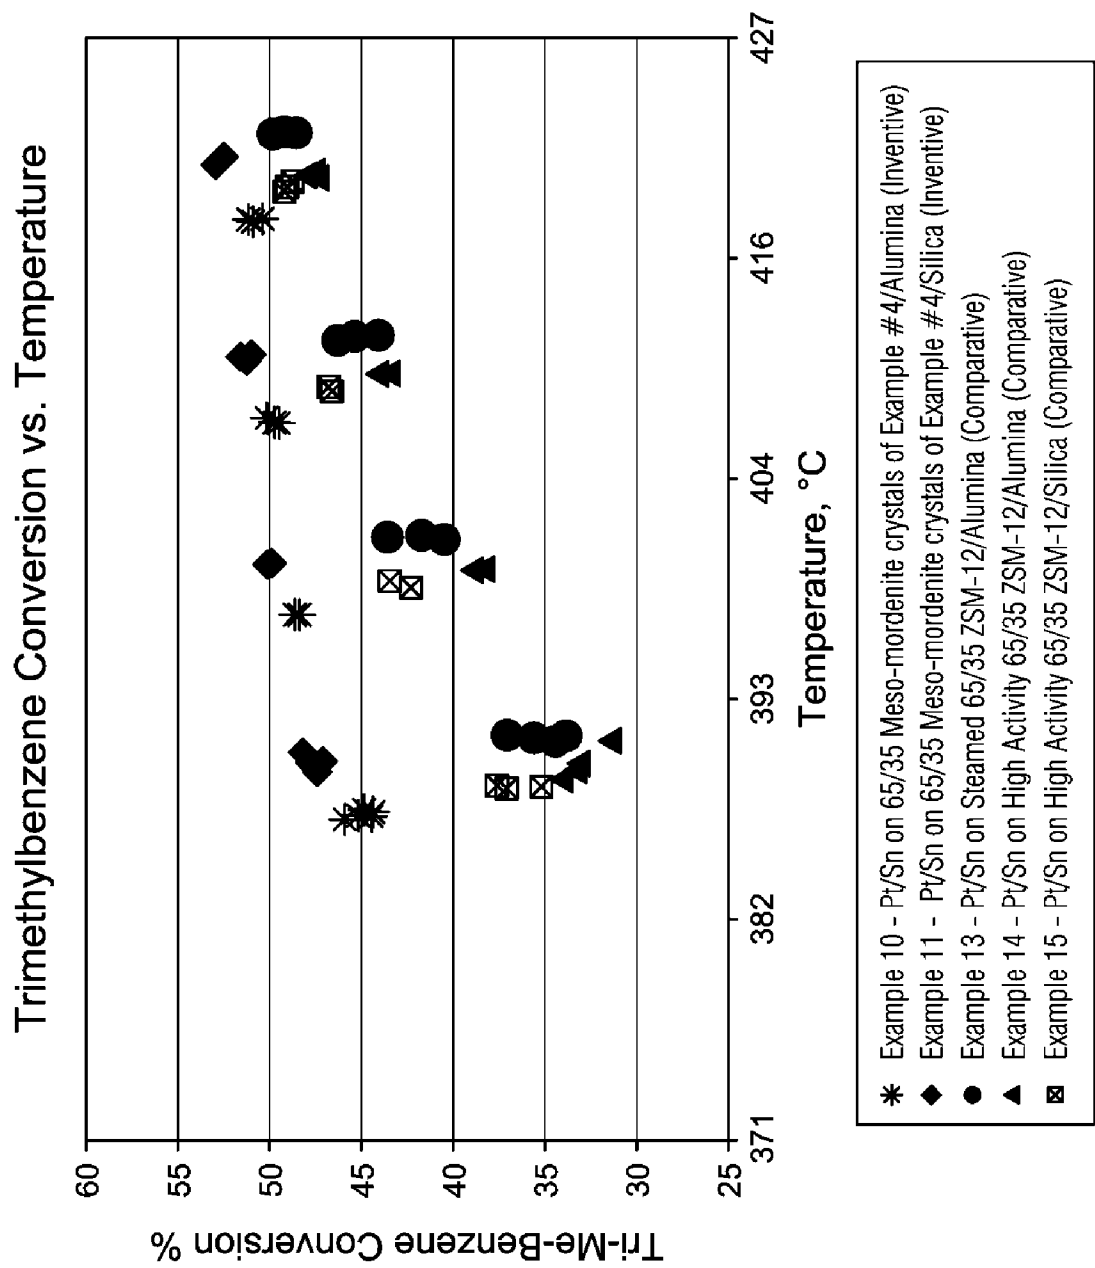


FIG. 8

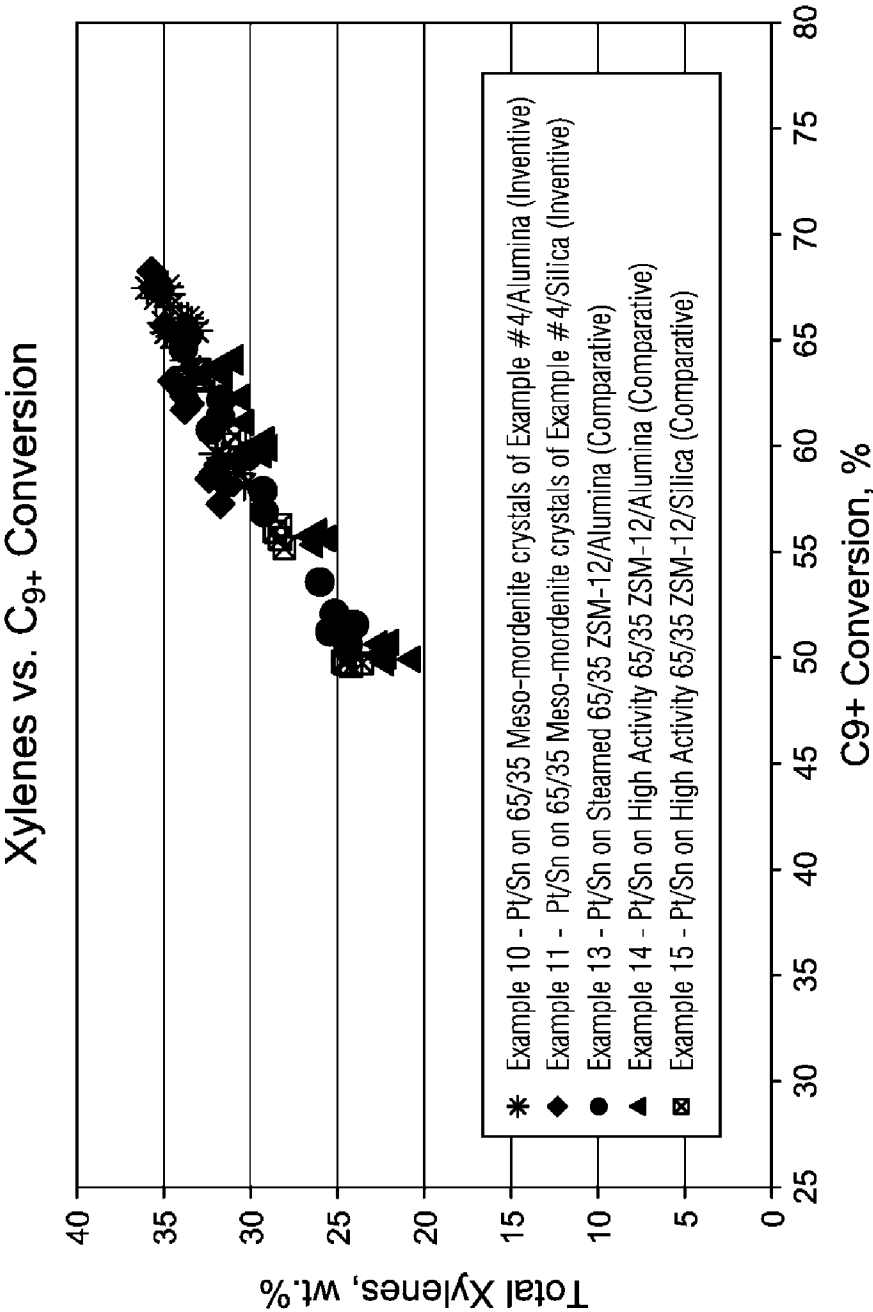


FIG. 9

7/15

C₉+ Conversion vs. Temperature

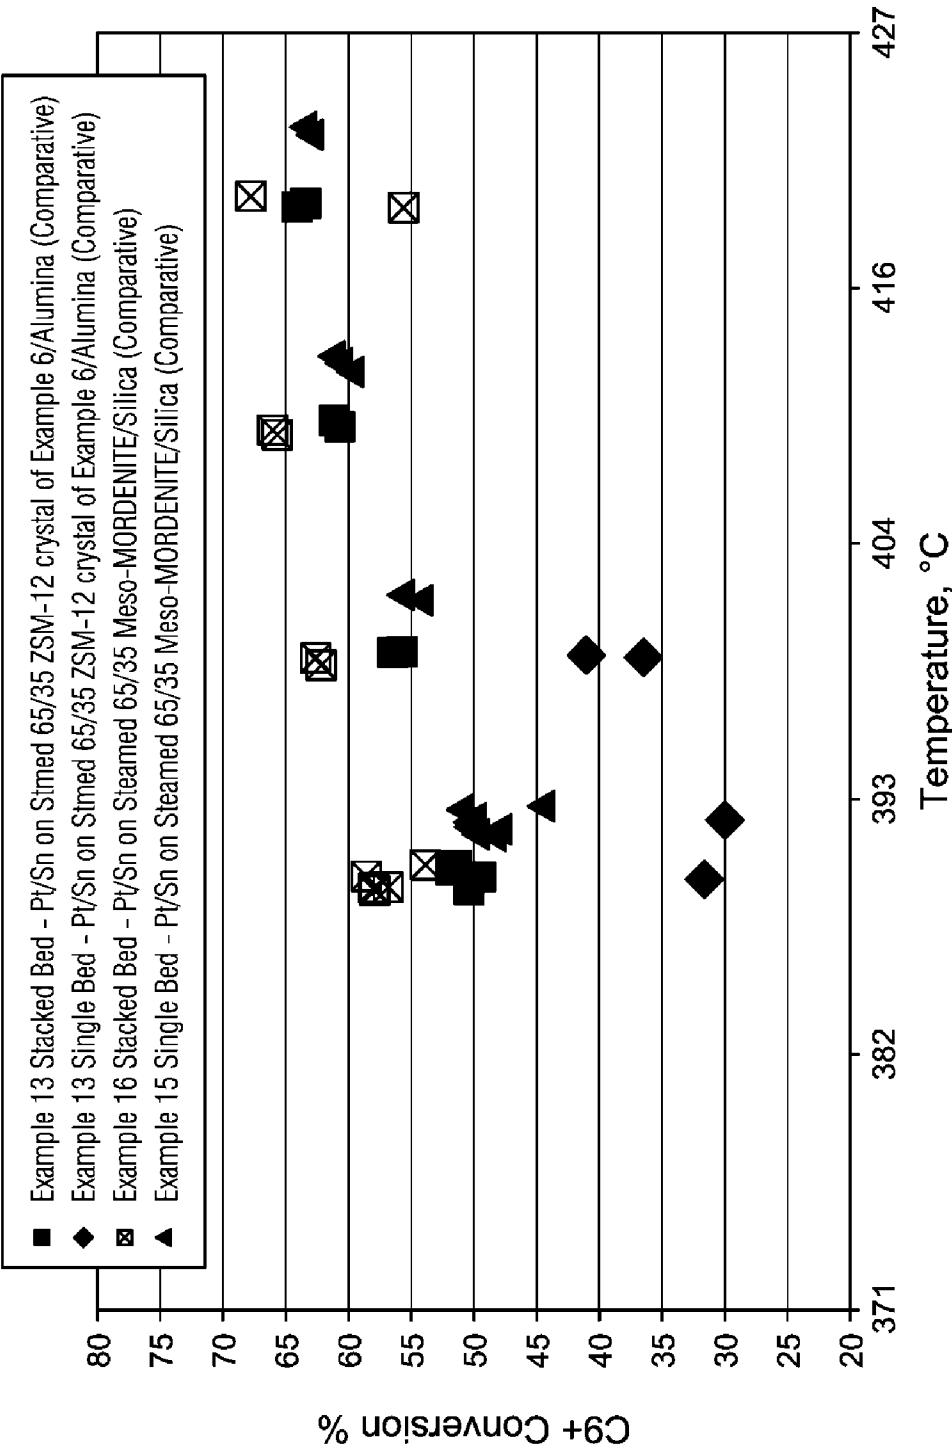


FIG. 10

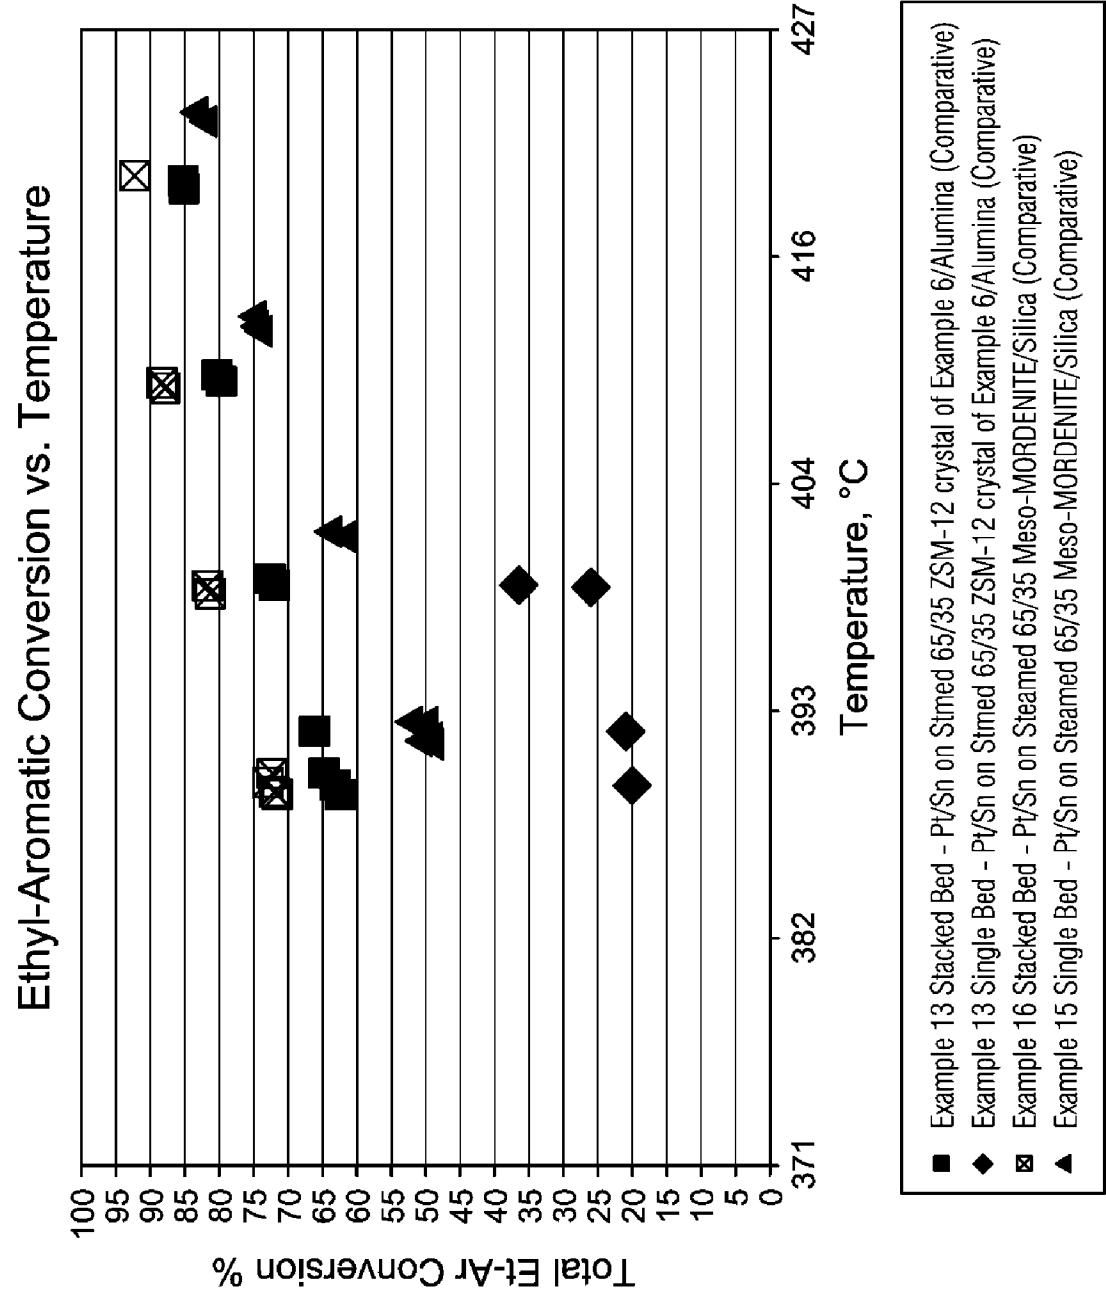


FIG. 11

9/15

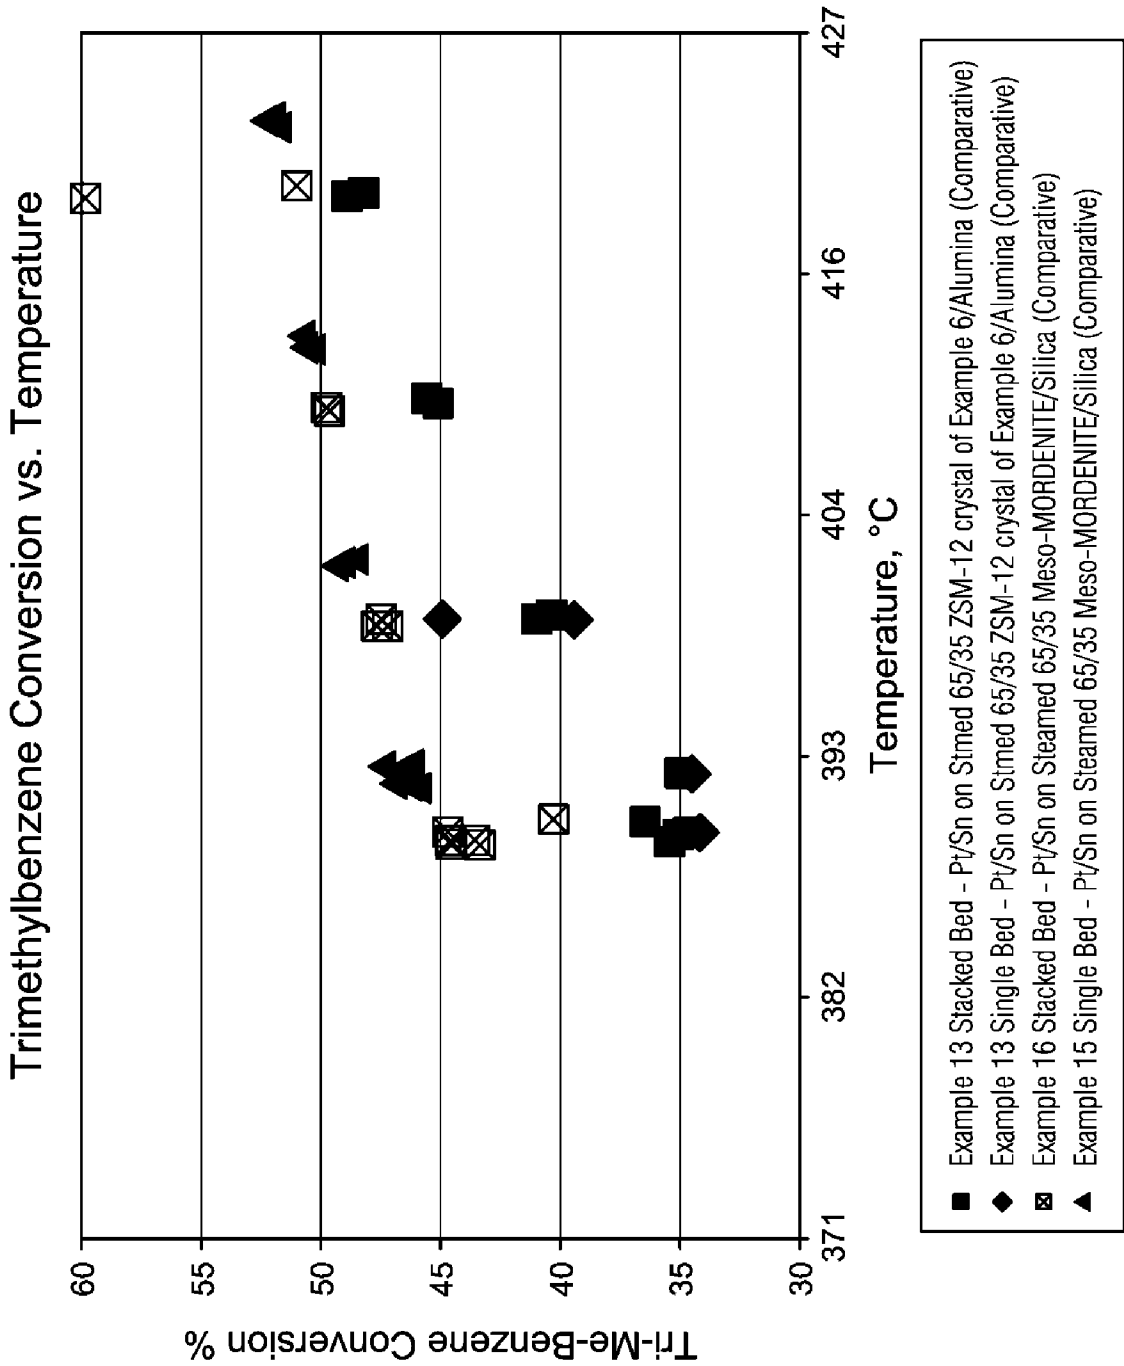


FIG. 12

10/15

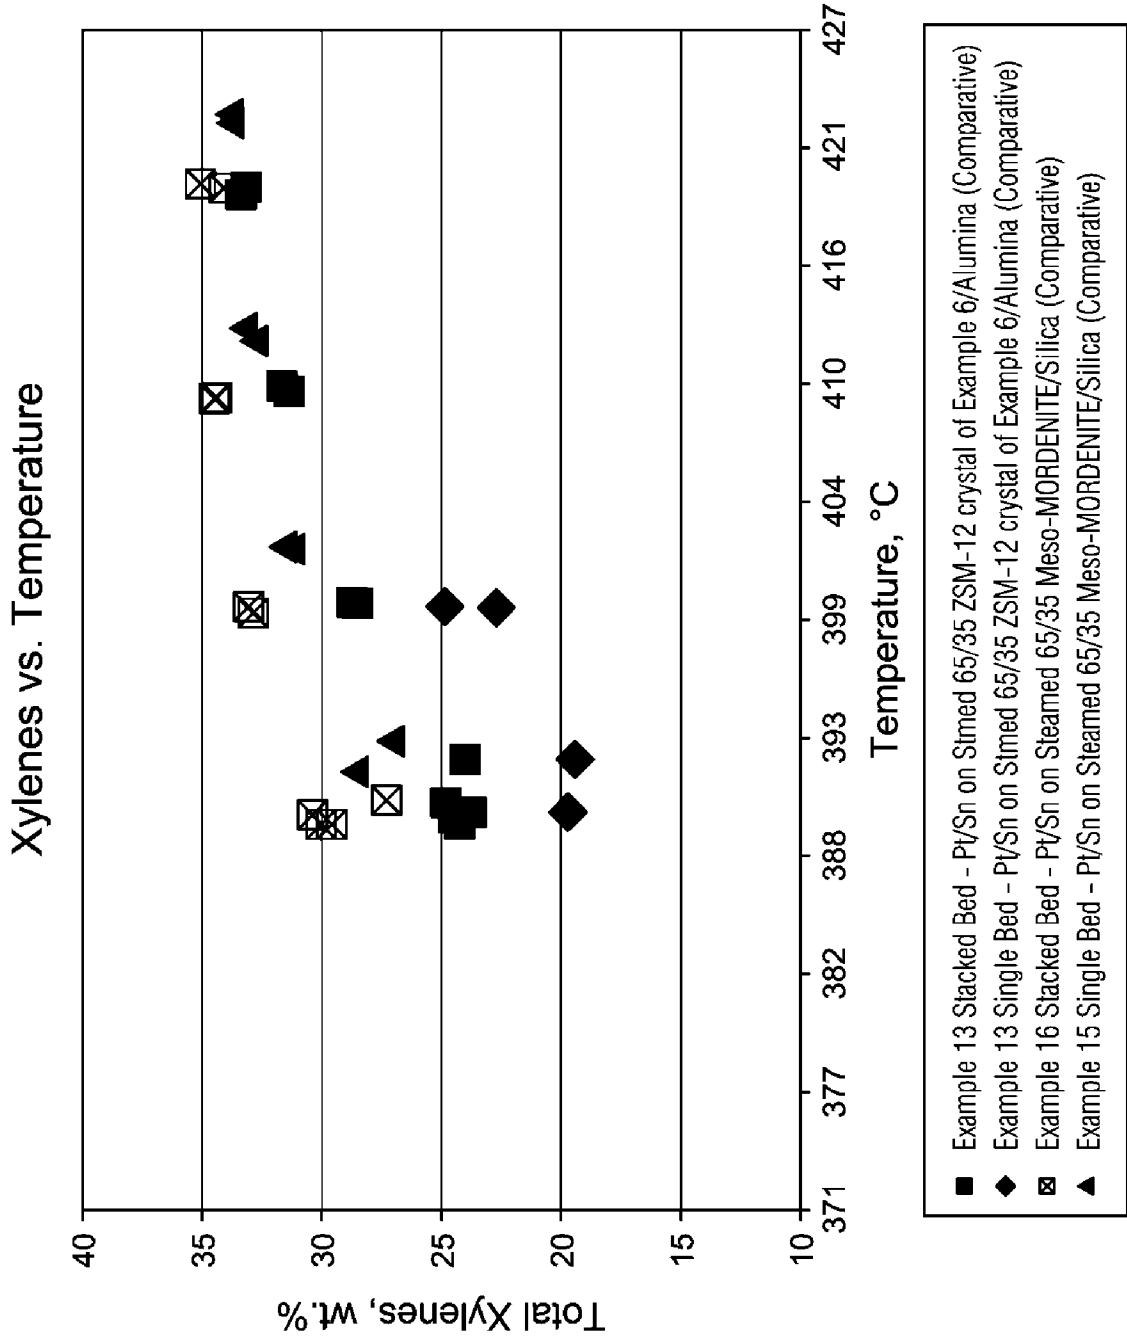


FIG. 13

C₉+ Conversion vs. Temperature

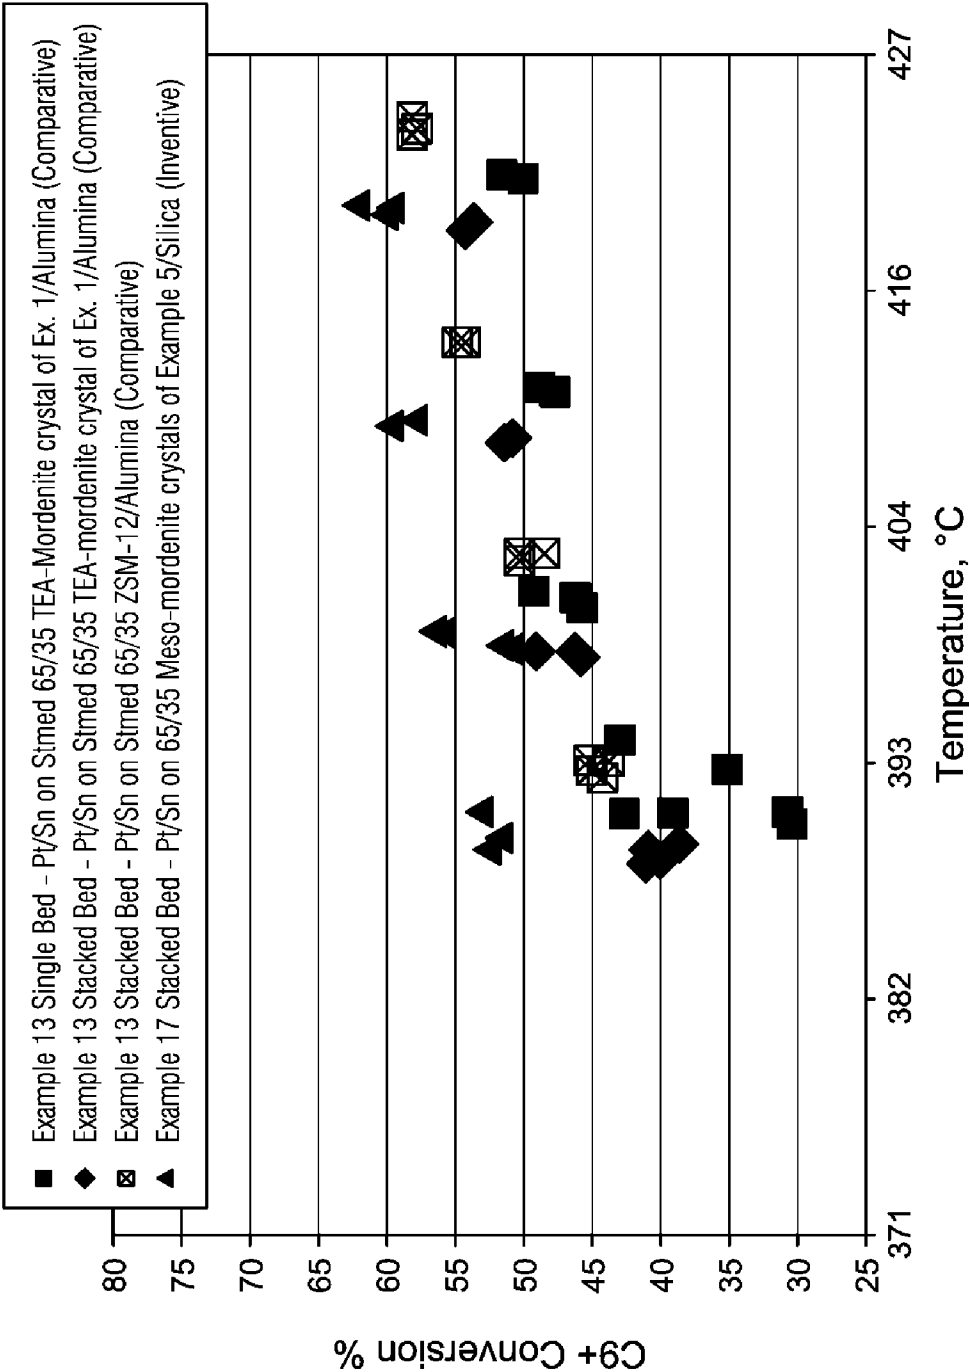


FIG. 14

12/15

Ethyl-Aromatic Conversion vs. Temperature

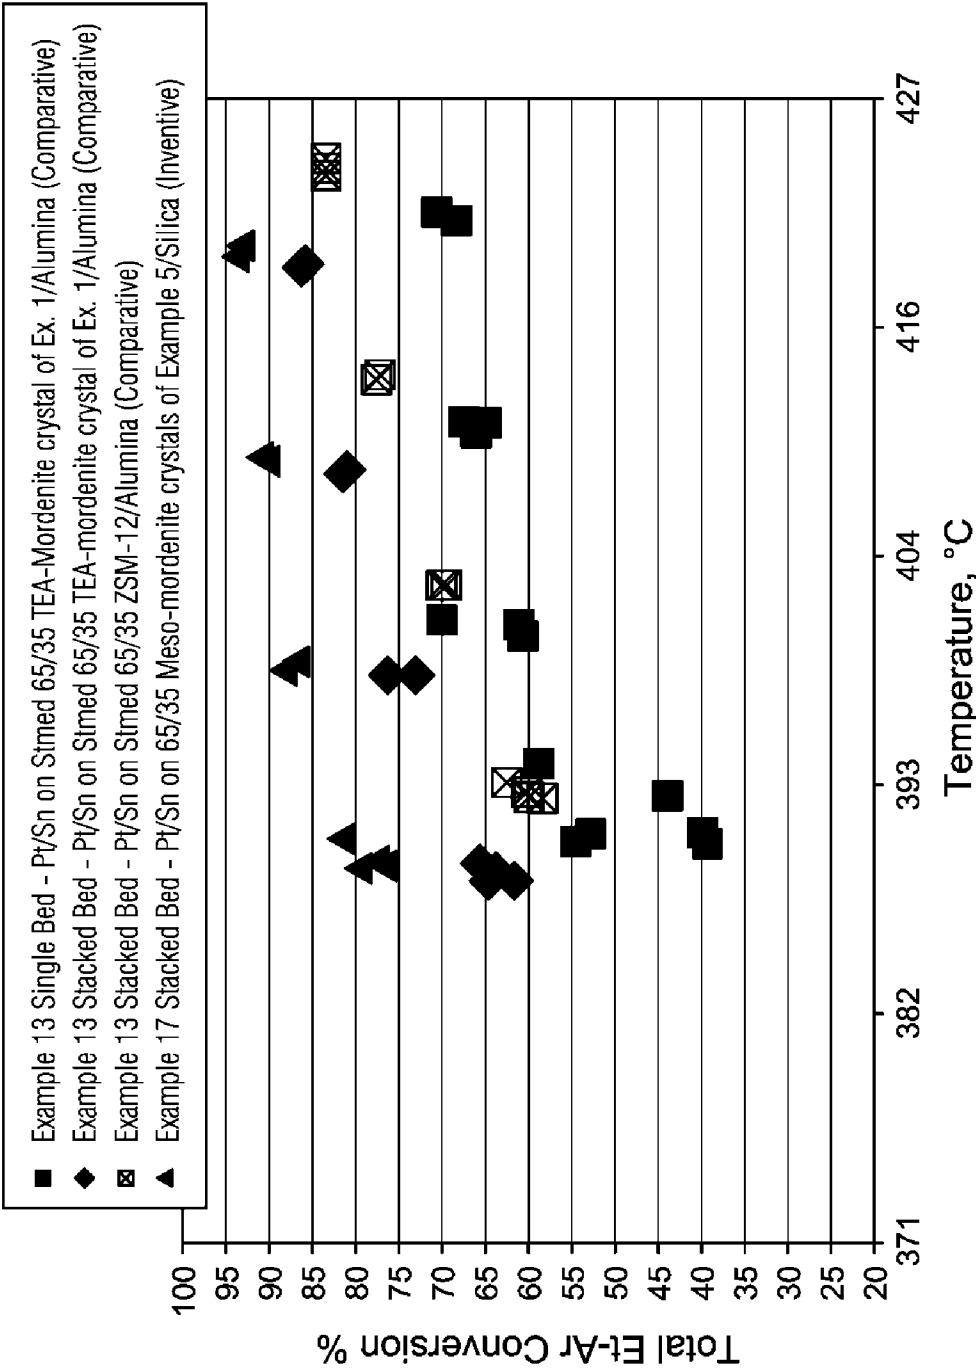


FIG. 15

Trimethylbenzene Conversion vs. Temperature

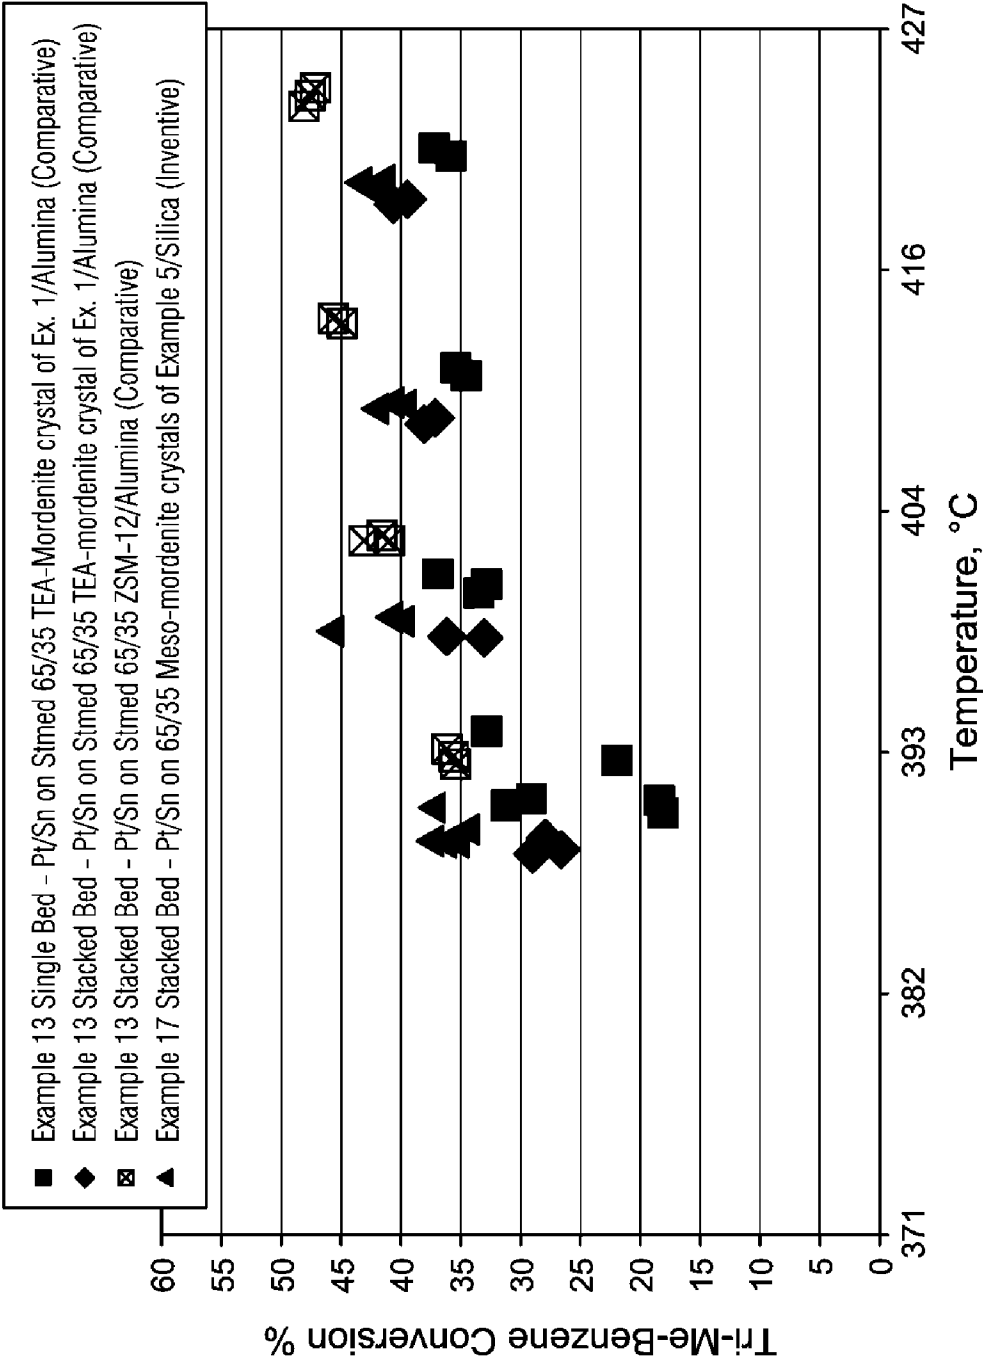


FIG. 16

Xylenes vs. Temperature

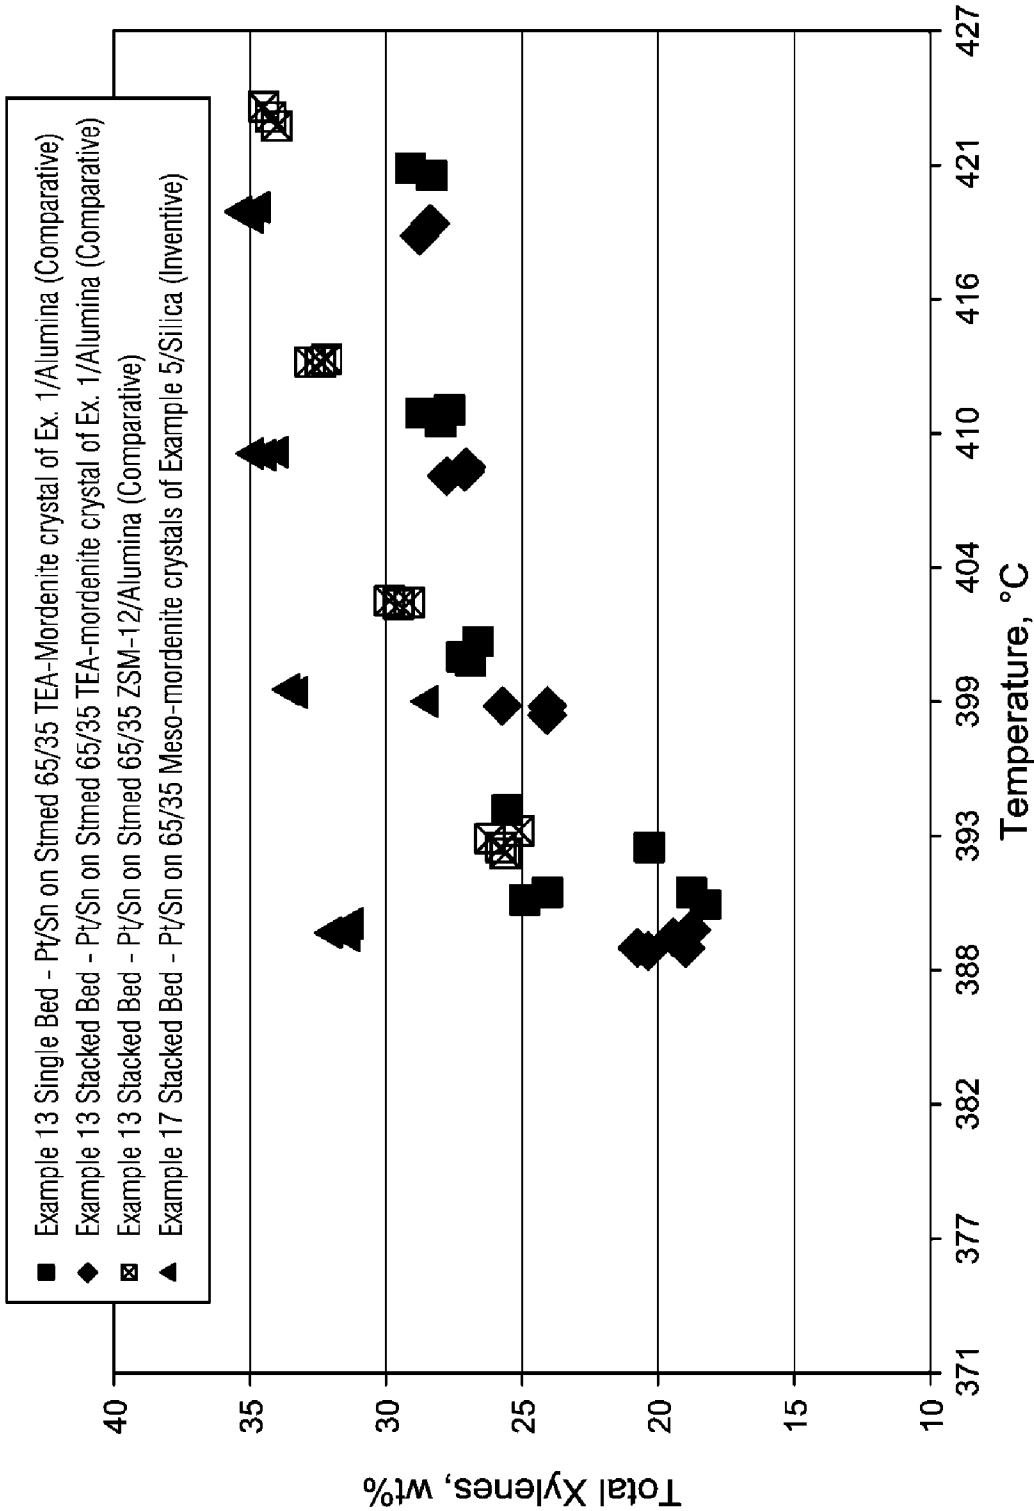


FIG. 17

BTX Yield vs. Temperature

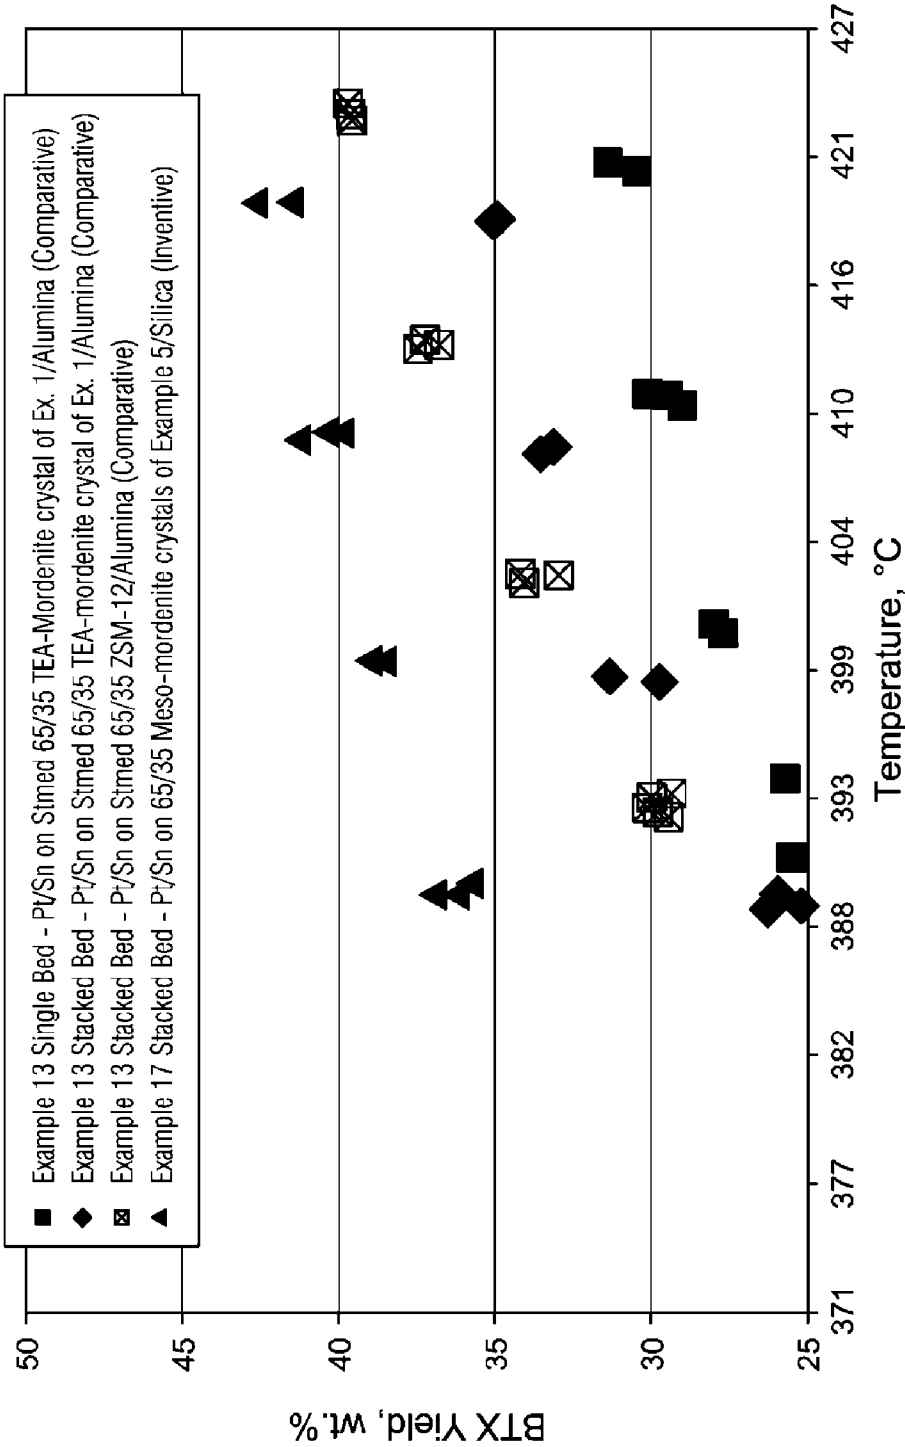


FIG. 18

A. CLASSIFICATION OF SUBJECT MATTER**B01J 29/40(2006.01)i, B01J 29/65(2006.01)i, B01J 29/18(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B01J 29/40; B01J 21/16; C07C 6/12; C07C 15/12; B01J 29/18; C07C 5/52; C07C 15/02; C01B 39/02; C07C 2/66; C01B 39/26; B01J 35/00; B01J 29/06; B01J 29/65

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords:double bed, mordenite, tetraethylammonium, nano size, mesopore surface area, Pt, Sn, alumina, catalyst, conversion, aromatic hydrocarbon

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2012-050748 A2 (UOP LLC) 19 April 2012 See examples 1-5; and claims 1, 2, 8, 9.	1-25
A	US 7687423 B2 (MOSCOSO, JAIME G. et al.) 30 March 2010 See examples 1, 2; and claims 1-4.	1-25
A	US 2003-0036670 A1 (OH, SEUNG-HOON et al.) 20 February 2003 See paragraphs [0036], [0059], [0066]; claim 1; and table 1.	1-25
A	US 7148391 B1 (BUCHANAN, JOHN SCOTT et al.) 12 December 2006 See column 3, lines 16-57; and claims 1-17.	1-25
A	US 2007-0185356 A1 (BOLDINGH, EDWIN P. et al.) 09 August 2007 See paragraphs [0039]-[0042]; and claims 1-15.	1-25
A	WO 2008-147190 A1 (TECHNISCHE UNIVERSITEIT DELFT et al.) 04 December 2008 See page 7, line 24 - page 8, line 4; page 12, line 5; claims 1, 8-9; figure 2; and table 1.	1-25
A	CN 1666956 A (EAST CHINA UNIVERSITY OF SCIENCE & TECHNOLOGY) 14 September 2005 See page 3, lines 18-22; and example 3.	1-25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 May 2016 (30.05.2016)

Date of mailing of the international search report

30 May 2016 (30.05.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

CHO, Han Sol

Telephone No. +82-42-481-5580



INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2016/014591

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 03-049857 A1 (DOW GLOBAL TECHNOLOGIES INC.) 19 June 2003 See claims 1-12.	1-25
A	HINCAPIE, BEATRIZ O. et al., "Synthesis of mordenite nanocrystals," Microporous and Mesoporous Materials, 2004, vol. 67, pp. 19-26 See experimental section; results section; and figures 4, 5.	1-25
A	MARGITFALVI, J. L. et al., "Zeolite supported Sn-Pt catalysts prepared by surface reactions," Journal of Molecular Catalysis A: Chemical, 2000, vol. 162, pp. 209-226 See experimental section; and tables 1, 2.	1-25

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/014591

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2012-050748 A2	19/04/2012	TW 201217327 A US 2012-0083635 A1 US 2012-0277510 A1 US 8242321 B2 US 8350112 B2 WO 2012-050748 A3	01/05/2012 05/04/2012 01/11/2012 14/08/2012 08/01/2013 21/06/2012
US 7687423 B2	30/03/2010	CN 102066257 A CN 102066257 B EP 2288575 A2 EP 2288575 A4 JP 2011-525888 A JP 5676438 B2 KR 10-2011-0037975 A RU 2010-153237 A RU 2491121 C2 US 2009-0325785 A1 WO 2009-158233 A2 WO 2009-158233 A3	18/05/2011 11/09/2013 02/03/2011 10/12/2014 29/09/2011 25/02/2015 13/04/2011 27/06/2012 27/08/2013 31/12/2009 30/12/2009 25/03/2010
US 2003-0036670 A1	20/02/2003	CN 1122571 C CN 1337890 A EP 1144113 A1 EP 1144113 B1 EP 1640066 A1 EP 1640066 B1 JP 2002-533211 A JP 4351393 B2 KR 10-0297586 B1 KR 10-0328677 B1 KR 10-2000-0042461 A KR 10-2000-0060952 A US 6867340 B2 WO 00-38834 A1	01/10/2003 27/02/2002 17/10/2001 22/03/2006 29/03/2006 05/03/2008 08/10/2002 28/10/2009 22/09/2001 25/10/2002 15/07/2000 16/10/2000 15/03/2005 06/07/2000
US 7148391 B1	12/12/2006	AU 2003285913 A1 CA 2583223 A1 CA 2583223 C CN 101048229 A CN 1311059 C CN 1711341 A EP 1563040 A1 EP 1827686 A1 JP 2006-506434 A JP 2008-518778 A JP 5252685 B2 KR 10-2005-0086554 A KR 10-2007-0073866 A MY 140891 A	15/06/2004 18/05/2006 03/07/2012 03/10/2007 18/04/2007 21/12/2005 17/08/2005 05/09/2007 23/02/2006 05/06/2008 31/07/2013 30/08/2005 10/07/2007 29/01/2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/014591

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0185356 A1	09/08/2007	TW 200418571 A	01/10/2004
		TW 285561 A	21/08/2007
		TW 285561 B	21/08/2007
		TW I375592 B	01/11/2012
		US 2005-0065017 A1	24/03/2005
		US 2007-0055086 A1	08/03/2007
		US 7485763 B2	03/02/2009
		US 7553791 B2	30/06/2009
		WO 2004-046278 A1	03/06/2004
		WO 2006-052324 A1	18/05/2006
WO 2008-147190 A1	04/12/2008	CA 2583172 A1	15/12/2005
		CN 101379012 A	04/03/2009
		EP 1773489 A2	18/04/2007
		EP 1773489 A4	05/01/2011
		JP 2008-500168 A	10/01/2008
		MY 139270 A	30/09/2009
		TW I303997 B	11/12/2008
		US 2005-0266979 A1	01/12/2005
		US 2008-0221375 A1	11/09/2008
		US 7220885 B2	22/05/2007
		US 7393805 B2	01/07/2008
		US 7544849 B2	09/06/2009
		WO 2005-118136 A2	15/12/2005
		WO 2005-118136 A3	16/02/2006
CN 1666956 A	14/09/2005	EP 2000435 A1	10/12/2008
		EP 2014619 A2	14/01/2009
WO 03-049857 A1	19/06/2003	None	
		AU 2002342005 A1	23/06/2003
		BR 0214658 A	03/11/2004
		CA 2468534 A1	19/06/2003
		CN 1596151 A	16/03/2005
		EP 1455939 A1	15/09/2004
		JP 2005-511285 A	28/04/2005
		KR 10-2005-0034633 A	14/04/2005
		MX PA04005454 A	11/10/2004
		TW 200300752 A	16/06/2003
		US 2005-0038307 A1	17/02/2005