



(51) International Patent Classification:  
*H04L 29/06* (2006.01) *H04L 12/24* (2006.01)

(21) International Application Number:  
PCT/US2010/039535

(22) International Filing Date:  
22 June 2010 (22.06.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
12/774,626 5 May 2010 (05.05.2010) US

(71) Applicant (for all designated States except US): **CRA-  
DLE TECHNOLOGIES** [US/US]; 82 Pioneer Way,  
Suite 103, Mountain View, CA 94041 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NATARAJAN, Ra-  
machandran** [IN/US]; 1011 Richwood Dr, Cupertino,  
CA 95014 (US). **PATIL, Suhas, S.** [US/US]; 21647  
Rainbow Dr, Cupertino, CA 95014 (US).

(74) Agents: **VINCENT, Lester, J.** et al.; Blakely, Sokoloff,  
Taylor & Zafman LLP, 1279 Oakmead Parkway, Sunnys-  
vale, CA 94085-4040 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,  
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,  
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,  
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,  
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,  
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,  
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,  
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,  
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,  
LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,  
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CONTROL OF SECURITY APPLICATION IN A LAN FROM OUTSIDE THE LAN

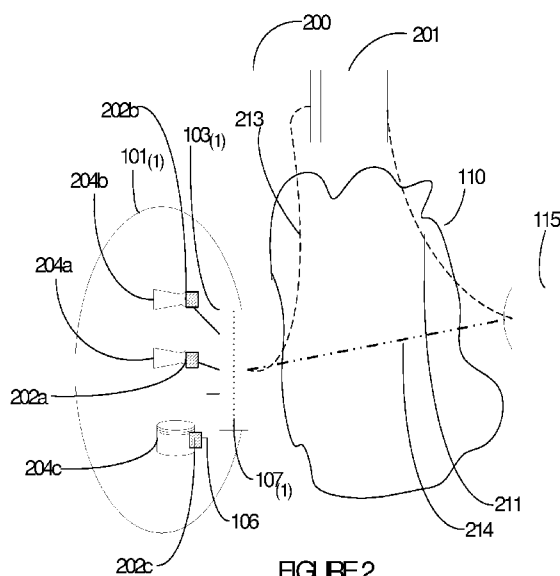


FIGURE 2

(57) Abstract: A method and a system are dis-  
closed wherein an address at the edge router  
(103) is used to establish a multi-pipe virtual pri-  
vate network (MVPN) (214) connecting con-  
trollers (115) to multiple web enabled end user  
devices (EUDs) (204) inside a security protected  
local area network (LAN) (101). The EUDs con-  
nect to a central server (CS) (201) outside the  
LAN during configuration establishing registra-  
tion and identity (ID) for each EUD. Once the  
EUDs establish connection from inside the LAN,  
the CS communicates with the EUDs using the  
address and ID provided during registration. The  
CS then acts as a facilitator establishing secure  
MVPN connection between controllers in the  
cloud and the EUDs inside the LAN. CS further  
acts as a pass through for those LANs that do not  
allow direct connections to controllers outside the  
LAN. The CS monitors the health of the overall  
system once connectivity is established.

## **CONTROL OF SECURITY APPLICATION IN A LAN FROM OUTSIDE THE LAN**

### **BACKGROUND OF THE INVENTION**

#### **1. Field of the Invention**

The invention relates to controlling and monitoring multiple processors and web enabled devices of a network that are within a secure LAN from outside the LAN without degrading the security at the edge and specifically to connecting to security cameras and security devices inside a secure LAN for monitoring and control from outside the LAN or from within another secure LAN.

#### **2. Prior Art**

In the current climate of competition and uncertainty, and because of the critical role computers and networked devices play and information they keep, it has become essential for all enterprises to have physical security covering the enterprise and network security covering internal network access and its periphery. Large enterprises tend to have their own internal security groups, which monitor network access within the company and also monitor the surrounding network continuously. Having internal security with an in-house security team is costly and this level of investment is not possible for smaller enterprises. These enterprises hence have to depend on an external security-monitoring group or company to handle the physical security within the enterprise through network connected security devices. Such groups have to have the ability to access, configure and monitor the networked devices and access monitoring devices installed within the network perimeter of the enterprise used to monitor the physical security of the LANs. Besides computers the networked devices on the networked end user devices (EUDs) include wide variety of devices such as media servers, monitoring and control devices for energy management and devices for physical security monitoring such as IP cameras, network video recorders and access control devices.

Typically, the security monitoring companies handle security for multiple enterprises simultaneously. The monitoring of the physical security devices in these cases is done via the internet. Hence the security companies require access to any secure local

area networks (LANs) that the enterprise has, and the ability to connect to the end customer specific security devices or end user devices (EUD), installed within the enterprise, for the purpose of monitoring and control. Secure LANs typically control access to the units and devices in the LAN from outside with firewalls and other network security software to protect the connected devices and systems. In order to access devices for control from outside the edge router, that is the interface between the secure LAN and the internet, reconfiguration of the edge device is essential. This has multiple issues during installation and configuration of the end user devices. Firstly, there is a need to obtain an address for each EUD. If a static address is to be used, then there is the need to obtain the static internet protocol (IP) address and an associated fully qualified domain name (FQDN). If a dynamic IP address is to be used, it is obtained from the internet service provider (ISP), and in addition a dynamic domain name server or System (DNS) address is also needed. Secondly, there is a need to enable connection to each of the EUDs. This requires opening certain/multiple ports on the edge routers facing the internet and forwarding these ports to the end customer devices. For example, if a web server or processor is running on the end-customer device, then port 80 of the router facing the internet should be forwarded to the device.

In certain high security systems, secure one to one connections are established between a device outside the secure LAN to a device within the LAN by establishing a secure data pipe between the two device entities. These pipes called virtual private networks (VPNs) are able to provide connections between individual devices with high security. The typical use of these VPNs is for secure communication purposes. The current VPNs still require individual connection through available ports on the edge routers and have the same limitations and impact on LAN.

There are several issues associated with port forwarding in networks to achieve connectivity. Multiple devices cannot use the same IP address and therefore multiple IP addresses have to be acquired from the ISP. For example, if two web servers based EUDs are located inside the customer premises, then only one of them can be visible using the default hypertext transfer protocol (HTTP) via the port. The second web server has to run on a different port and thus cannot be accessed from a web client without modifying the uniform resource locator (URL), i.e, adding another port to the URL. Opening ports on the routers is a security risk that is difficult for the enterprise to accept- open ports allow

hackers a chance to get in without being stopped by the firewall security protection. This means the end customer devices should be able to run firewalls to prevent hackers from entering the system. This makes the end customer devices more expensive and even then the security provided is not strong. Typically if the router administration is handled by the ISP or a network administrator, they may not be willing or available for installation work without additional payment, and hence additional cost. Opening ports needs technically qualified people who know networking protocols (what type of port to open etc.) and the router configuration details. Since connection using port forwarding is a one to one connection, in order to connect using port forwarding, web server based end customer devices have to be installed directly behind the edge router facing the internet. Hence there is a limit to the number of end customer devices that can be connected, as port availability is limited on the edge routers. If a customer already has a complex network topology with multiple routers in the network, then installation and configuration of the end customer devices in the system are very complex using the port forwarding method.

Fig. 1 is a block diagram 100 of a current installation of end customer devices 104a, 104b, 104c, within a secure LAN 101. The secure LAN 101 has an edge router 103 providing connectivity to the internet 110. Three end customer devices with processors 104a, 104b, 104c are inside the secure LAN 101 perimeter. A monitor controller 115 outside the secure LAN 101 is used to configure, monitor and control these secure devices 104a, 104b, 104c. In order for the monitor controller to connect to the end customer devices (EUDs) 104a, 104b, 104c inside the secure LAN 101 via the internet 110 it is necessary for each EUD to be connected to a forwarded port, device 104a connected via the forwarded port 102a of the edge router, device 104b connected via the forwarded port 102b, device 104c connected via forwarded port 102c, on the edge router 103. This port forwarding eliminates the checking and access control provided by the firewall 107 at the edge router 103 creating security risk to the secure LAN 101. Further in order for the monitor controller to access the respective forwarded ports 102a, 102b and 102c individual URLs enabling connection 111a, 111b, 111c, through the internet 110 are necessary. Hence these connections are considered as independent connections 111a, 111b, 111c respectively through the internet 110. As the number of end customer devices increase and multiple LANs of an enterprise are covered this type of installation becomes very complicated and resource intensive as shown. It also increases the security risk to the enterprise.

Hence it would be advantageous in any network to have a different and easier way to install and configure the EUDs and provide access to them via the edge router for monitoring and control from outside the LAN through the internet. It would be of additional advantage if multiple devices can be accessed for monitoring and control simultaneously without tying up additional ports on the edge router and enabling independent URLs for establishing the connections. It would be further advantageous to eliminate the need for port forwarding at the edge routers to eliminate the security concerns of the enterprise. It would be further advantageous to have the capability to continuously monitor the system performance and health once connections are established.

### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a typical prior art implementation connecting processors inside a secure LAN to a monitor and controller outside using port forwarding at the edge router.

Fig. 2 is a block diagram of the current invention using a central server as facilitator to enable connection without port forwarding.

Fig. 2A is a block diagram of the current invention using a central server enabling connection of EUDs inside a secure LAN to monitor controller inside another secure LAN.

Fig. 3 is a flowchart of the sequence of operations to enable connection between the EUDs inside a secure LAN and the monitor controller outside that secure LAN, as per the invention.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A method and a system are disclosed that enable an address at the edge router to be used to establish a multi-pipe virtual private network (MVPN) connecting controllers to multiple web enabled end user devices (EUDs) inside a security protected local area network (LAN). The EUDs connect to a central server (CS) outside the LAN during configuration establishing registration and identity (ID) for each EUD. Once the EUDs establish connection from inside the LAN, the CS is enabled to communicate with the EUDs using the address and ID provided during registration. The CS then acts as a

facilitator establishing secure VPN connection between controllers in the cloud and the EUDs inside the LAN. CS further acts as a pass through for those LANs that do not allow direct connections to controllers outside the LAN. The CS continues to monitor the health of the overall system once connectivity is established.

This connection can be established as a secure tunnel, in the form of MVPN with the capability to handle multiple connections from the EUDs to the controller simultaneously, it uses only a single address at the edge router of the LAN. This MVPN due to its secure nature is able to provide the high security that is needed for the data being transmitted through the cloud while allowing connection to multiple EUDs within the LAN. The CS can also act as a pass through for those LANs that do not allow direct connections from within the LAN to controllers outside the LAN. Also, multiple Central Servers could be deployed for scalability.

There are a number of advantages to using a central server that is a dedicated and secure server to mediate establishment of the secure connection or MVPN connection. Firstly, the use of the central server removes the need for port forwarding – multiple EUDs can be installed behind routers and each can be accessed securely and independently from the internet. This is due to the established registration within IDs that can be used to access them individually. Secondly, the central server by being a dedicated and secure central server, eliminates a lot of the security concerns of the users of the systems during the establishment of the connections. Thirdly, the central server acts as an intermediary for setting up secure pipe connections between monitor controllers and EUDs within a secure LAN in the form of MVPN. These connections protect the data during transport through the cloud from and to the controller and EUDs. Where the connections are not allowed the central server acts as a relay server between the monitor controller and EUDs to allow secure dual MVPN connection for monitoring and control without reconfiguration of the router. Fourthly, the central server acts as a dedicated identifying server (IDS) for the system where the IDS may also be enabled as a dedicated domain name system (DNS) server eliminating the need for the EUDs to get dynamic DNS names and internet protocol (IP) addresses from external sources when needed. Fifthly, once the secure connections are established, the central server is freed to oversee the system health of the security monitoring and sends information via email/short message service (SMS) to inform the physical security-management company of any failures of EUDs or storage devices so that

any lost connections can be reestablished fast and repairs can be undertaken speedily. Lastly, the central server is a back up device that can help the system recover from any crashes.

Fig. 2 is an exemplary and non-limiting block diagram 200 of the invention. According to the principles of the invention a secure dedicated central server 201, installed outside the secure LAN 101(1) and equipped with dedicated software, enables it to communicate with the EUDs 204a, 204b, 204c, and retain the connection once an initial connection is established. The central server is also enabled as a IDS to provide the necessary identification and any domain and IP addresses resolution to the EUDs (S302). This eliminates the need for the EUDs 204a, 204b, 204c, to acquire from outside sources, static IP addresses or Dynamic DNS names making the system more secure. The disclosed system uses network address translation (NAT) traversal to enable and retain connectivity between the end user devices 204a, or 204b, or 204c, and the central server 201. For this purpose, the EUDs 204a, 204b, 204c themselves have proprietary NAT traversal modules (NATTM), 202a, 202b, 202c, embedded in them. In a typical installation and configuration sequence, the NATTM 202a, 202b, 202c, enable connection of the EUDs 204a, 204b, 204c, within the LAN 101(1) to the dedicated central server 201 directly, through the edge router 103(1) with the fire wall 107(1) and the internet 110. These EUDs 204a, 204b, 204c, also register with the central server 201 during configuration to establish a permanent connection. The registration with the central server 201 includes providing the central server 201 information on the identity (ID) of each of the EUDs, 204a, 204b, 204c, the type of NAT traversal configuration at the edge router 103(1), and the address of the EUDs 204a, 204b, 204c. Once the external connection 213 with registration is initiated and established by the EUDs 204a, 204b, 204c, to the central server 201, the connection 213 is considered secure. Hence the central server 201 is able to maintain the connection 213 and communicate with the EUDs 204a, 204b, 204c, through the edge router 103(1) with the firewall 107(1) enabled. Once this external connection to the central server 201 is established, the monitor controller 115 can connect to the central server via the internet connection 211 and provide the monitoring and control functions for the EUDs 204a, 204b, 204c. The central server now acts as a facilitator or mediator to establish the direct secure tunnel or MVPN 214, between the controller 115 and the EUDs 204a, 204b and 204c.

Since the connections between the central server 201 and the web enabled devices within the LAN 101(1), as well as the monitor controller 115 are permanent connections with registration for security, even after the establishment of the secure tunnel or MVPN 214, it enables connection of other such systems in the same LAN and other LANS. The CS 201 is also able to monitor the health of the systems so connected. The permanent connection allows the central server 201 to identify system problems immediately as they happen and take remedial action or inform the administrator for manual action. The central server 201 also acts as a backup storage for security data for the systems it is connected to as it has established permanent secure connection to the devices.

If the monitor controller 115 is within a second secure LAN 101(2) the procedure to enable connection of the monitor controller 115 to the central server is through an edge router 103(2) with firewall 107(2) of the second LAN 101(2) and the internet 110. Fig. 2A shows the block diagram of such a system. In this case the finally established secure tunnel or MVPN 214 will have to have its ends in the separate LANs 101(1) and 101(2). To enable this, the secure server connects on one side to the web enabled security devices and on the other to the monitor controller in a secure fashion. Both the web enabled device and the monitor controller have to complete registration and receive individual IDs from the CS before direct secure MVPN 214 connection can be established through firewalls of the respective LANs 101(1) and 101(2).

In the special case where both EUDs and the monitor controller are behind symmetric NATs then the punch through connection may not work and the connection has to be continued through the central server 201. That is, the central server transfers data from the EUDs 204a, 204b, 204c, to the monitor controller 115 and transfers control and support data back to the EUD 204a, 204b, 204c, from monitor controller 115.

In other cases of connections with non-symmetric NAT implementations, once the initial connections and registration have been established, the central server 201 can in most cases act as a facilitator, to enable direct MVPN connection between the monitor controller 115 and the EUDs 204a, 204b, 204c. Complex NAT traversal algorithms are used to enable these secure connections using user datagram protocol (UDP) or transmission control protocol (TCP) hole punch techniques. Typically this is done by establishing the MVPN connection 214 between NAT modules on either side. One end of the secure tunnel



connects to the EUDs 204a, 204b, 204c, and the other end connects to the monitoring control 115. The establishment of the MVPN connection 214 is done with the help of the mediating central server 201. Once established the MVPN connection 214 enables the monitor controller 115 to directly communicate to the EUDs 204a, 204b, 204c, without going through the central server 201. This releases the central server 201 to handle other operations as necessary.

Such an implementation of the invention enables easy and secure connection of the EUDs, 204a, 204b, 204c, within a secure LAN 101(1), to the monitor controller 115. The use of a dedicated and secure CS 201 as a facilitator to establish direct connection via UDP or TCP initiated MVPN tunnel 214 without port forwarding requirements allow the security of the secure LAN to be enhanced by use of the fire walls 107. The use of the secure server 201 as a dedicated IDS, acting where needed as a secure DNS server, further reduces the complexity of providing addresses and establishing connections to the EUDs within the secure LAN 101(1). This invention hence provides for easy installation and commissioning for monitoring and control of EUDs 204a, 204b, 204c, within secure LAN 101(1) without compromising the security of the secure LAN 101(1).

Fig. 3, comprising of S301 to S307, is an exemplary and non-limiting flowchart 300 of the establishment of connection between the monitor controller 115 and the EUD 204a, 204b, 204c, discussed below in more detail.

In S301 – Installing a computing unit configured as a server outside the secure LAN 101(1), with software necessary to establish connectivity to EUDs 204a, 204b, 204c, that are inside the secure LAN 101(1). Server is made a secure, dedicated central server 201 with installed proprietary software. This central server 201 is enabled also to act as an IDS to provide the identification to the EUDs 204a, 204b, 204c, as well as a DNS server when and if needed providing the necessary addresses to the EUDs 204a, 204b, 204c.

In S302 – Installing required number of EUDs 204a, 204b, 204c, with specialized and proprietary software, the NATTM software 202a, 202b, 202c, within the secure LAN 101(1). The NATTM software 202a, 202b, 202c, enable the EUDs 204a, 204b, 204c, to connect to the central server 201 outside the secure LAN 101(1) through the firewall 107(1) enabled edge router 103(1).

In S303 – During installation and configuration of the EUDs 204a, 204b, 204c, connecting them to the central server 201 to register themselves with the central server by supplying the central server with their id, their address in the LAN and the type of NAT traversal configuration at the edge router 103(1).

In S304 – Enabling the central server to retain the connection with the EUDs 204a, 204b, 204c even through the firewall 107(1) enabled edge router 103(1), using the registration information available. Since the original connection to the central server was initiated by the EUDs 204a, 204b, 204c, within the secure LAN the connection is considered secure and trust worthy by the firewall.

In S305 – Allowing the monitor controller 115 to connect securely to the central server 201, the central server 201 enabled to facilitate pass through connection to and from the EUDs 204a, 204b, 204c, to the monitor controller 115 to exchange data. The monitor controller 115 thereby further enabled to continuously provide security monitoring of the EUDs 204a, 204b, 204c, to provide security control to the enterprise.

In S306 – Acting as a facilitator the central server 201 enables formation of a UDP tunnel or a TCP tunnel that is a direct secure tunnel or MVPN connection 214 between the monitor controller 115 and the EUDs 204a, 204b, 204c. The direct MVPN connection 214 is established only if the EUDs 204a, 204b, 204c and the monitor controllers 115 are not behind symmetric NATs. If the EUDs and the controller are behind symmetric NATs, formation of such peer to peer connections may not be possible.

In S307 –Allowing the monitor controller 115 to oversee the physical security of the enterprise using the EUDs 204a, 204b, 204c, directly, through the MVPN connection 214 while the central server 201 takes the task of monitoring the health of the connections and security system as a whole.

Even though not specifically detailed in this disclosure, the disclosed or similar systems can be established for managing the connectivity in other applications requiring secure connections to processing systems and web enabled systems within secure LANs. It can also be used in networks having LANs with limited port availability to establish secure connection to a number of entities within the LAN using the MVPN established with the

help and mediation of a secure central server to which each of the entities in the LAN are registered and have unique IDs assigned to them.

The invention disclosed hereinabove is described with respect to specific embodiments, with an example of security application, but other embodiments and applications of the invention are possible in other areas of the networking field without departing from the scope of the disclosed invention as will be known to the practitioners of the art. Any improvements and modifications of the invention that are possible without departing from the spirit of the invention are covered by the present disclosure. Furthermore implementations of the invention with different hardware, software, firmware and various combinations thereof are specifically included.

## CLAIMS

What is claimed is:

1. A security system comprising:
  - a secure LAN with an interface to the internet;
  - a server enabled to operate as a secure central server outside the secure LAN and further enabled to act as a dedicated identifying server;
  - at least a router that is an edge router, with firewall protection at an addressable interface with an internet coupled to the secure LAN;
  - a plurality of end user devices that are web enabled, coupled to said edge router from within the secure LAN and further enabled with a proprietary network address translation traversal modules; and
  - a monitor controller outside the secure LAN enabled to connect to said server via the internet;

such that the web enabled user devices inside at least the secure LAN are securely and communicatively coupled to at least said monitor controller outside of the secure LAN, using a multi-pipe virtual network, through said edge router enabled with firewall protection at said addressable interface.
2. The system of claim 1, wherein said network address translation traversal modules are enabled to connect, during an installation and configuration of said plurality end user devices, to said central server, and provide registration information comprising at least an ID, an address and a network address translation traversal configuration for each of the said plurality of end user devices.
3. The system of claim 2, wherein said central server is enabled to maintain connectivity to said plurality of end user devices to transfer data and control between said central server and said plurality of end user devices through said addressable interface of said edge router with said firewall protection engaged after said registration is complete.
4. The system of claim 2, wherein said monitor controller is enabled to connect directly through a secure tunnel forming a multi-pipe virtual private network, using user datagram protocol to said plurality of end user devices within the secure LAN with said

central server acting as a facilitator to establish said multi-pipe virtual private network connection.

5. The system of claim 2, wherein said monitor controller is enabled to connect directly through a secure tunnel forming a multi-pipe virtual private network, using transmission control protocol to said plurality of end user device within the secure LAN with said central server acting as a facilitator to establish said multi-pipe virtual private network connection.

6. The system of claim 1, wherein said monitor controller is enabled through said central server to connect to said plurality of end user devices for monitoring, managing and controlling said plurality of end user devices with said firewall engaged without reconfiguring said edge router.

7. A method of establishing a connection between a plurality of web enabled end user devices within a secure LAN and a monitor controller outside the secure LAN comprising:

- establishing and configuring a server outside the secure LAN with proprietary software to act as a dedicated and secure central server;

- configuring said central server to act as an identifying server;

- installing a proprietary software network address translation traversal module, in each of the plurality of web enabled end user devices within the secure LAN, enabling the plurality of web enabled end user devices to connect to said central server;

- establishing connection from the plurality of web enabled end user devices to said central server through a firewalled edge router at an addressable interface of the secure LAN and an internet using said network address translation traversal modules;

- each of the plurality of web enabled end user devices registering itself with said central server providing at least an ID, an address, and a network address translation traversal configuration;

- said central server establishing a permanent connection to the plurality of web enabled end user devices via a secure tunnel forming a multi-pipe virtual private network;

- said central server establishing a secure dedicated connection to the monitor controller via said internet; and

said central server enabling a pass through secure tunnel forming a multi-pipe virtual network connection from the monitor controller to the plurality of web enabled end user devices;

such that the said connection from the monitor controller to the plurality of web enabled end user devices is enabled through said addressable interface of said edge router, wherein a security fire wall is enabled, for continuous monitoring and control of the plurality of end user devices, without reconfiguring said edge router and compromising security of the secure LAN.

8. The method of claim 7, wherein said monitor controller is within a second secure LAN.

9. A method of establishing a connection between a plurality of web enabled end user devices within a secure LAN and a monitor controller outside the secure LAN comprising:

establishing and configuring a server outside the secure LAN with proprietary software to act as a dedicated and secure central server;

configuring said central server to act as an identifying server;

installing a proprietary software network address translation traversal module in each of the plurality of web enabled end user devices within the secure LAN, enabling each of the plurality of web enabled end user devices to connect to said central server;

establishing connection from each of the plurality of web enabled end user devices to said central server through a firewalled edge router at the interface of the secure LAN and an internet using said network address translation traversal modules;

each of the plurality of end user devices registering itself with said central server providing at least an ID, an address, and a network address translation traversal configuration;

said central server establishing a permanent connection to each of the plurality of web enabled end user devices;

said central server establishing a secure dedicated connection to the monitor controller via said internet;

said central server enabling a pass through secure connection from the monitor controller to the plurality of web enabled end user devices using a secure tunnel in the form of a multi-pipe virtual private network; and

said central server releasing monitoring of said secure LAN to said monitor controller;  
such that said monitor controller is enabled to monitor the plurality of web enabled end user devices and said central server is enabled to act as an overseeing monitor of said connection and health of said system.

10. The method of claim 9, wherein said monitor controller within a second secure LAN.

11. The method of claim 9, wherein said identifying server is enabled to act as a dedicated DNS server.

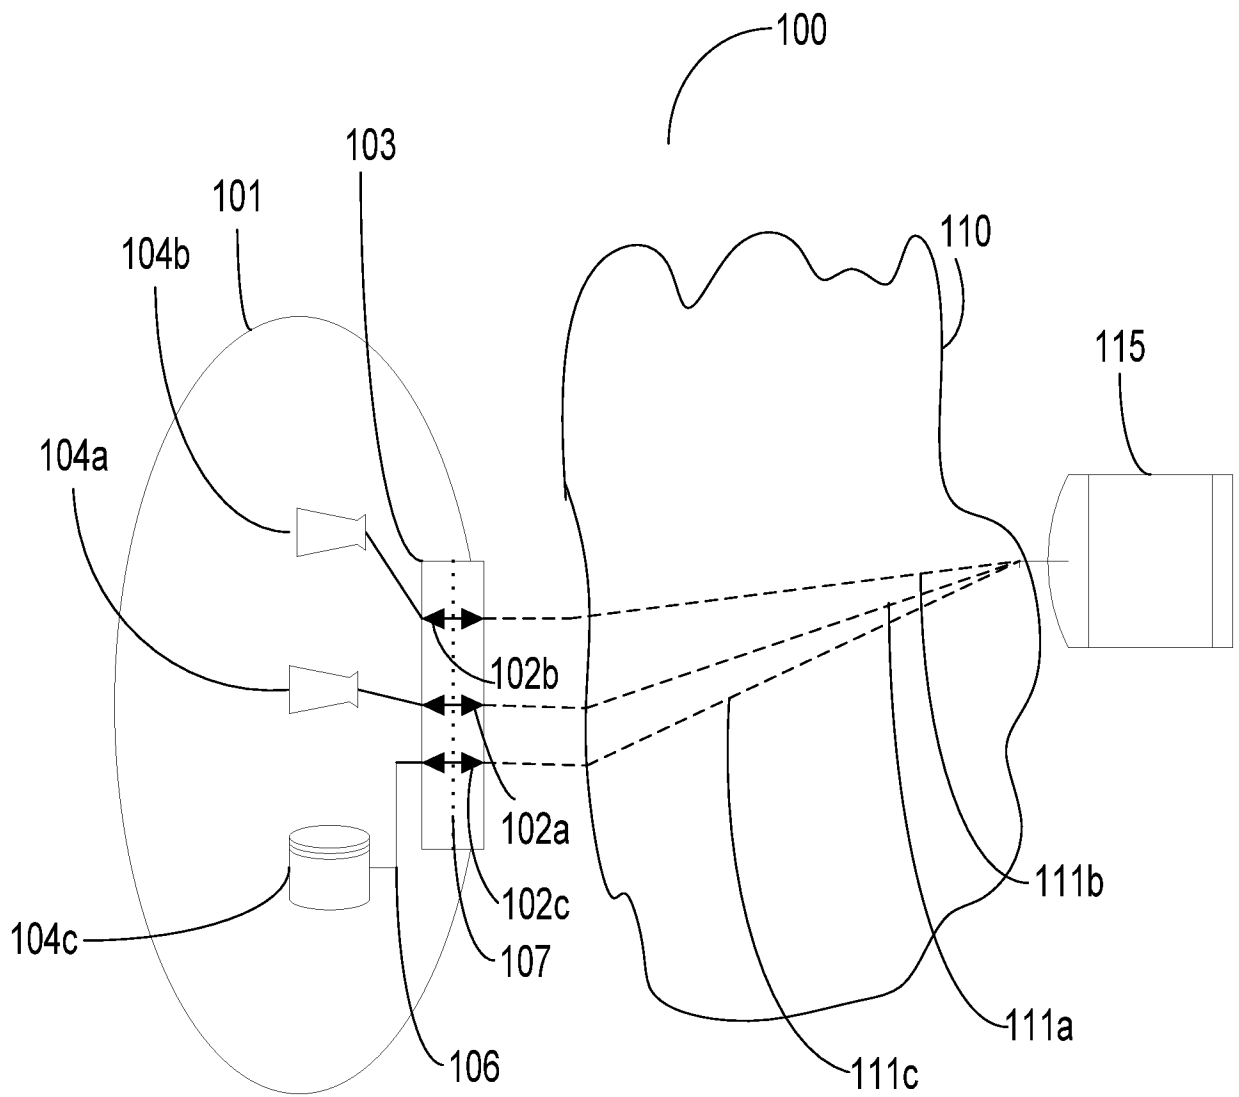
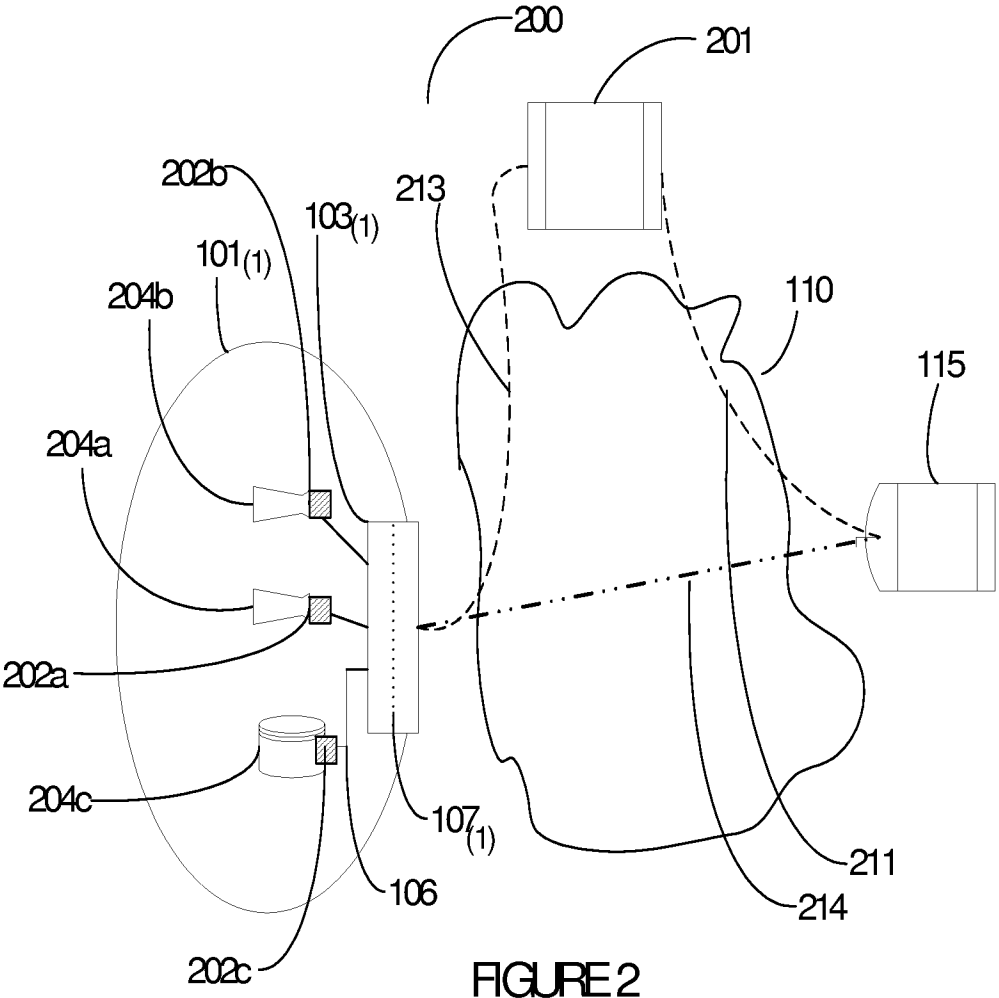


FIGURE 1  
(Prior art)





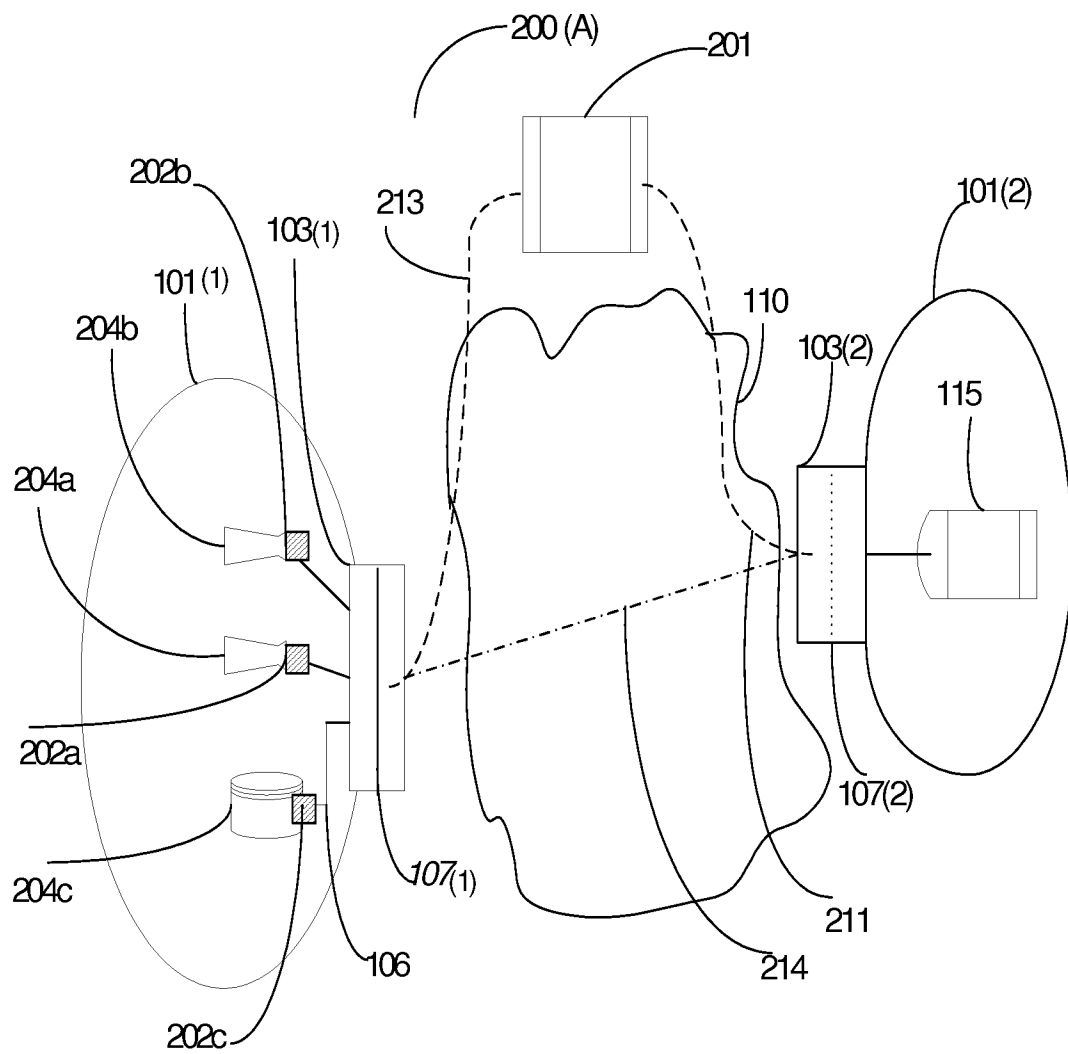


FIGURE 2A

4/4

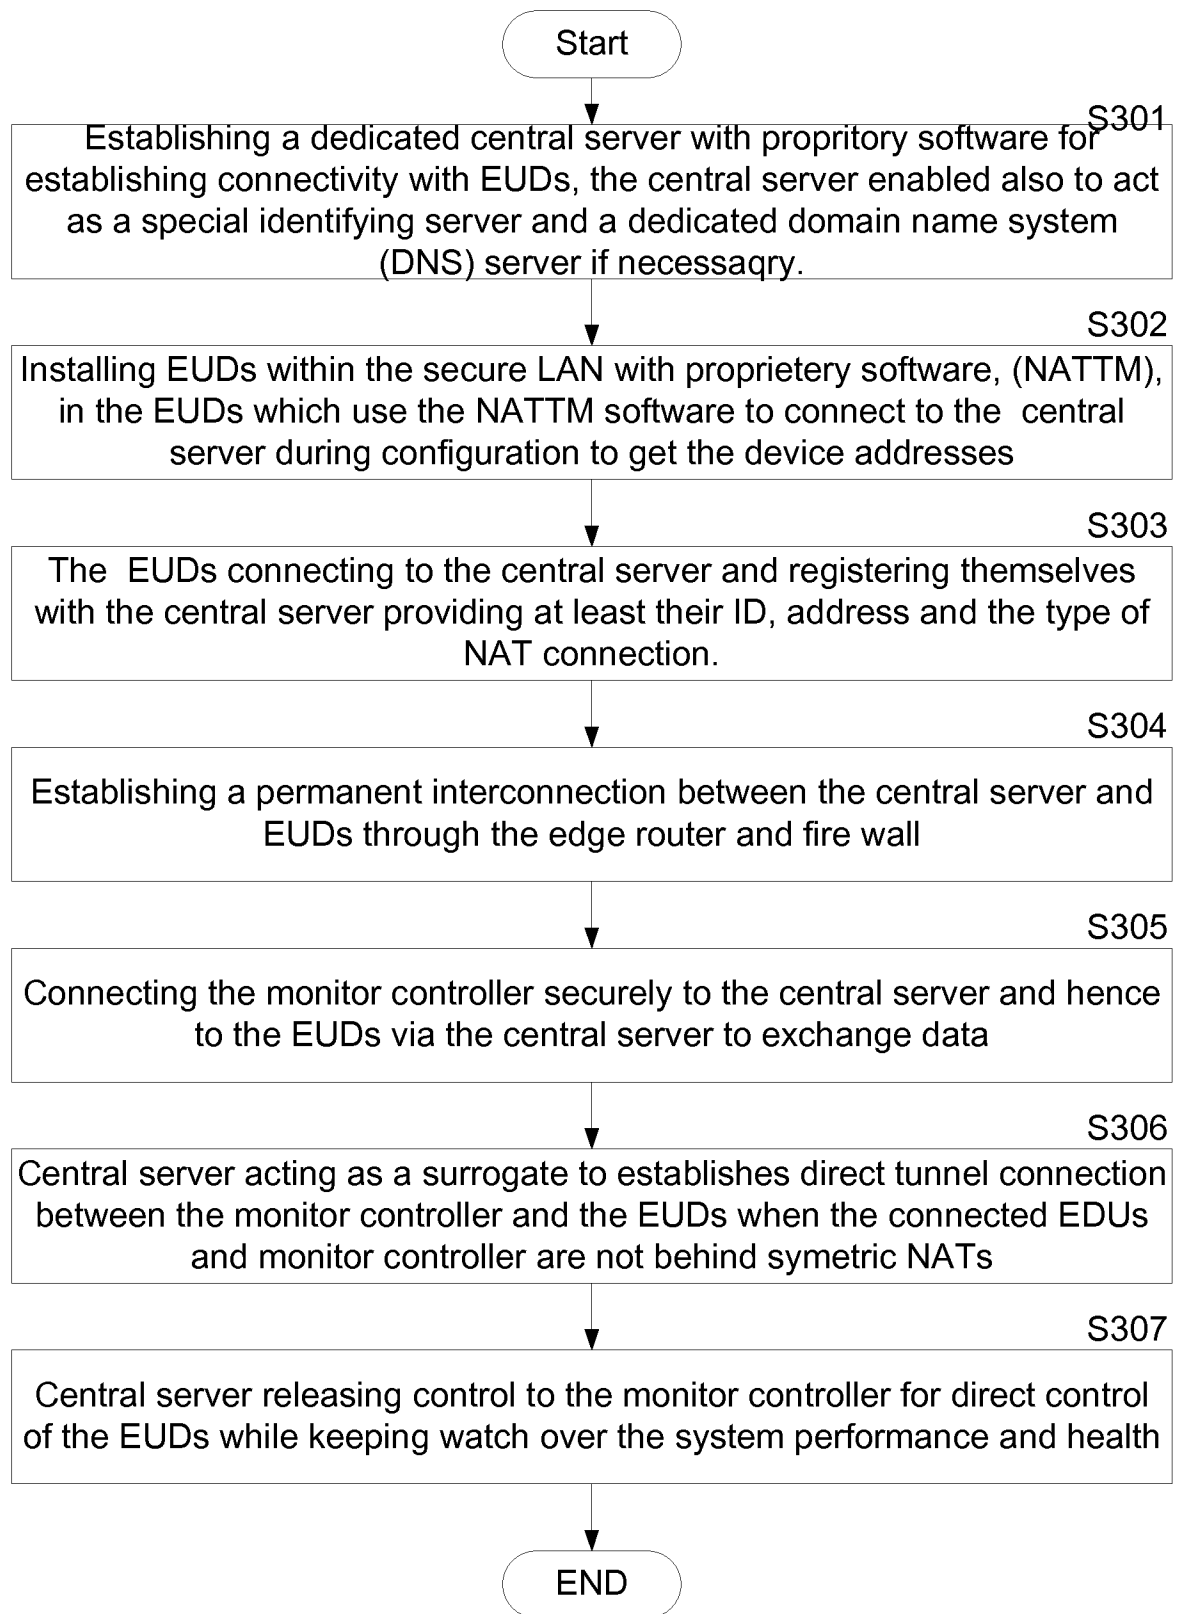


FIGURE 3

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2010/039535A. CLASSIFICATION OF SUBJECT MATTER  
INV. H04L29/06 H04L12/24  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/06963 A1 (FUSIONONE INC [US]) 24 January 2002 (2002-01-24) * abstract figure 2 page 1, line 10 - line 14 page 3, line 1 - line 18 page 5, line 1 - line 11 page 5, line 16 - page 6, line 5 page 6, line 8 - line 12 page 6, line 20 - page 7, line 14 page 7, line 19 - page 8, line 2 page 11, line 1 - line 2 page 11, line 9 - line 11 page 12, line 3 - line 5 page 12, line 12 - line 16 page 12, line 21 - page 18, line 20 ----- -/--	1-11



Further documents are listed in the continuation of Box C.



See patent family annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

27 January 2011

Date of mailing of the international search report

03/02/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Oliveira, Joel

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2010/039535

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 2009/029774 A1 (ANDREW CORP; KURK MORGAN [US]; JOVANOVIĆ MILUN [DE]; PISCHKE ARNDT [DE] 5 March 2009 (2009-03-05) * abstract paragraph [0002] paragraph [0005] - paragraph [0006] paragraph [0015] paragraph [0018] paragraph [0025] paragraph [0028] - paragraph [0029] paragraph [0035] paragraph [0039] -----</p>	1-11

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/039535

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0206963	A1	24-01-2002	NONE
WO 2009029774	A1	05-03-2009	US 2009059837 A1 05-03-2009