

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number  
**WO 2004/085945 A1**

(51) International Patent Classification<sup>7</sup>: **F28D 1/03**,  
F28F 3/02, 3/04

(74) Agent: **RIDOUT & MAYBEE LLP**; One Queen Street  
East, Suite 2400, Toronto, Ontario M5C 3B1 (CA).

(21) International Application Number:  
PCT/CA2004/000430

(22) International Filing Date: 23 March 2004 (23.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2,423,193 24 March 2003 (24.03.2003) CA

(71) Applicant (for all designated States except US): **DANA  
CANADA CORPORATION** [CA/CA]; 656 Kerr Street,  
Oakville, Ontario L6K 3E4 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WU, Alan Ka-Ming**  
[CA/CA]; 66 Bechtel Dr., Kitchener, Ontario N2P 1S8  
(CA). **MARTIN, Michael, A.** [CA/CA]; 802-30 Speers  
Road, Oakville, Ontario L6K 2E4 (CA).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: LATERAL PLATE SURFACE COOLED HEAT EXCHANGER

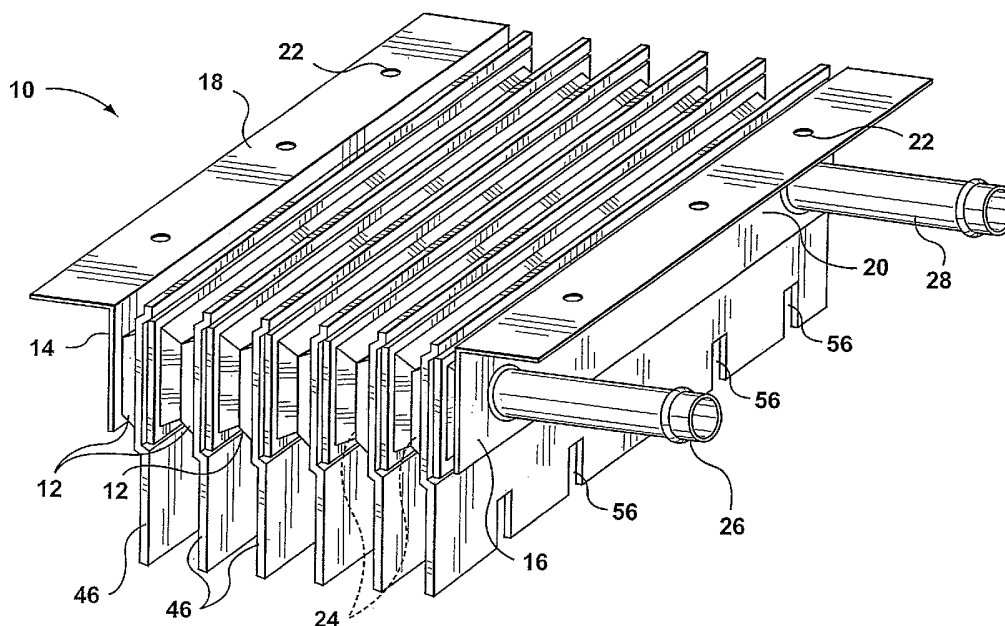

(57) Abstract: A surface cooled heat exchanger including a stack of elongate plate pairs, each plate pair including first and second plates having elongate central portions surrounded by sealably joined edge portions with a fluid passage defined between the central portions; each plate pair having spaced apart inlet and outlet openings that are connected together for the flow of fluid through the fluid passages; each plate pair having an exposed fin plate extending peripherally outward from the joined edge portions along a length of the plate pair. Each fin plate may have a varying edge profile along an outwardly extending edge thereof.

WO 2004/085945 A1



- 
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## LATERAL PLATE SURFACE COOLED HEAT EXCHANGER

### **BACKGROUND OF THE INVENTION**

5           The present invention relates to surface cooled heat exchangers used for cooling fluid.

          Surface cooled heat exchangers are often used in applications where the height clearance for a heat exchanger is quite low, for example, slush box engine coolant coolers in snowmobiles, and under-body mounted fuel coolers in  
10   automotive applications. One style of known surface cooled heat exchangers are extrusion formed devices that include fins integrally extruded with top and bottom walls that are connected along opposite sides to define a cavity that is welded shut at opposite ends after extrusion to provide a fluid cooling container. An example of such a heat exchanger for use as a rear cooler on a snowmobile can  
15   be seen in U.S. Patent no. 6,109,217 issued August 29, 2000. In extrusion formed coolers, the extrusion process makes it difficult to include fluid circuiting baffles or turbulizers within the cavity.

          Known low profile surface cooled heat exchangers can be heavy and can be relatively expensive to manufacture. Thus, there is a need for a surface cooled  
20   heat exchanger that is relatively light-weight and relatively cost efficient to manufacture. Also desired is a surface cooled heat exchanger that can be manufactured in a range of sizes with little tooling changes, and in which flow circuiting can be easily incorporated.

### 25   **SUMMARY OF THE INVENTION**

          According to one aspect of the invention, there is provided a surface cooled heat exchanger that includes a stack of elongate plate pairs, each plate pair including first and second plates having elongate central portions surrounded by sealably joined edge portions with a fluid passage defined between the central  
30   portions; each plate pair having spaced apart inlet and outlet openings that are connected together for the flow of fluid through the fluid passages; each plate pair having an exposed fin plate extending peripherally outward from the joined edge

portions along a length of the plate pair. Each fin plate preferably has a varying profile along a length thereof.

According to another aspect of the invention, there is provided a cooler for cooling snowmobile engine coolant. The cooler includes a stack of elongate plate pairs, each plate pair including first and second plates that are joined together to define an elongate sealed internal passage for the engine coolant having spaced apart inlet and outlet openings, each plate pair including an enlarged exposed fin plate portion located adjacent a substantial length of the internal passage for receiving materials flung by a drive track of the snowmobile, and mounting bracket means connected to the stack of plate pairs for securing the stack to the snowmobile.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Preferred embodiments of the present invention will be described, by way of example with reference to the following drawings.

Figure 1 is a perspective view of a plate pair heat exchanger according to embodiments of the invention.

Figure 2 is a top plan view of the heat exchanger of Figure 1.

Figure 3 is a diagrammatic illustration of a snowmobile having a heat exchanger according to the present invention.

Figure 4 is a side elevation of a single plate pair of the heat exchanger of Figure 1.

Figure 5A is a sectional view of the plate pair, taken along lines V-V of Figure 4.

Figure 5B is a sectional view of an alternative embodiment of the plate pair.

Figures 6A-6D are partial perspective views of plate pairs of the heat exchanger showing alternative forms of edge enhancements.

Figure 7 is a side elevation of a single plate pair according to a further embodiment of the invention.

Figure 8 is a sectional view of the plate pair of Figure 7, taken along lines VIII-VIII of Figure 7.

Figure 9 is a bottom view of a heat exchanger according to another embodiment of the invention.

- 5 Figure 10 is a side elevation of a plate pair of the heat exchanger of Figure 9.

Figure 11 is a sectional view of the plate pair, taken along line XI-XI of Figure 10.

Figure 12 is a further sectional view, taken along the line XII-XII of Figure 10.

Figure 13 is an end view of a heat exchanger according to a further embodiment of the invention.

- 10 Figure 14 is a perspective view of the heat exchanger of Figure 13.

Figure 15 is a side view of a heat exchanger according to yet another embodiment of the invention.

Figure 16 is a top plan view of an alternative embodiment of the heat exchanger of Figure 1.

- 15 Figure 17 is a top plan view of a further alternative embodiment of the heat exchanger of Figure 1.

## **DESCRIPTION OF THE PREFERRED EMBODIMENTS**

- 20 Referring to Figure 1, a heat exchanger according to preferred embodiments of the invention is indicated generally by reference numeral 10. Heat exchanger 10 is formed from a plurality of parallel plate pairs 12, which are sandwiched between first and second end support plates 14, 16. The end support plates 14, 16, as shown, are L-shaped with horizontal mounting flanges 18, 20, each of which has a plurality of mounting holes 22 formed therethrough for mounting the heat exchanger 10 in a desired location. First and second end support plates 14, 16 may be omitted, altered or replaced with other suitable arrangements for mounting heat exchanger 10.
- 25

Referring to Figure 2, plate pairs 12 each define an internal elongate fluid passage 24 that extends from substantially a first end to a second end of the plate pair 12. Each plate pair 12 includes inlet and outlet openings at opposite ends thereof in flow communication with the fluid passage 24, with the inlet openings  
5 being aligned across the width of the heat exchanger to form an inlet manifold (shown in phantom in Figure 2, and indicated by reference numeral 25) in communication with an inlet fitting 26, and the outlet openings being aligned to form an outlet manifold (shown in phantom in Figure 2, and indicated by reference numeral 27) in flow communication with an outlet fitting 28.

10 In one preferred embodiment, the heat exchanger 10 is used as a snowmobile cooler for cooling the liquid coolant used to cool the snowmobile engine. With reference to Figure 3, in such a configuration, one or more heat exchangers 10 are mounted between the chassis and drive track 32 of a snowmobile 30. Engine coolant entering through inlet fitting 26 and exiting through  
15 outlet fitting 28 is cooled by slush, snow, ice, and water that is flung from the drive track 32 onto the heat exchanger 10. Embodiments of the heat exchanger may also be used in other applications, such as an underbody fuel cooler for a wheeled vehicle, for example.

With reference to Figures 4 and 5, the plate pairs 12 will now be described  
20 in greater detail. Each plate pair 12 is made up of a first plate 34 and a second plate 36. The first plate 34 includes an elongate central planar portion 38 that is surrounded by a peripheral edge portion 40. The second plate 36 includes an elongate central planar portion 42, which is also surrounded by an edge portion 44, which in turn is surrounded by an integral, peripherally extending flange 45.  
25 The peripherally extending flange 45 includes a substantially planar, fin plate portion 46 that extends outward from one elongate side of the edge portion 44, providing an enlarged exposed air-side heat exchange surface. According to embodiments of the present invention, edge enhancements, which may be slots 56, are provided intermittently along the fin plate 46, providing the fin plate with a  
30 varying profile along its length. Such edge enhancements may augment heat transfer or external fluid draining. Although rectangular, open-ended slots 56 are

shown in Figures 1 and 4, slots 56 could take other shapes, and may be set in from the lower edge such that they are closed-ended.

First and second plates 34 and 36 are placed together and sealably connected about edge portions 40, 44 to form plate pair 12 in which the fluid passage 24 is defined between spaced apart planar central portions 38, 42. Openings 50, 52 that are in communication with fluid passage 24 are provided through the end areas of planar central portions 38, 42 (Such openings may be omitted from the final plate 46 in the stack). When plate pairs 12 are stacked together to form heat exchanger 10, all of the openings 50 are in registration and communicate with inlet fitting 26 (thereby forming inlet manifold 25), and all of the openings 52 are in registration and communicate with outlet fitting 28 (thereby forming outlet manifold 27). In such a configuration all of the fluid passing internally through the heat exchanger fluid passages 24 flows in parallel through plate pairs 12. However, it will be appreciated that some of the openings 50, 52 in selected plates could be omitted or otherwise blocked so that fluid could be made to flow in series through each of the plate pairs 12, or in some series/parallel multi-pass combination. In a multi-pass configuration, the locations of at least one of the inlet and outlet fittings 26, 28 may have to be varied from that shown in Figures 1 and 2 – for example, the outlet fitting may be at the same end, but at the opposite side of heat exchanger than the inlet fitting. The locations and types of inlet and outlet fittings shown in the Figures are exemplary only and not relevant to the broader aspects of the invention.

With reference to Figure 5A, in a preferred embodiment, a lateral locating wall 54 integrally connects the edge portion 44 of plate 36 with the flange portion 45 thereof, forming a pocket in plate 36 within which the edge portion 40 of first plate 34 is nested. Such a feature provides a self-locating and self aligning function during assembly of the plate pairs 12. Figure 5B shows a sectional view of an alternative embodiment in which the locating wall 54 and flange portion 45 are only provided along with fin side of the plate pair 12. In some embodiments, the step wall 54 may be omitted completely.

Referring to Figures 1 and 2, in the illustrated embodiment, the heat exchanger 10 includes two end plate pairs 12, and a plurality of intermediate plate

pairs 12, all of which are arranged parallel to each other. The end plate pairs each abut on one side thereof with a respective intermediate plate pair, and the intermediate pairs are each sandwiched on both sides by other plate pairs. For each of the intermediate plate pairs, the planar central portion 38 of the first plate 34 of one plate pair 12 abuts against the planar central portion 42 of the second plate 36 of an adjacent plate pair 12. Fin plate portions 46 are spaced apart from each other such that ice, snow, air, slush, water and other materials can be thrown up on and in between the fin plate portions 46 by snowmobile drive track 32. In some embodiments, it may be desirable to have a heat exchanger in which the planar central portions of adjacent plate pairs are spaced apart from each other, to allow cooling materials or fluids to get between the different plate pairs. In such configurations, spacers 140 (see Figure 16) can be used between the plate pairs 12, or integrally formed outwardly extending bosses 142 (see Figure 17) can be provided in the plates 34, 36 around openings 50, 52 to provide a desired spacing 144 between adjacent plate pairs.

The enhancements that are provided along the lower portion of fin plate portion 46 could include further enhancements in addition to or in place of slots 56. For example, Figures 6A-6D show examples of plate pairs 12 in which different types of enhancements are provided on fin plate portion 46. In the fin plate 12 of Figure 6A, louvered slots 58 are provided along the bottom edge portion of fin plate portion 46. In Figure 6B, expanded convolutions 60 are provided along the length of fin plate portion 46 at spaced intervals. In Figure 6C, the fin plate portion 46 is rippled or corrugated along its length. In Figure 6D, stamped openings 64 are provided along the length of fin plate portion 46. Although the stamped openings 64 are shown as circular, they could be other shapes for example, rectangular. Different types of enhancements could be used along the same fin plate portion - for example, slots 56, louvered slots 58, convolutions 60 and circular openings 64 could each be located at spaced intervals along the same fin plate portion 46. Additionally, the edge enhancements used on the different plate pairs throughout the heat exchanger stack could be varied from plate pair to plate pair. In addition to providing improved heat transfer in some applications, the edge enhancements may also increase the strength of the fin plate portions 46 of the plate pairs 12. The size of the fin plate portion and

the edge enhancement applied thereto can be chosen to give predetermined or desired heat exchange and strength characteristics to the heat exchanger.

In some embodiments, the plate pairs could be formed from identical or substantially identical plates. By way of example, Figures 7 and 8 show an embodiment of a plate pair 70 that could be used in heat exchanger 10 in place of plate pair 12. The plate pair 70 is formed from two substantially identical plates 72, 74. Each plate 72, 74 includes an elongate central planar portion 76 that is surrounded by a peripheral edge portion 78. The part of peripheral edge portion 78 that is along an elongate side of the central planar portion 76 is enlarged to provide a lower fin plate 80. The plates 72, 74 are sealably joined about peripheral edge portions 78, with central planar portions 76 being spaced apart and defining flow passage 24 therebetween. The planar fin plates 80 of each of the plates 72, 74 have parallel abutting surfaces, and may have edge enhancements such as slots 56 provided along their respective lengths. Alternative edge enhancements such as those described above in respect of Figures 6A-6D could also be used.

Various flow augmentation devices that are known in the art of plate pair type heat exchangers could be used in the flow passages of the plate pairs of the present invention to improve heat transfer and strengthen the heat exchanger structure. By way of example, an elongate turbulizer 82 (Figure 8) including rows of expanded convolutions could extend the length of flow passage 24. Alternatively, ribs such as those shown in U.S. Patent No. 5,692,559 issued December 2, 1997 could be provided along the walls that define the flow passage 24. Dimples along the flow passage 24 walls could also be used to augment flow.

With reference to Figures 9 through 12, another embodiment of a heat exchanger, indicated generally by reference 100 in Figure 9, is shown. Figure 9 shows a bottom view of heat exchanger 100, which is similar in construction and operation to heat exchanger 10, except for the differences in plate pair configuration discussed as follows. The heat exchanger 100 is formed from a stack of plate pairs 102, which are sandwiched between end brackets 14, 16. Each plate pair 102 is formed from two substantially identical plates 104, 106, each of which has an elongate, substantially planar central portion 108 that is surrounded by an edge portion 110. The edge portions 110 of the plates 104, 106

are sealably joined together, with central planar portions 108 being spaced apart and defining an elongate internal fluid passage 24 that extends from an inlet opening 50 to an outlet opening 52. An integral fin plate 112 extends downwardly from the bottom of edge portion 110 of each plate 104,106. The fin plate 112 has  
5 a series of half-hex patterns stamped along its length, such that when the fin plates 112 are assembled into plate pairs 102 and the plate pairs are stacked to form the heat exchanger core, the fin plates 112 form a hexagonal honeycomb-like pattern as best seen in the bottom view of Figure 9.

In particular, each fin plate 112 includes planar inner wall portions 114 that  
10 are interspaced by outwardly offset outer wall portions 116. The outer wall portions 116 (see Figure 9) are each joined at opposite, upwardly extending side edges to inner wall portions 114 by angled connecting wall portions 118. In one embodiment, outer wall portions 116 have an outer surface that is in the same plane as an outer surface of the central planar portion 108 such that when the  
15 plate pairs 102 are stacked together, the central planar portions 108 of the adjacent plates of adjacent plate pairs abut against each other, and the outer wall portions 116 of the adjacent plates of adjacent plate pairs also abut against each other. As can be seen in Figure 9, internal plate pair hexagonal cells 122 are defined by the outer and connecting walls 116 and 118 of the plates 104 and 106  
20 of a plate pair 102, and intra-plate pair hexagonal cells 124 are formed by the inner and connecting walls 114 and 118 of the plate 106 from one plate pair 102 and the inner and connecting walls 114 and 118 of the plate 104 from an abutting plate pair 102. Such a configuration provides structural strength and a relatively large external air side surface area for heat transfer. Although shown in a  
25 honeycomb pattern in the illustrated embodiment, other configurations could also be used, for example, the fin plate could have a sinusoidal shape, with the peaks of the sinusoidal curve of one fin plate from one plate pair engaging the peak of the sinusoidal curve of a fin plate from an adjacent plate pair. Other multi-sided structures could also be formed by the fin plates.

30 In some embodiments, the heat exchanger may be angled or curved to allow the heat exchanger to fit within a restricted space, or to improve heat exchanger efficiency. By way of example, Figures 13 and 14 show a heat

exchanger 200, which is similar to heat exchanger 10 except that the heat exchanger 200 is arcuately bent about an axis parallel to the direction of internal fluid flow through the plate pairs 12. In one embodiment, heat exchanger 10 is bent after it has been brazed in order to form heat exchanger 200, which is curved  
5 to allow it to conform to the underbody of the snowmobile chassis or a vehicle underbody. In some embodiments, the heat exchanger may be angled or curved other than as shown in Figures 13 and 14, for example, the heat exchanger may be angled or curved along its longitudinal length, as shown in Figure 15.

The plates used in the plate pairs of the present invention may be stamped  
10 from braze-clad roll formed aluminum or aluminum alloy. However other suitable metallic and non-metallic materials formed using various methods such as stamping, roll forming, molding, etc. could be used as desired for specific heat exchanger applications. In some embodiments, an epoxy or TEFLON™ or other coating may be provided on the heat exchanger to reduce the adherence of snow  
15 or ice or other debris to the outer surfaces of the heat exchanger. Similarly, corrosion inhibiting coatings could also be applied to the heat exchanger in some embodiments.

As will be apparent to those skilled in the art, many alterations and modifications are possible in the practice of this invention without departing from  
20 the spirit or scope thereof. Accordingly, the scope of the invention is to be construed in accordance with the substance defined by the following claims.


## CLAIMS:


1. A surface cooled heat exchanger (10,100,200) comprising:  
a stack of elongate plate pairs (12,70,102), each plate pair including first and second plates (34,36;74;104,106) having elongate central portions surrounded by sealably joined edge portions (40,44;78;110) with a fluid passage (24) defined between the central portions; each plate pair (12,70,102) having spaced apart inlet and outlet openings (50,52) that are connected together for the flow of fluid through the fluid passages (24); characterized by at least some of the plate pairs (12,70,102) having an exposed elongate fin plate (46,80,114) extending peripherally outward from the joined edge portions (40,44;78;110) along a length thereof.
2. The heat exchanger of claim 1 characterized in that each fin plate (46,80,114) has a varying profile along a length thereof.
3. The heat exchanger of claim 2 characterized in that the fin plates (46,80) each define a plurality of spaced apart slots (56) along a length thereof.
4. The heat exchanger of claim 3 characterized in that the slots (56) are open ended at an outwardly extending end thereof.
5. The heat exchanger of claim 2 characterized in that the varying profile includes a plurality of louvered slots (58) located along at least some of the fin plates (46).
6. The heat exchanger of claim 2 characterized in that the varying profile includes a plurality of expanded convolutions (60) provided along at least some of the fin plates (46).
7. The heat exchanger of claim 2 characterized in that the fin plates (104,106) of adjacent plate pairs (102) come into intermittent contact with each other at a plurality of spaced apart locations along a length thereof.

8. The heat exchanger of any one of claims 1 to 7 characterized in that the elongate central portions (34,36) of adjacent plate pairs (12) in the stack are spaced apart from each other.
9. The heat exchanger of any one of claims 1 to 6 characterized in that the fin plate (46) of each plate pair is formed integrally with only one of the first and second plates (34,36) thereof.
10. The heat exchanger of any one of claims 1 to 8 characterized in that the fin plate (80, 114) of each plate pair (70,102) is formed from a plate portion formed integrally with the first plate (74;104,106) and a further plate portion formed integrally with the second plate (74;104,106).
11. The heat exchanger of any one of claims 1 to 6 characterized in that the first plate (36) includes a laterally extending flange (54) around an outer edge of the edge portion (44) thereof, the edge portion (40) of the second plate (34) being nested within the laterally extending flange (54), the fin plate (46) extending from an edge of the laterally extending flange (54).
12. The heat exchanger of any one of claims 1 to 11 characterized in that the heat exchanger is a snowmobile engine coolant cooler.
13. The heat exchanger of any one of claims 1 to 12 characterized in that the elongate fin plates (46,80,114) extend only from one elongate joined edge portion of the plate pairs.
14. The heat exchanger of claim 12 characterized by mounting bracket means (16,18) connected to the stack of plate pairs for securing the stack to a snowmobile.
15. The heat exchanger of claim 14 characterized in that the mounting bracket means (16,18) includes two L-brackets between which the stack of plate pairs is sandwiched.





16. The heat exchanger of claim 1 characterized in that intermittent edge enhancements (56,58,60,62,64,16) are provided along a length of each of the fin plate (46,80,114).





17. The heat exchanger (200) of any one of claims 1-16 characterized in that the stack is arcuately bent about an axis thereof.


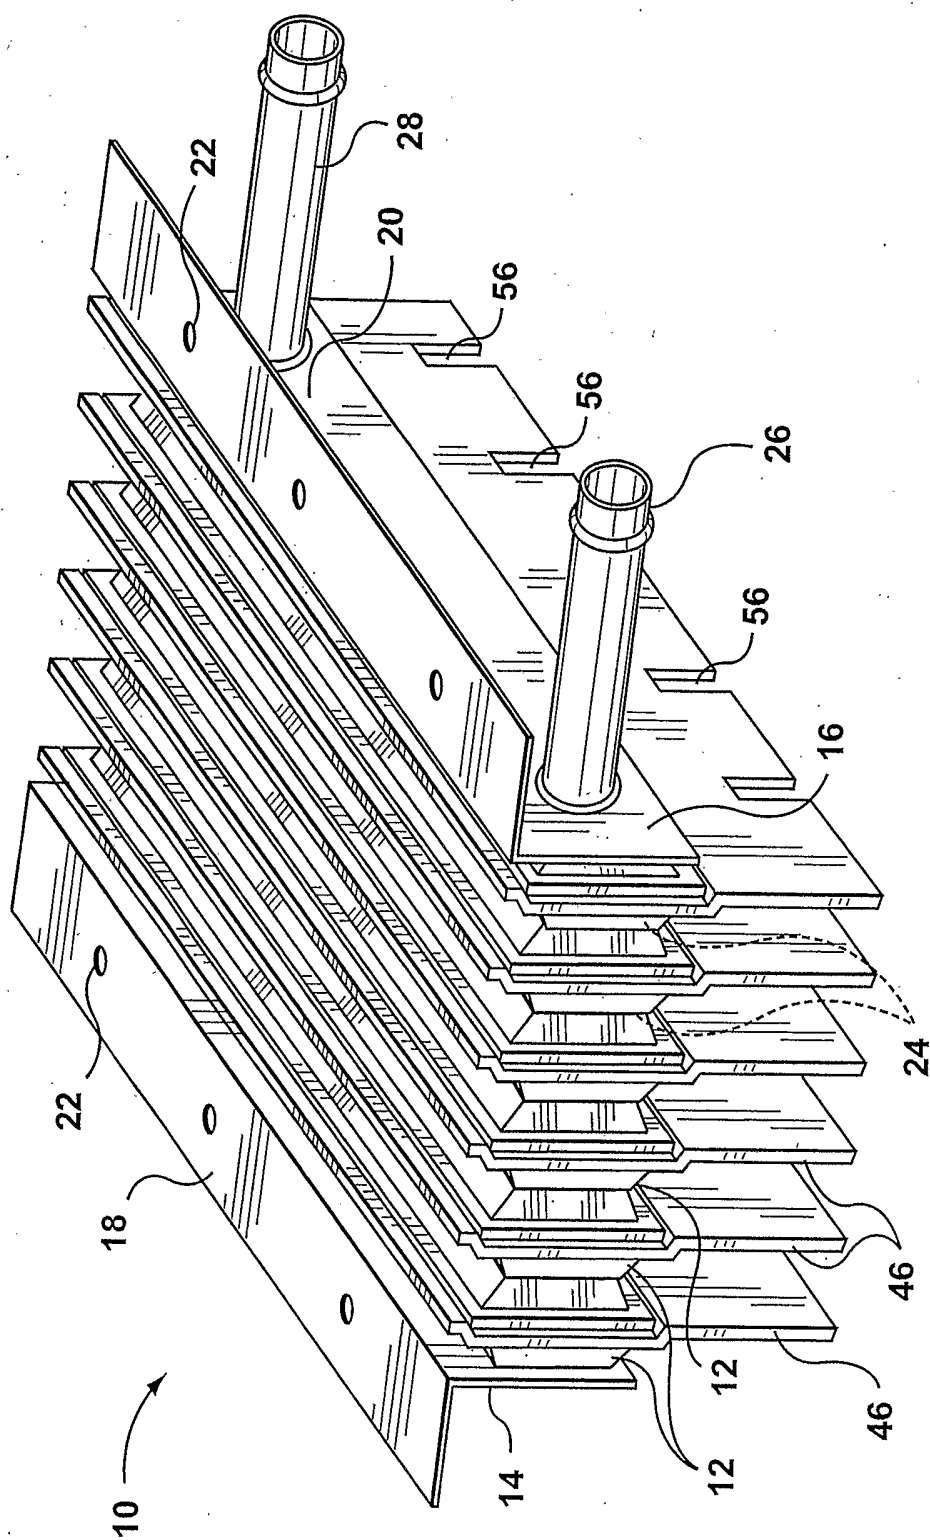
**FIG. 1**

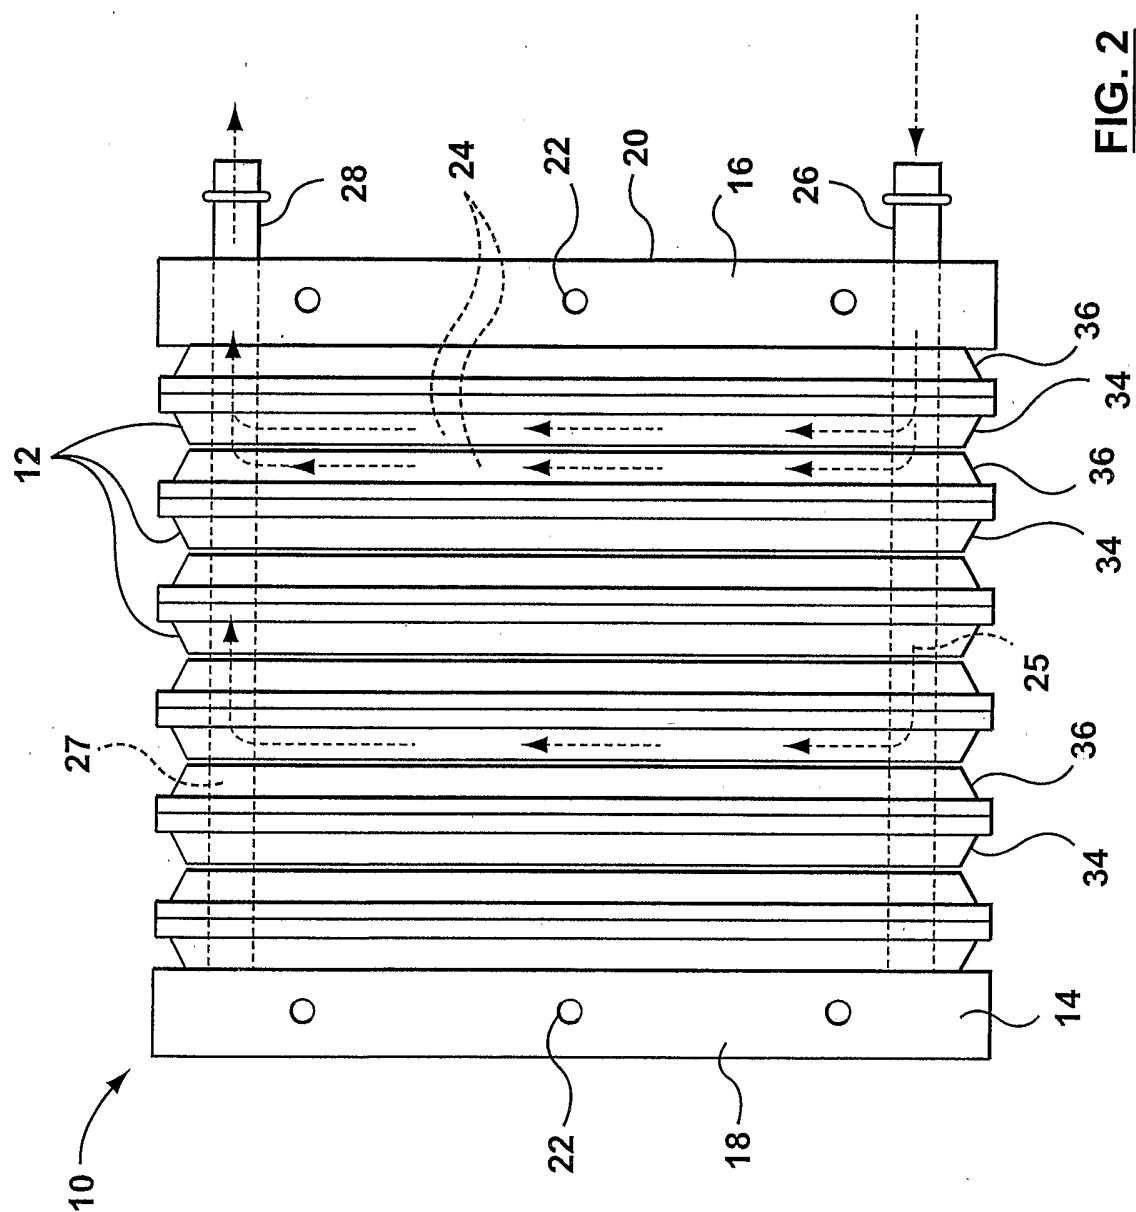



**FIG. 2**

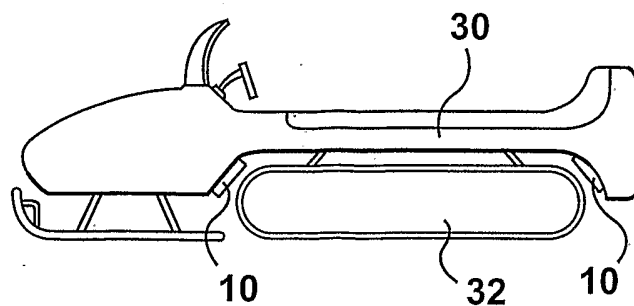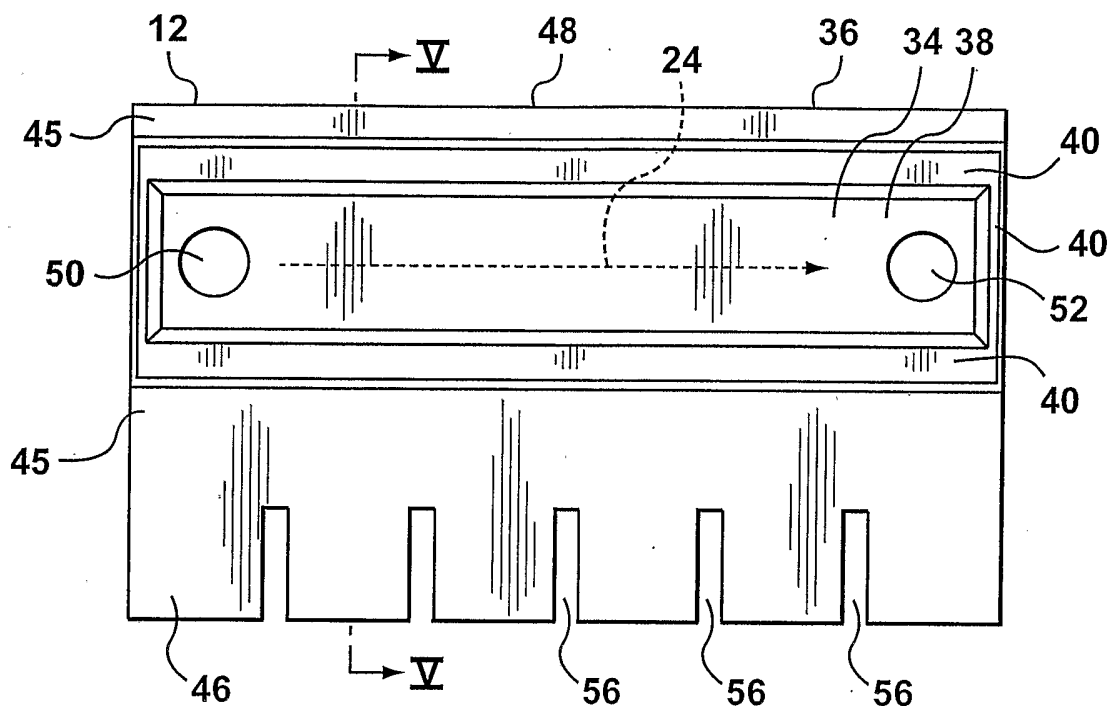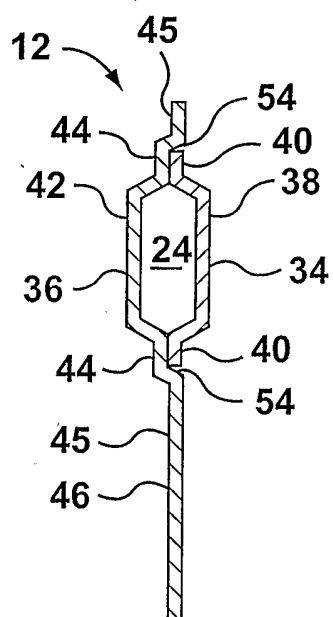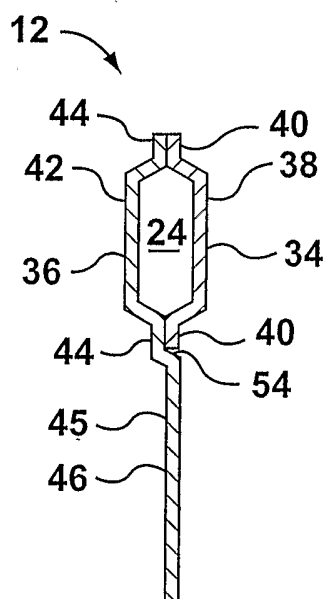**FIG. 3****FIG. 4****FIG. 5A****FIG. 5B**

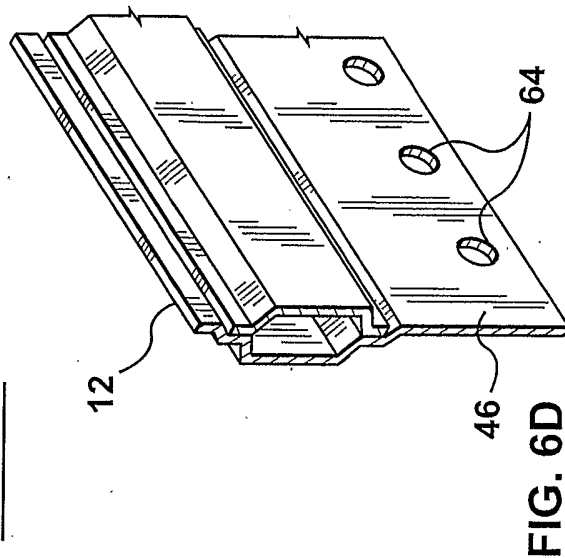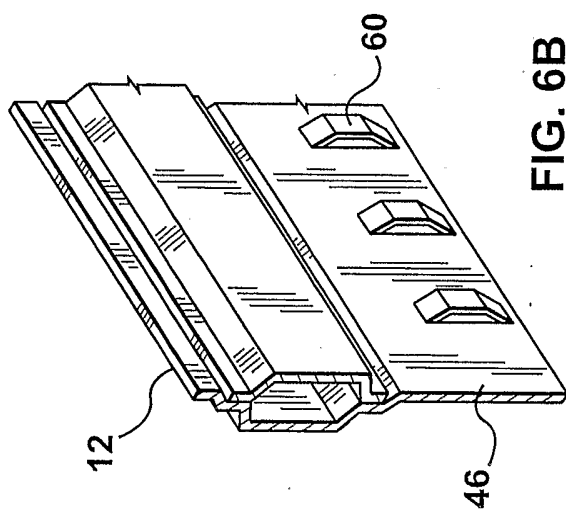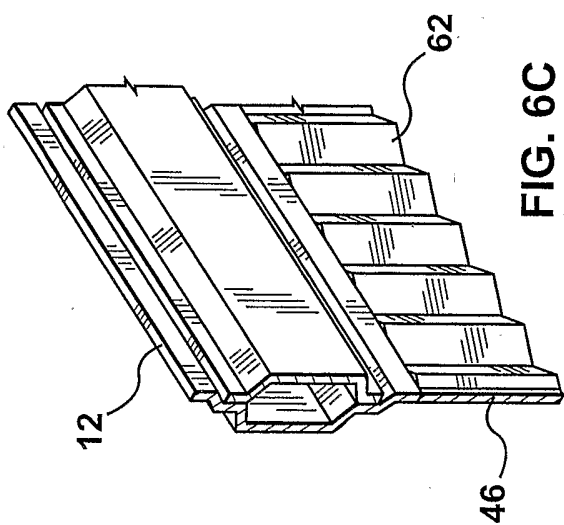
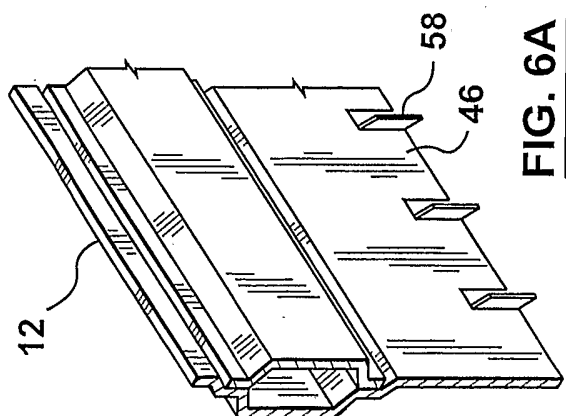


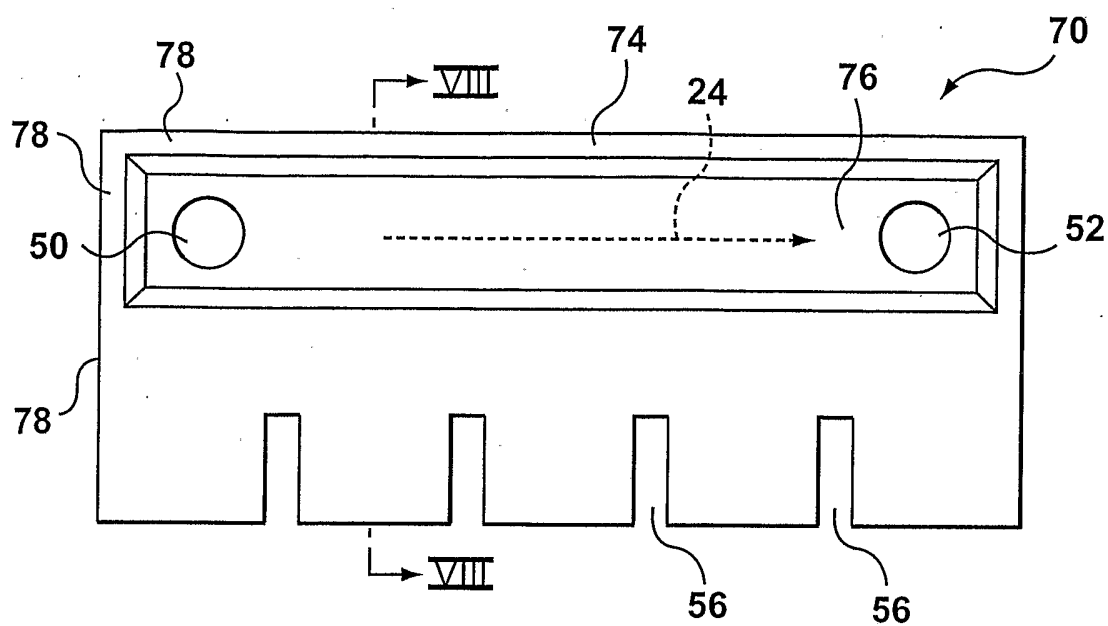
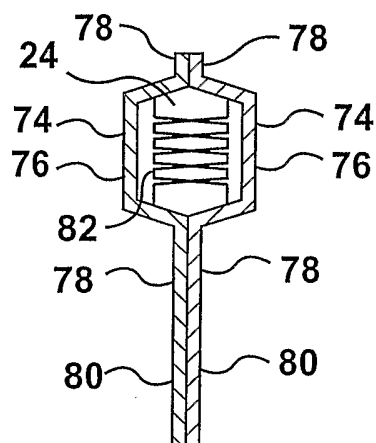
**FIG. 7****FIG. 8**

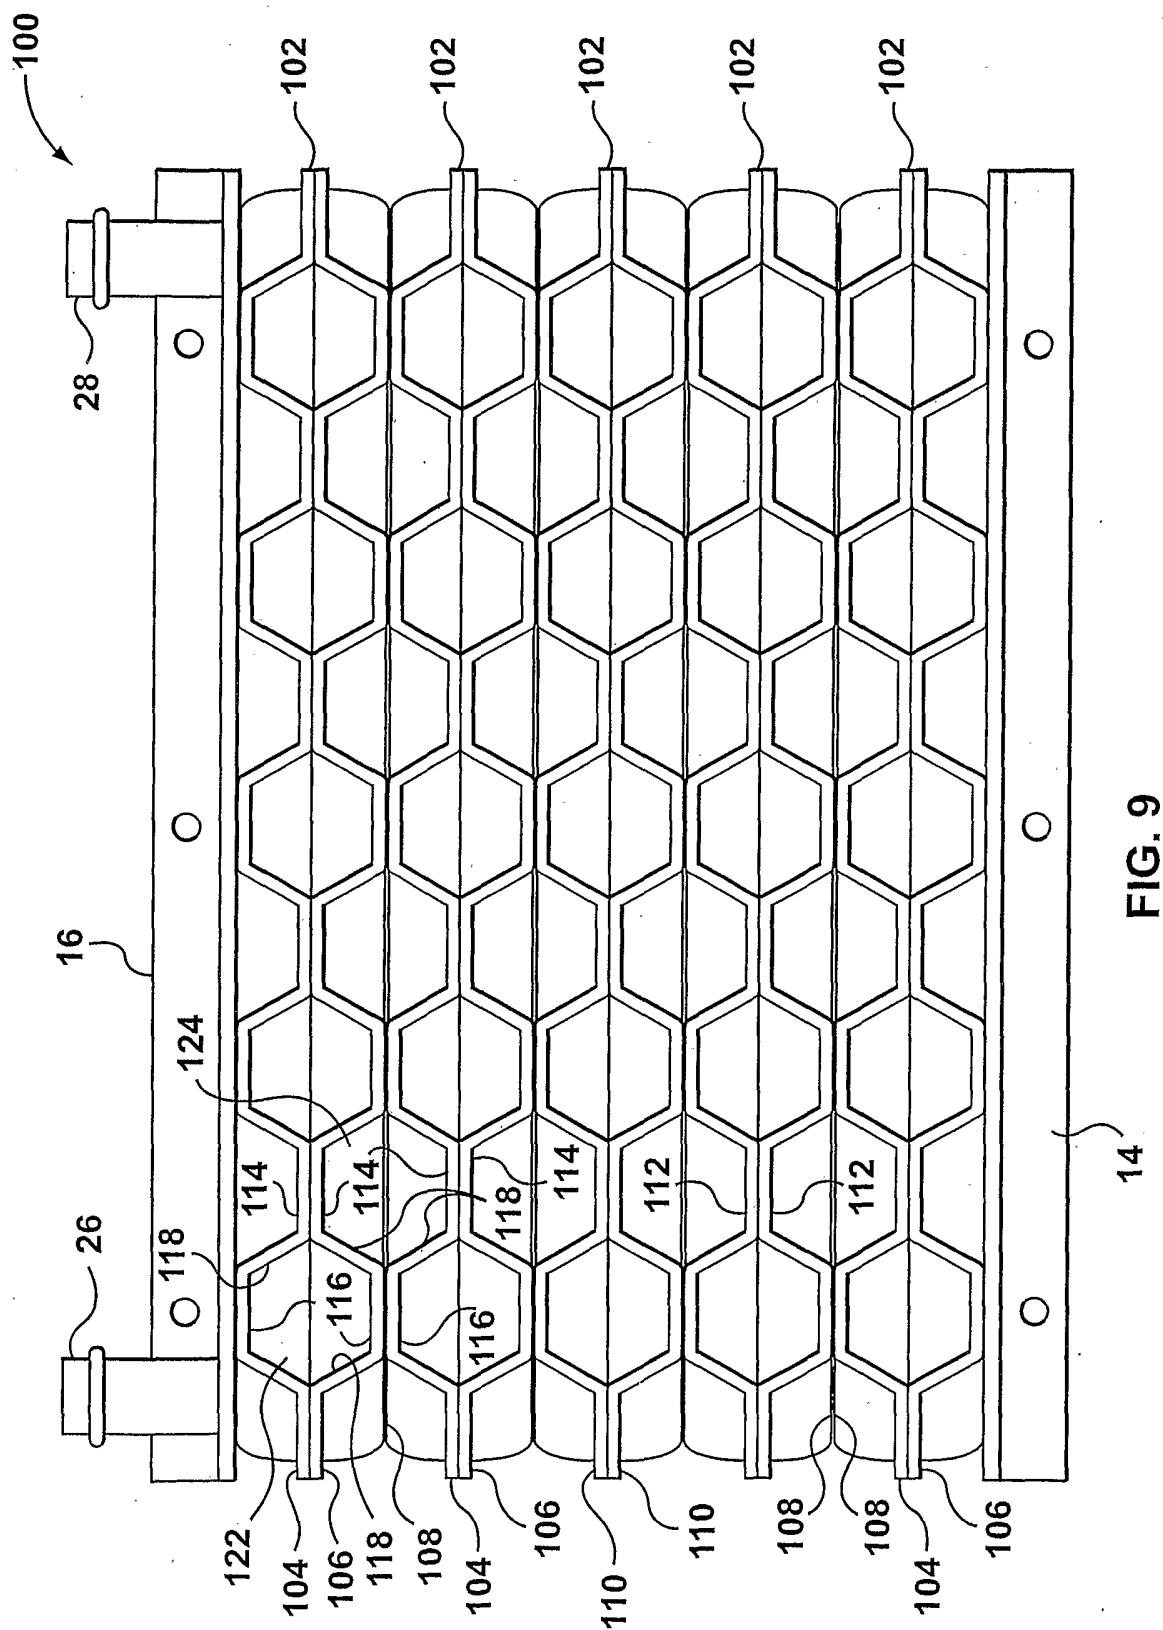


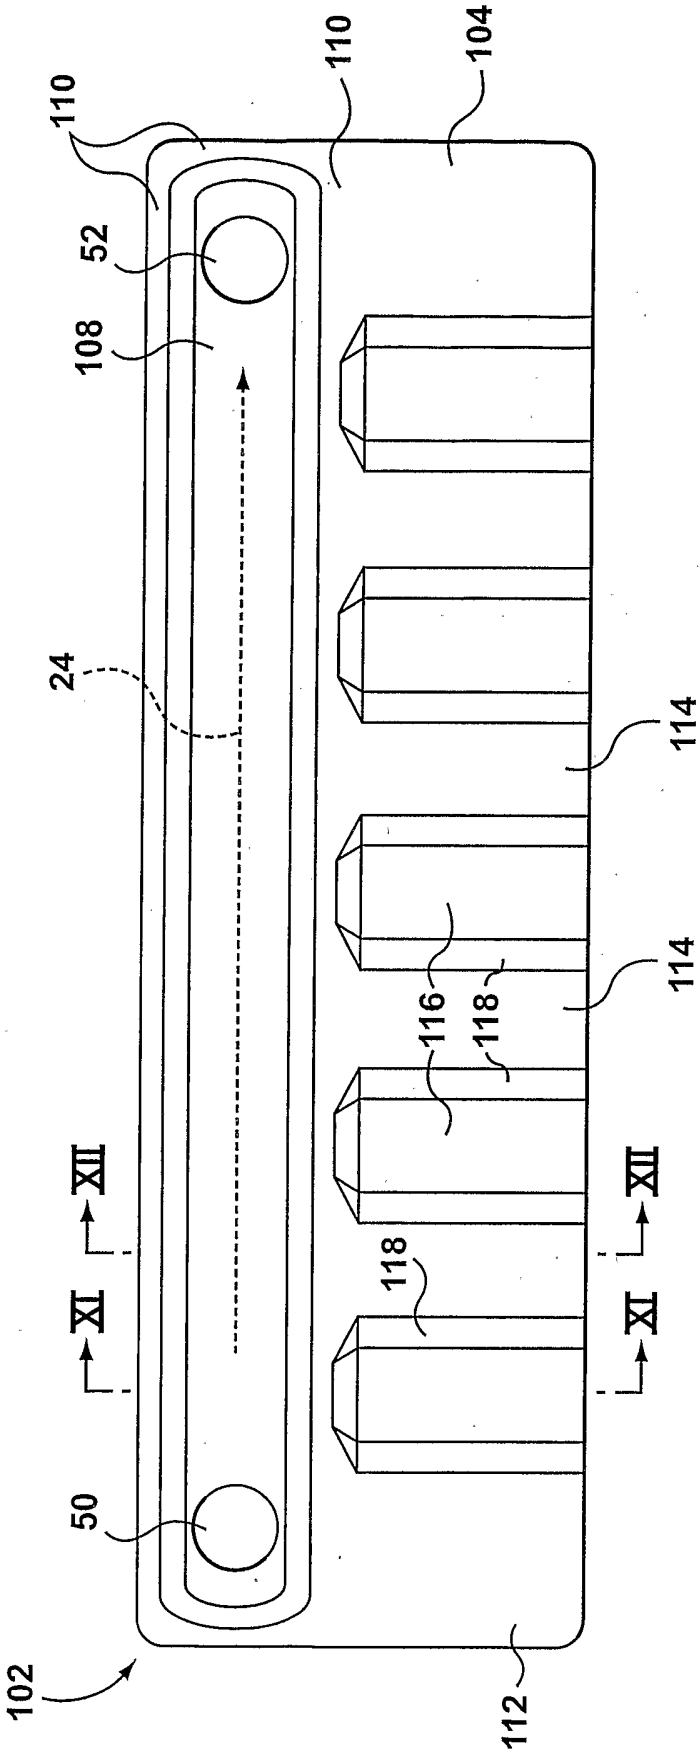


**FIG. 10**

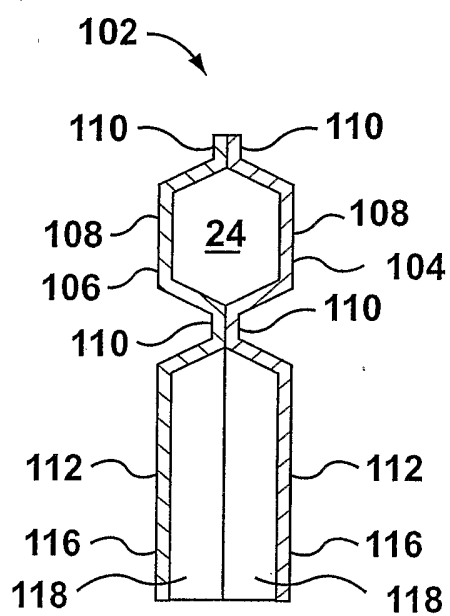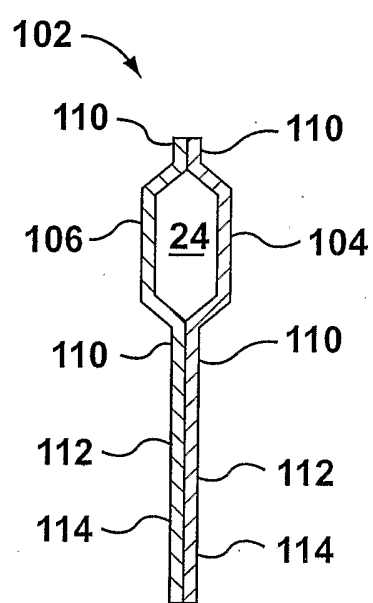**FIG. 11****FIG. 12**

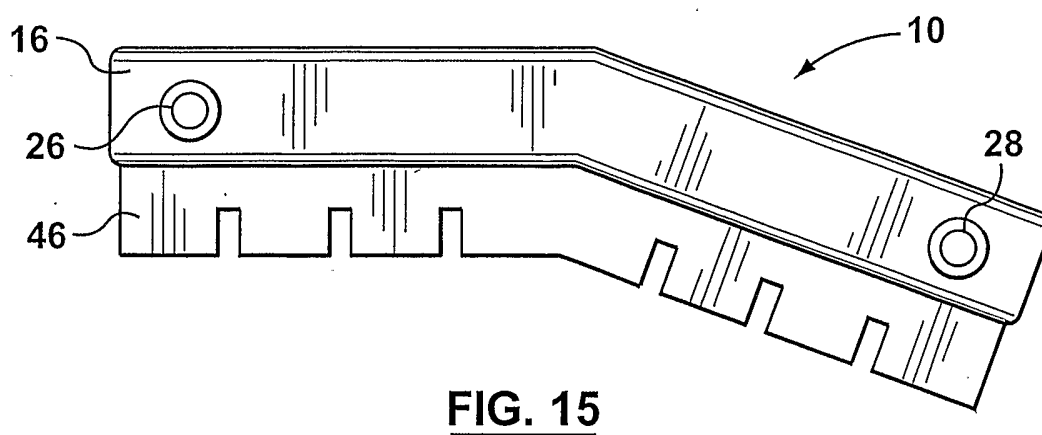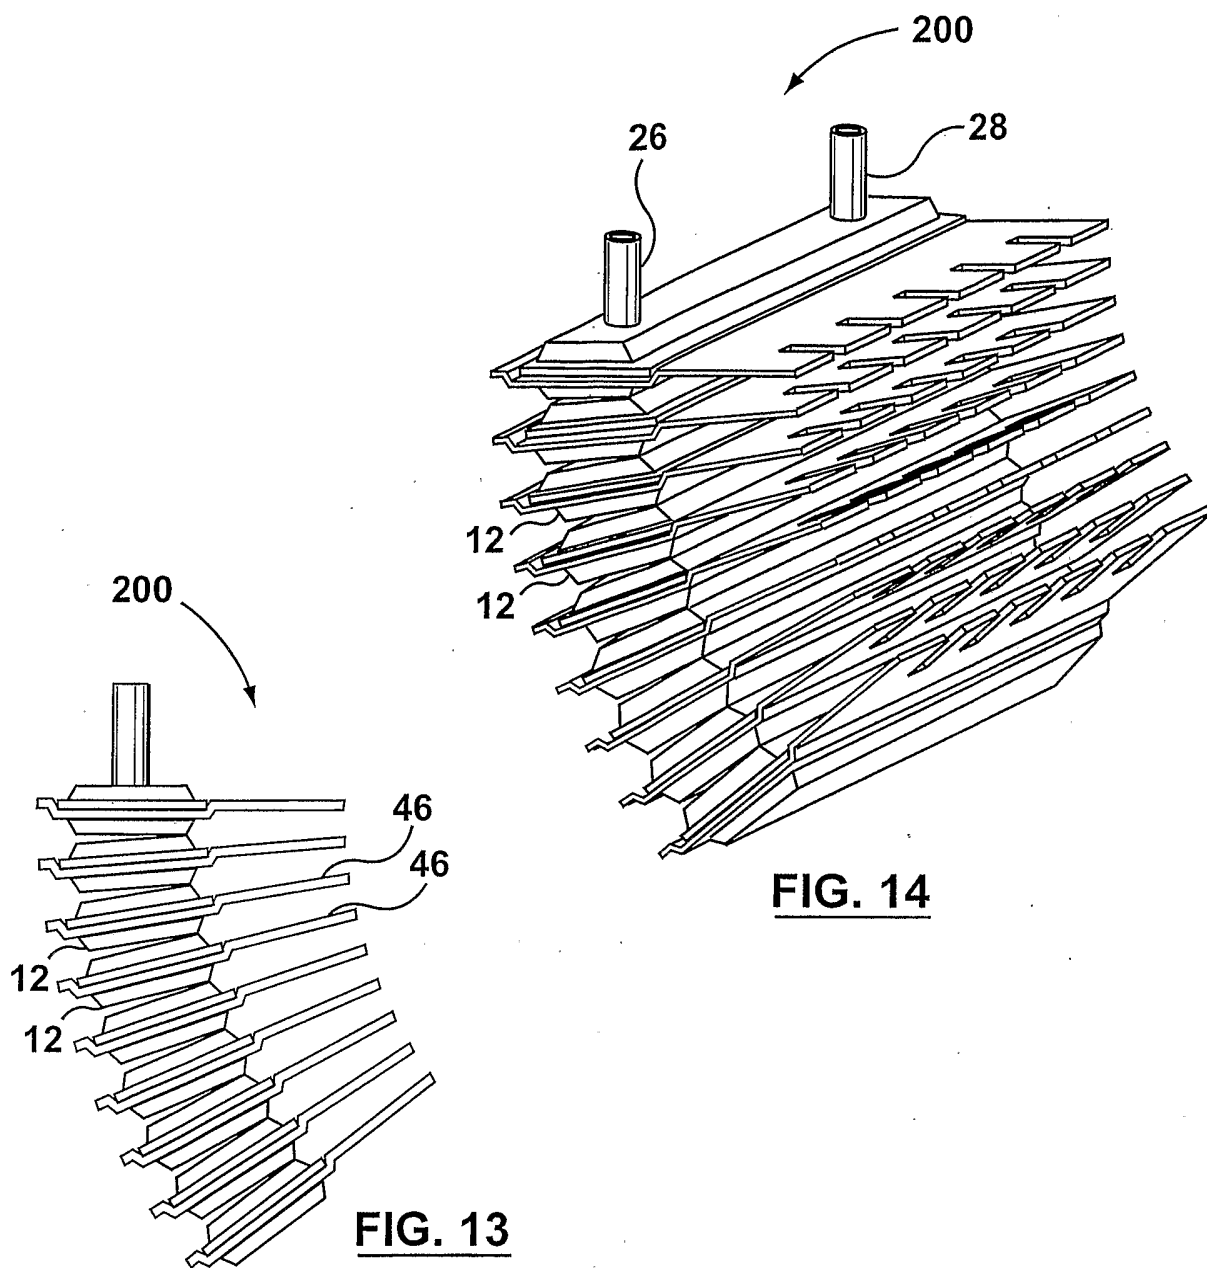

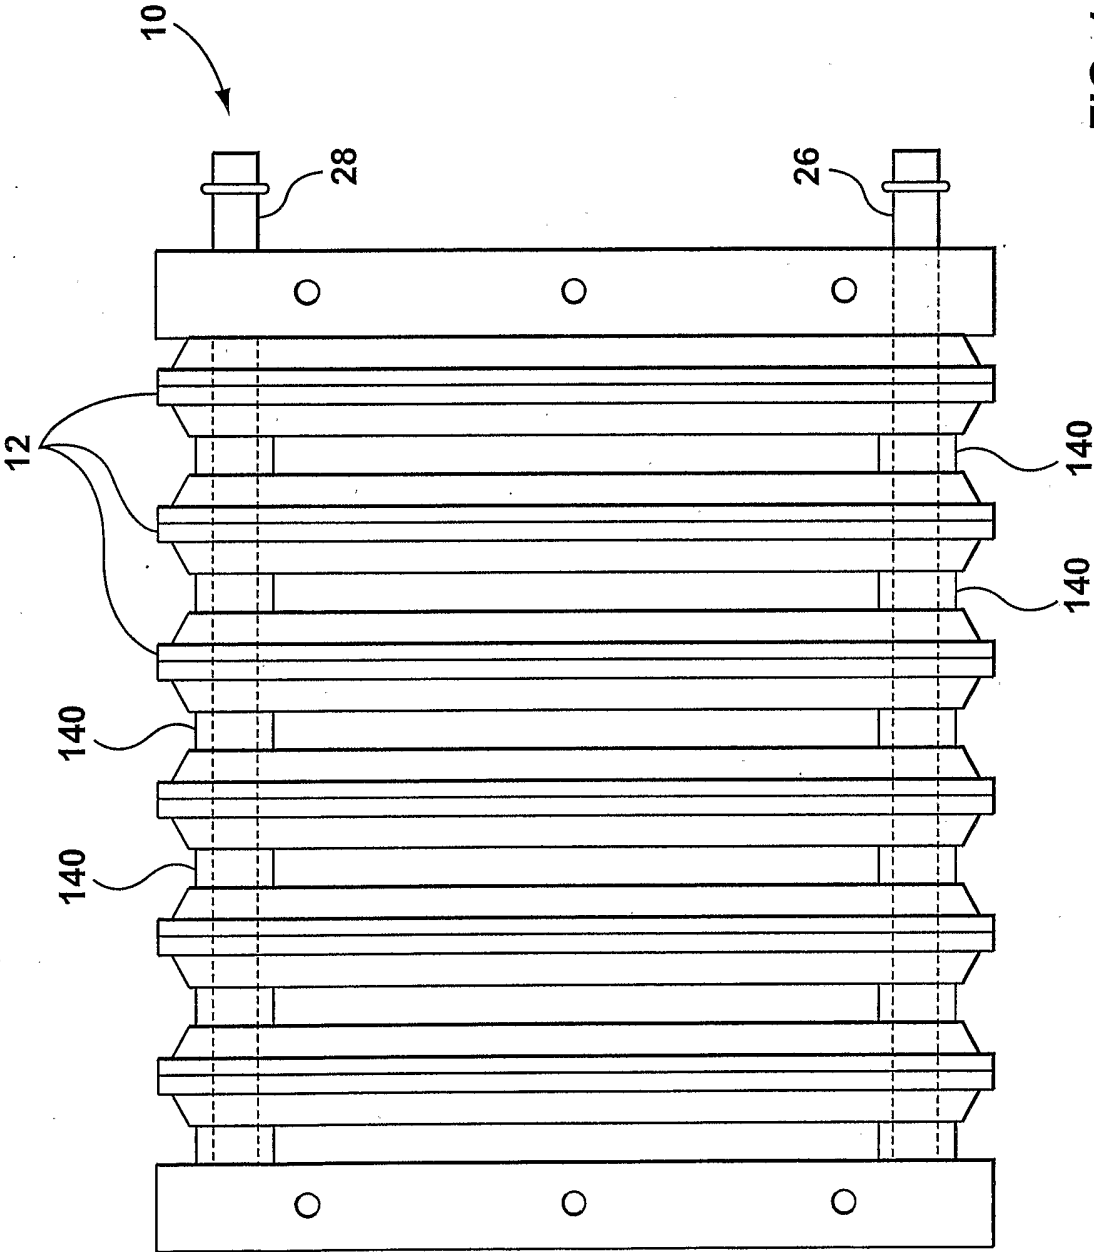

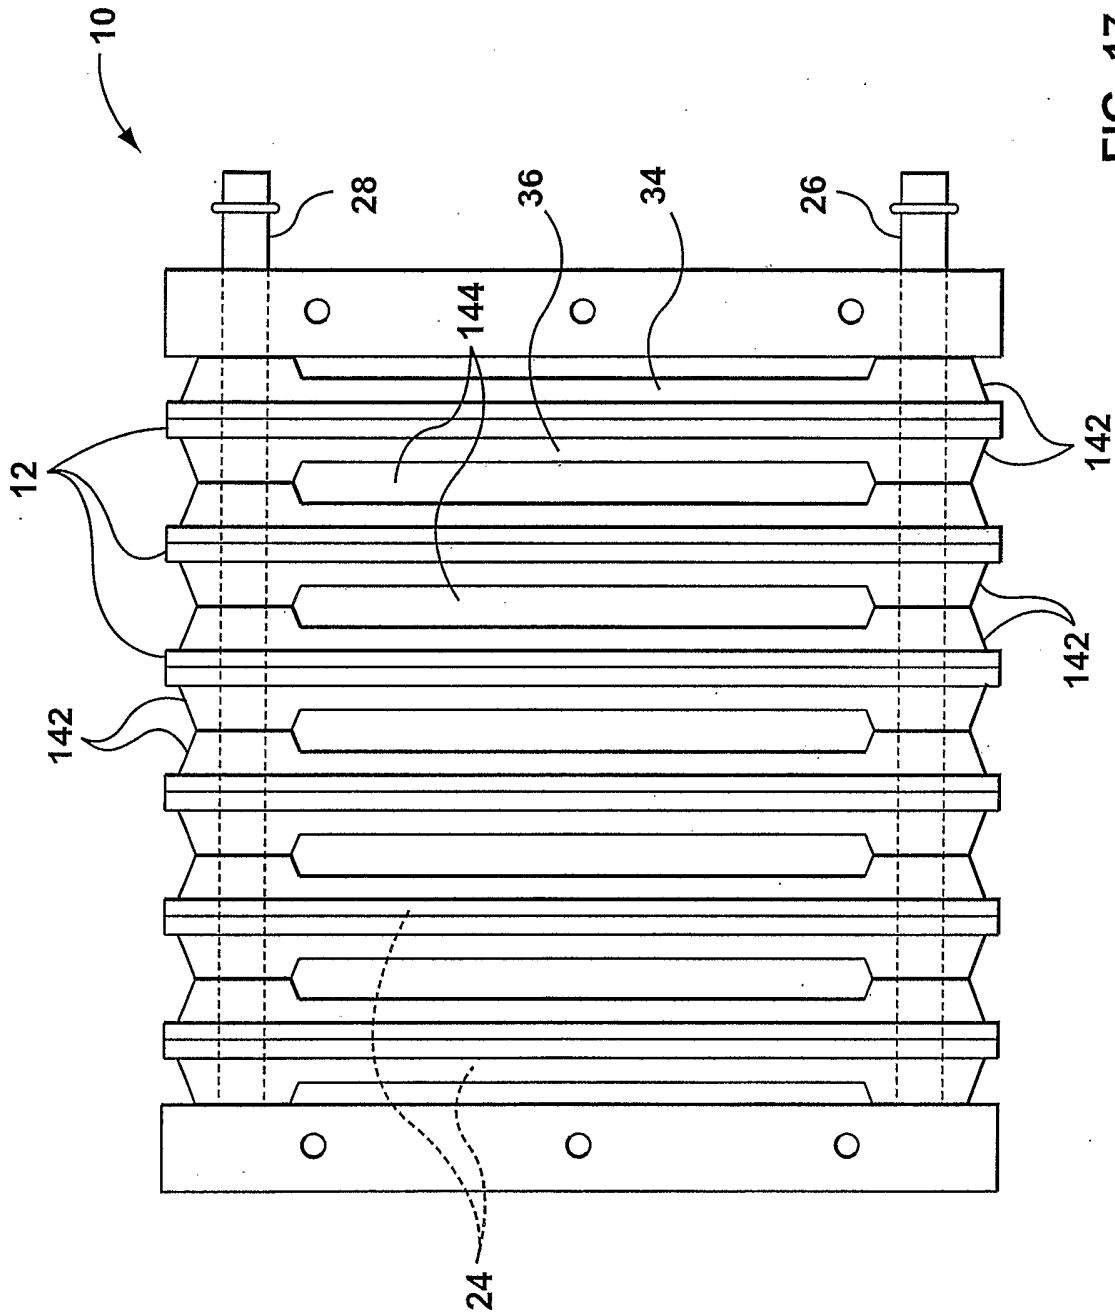

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA2004/000430

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F28D1/03 F28F3/02 F28F3/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F28D F28F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 1 424 689 A (UNION CARBIDE CORP) 11 February 1976 (1976-02-11)	1-11, 13, 16, 17
Y	the whole document	12, 14, 15
X	EP 1 136 667 A (ZEUNA STAERKER KG) 26 September 2001 (2001-09-26) figure 1	1, 2
Y	US 6 109 217 A (HEDLUND JAN M ET AL) 29 August 2000 (2000-08-29) cited in the application the whole document	12, 14, 15

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

26 July 2004

Date of mailing of the international search report

03/08/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Mellado Ramirez, J

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA2004/000430

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 1424689	A	11-02-1976	US 3845814 A	05-11-1974
			US 3810509 A	14-05-1974
			AU 471919 B2	06-05-1976
			AU 5436473 A	17-10-1974
			CA 983916 A1	17-02-1976
			DE 2318132 A1	25-04-1974
			ES 413670 A1	16-01-1976
			FR 2192282 A1	08-02-1974
			IT 1046204 B	30-06-1980
			SE 399301 B	06-02-1978
EP 1136667	A	26-09-2001	DE 10014266 A1	27-09-2001
			EP 1136667 A2	26-09-2001
US 6109217	A	29-08-2000	NONE	