

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 256 820 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **29.07.92** (51) Int. Cl.⁵: **G03C 1/00**

(21) Application number: **87307044.5**

(22) Date of filing: **07.08.87**

(54) **Thermal developing light-sensitive material.**

(30) Priority: **08.08.86 JP 187089/86**
20.07.87 JP 180856/87

(43) Date of publication of application:
24.02.88 Bulletin 88/08

(45) Publication of the grant of the patent:
29.07.92 Bulletin 92/31

(84) Designated Contracting States:
DE FR GB IT NL

(56) References cited:
EP-A- 0 218 385

(73) Proprietor: **KONICA CORPORATION**
26-2, Nishi-shinjuku 1-chome Shinjuku-ku
Tokyo(JP)

(72) Inventor: **Kohno, Junichi**
Konishiroku Photo Industry Co., Ltd 1
Sakura-machi
Hino-shi Tokyo(JP)
Inventor: **Komamura, Tawara**
Konishiroku Photo Industry Co., Ltd 1
Sakura-machi
Hino-shi Tokyo(JP)
Inventor: **Okauchi, Ken**
Konishiroku Photo Industry Co., Ltd 1
Sakura-machi
Hino-shi Tokyo(JP)

(74) Representative: **Wood, Anthony Charles et al**
Urquhart-Dykes & Lord 91 Wimpole Street
London W1M 8AH(GB)

EP 0 256 820 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

FIELDS OF THE INVENTION

5 The present invention relates to a thermal developing light-sensitive material for forming an image by the thermal development, in particular to a thermal developing light-sensitive material, wherein thermal-development-induced fogging (thermal fogging) has been improved.

BACKGROUND OF THE INVENTION

10

As to thermal developing light-sensitive materials with which developing process can be carried out by the thermal treatment, Japanese Patent Examined Publications No. 4921/1968 and No. 4924/1968 have disclosed light-sensitive materials comprising organic silver salts, silver halides and reducing agents.

15 With the improved thermal developing light-sensitive materials, the studies to obtain color images by various methods have been described.

For example, U.S. Patents No. 3,531,286, No. 3,761,270 and No. 3,764,328 have independently disclosed thermal developing color light-sensitive materials respectively forming a dye image by the reaction of an oxidized Product of aromatic primary amine developing agents and a coupler.

20 In addition, Research Disclosure No. 15108 and No. 15127 issues disclosed thermal developing color light-sensitive materials individually forming a dye image by the reaction of an oxidized product of sulfonamidophenol or sulfonamidaniline derivative color developing agent and a coupler. However, these methods incurred a disadvantage; since an image of reduced silver and a dye image are simultaneously formed on an exposed portion after the thermal development, the dye image accompanies stains. To solve this problem, a method is available, wherein a silver image is removed by a liquid treatment, or wherein
25 only dyes are transferred onto other layers, for example, an image-receiving sheet comprising an image-receiving layer. However, such a method incurs still another problem; it is difficult to distinguish unreacted matter from the dyes to be transferred.

Further, Research Disclosure, No. 16966 disclosed a method involving thermal developing color light-sensitive materials, wherein using organic imino silver salts independently having a dye-portion, imino groups on the exposed portion are removed by the thermal development, whereby a dye image is formed on an image-receiving layer as a transfer paper by the use of solvents. However, in this method a problem occurs; it is difficult to suppress the liberation of dyes on unexposed portions, therefore, well-defined clear color images cannot be obtained.

35 Additionally, Japanese Patent Publication Open to Public Inspection (hereinafter referred to as Japanese Patent O.P.I. Publication) No. 105821/1977, Japanese Patent O.P.I. Publications No. 105822/1977 and No. 50328/1981, U.S. Patent No. 4,235,957, Research Disclosure No. 14448, No. 15227 and No. 18137 issues disclosed thermal developing color light-sensitive materials for forming a positive color image by a heat-sensitive silver dye bleaching method. However, this method incurs problems: otherwise unnecessary steps to heat piled sheets independently having an activator to accelerate the bleaching of dye, as well as a photographic constituent material; the obtained dye image is eventually reduced and bleached, in the
40 course of a prolonged storage, by the coexisting free silver and the like.

Furthermore, U.S. Patent No. 3,180,732, U.S. Patent No. 3,985,565, U.S. Patent No. 4,022,617 and Research Disclosure No. 12533 disclosed thermal developing color light-sensitive materials to form a color image by using a leuco dye. However, this method also incurs a problem; it is difficult to stably contain
45 leuco dye in a photographic light-sensitive material and the photographic light-sensitive material is gradually discolored during its preservation.

Also, Japanese Patent O.P.I. Publications No. 179840/ 1982, No. 186744/1982, No. 123533/1982, No. 12431/1984, No. 124339/1984, No. 166954/1984, No. 159159/1984, No. 181395/ 1984, No. 229556/1984, and the like, have disclosed thermal developing coupler light-sensitive materials discharging or forming a
50 diffusible dye by the thermal development to obtain a transferred color image.

EP-A-0 218 385 describes a thermally developable light-sensitive material having at least on light-sensitive silver halide containing layer on a support and which further contains a compound represented by the general formular (I):

55
$$X--(J)_m--F \quad (I)$$

wherein X is the residue of a development restrainer; J is a divalent linkage and F is an immobilising group that is capable of reducing the diffusibility of the compound of formula (I) or a silver salt or silver complex

thereof during the thermal development; m is 1 or 2 and n is an integer of 1 to 3. This European patent application was not filed or published before priority date of the present application.

However, these prior arts incurs a disadvantage; a larger density (D_{max}) causes a increased fogging (D_{min}), whereby a restrainer used in a conventional photographic light-sensitive material not only fails to show restraining effects but even deteriorates fogging, or simultaneously deteriorates D_{max} as well as the sensitivity. Accordingly, the development of a restrainer usable in the thermal developing light sensitive material has been eagerly desired.

The inventor has found that not only the fogging in the thermal development but also the preservability could be simultaneously improved by using a thermal developing light-sensitive material containing a restrainer having a ballast group. However, the degree of the improvement was still insufficient. The inventor also found that if dye-sensitized silver halide emulsions are used, the fogging increases and the sensitivity is reduced during the preservation of the thermal developing light-sensitive materials under a high temperature and a high humidity.

In view of this, the inventors have found that the fogging in the thermal development may be improved by using a thermal developing light-sensitive material containing a restrainer having a hydroxyl group, carboxyl group, sulfon group or sulfin group, or a salt thereof. However, it was learned that this arrangement incurs another disadvantage: the fogging increases during the preservation of the thermal developing light-sensitive material under a high temperature and a high humidity.

According to the invention there is provided a thermal developing light-sensitive material comprising a support, and provided thereon, photographic structural layers comprising at least one layer containing light-sensitive silver halide, said photographic structural layer comprising a compound represented by general formula (1);

Formula (1)

$X_1\text{---}L_1\text{---}A$

in which X_1 represents a residual group of a photographic restrainer, L_1 is a single bond or a divalent group and A is a hydrogen atom, an amino group, a hydroxyl group, a carboxyl group or a salt thereof, a sulfo group or a salt thereof or a sulfin group or a salt thereof;

and a compound represented by general formula (2);

Formula (2)

$X_2\text{---}L_2\text{---}B$

in which X_2 represents a residual group of a photographic restrainer, L_2 is a divalent group and B is a ballast group, wherein the compound represented by general formula (1) is contained in said material in a quantity of 10^{-7} to 10^{-1} mol with respect to 1 mol of said light-sensitive silver halide and wherein the compound represented by general formula (2) is contained in said material in a quantity of 10^{-5} to 10^{-1} mol with respect to 1 mol of said light-sensitive silver halide.

There are also provided methods of thermally developing such light-sensitive materials.

SUMMARY OF THE INVENTION

It is an object of the present invention to solve the above disadvantages of the thermal developing light-sensitive material.

More specifically, it is an object of the present invention to provide a thermal developing light-sensitive material containing a novel fogging restrainer.

It is another object of the invention to provide a thermal developing light-sensitive material allowing the formation of the high-density fogging-free image.

It is still another object of the invention to provide a thermal developing light-sensitive material having improved preservability.

The above objects of the invention are attained by a thermal development light-sensitive material comprising a support and, provided thereon, a layer containing light-sensitive silver halide grains, in particular, a thermal development light-sensitive material containing at least one compound selected from those represented by the following general formula (1) and at least one compound selected from those represented by the following general formula (2):

General formula (1)

$X_1 - L_1 - A$

[wherein X_1 represents a residue group of photographic restrainer, L_1 is a single bond or bivalent group, A represents any of a hydrogen atom, amino group, hydroxyl group, carboxyl group or salts thereof, sulfo group or salts thereof, or sulfin group or salts thereof;]

General formula (2)

$X_2 - L_2 - B$

[wherein X_2 represents a residual group or photographic restrainer, L_2 represents a bivalent group and B represents a ballast group.]

BRIEF DESCRIPTION OF DRAWINGS

Fig. 4 is a schematic diagram illustrating the outline of thermal developing apparatus to process the thermal developing light-sensitive material of the invention, wherein the reference numerals correspondingly represent the following parts and components.

Reference numeral 1 represents a drum; 3, 4, 7 and 8, pressing rollers; 5 and 9, tension rollers; 6 and 10, belts; 21, a guide roller; 22, CRT; 23, an image receiving member; 24A and 24B, plate heaters; 25 and 26, heating rollers; 27, a guide plate; 28, 29 and 30, guide rollers; 31, a separation roller; 32, a take-in roller; 33 and 34, a transporting roller; 35, a cutter, and; 36, a container.

DETAILED DESCRIPTION OF THE INVENTION


A thermal developing light-sensitive material according to the invention comprises a thermal developing light-sensitive element and an image-receiving element. The thermal developing light-sensitive element is hereinunder referred to as a thermal light-sensitive material or simply as a light-sensitive material; and an image-receiving element is hereinafter called an image-receiving member.

The restrainer represented by the general formula (1) is described in detail below.

The examples of a residue, of photographic restrainer, represented by X_1 in the above general formula (1) are residues of organic compounds known as restrainers (or anti-fogging agents) in a conventional silver halide photographic light-sensitive material, and include those described in the following: "The Fundamentals of Photographic Technology, Silver Salt Photography" (compiled by Photographic Society of Japan, published from Corona Ltd.), p. 354; "Chemistry of Photography" (written by Akira Sasai, Shashin Kogyo Shuppan Co., Ltd.), pp. 168 - 169; The Theory of Photographic Process (edited by T.H. James, published from MacMillan Company), pp. 396 - 399. Among these examples, those preferred are the residues of the organic compounds of which silver salts have a solubility product (pKsp) of more than 10 in relation to water of 25 °C.

The preferred examples of the compound of formula (1) are those in which the group X_1 represents a residual group of a photographic restrainer having one of the general formulae (3) to (18) set out below.


(3)



[wherein R^1 and R^2 independently represent any of a hydrogen atom, or alkyl group or aryl group each having 1 to 7 carbon atoms, M represents a hydrogen atom, alkali metal atom, ammonium group or organic amine residue.]


(4)

5



10 [wherein R¹ represents a hydrogen atom, or alkyl group or aryl group each having 1 to 7 carbon atoms, M is same as that in the general formula (3).]
(5)


15



20

[wherein R¹ represents any of a hydrogen atom, alkyl group having 1 - 7 carbon atoms, aryl group having 1 - 7 carbon atoms or


25

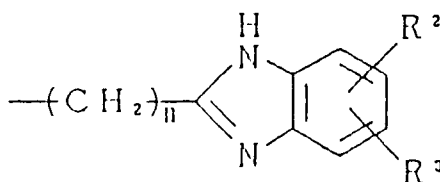

30

(n is 1 or 2), R² and R³ independently represent a hydrogen atom, or alkyl group having 1 - 7 carbon atoms, or aryl group or nitro group having 1 - 7 carbon atoms, R² and R³ may be bonded together to form a five-membered or six-membered ring.]
(6)


40




45

[wherein R¹ represents a hydrogen atom, or alkyl group or aryl group each having 1 - 7 carbon atoms, R² and R³ independently represent any of a hydrogen atom, or alkyl group having 1 - 7 carbon atoms or aryl group having 1 - 7 carbon atoms, R² and R³ may be bonded together to form a five-membered or six-membered ring.]
(7)

55




[wherein Y represents




- O - or - S -, R¹ represents a hydrogen atom, or alkyl group or aryl groups each having 1 - 7 carbon atoms, and M is same as that in the general formula (3).]

(8)




[wherein Y represents - O -, - S -,




R¹ represents a thiol group, or - NH - R⁴ (R⁴ represents a hydrogen atom, or alkyl group or aryl group each having 1 - 7 carbon atoms), R² and R³ independently represent a hydrogen atom, alkyl group having 1 - 7 carbon atoms, or aryl group or nitro group having 1 - 7 carbon atoms, R² and R³ may be bonded together to form a five-membered or six-membered ring.]

(9)




[wherein R¹ and R² independently represent a hydrogen atom, or alkyl group having 1 - 7 carbon atoms, or aryl group having 1 - 7 carbon atoms, or hydrogen atom, R¹ and R² may be bonded together to form a five-membered or six-membered ring.]

(10)



5


10 [wherein R^1 , R^2 and R^3 independently represent any of a hydrogen atom, alkyl group having 1 - 7 carbon atoms, amino group, alkoxy group having 1 - 7 carbon atoms, thioalkoxy group having 1 - 7 carbon atoms or - SM (M is same as that in the general formula (3)).]
(11)



15

20


25 [wherein R^1 , R^2 , R^3 , R^4 and R^5 independently represent any of a hydrogen atom, alkyl group having 1 - 7 carbon atoms, aryl group having 1 - 7 carbon atoms, - NH - R^6 (R^6 represents a hydrogen atom, alkyl group having 1 - 7 carbon atoms or aryl group having 1 - 7 carbon atoms), - SM (M is same as that in the general formula (3)), alkylthio group having 1 - 7 carbon atoms or alkoxy group having 1 - 7 carbon atoms.]
(12)



30

35


[wherein R^1 , R^2 , R^3 and R^4 are respectively identical to R^1 through R^5 in the general formula (11).]
(13)



40

45

50 [wherein R^1 and R^2 independently represent a hydrogen atom, or alkyl group having 1 - 7 carbon atoms, M is same as that in the general formula (3).]
(14)




55


[wherein R^1 and R^2 independently represent a hydrogen atom, alkyl group or aryl group each having 1 - 7

carbon atoms, R¹ and R² may be bonded together to form a five-membered or six-membered ring.]

(15)




[wherein R¹, R² and R³ independently represent a hydrogen atom, or alkyl group or aryl group each having 1 - 7 carbon atoms, R¹ and R² may be bonded together to form a five-membered or six-membered ring, and Y represents any of - O -, - S - or




(R⁴ represents a hydrogen atom, or alkyl group having 1 - 7 carbon atoms.)]

(16)




[wherein R¹ represents a hydrogen atom, or amino group or alkyl group or aryl group each having 1 - 7 carbon atoms, Y represents - O -, - S - or



(R³ represents a hydrogen atom, or amino group, or alkyl group or aryl group each having 1 - 7 carbon atoms), and M is same as that in the general formula (3).]

(17)




[wherein R¹ and R² independently represent any of a hydrogen atom, and acyl group, alkyl group and aryl group each having 1 - 7 carbon atoms, R¹ and R² may be bonded together to form a five-membered or six-membered ring, Y represents = N - or



(R³ is a hydrogen atom, or alkyl group having 1 - 7 carbon atoms), and M is same as that in the general formula (3).]

(18)




[wherein R¹, R² and R³ are same as those in the general formula (15), and Y⁽⁻⁾ represents a pair anion.]

With the general formulae (3) through (18), the preferred residues of photographic restrainer are the nitrogen-containing residues independently having a - SM group (M is a hydrogen atom, alkali metal atom, or ammonium group or organic amine residue), and the photographic restrainer residues represented by the general formula (4) or (8) are particularly advantageous.

In the above general formula (1), L₁ represents a bivalent group, and more favorably represents any of the following independently having 1 through 7 carbon atoms: an alkylene group (such as methylene group, ethylene group, propylene group and the like), alkenylene group (such as vinylene group, propenylene group and the like), arylene group (such as p-phenylene group, m-phenylene group, o-phenylene group and the like), imino group, carbonyl group, sulfonyl group, ether group or group comprising the combination thereof (such as alkylencarbonylamino group, aralkylenamino group, sulfonylamino group and the like).

The compounds according to the invention expressed by the above general formula (1) are preferably those represented by the following general formula (19).

General formula (19)

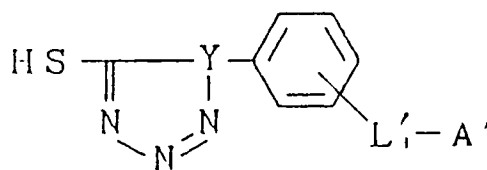


wherein L₁' and A' are the same as L₁ and A in the above general formula (1) respectively; Y represents a nitrogen atom or carbon atom.

The typical examples of the compounds according to the invention represented by the above general formula (1) are listed below. However, the scope of the useful compounds according to the present invention are not limited only to them.

(A - 1)

5


10



15

(A - 2)


20

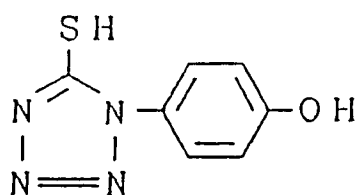

25

(A - 3)

30

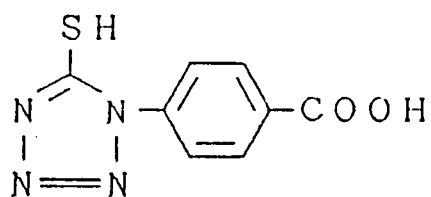

35

40


45

50

55

(A - 4)


5

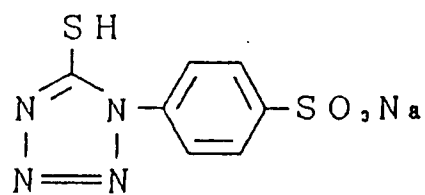

10

(A - 5)

15

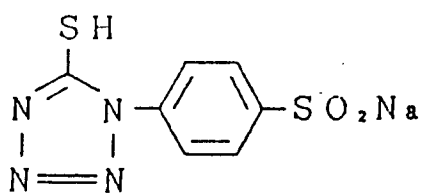


20

25

(A - 6)


30

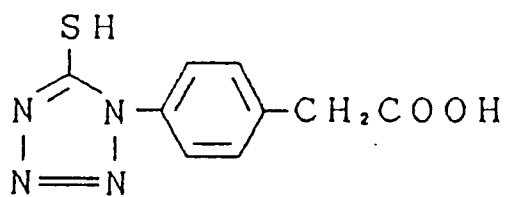

35

(A - 7)

40

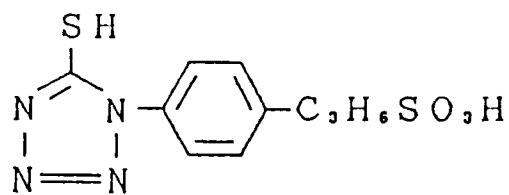


45


50

55


(A-8)

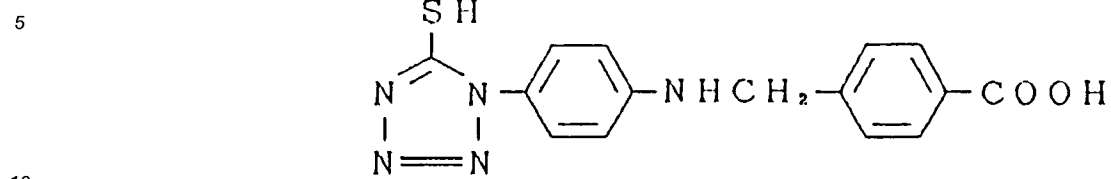

(A-9)

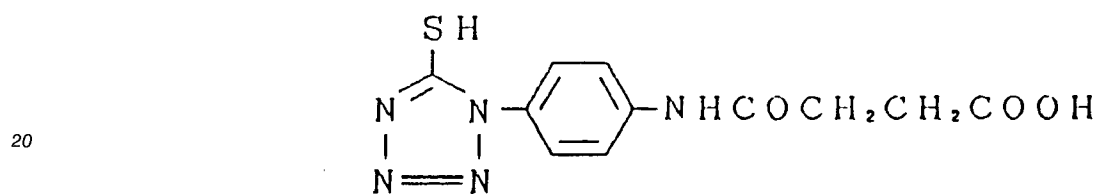

(A-10)

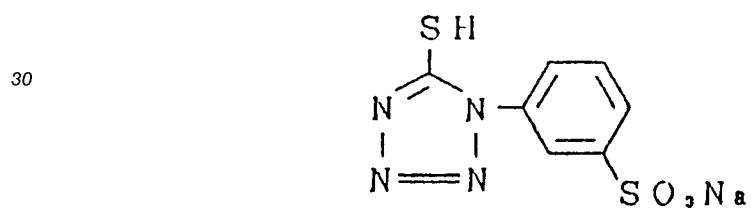


40

45


50

55


(A-11)




(A-12)

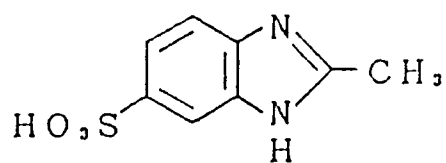


(A-13)

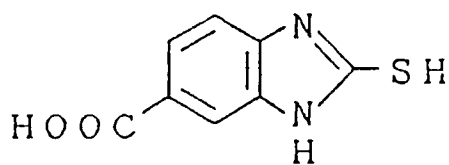


(A-14)




(A-15)

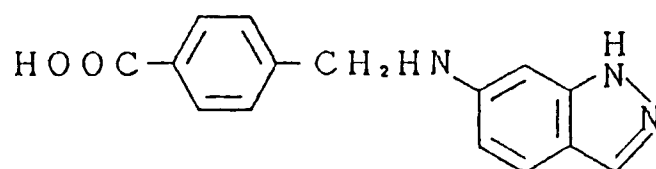


(A-16)




(A-17)

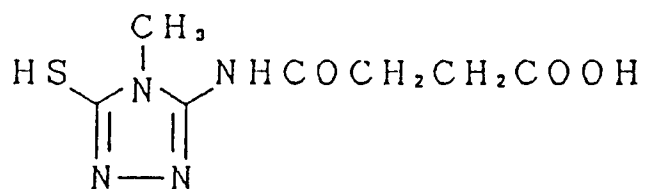


(A-18)




(A-19)




(A-20)

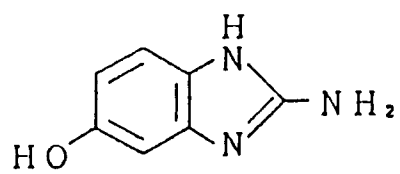

(A-21)

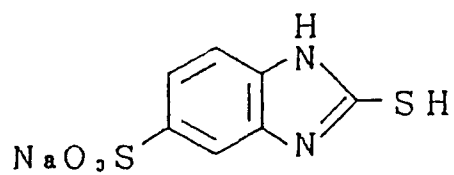


(A-22)




(A-23)




(A-24)




(A-25)




(A-26)




(A-27)




(A-28)




(A-29)




(A-30)




(A-31)

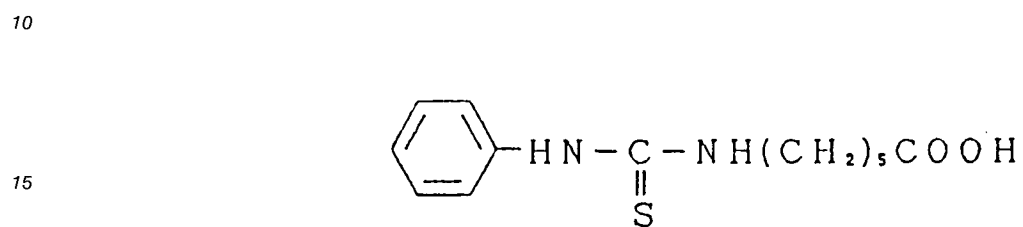


(A-32)

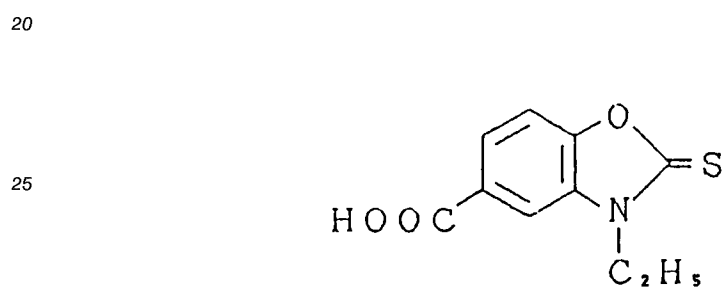


(A-33)

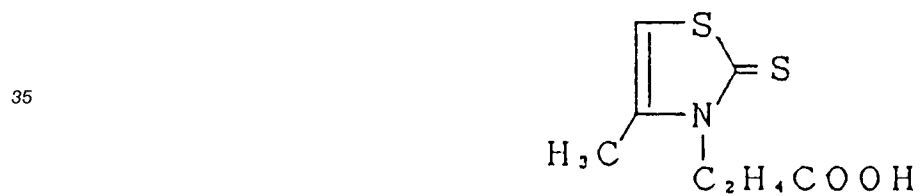


(A-34)




(A-35)




(A-36)

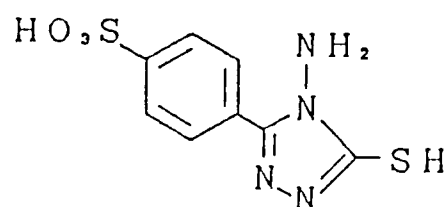

(A-37)

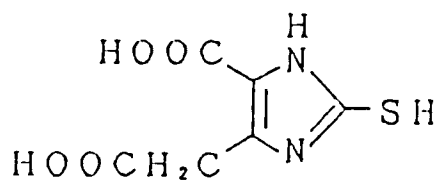


(A-38)

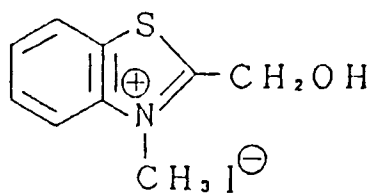

(A-39)

5

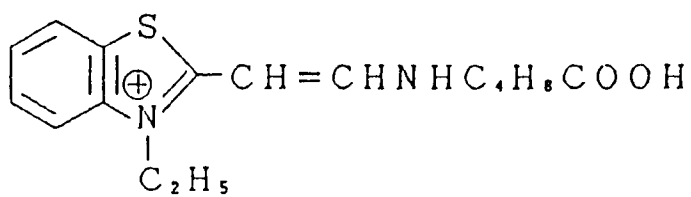


10

(A-40)

15


20

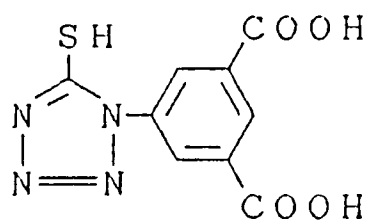

(A-41)

25


30



(A-42)

35


40



(A-43)

45

50

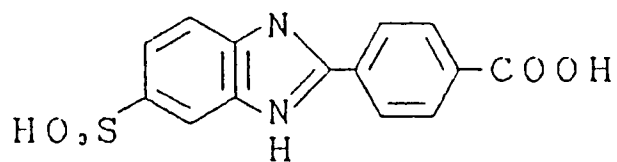


55

(A-44)

5


10



15

(A-45)


20



25

(A-46)

30

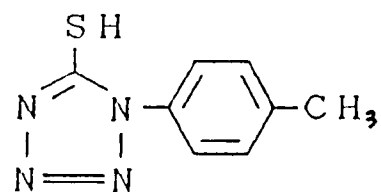


35

(A-47)

40

45

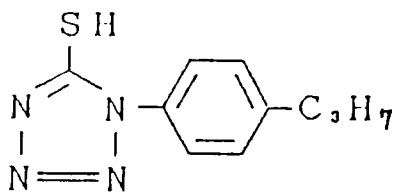


50

55

(A-49)


5



10

(A-50)


15



20

(A-51)


25



30

(A-52)

35



40


45

50

55

(A-53)


5



10

(A-54)


15



20

(A-55)


25



30

(A-56)


35



40

(A-57)


45




50

55

(A-58)



(A-59)



The compounds represented by the above general formula (1) can be synthesized by a conventional method. For example, they can be synthesized with reference to methods disclosed in "Chemische Berichte", 86, pp. 314 (1953); "Canadian Journal of Chemistry", 37, pp. 101 (1959); "Journal of Chemical Society", 49, pp. 1748 (1927); British Patent No. 1,275,701; U.S. Patent No. 3,266,897; Japanese Patent O.P.I. Publications No. 89034/ 1975, No. 28426/1978, No. 21067/1980, No. 111846/1981; and the like.

The amount of addition of the compound according to the invention represented by the general formula (1) is not particularly limited. It may be determined in accordance with the following factors; a type of the compound; whether the compounds are used singly or combinedly; the types, amount, the ratio of mixture of light-sensitive silver halide or organic silver salt, or what types of layers comprise the light-sensitive material of the invention. In general, the amount of addition is 10^{-7} to 10^{-1} , more specifically, 10^{-5} to 10^{-2} mol per mol light-sensitive silver halide.

The compound of the invention represented by the general formula (1) may be contained in any of the structural layers of the thermal developing light-sensitive material, and may be simultaneously contained in more than two layers. Though contained in the structural layers, usually the light-sensitive layers containing light-sensitive silver halide or the layers containing organic silver salts, the compound may be contained non-light-sensitive layers. When such a compound is incorporated into the silver halide light-sensitive layers, the timing of addition is arbitrarily selected from the period, after the precipitation of silver halide grains used for the above-mentioned light-sensitive layers has been formed following the physical ripening, and before the emulsions containing the light-sensitive silver halide grains are applied by coating. The addition method is arbitrarily selected from those used in incorporating an ordinary compound into emulsions. Accordingly, for example, the compound of the invention is, in the form of acid or salt, firstly solved in water or an organic solvent such as methanol or the like, or in the mix solvent comprising them, then added into emulsions. Additionally, if the compound of the invention can be solved in an organic solvent such as ethyl acetate or cyclohexane, it may be incorporated into the layers, in the form of emulsion.

Next, the restrainers represented by the general formula (2) are specifically described below.


As residues, of photographic restrainer, represented by X_2 in the compound represented by the general formula (2), those identical to the examples of X_1 in the general formula (1) are available. Among them, the residues, of photographic restrainer, represented by the general formula (4) or (8) are particularly advantageous.

Further, the examples of a bivalent group represented by L_2 in the above general formula (2) are identical to those of L_1 in the general formula (1). More specifically, the following bivalent groups are available.

- CONH -, SO_2NH -, - NHCONH -, - COO -,









- NHCO -, - NHSO₂ -, - O -, - S -, - N - (R is a hydrogen atom or alkyl group) and



The ballast groups used in the invention represented by B in the general formula (2) are organic ballast groups individually having molecular size and configuration sufficient enough to reduce or eliminate the diffusibility of the compound used in the invention represented by the general formula (2) or the silver salt thereof (or silver complex) during the thermal developing process. The typical examples of such an organic ballast group include the following; a long-chained alkyl group bonded to the residue of photographic restrainer represented by X₂, directly, or via a bivalent bonding group represented by L₂; a benzene or naphthalene aromatic group directly or indirectly fused into a carbon-containing ring or heterocycle of the residue of photographic restrainer. A useful ballast group usually has at least 8 carbon atoms, and more favorably, is an alkyl group (which may have a substituent) having 8 to 40 carbon atoms (if it has a substituent, the number includes the carbon atoms in a substituent).

The useful ballast group is also typified by a group having not only a group having a hydrophilic substituent such as a sulfo group, carboxy group or the like, but a group having an alkyl group (which may have a substituent) containing 8 to 30 carbon atoms.







The preferred examples of ballast group are listed below.

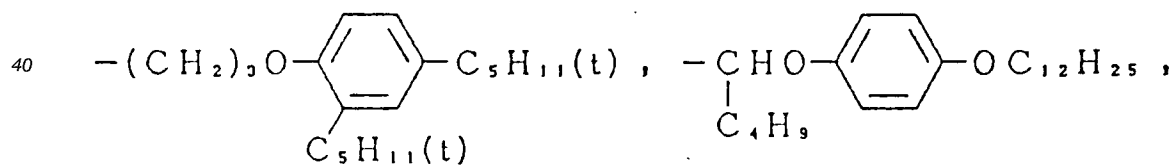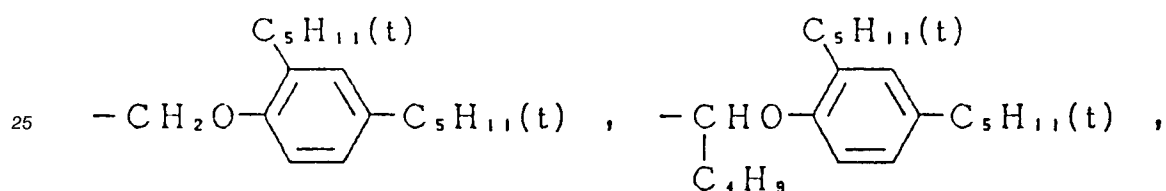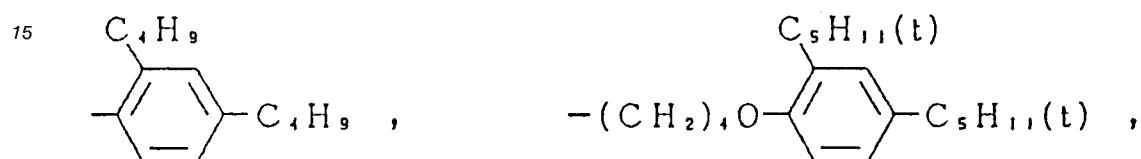





45

50


55

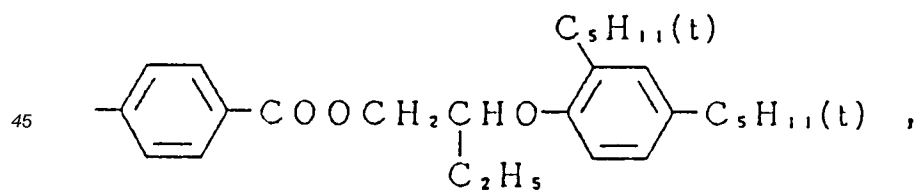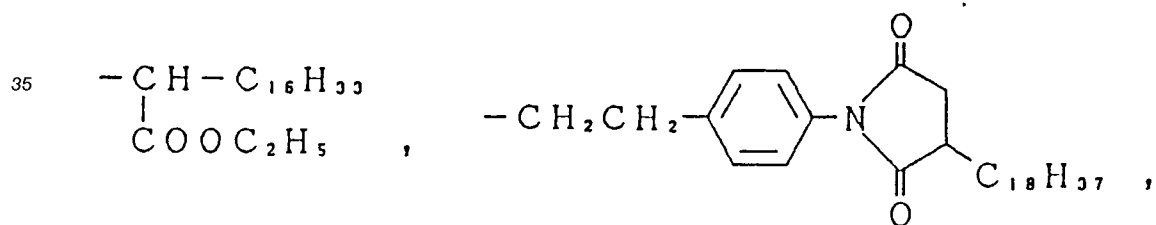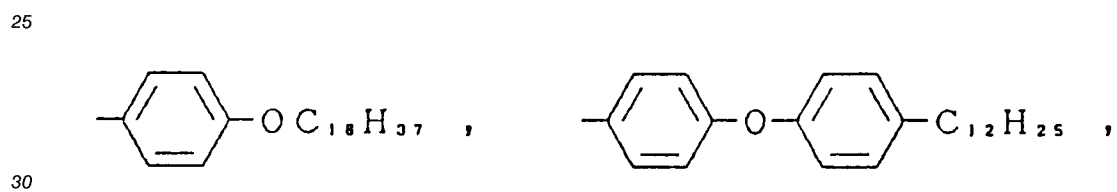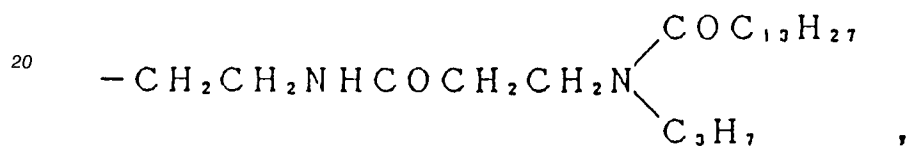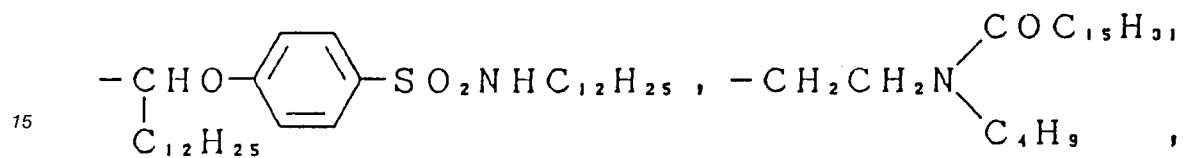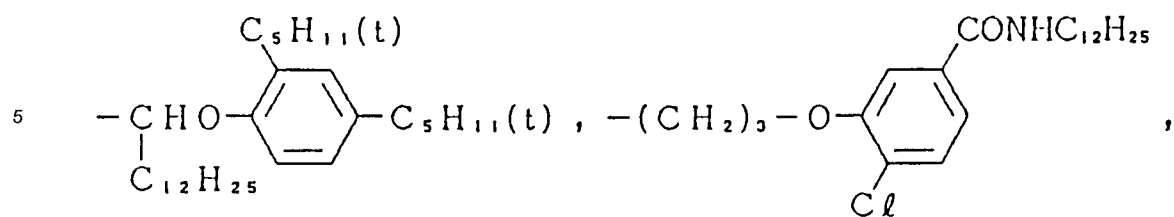

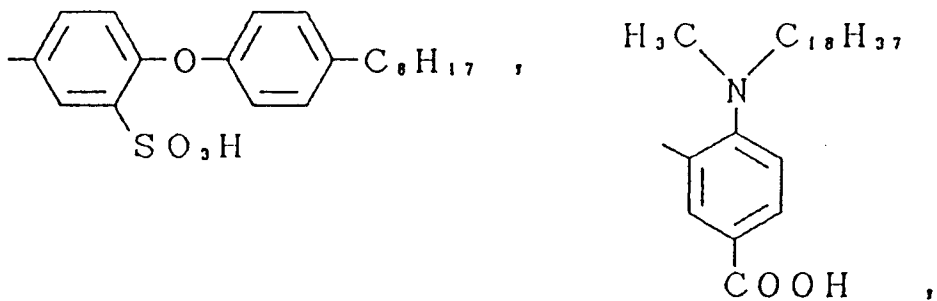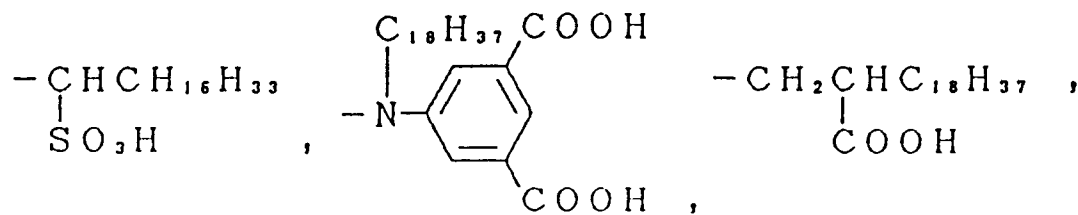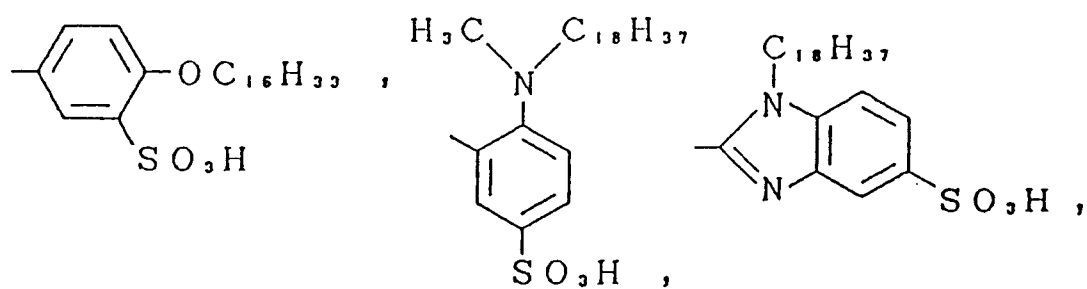


40 The typical example compounds represented by the above general formula (2) are listed below. However, the scope of compounds used in the invention is not limited only to these examples.


(B - 1)

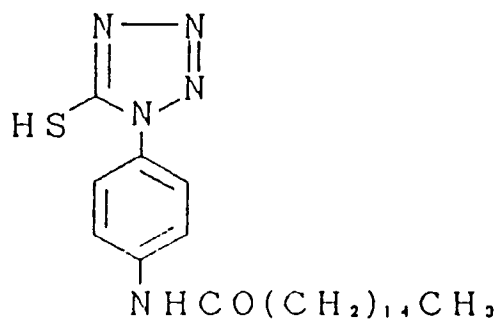


(B - 2)

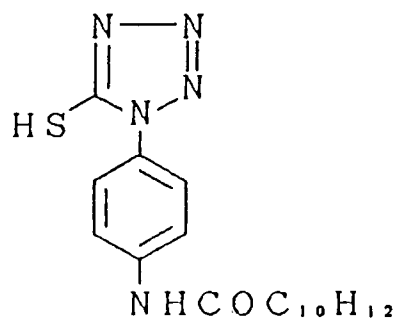


(B - 3)

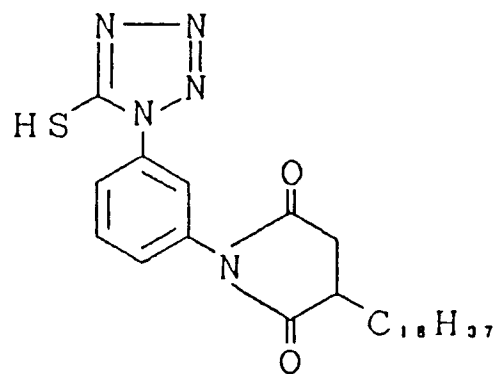


(B - 4)

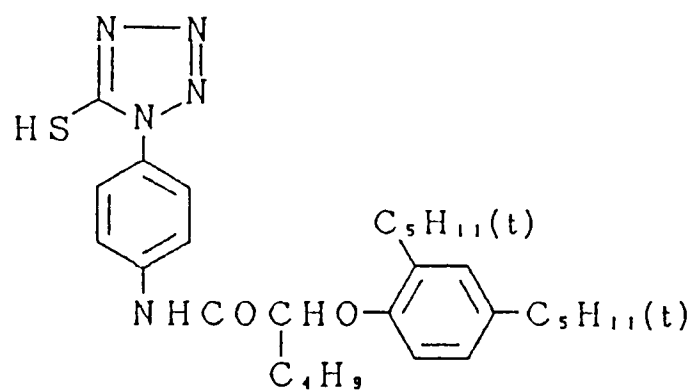


(B - 5)

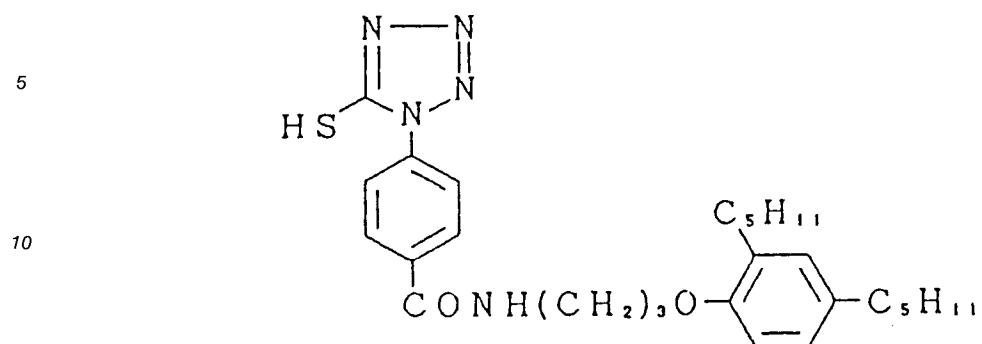


(B - 6)

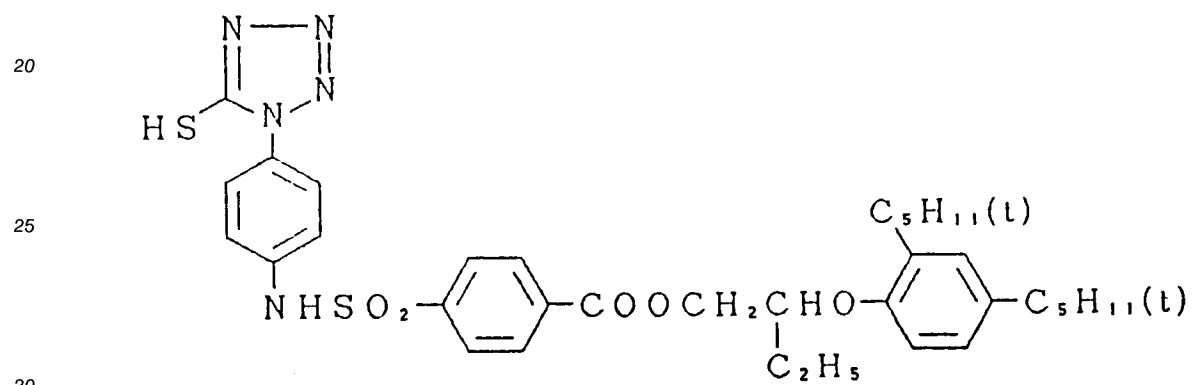


(B - 7)

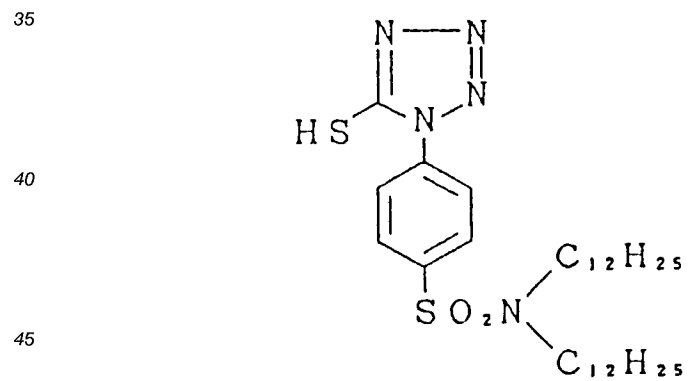


(B - 8)

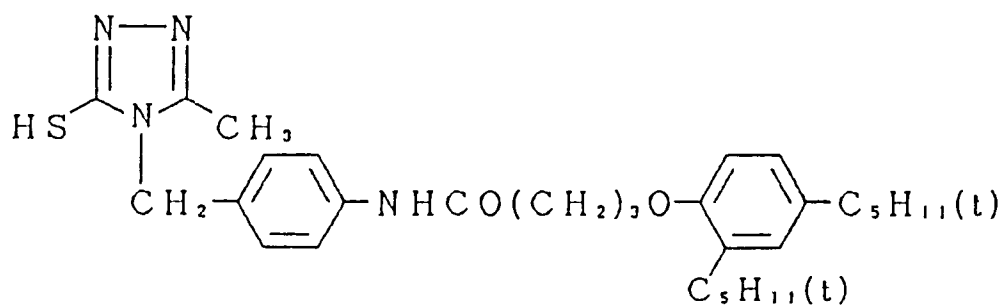


(B - 9)

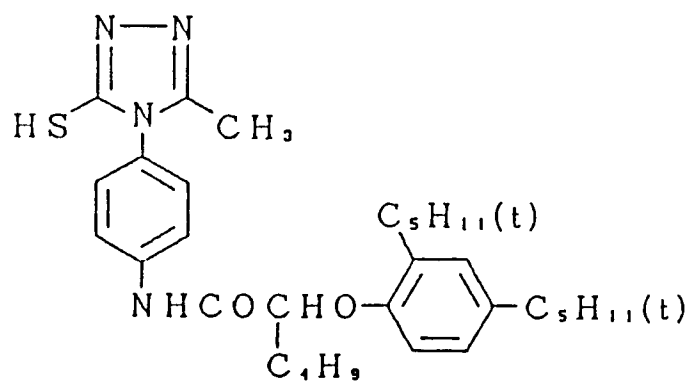


(B - 10)

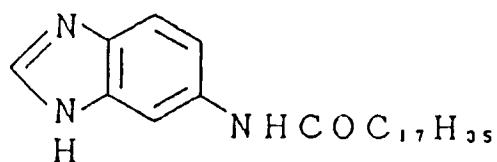


(B - 1 1)

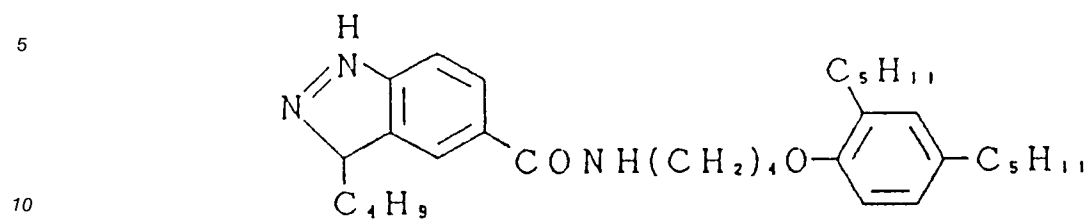


(B - 1 2)

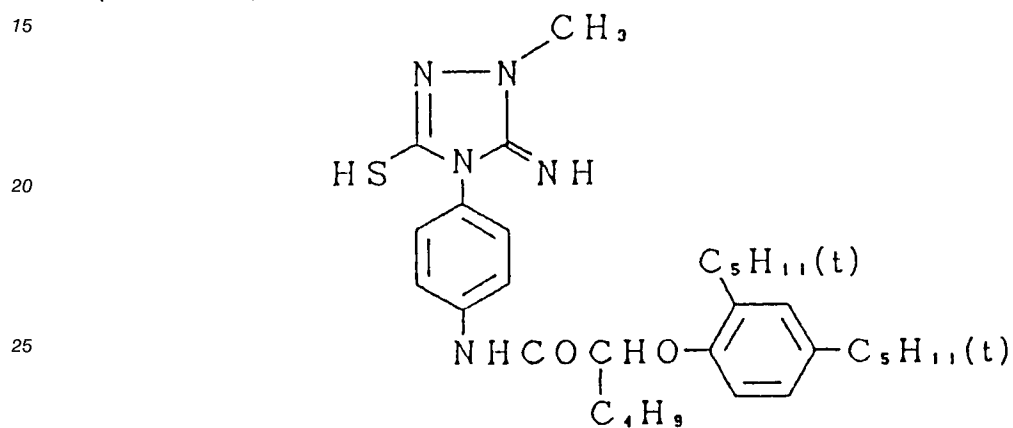

30 (B - 1 3)

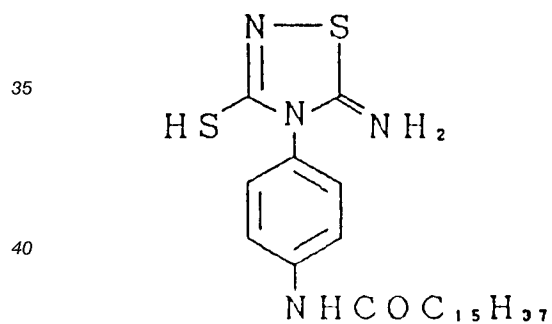


(B - 1 4)




55


(B-15)

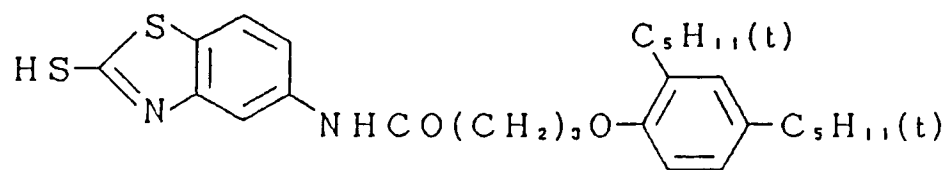


(B-16)





(B-17)

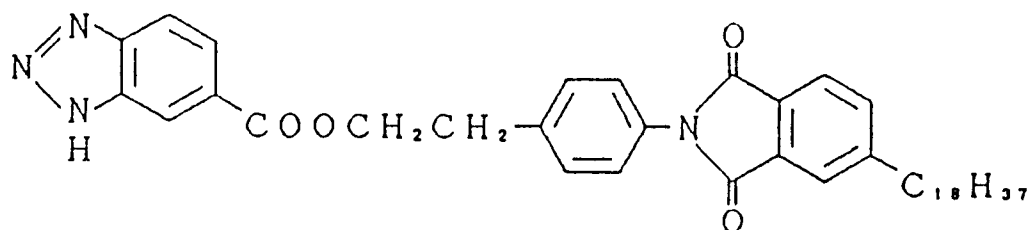


(B - 2 1)

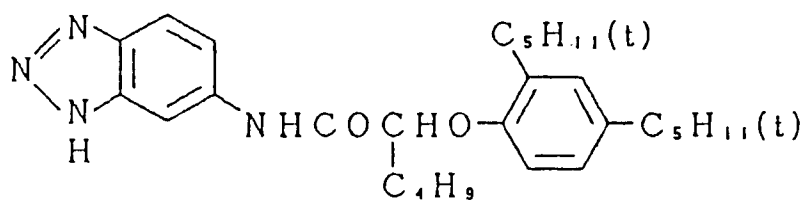


(B - 2 0)

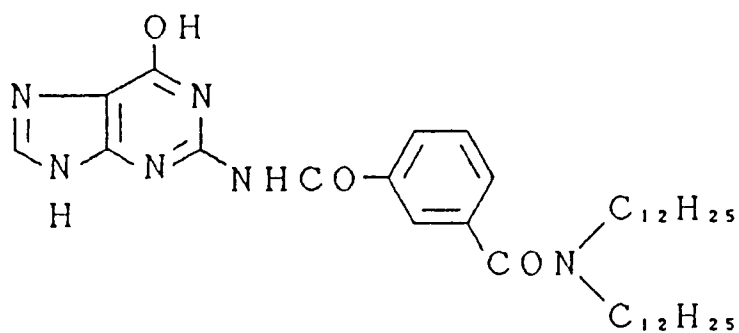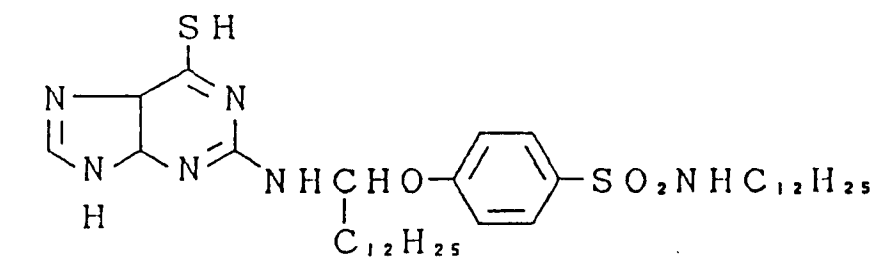


(B - 2 2)

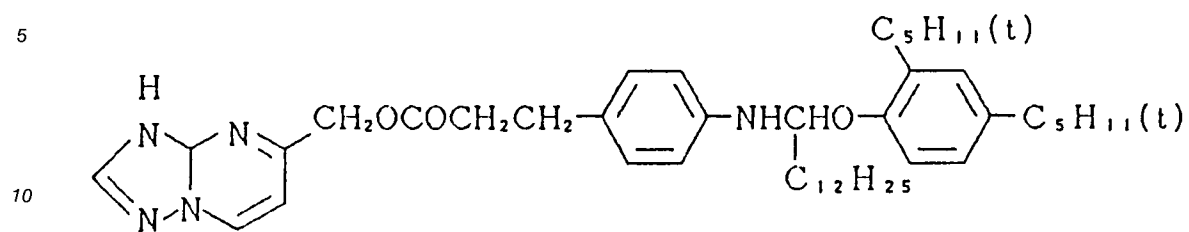

(B - 2 3)

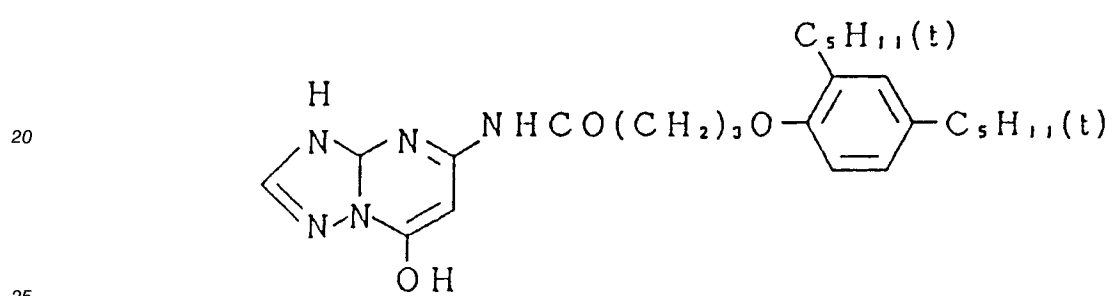


(B - 2 4)

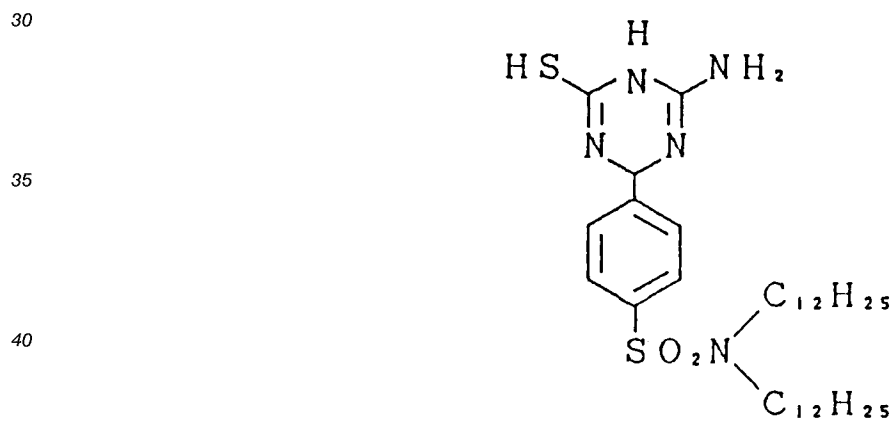

(B - 25)

5


10

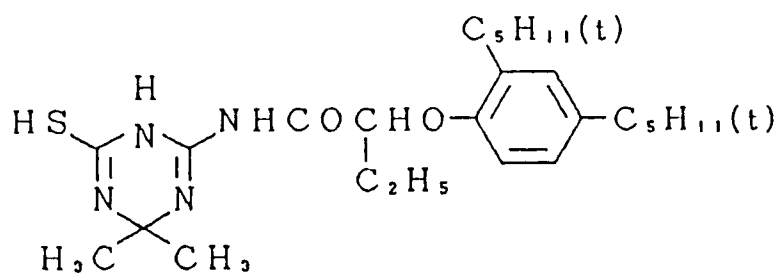

(B - 26)

15


20

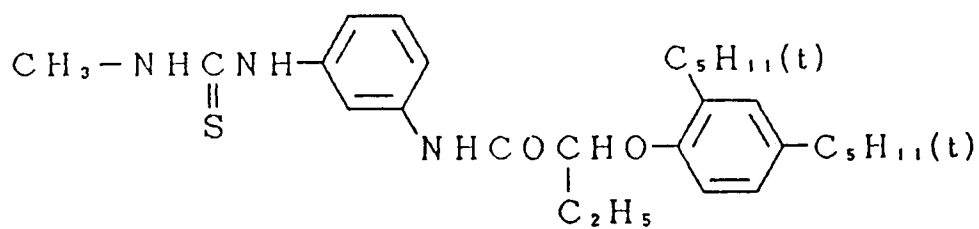

25

(B - 27)


30

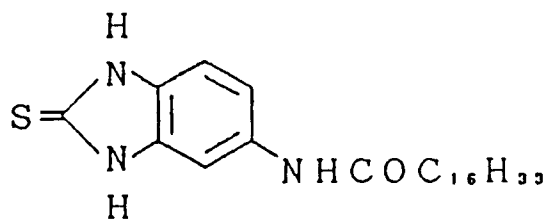

35

(B - 28)

40

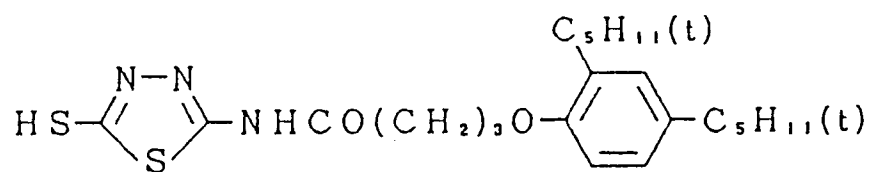


45


50

55


(B - 29)

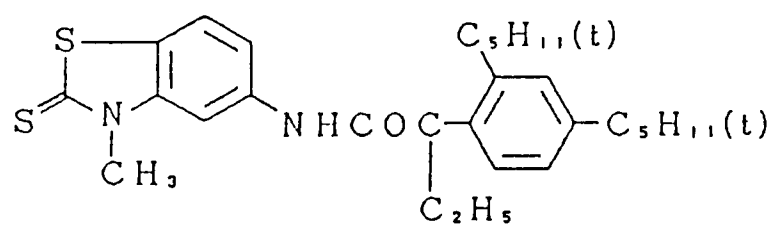


(B - 30)

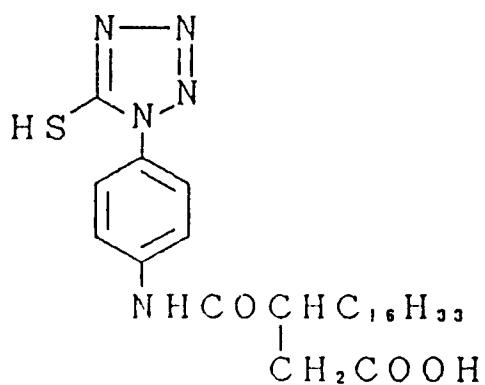


(B - 31)

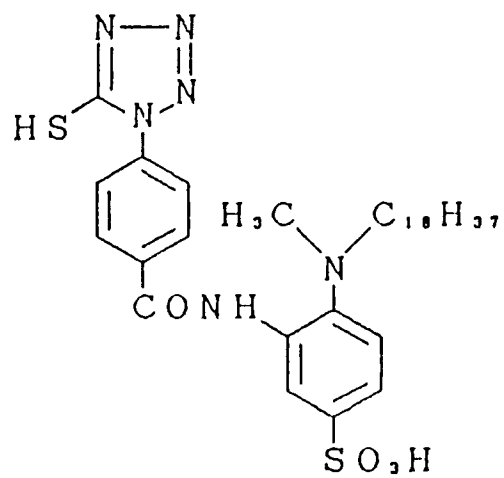


(B - 32)

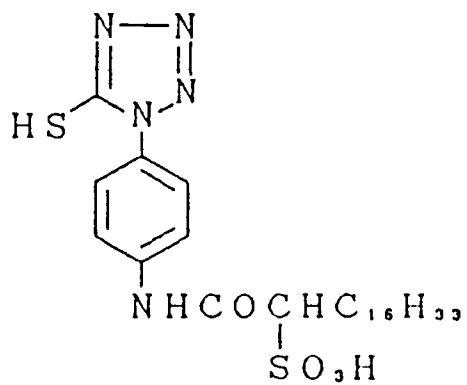


(B - 3 3)

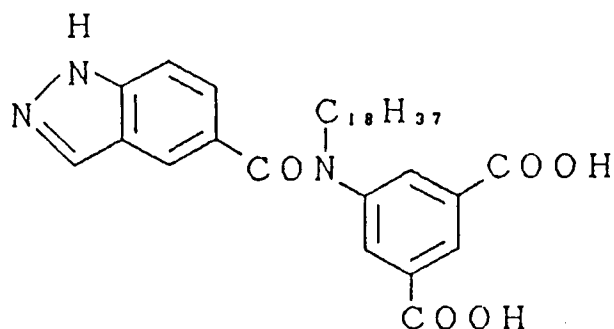


(B - 3 4)

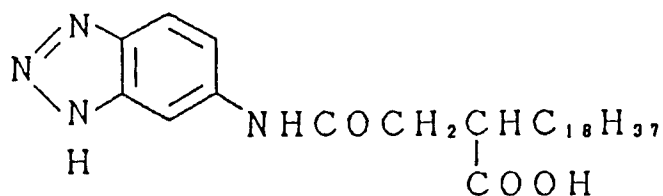

(B - 3 5)

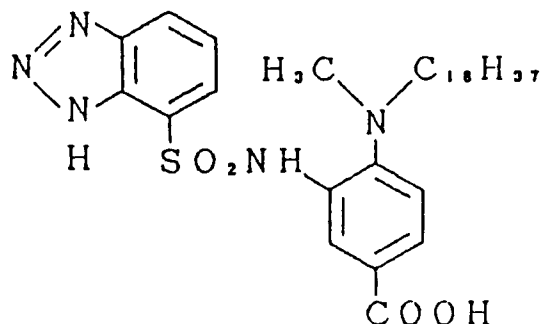

(B - 3 6)

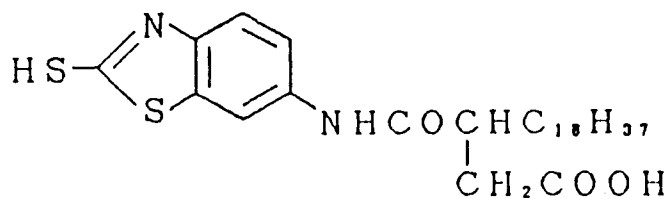

The examples typically demonstrating the synthesization of the compounds used in the invention are as follows.

Synthesizing example - 1: Compound (B - 1)

19.3 g of 1-(p-aminophenyl)-1,2,3,4-tetrazol-5-thiol and 20 ml of pyridine were added into 200 ml acetonitrile, thereinto 33 g of palmitoyl chloride was added dropwise with stirring under a room temperature, then the solution was heated and refluxed for one hour, then cooled. This caused crystals to precipitate. The crystals were filtered out and rinsed with cool acetonitrile, then dried, thus 31.5 g (yield, 76%) object product was obtained.

Synthesizing example - 2: Compound (B - 15)

18.2 g of 6-amino-2-mercaptobenzothiazole and 20 ml of pyridine were added into 200 ml acetonitrile, thereinto 50 ml acetonitrile solution containing 35 g of 3-(2,4-di-(t)-pentyl-phenoxy)-butyric chloride was added dropwise, with stirring under a room temperature, then the solution was heated and refluxed for one hour. The reaction solution was rinsed with water, and the crystals were filtered out, then recrystallized with acetonitrile, thus 33.8 g (yield, 88%) object product was obtained.

The other compounds of the invention may be synthesized with the similar methods.

The amount of addition of the compound according to the invention represented by the general formula (2) is not particularly limited. It may be determined in accordance with the following factors; a type of the compound; whether the compounds are used singly or more than two of them are combinedly used; the types, amount, the ratio of mixture of light-sensitive silver halide or organic silver salt, or; what types of layers comprise the light-sensitive material of the invention. In general, the preferred amount of addition is 10^{-5} to 10^{-1} , more specifically, 10^{-4} to 10^{-2} mol per mol light-sensitive silver halide.

The compound represented by the general formula (2) may be contained in any of the structural layers of the thermal developing light-sensitive material, and may be simultaneously contained in more than two layers. However, the compound should be favorably contained in the light-sensitive layers containing light-sensitive silver halide. When such a compound is incorporated into the silver halide light-sensitive layers, the timing of addition is arbitrarily selected from the period, after the formation of silver halide grains used for the above-mentioned light-sensitive layers, and before the emulsions containing the light-sensitive silver halide grains are applied by coating. The addition method is arbitrarily selected from the conventional methods. Such methods are as follows; a method, wherein a compound is firstly dissolved in a low-boiling solvent (such as methanol, ethanol or ethyl acetate) or high-boiling solvent (such as dibutyl phthalate, dioctyl phthalate or tricresyl phosphate), then, subjected to an ultrasonic dispersion; a method, wherein a compound is dissolved in an aqueous alkali solution (for example a 10% aqueous sodium hydroxide solution), and then neutralized by a mineral acid (for example hydrochloric acid, nitric acid); a method, wherein a compound is dispersed together with an aqueous solution of suitable polymer (for example, polyvinyl butyral or polyvinyl pyrrolidone) by means of a ball mill.

It is preferable that only of the thermal developing light-sensitive layers of the thermal developing light-sensitive material of the invention contains all of (1) light-sensitive silver halides, (2) reducing agent, (3) dye-supplying material, (4) binder, and if so required, (5) organic silver salt. It is, however, not always necessary that these are contained in only one photographic structural layer. For example, a thermal developing light-sensitive layer is divided into two layers, whereby one thermal developing light-sensitive contains the above components (1), (2), (4) and (5) are contained in one thermal developing light-sensitive layer, while the other thermal developing light-sensitive layer adjacent to it contains the dye-supplying material (3). In other words, as far as these compounds can react with each other, they may be isolatedly distributed to more than two photographic structural layers.

In addition, the thermal developing light-sensitive layer may be divided into more than two layers, for example, a high sensitive layer and a low sensitive layer or a high density layer and a low density layer.

The thermal developing light-sensitive material of the invention comprises at least one thermal developing light-sensitive layer provided on a support. A thermal developing color light-sensitive material usually comprises three thermal developing light-sensitive layers independently having an individual color-sensitivity. In the light-sensitive layer, a dye having individual color is formed or released by a thermal developing. A blue-sensitive layer has a yellow dye; a blue-sensitive layer has a magenta dye, and; a red-sensitive layer has a cyan dye. However, these combinations are not necessarily mandatory. Also, a near-infrared light-sensitive layer may be incorporated into the material.

The constitution of the layers may be arbitrarily determined. The following constitutions are available; a constitution comprising comprising a support, sequentially disposed thereon, a red-sensitive layer, a green-sensitive layer and a blue-sensitive layer; a constitution comprising a support, sequentially disposed thereon, a blue-sensitive layer, a green-sensitive layer and a red-sensitive layer; a constitution comprising a support, sequentially disposed thereon, a green-sensitive layer, a red-sensitive layer and a blue-sensitive layer.

The thermal developing light-sensitive material of the invention may have, in addition to the above-mentioned thermal developing light-sensitive layers, the non-light-sensitive layers, such as a subbing layer, intermediate layers, a protective layer, a filter layer, a backing layer and a separation layer, and others. To form the above thermal developing light-sensitive layers and these non-light-sensitive layers on the support, the coating methods similar to those used for preparing, by coating, a conventional silver halide light-sensitive material can be used.

More specifically, the a dipping method, a roller method, a reverse roll method, an air knife method, a doctor blade method, a spray method, a bead method, an extrusion method, a stretch flow method and a curtain flow method (methods and apparatus) can be used.

The thermal developing light-sensitive material of the invention contains light-sensitive silver halides. The light-sensitive silver halides used in the invention include silver chloride, silver bromide, silver iodide, silver chlorobromide, silver chloro-iodide, silver iodo-bromide and silver chloro-iodo-bromide. The above light-sensitive silver halides can be prepared by an optional method known in the photographic art, such as a single-jet precipitation method and a controlled double-jet precipitation method. Light-sensitive silver halide emulsions containing light-sensitive silver halides prepared in accordance with a conventional method to prepare silver halide gelatin emulsions can be arbitrarily used.

Mono-dispersion silver halide grains are preferably used. They may be of core/shell type silver halide grains, and may be giant grains or fine grains. However, a preferred mean grain size is 0.001 to 1.5 μm , or more specifically, 0.01 to 0.5 μm .

The above light-sensitive silver halide emulsions may be chemically sensitized by optional methods in the photographic art. Such sensitizing methods include a gold sensitization, sulfur sensitization, gold-sulfur sensitization and reducing sensitization.

The light-sensitive silver halide emulsions can be turned into spectrally sensitized light-sensitive silver halide emulsions by containing various types of spectral sensitizing dyes.

The typical spectral sensitizing dyes used in the invention include cyanine, melocyanine, complex (tri-nucleus or tetra-nucleus) cyanine, holopolar cyanine, styryl, hemicyanine and oxonol. Of the cyanine dyes, those having a basic nucleus, such as thiazoline, oxazoline, pyrroline, pyridine, oxazole, thiazole, selenazole and imidazole are favorably used. Such nuclei may have an enamine group capable of forming an alkyl group, alkylene group, hydroxyalkyl group, sulfoalkyl group, carboxylalkyl group and aminoalkyl group, or an enamine capable of forming a condensed carbon ring or heterocyclic ring. In addition, such a nucleus may be either a symmetrical type of asymmetrical type, and may have, in a methine chain or polymethine chain thereof, an alkyl group, phenyl group, enamine group or heterocyclic substituent.

The melocyanine dye may have, in addition to the above basic nuclei, an acidic nucleus such as a thiohydantoin nucleus, rhodanine nucleus, oxazolidine nucleus, barbituric nucleus, thiazolinethione nucleus, malononitril nucleus and pyrazolone nucleus. Such acidic nucleus may have a substituent of alkyl group, alkylene group, phenyl group, carboxyalkyl group, sulfoalkyl group, hydroxyalkyl group, alkoxyalkyl group, alkylamino group or heterocyclic nuclei. More than two of such dyes may be, if necessary, simultaneously used. Also, super-sensitizing dyes not absorbing visible light, such as ascorbic derivatives, cadmium salt of azaindene and organic sulfonic acids and the like, as disclosed in U.S. Patents No. 2,933,390 and No. 2,937,089, can be used together with such a dye.

The amount addition of such a dye is 1×10^{-4} to 1 mol, preferably 1×10^{-4} to 1×10^{-1} mol per mol silver halide or silver halide-forming component.

Such light-sensitive silver halides and the light-sensitive silver salt-forming components may be used in combination, in compliance with various methods, and the total amount of addition is 0.001 to 50 g/m², preferably 0.1 to 10 g/m² per layer.

According to the invention, various organic silver salts can be used to increase the sensitivity and improve the developability of the material.

The examples of organic silver salt used together with the thermal developing light-sensitive material of the invention are as follows; as disclosed in Japanese Patent Examined Publication No. 4921/1968, No. 26582/1969, No. 18416/1970, No. 12700/1970 and No. 22185/1970, Japanese Patent O.P.I. Publications No. 52626/1974, No. 31728/1977, No. 137321/1977, No. 141222/1977, No. 36224/1978, No. 36224/1978 and No. 37610/1971, U.S. Patents No. 3,330,633, No. 3,794,496 and No. 4,105,451, silver salts of long-chained aliphatic carboxylic acids and silver salts of carboxylic acids having a heterocycle, for example, silver laurate, silver myristate, silver palmitate, silver stearate, silver alaquidonate, silver bahanate, α -(1-phenyl-tetrazaolethio) silver salts of aromatic carboxylic acids, for example silver benzoate and silver phthalate; as disclosed in Japanese Patent Examined Publications No. 26582/1969, No. 12700/1970 and No. 22185/1970, Japanese Patent O.P.I. Publications No. 137321/1977, No. 118638/1983 and No. 118639/1983, U.S. Patent No. 4,123,274 silver salts of imino group.

The silver salts of imino group include silver benzotriazole silver. Such benzotriazole silver may be substituted or unsubstituted. The typical examples of substituted benzotriazole silver include alkyl-substituted benzotriazole silver (preferably substituted by an alkyl group having less than 22 carbon atoms, preferably less than 4 carbon atoms, such as methylbenzotriazole silver, ethylbenzotriazole silver, n-octylbenzotriazole silver), alkylamidebenzotriazole silver (preferably substituted by an alkylamide group having less than 22 carbon atoms, such as acetamidebenzotriazole silver, propionamidebenzotriazole silver,

iso-butylamidebenzotriazole silver, laurylamidebenzotriazole silver), alkylsulfamoylbenzotriazole silver (preferably substituted by an alkylsulfamoyl group having less than 22 carbon atoms, such as 4-(M, N-diethylsulfamoyl) benzotriazole silver, 4-(M-propylsulfamoyl) benzotriazole silver, 4-(N-octylsulfamoyl) benzotriazole silver, 4-(N-decylsulfamoyl) benzotriazole silver, 5-(N-octylsulfamoyl) benzotriazole silver), silver salts of halogen-substituted benzotriazole (such as 5-chlorobenzotriazole silver, 5-brombenzotriazole silver), alkoxybenzotriazole silver (preferably, substituted by an alkoxy group having less than 22, or more specifically, less than 4 carbon atoms, such as 5-methoxybenzotriazole silver, 5-ethoxybenzotriazole silver), 5-nitro-benzotriazole silver, 5-aminobenzotriazole silver, 4-hydroxybenzotriazole silver, 5-carboxybenzotriazole silver, 4-sulfobenzotriazole silver and 5-sulfobenzotriazole silver.

The other examples of useful silver salt having an imino group are as follows; imidazole silver, benzimidazole silver, 6-nitrobenzimidazole silver, pyrazole silver, urazole silver, 1,2,4-triazole silver, 1H-tetrazole silver, 3-amino-5-benzylthio-1,2,4-triazole silver, saccharin silver, phthalazinone silver, phthalimide silver; salts of mercapto compounds such as 2-mercaptobenzoxazole silver, 2-mercaptooxadiazole silver, 2-mercaptobenzothiazole silver, 2-mercaptobenzimidazole silver, 3-mercapto-4-phenyl-1,2,4-triazole silver, 4-hydroxy-6-methyl-1,3,3a,7-tetraazaindene silver, 5-methyl-7-hydroxy-1,2,3,4,6-pentaazaindene silver.

Also silver complex compounds having a stability constant of 4.5 - 10.0 as disclosed in Japanese Patent O.P.I. Publication No. 31728/1977, as well as silver salts of imidazolinethione as disclosed in U.S. Patent No. 4,168,980 are used.

Of the above organic silver salts, silver salts of imino group are preferable, in particular, silver salts of benzotriazole derivatives, preferably 5-methylbenzotriazole and derivatives thereof, sulfobenzotriazole and derivatives thereof, and N-alkylsulfamoylbenzotriazole and derivatives thereof are advantageous.


The organic silver salts in the invention may be used singly or in combination. A silver salt may be formed in an appropriate binder, which may be used without isolating the silver salt, or otherwise, the isolated silver salt may be dispersed in a binder to be used, with an appropriate means. The useful dispersing methods include a ball mill, sand mill, colloid mill and vibration mill but the use of them are not mandatory.

In addition, the organic silver salts are usually prepared by a method, wherein silver nitrate and raw organic compounds are dissolved blended in water or organic solvent. If necessary, the addition of binder or the addition of alkali such as sodium hydroxide can accelerate the dissolution of the organic compounds, and the use of an ammonia solution of silver nitrate is also effective.

The preferred amount of such an organic silver salt is usually 0.01 to 500 mol, more specifically, 0.1 to 100 mol, and most specifically, 0.3 to 30 mol per mol light-sensitive silver halide.

When the thermal developing light-sensitive material of the invention is a color light-sensitive material, a dye-supplying material is employed.

The dye-supplying materials useful of the invention are described below. The dye-supplying materials should be compulsorily materials being capable of taking part in the reducing reaction of light-sensitive silver halide and/or organic silver salt used in compliance with a requirement, and being capable of forming or emitting diffusible dyes in proportion to the function of the reaction, and are categorized, based on the nature of reaction, into negative type dye-supplying materials which form a negative dye image, in proportion to the positive function, when negative silver halide is used, and positive type dye-supplying materials which form a positive dye image, in proportion to the negative function, when negative silver halide is used. The negative type dye-supplying materials are further divided into the following categories.

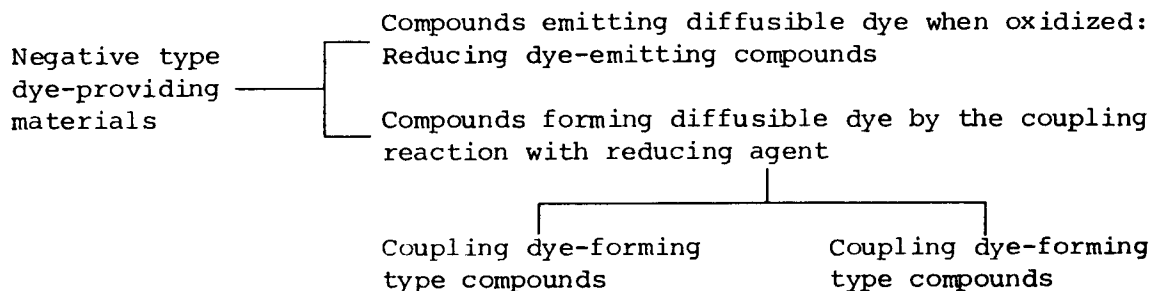

Each dye-supplying material is further described below.

The examples of reducing dye-emitting compound are, for example, those represented by the following general formula (2').

General formula (2')

Car - NHSO_2 - Dye

5 In this formula, Car represents a reducing base (so called a carrier) which is oxidized to emit a dye in the reduction of light-sensitive silver halides and/or organic silver salts used if necessary, and Dye represents a residue of diffusible dye.

10 The typical examples of the above reducing dye-emitting type compound are disclosed in Japanese Patent O.P.I. Publications No. 179840/1982, No. 116537/1983, No. 60434/1984, No. 65839/1984, No. 71046/1984, No. 87450/1984, No. 88730/1984, No. 123837/1984, No. 165054/1984 and No. 165055/1984, and exemplified as follows.

Example dye-supplying materials

15

20

25

30

35


40

45


50

55


①

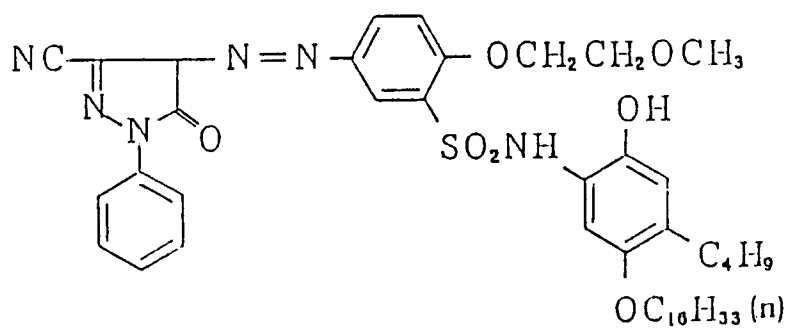


②

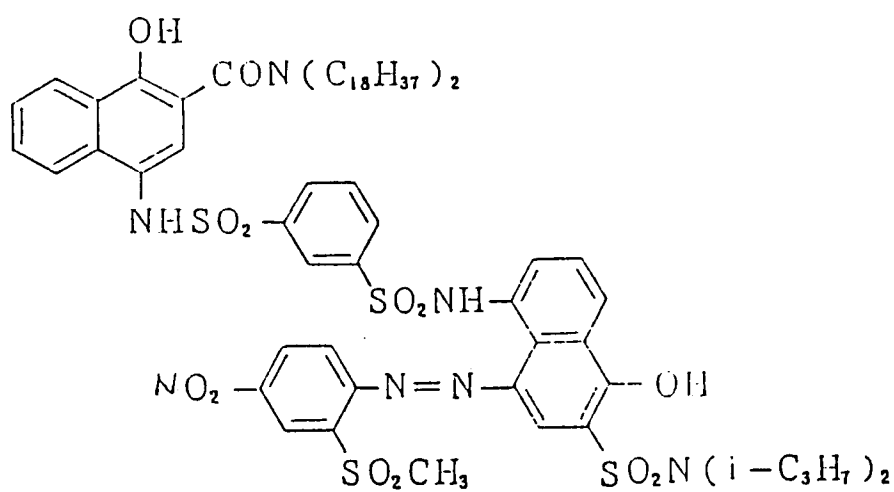


③

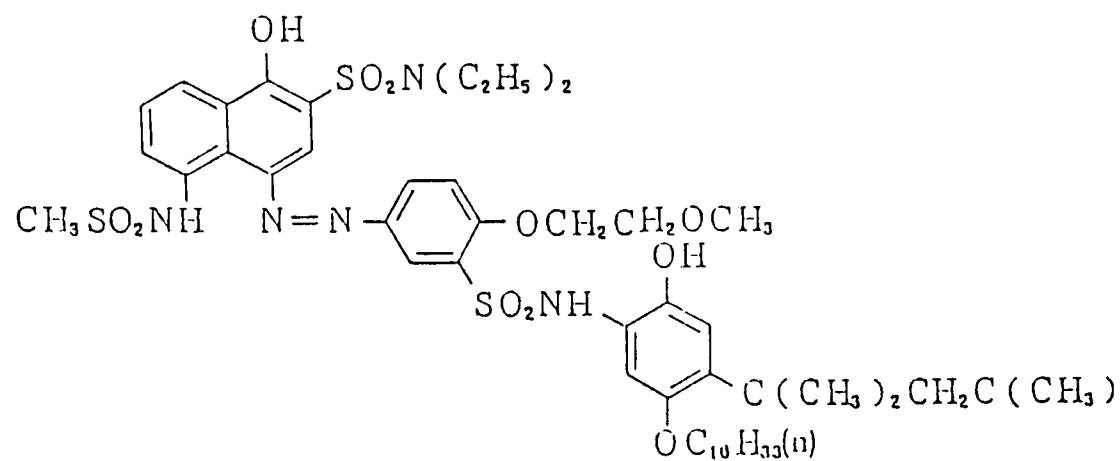


④

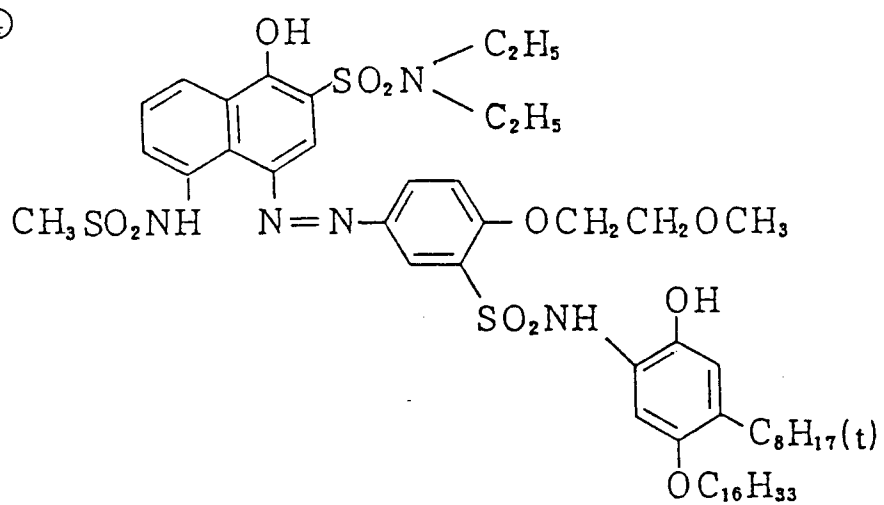


⑤

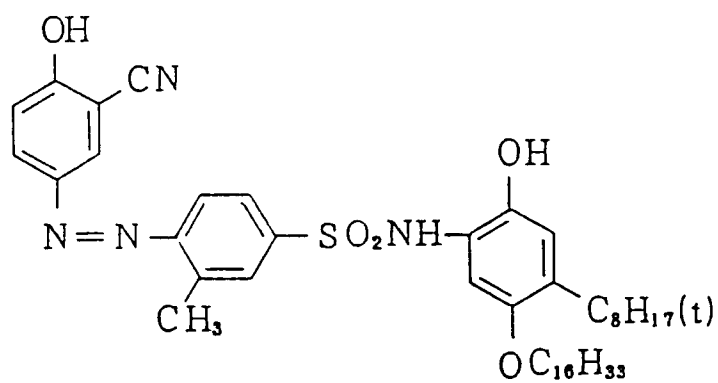


⑥

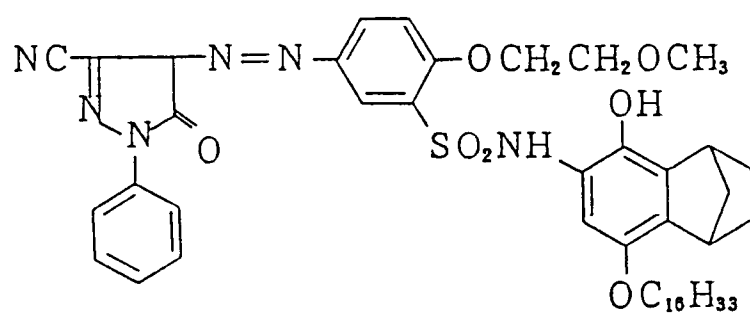


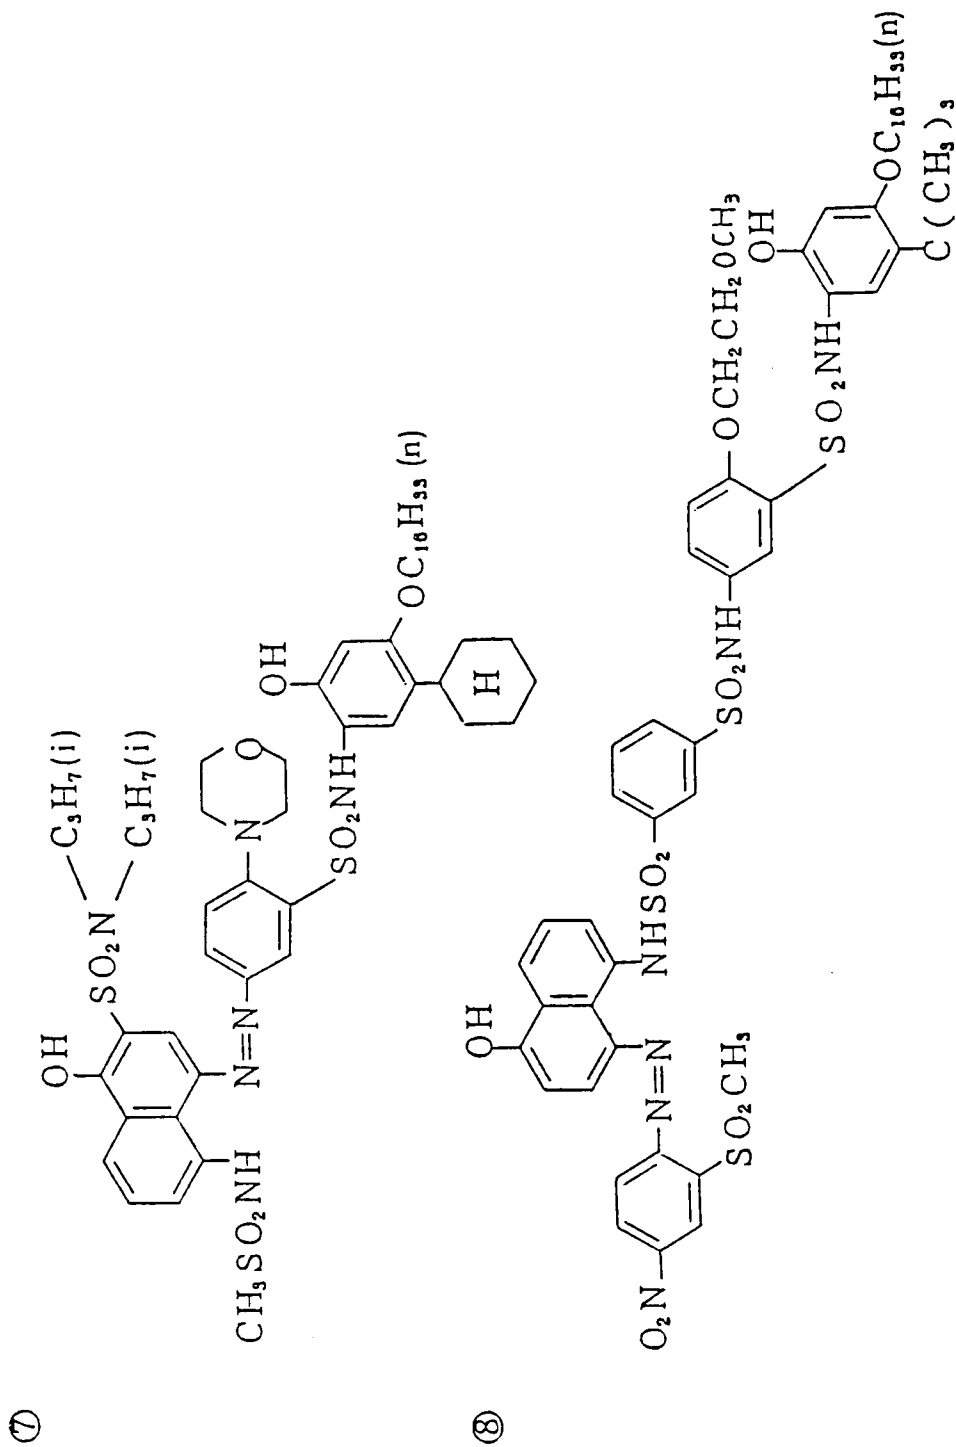


⑨

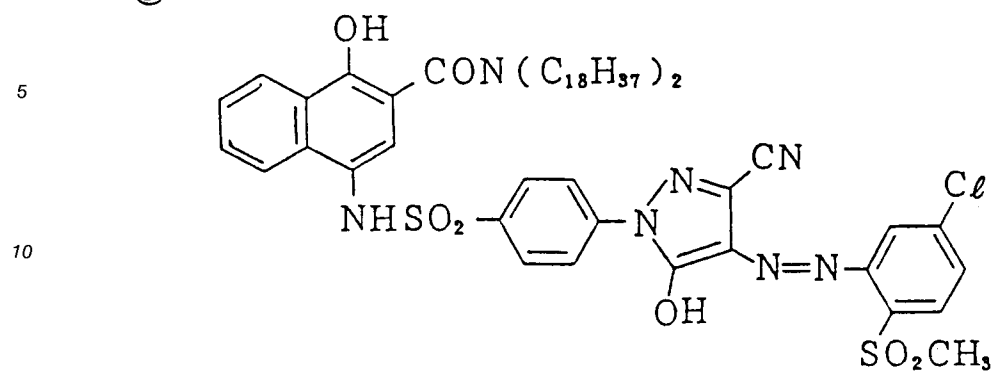


⑩

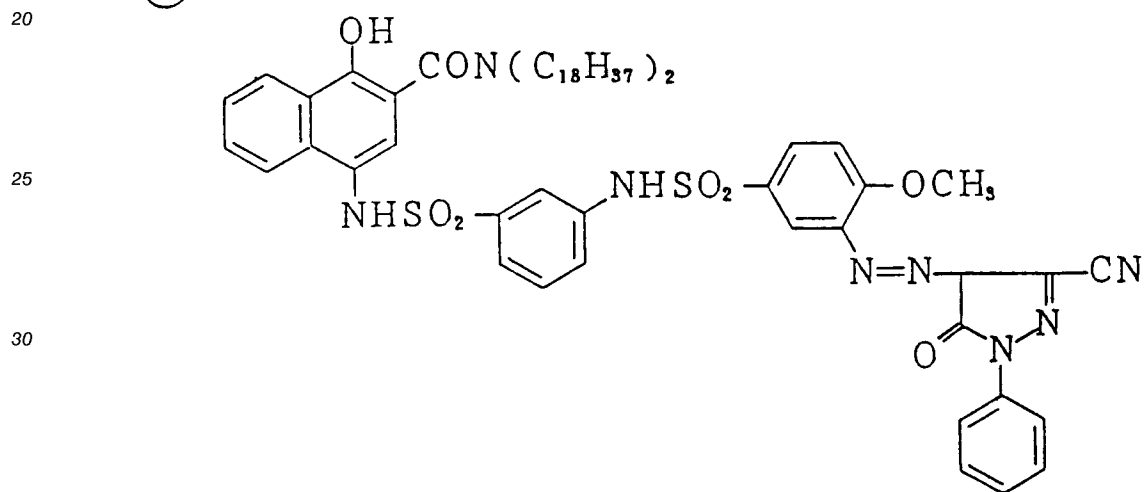


⑪


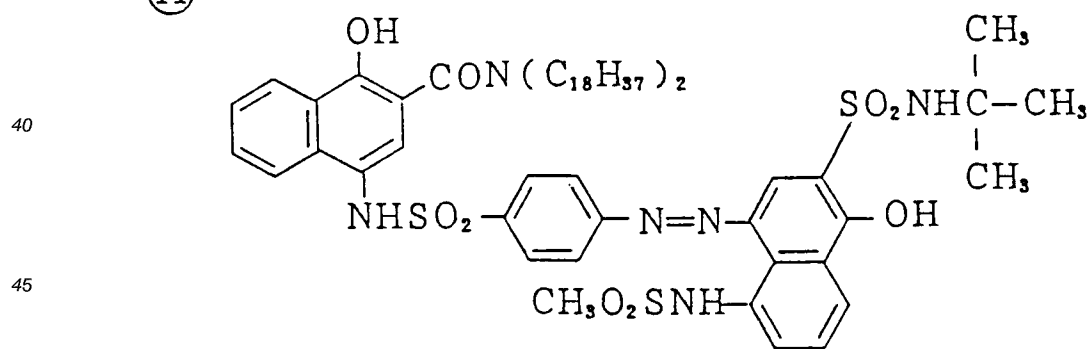




⑫

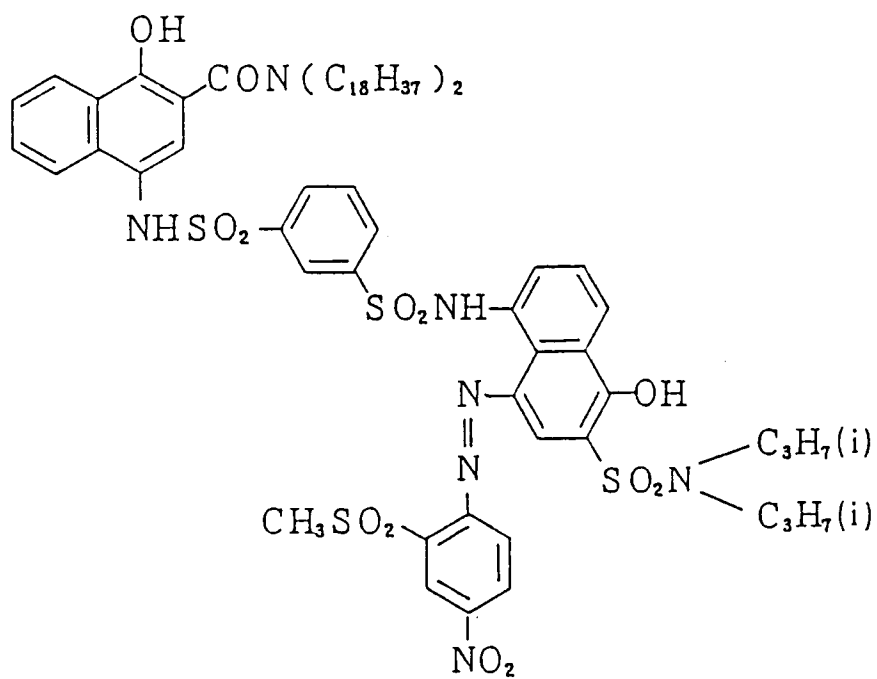

⑬

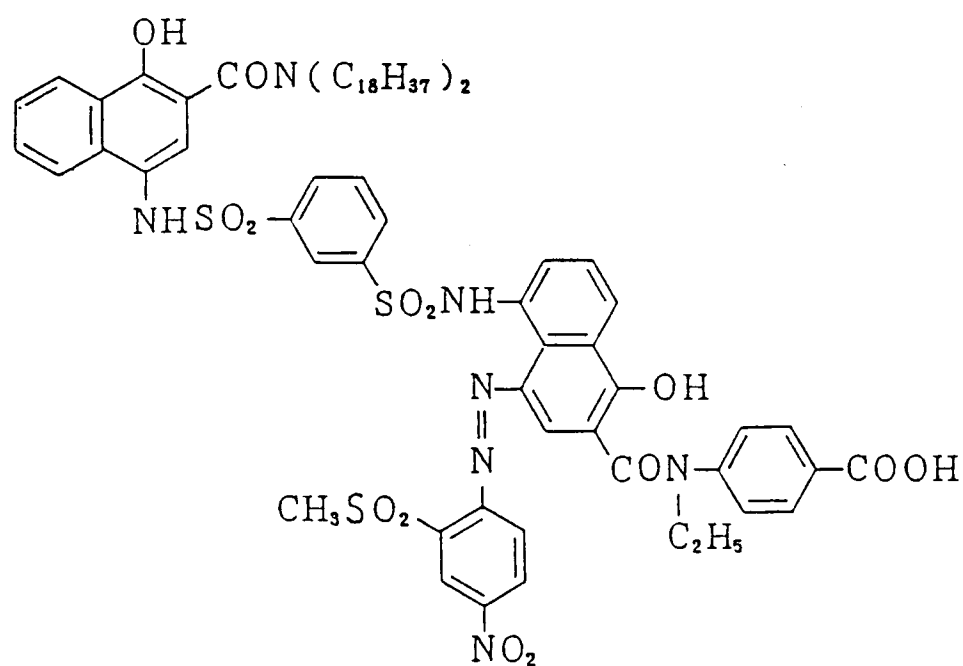


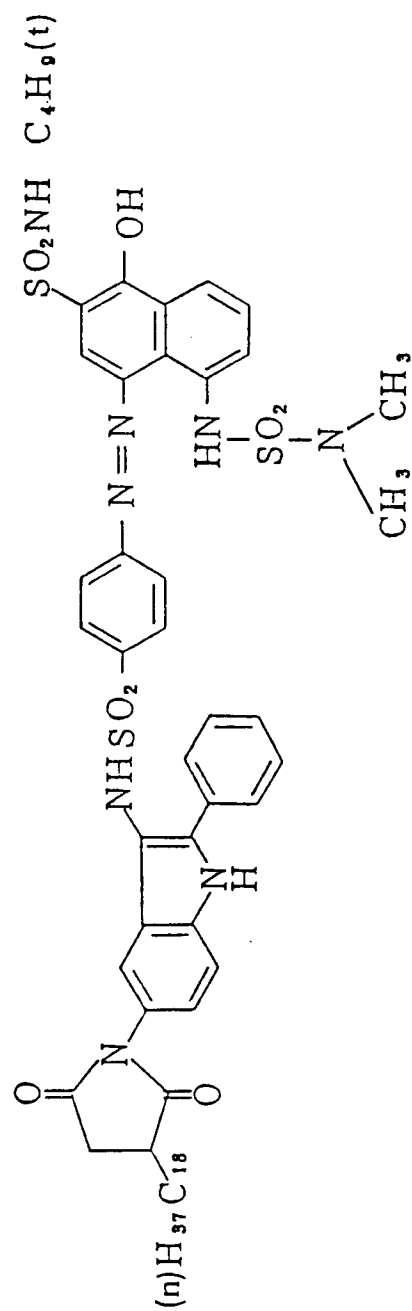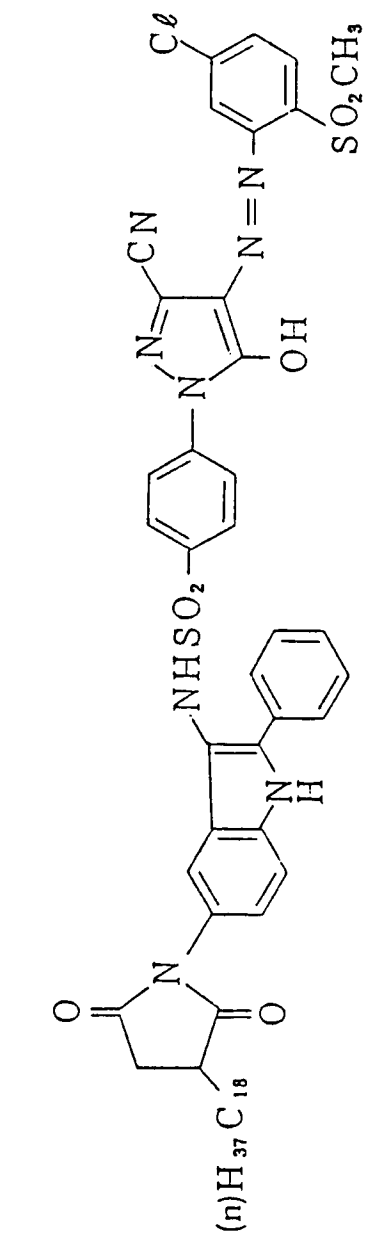

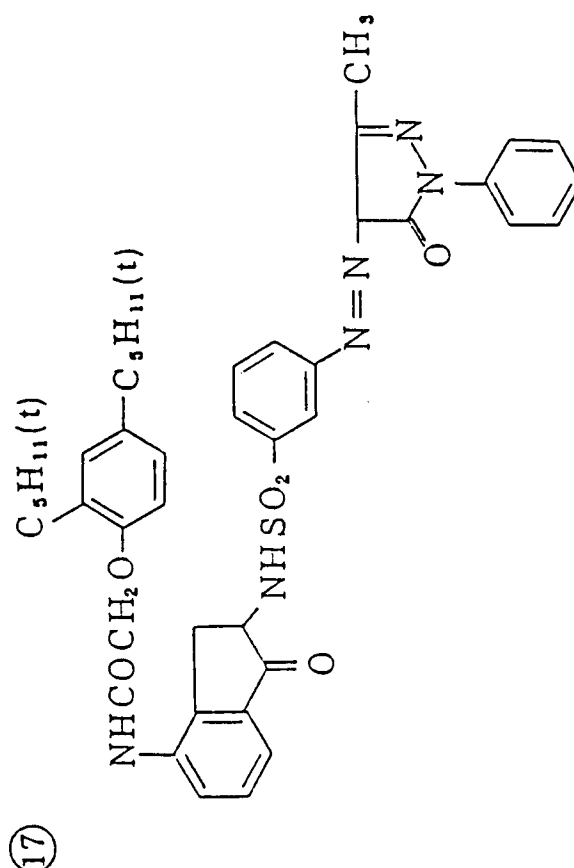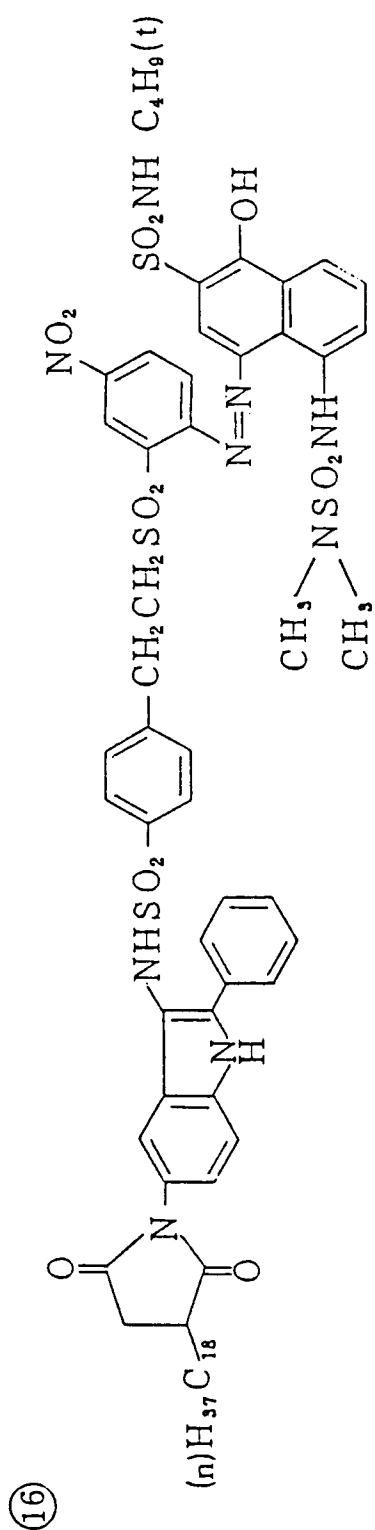

Other reducing dye-emitting compounds include compounds represented the following general formula (3'):

General formula (3')

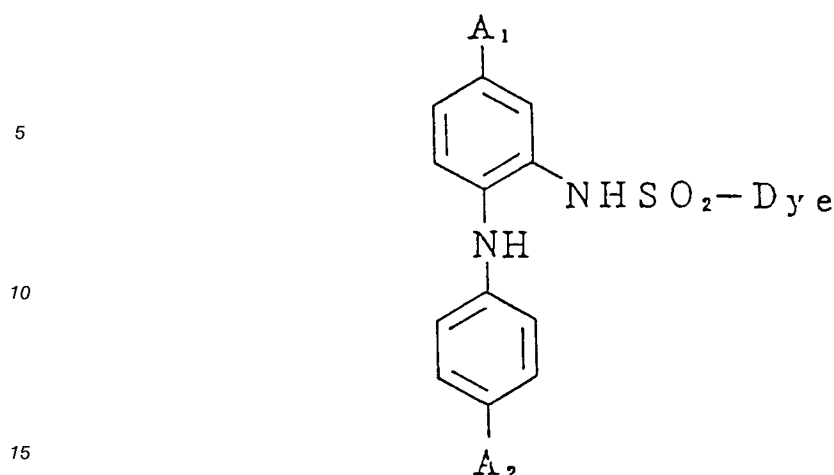

In the formula, A₁ and A₂ individually represent a hydrogen atom, hydroxyl group or amino group, and Dye is identical to Dye in the general formula (2'). The typical examples of this compound are disclosed in Japanese Patent O.P.I. Publication No. 124329/1984.

The coupling dye-emitting type compounds include the compounds represented by the following general formula (4').

General formula (4')


25 $Cp_1 - \{ J \}_n - Dye$

In the formula, Cp₁ represents an organic group (so called a coupler residue) capable of reacting with an oxidized product of a reducing agent, to emit a dye, J represents a bivalent bonding group; a bond between Cp₁ and J is cleaved by the reaction with the oxidized produce of reducing agent; n represents 0 or 1; and Dye is identical to than in the general formula (2'). In addition, Cp₁ is preferably substituted with any of various types of ballast group in order to make the coupling dye-emitting type compounds non-diffusible. Though variable in accordance with the nature and configuration of the light-sensitive material to be used, the examples of such a ballast groups are as follows: an organic group having more than 8 carbon atoms (more specifically, more than 12 carbon atoms); a hydrophilic group, such as a sulfon group or carboxyl group each having more than 8 carbon atoms (preferably, more than 12 carbon atoms); a group simultaneously having carbon atoms, and hydrophilic groups such as a sulfon group, carboxy group and others. Another particularly advantageous ballast groups is a polymer chain.


The typical examples of the above compounds represented by the general formula (4') are disclosed in Japanese Patent O.P.I. Publications No. 186744/1982, No. 122596/1982, No. 160698/1982, No. 174834/1984, No. 224883/1982, No. 159159/1984 and No. 231540/1984. For example, the following compounds are disclosed.

Example dye-supplying materials


(18)

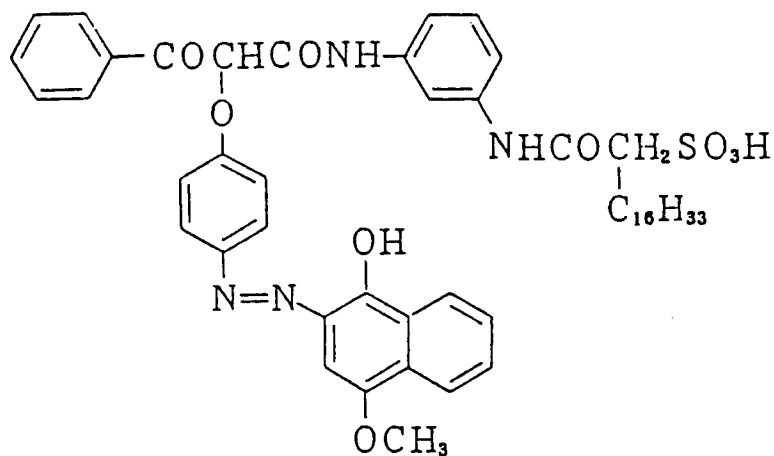


(19)

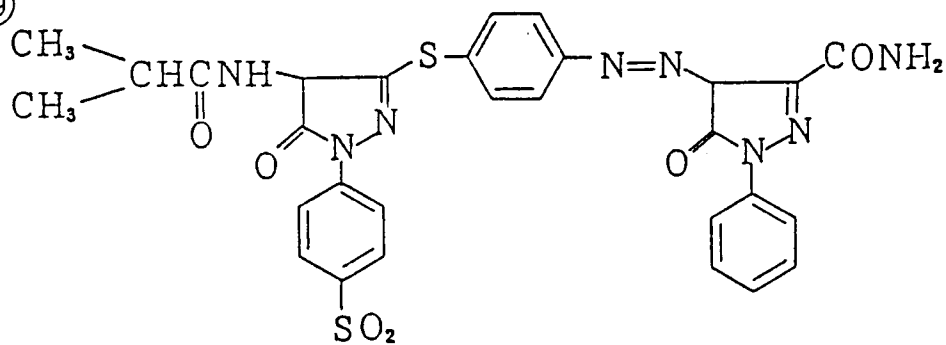

(20)

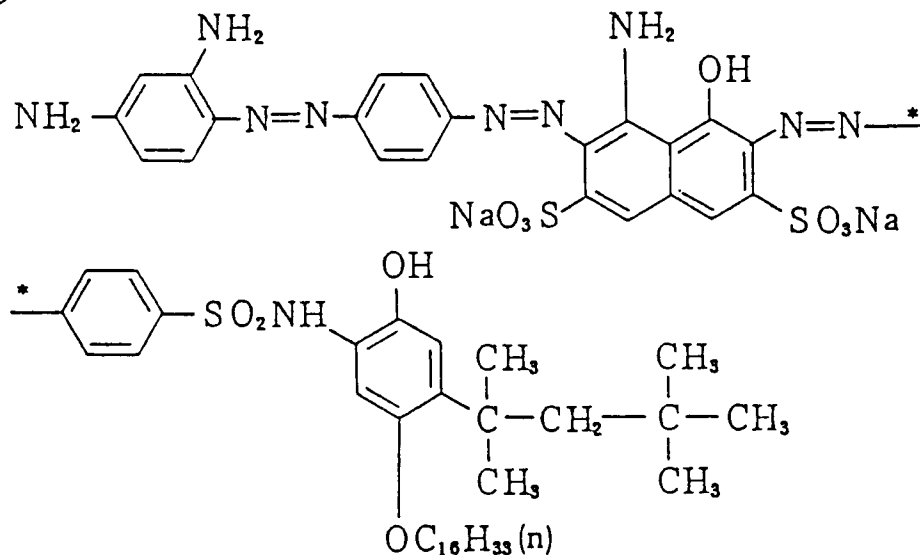

The coupling dye-forming compounds include those represented by the following general formula (5'):
General formula (5')



In the formula, above, Cp_2 represents an organic group (so called a coupler residue) being capable of


reacting (coupling reaction) with the oxidized product of a reducing agent to form a diffusible dye, F represents a bivalent bonding group, and B represents a ballast group.

Preferably, the coupler residue represented by Cp_2 has a molecular weight of less than 700, more specially less than 500, to ensure the diffusibility of a dye to be formed.

5 In addition, the ballast group is preferably identical to that defined in the general formula (4'). In particular, a group having simultaneously more than 8 carbon atoms (preferably, more than 12 carbon atoms) and a hydrophilic group, such as a sulfon group and carboxyl group, is preferable. In addition, a polymer chain is more advantageous.

10 As a coupling dye-forming compound having such a polymer chain, the polymer having repeated units derived from a monomer and represented by the following general formula (6') is advantageous.

General formula (6')



In this formula, Cp_2 and F respectively have the same meaning as in the general formula (5'); Y represents an alkylene group, arylene group or aralkylene group; 1 represents 0 or 1; Z represents a bivalent organic group; and L represents an ethylenic unsaturated group or a group having an ethylenic unsaturated group.

20 The typical examples of the coupling dye-forming compound respectively represented by the general formulae (5'), (6') are disclosed in Japanese Patent O.P.I. Publications No. 124339/ 1984, No. 181345/1984 and No. 2950/1985, Japanese Patent Applications No. 179657/1984, No. 181604/1984, No. 182506/1984 and No. 182507/1984, and others, 59-182507. For example, the following compounds are available.

25 Example dye-supplying materials

30

35


40

45


50

55


(21)

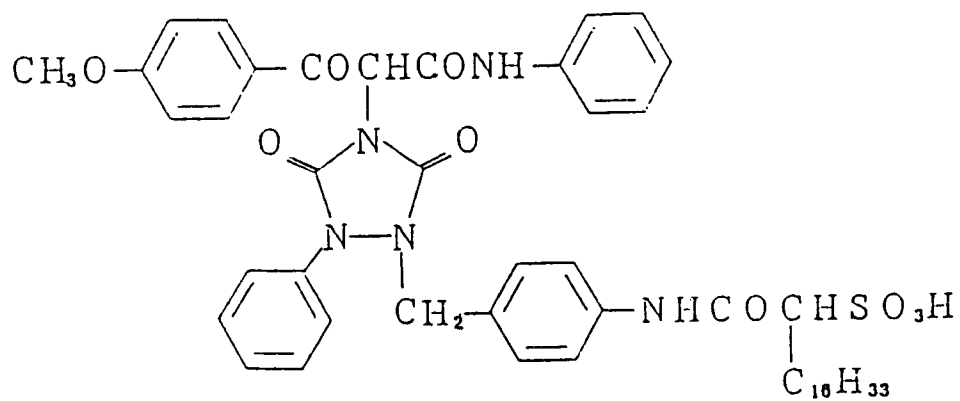

(22)

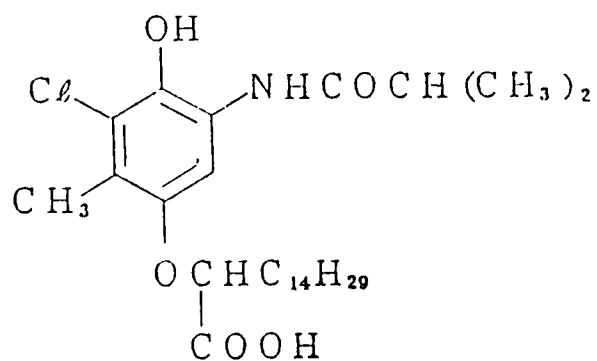


(23)

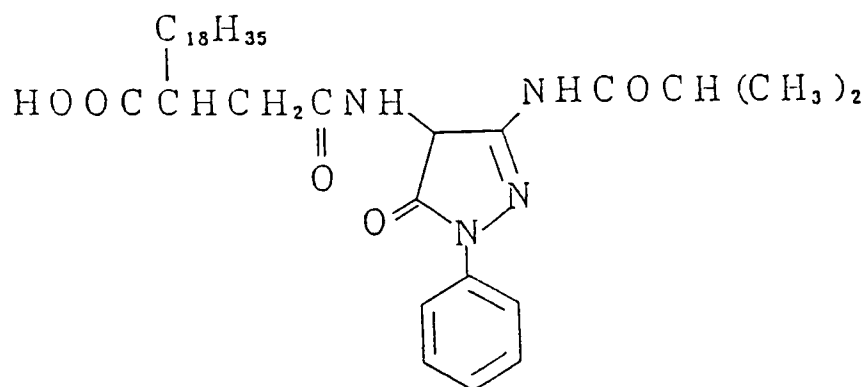


50 Polymers


55




P M - 2




P M - 3

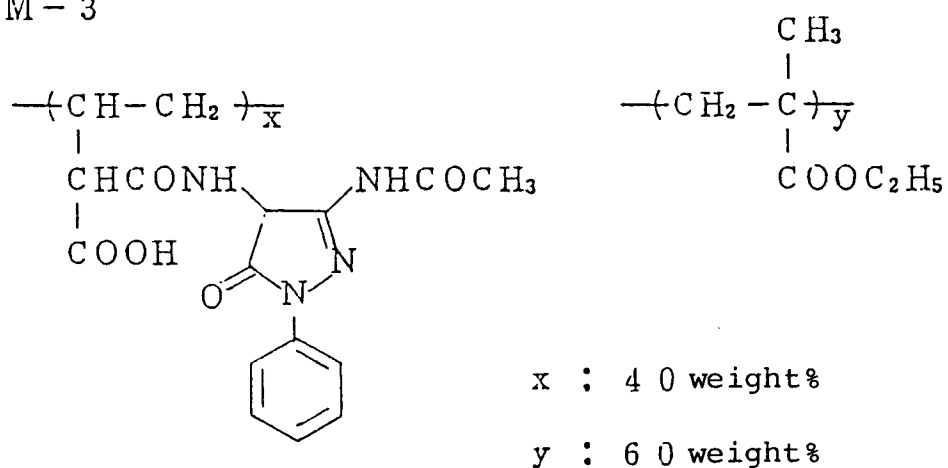

P M - 4

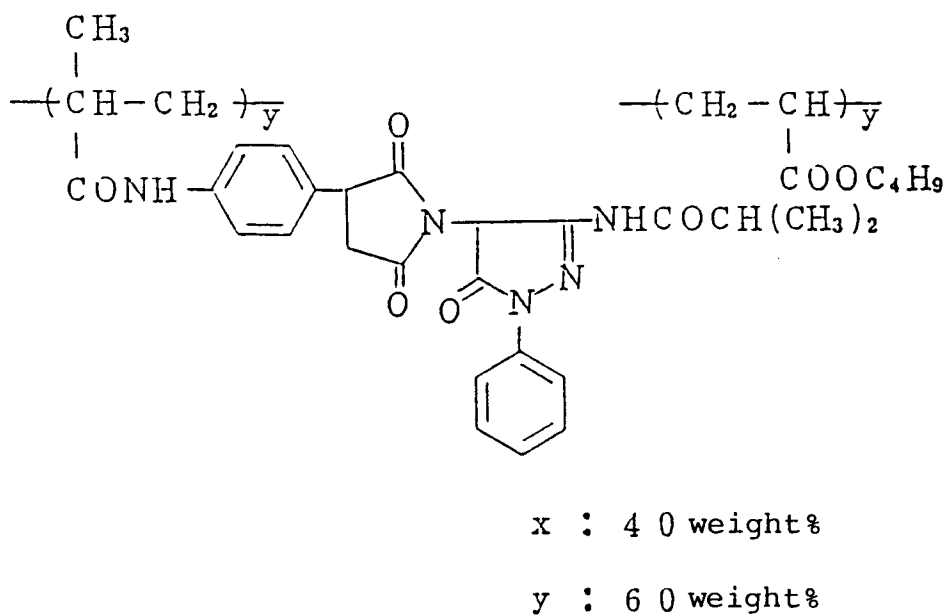


PM - 5

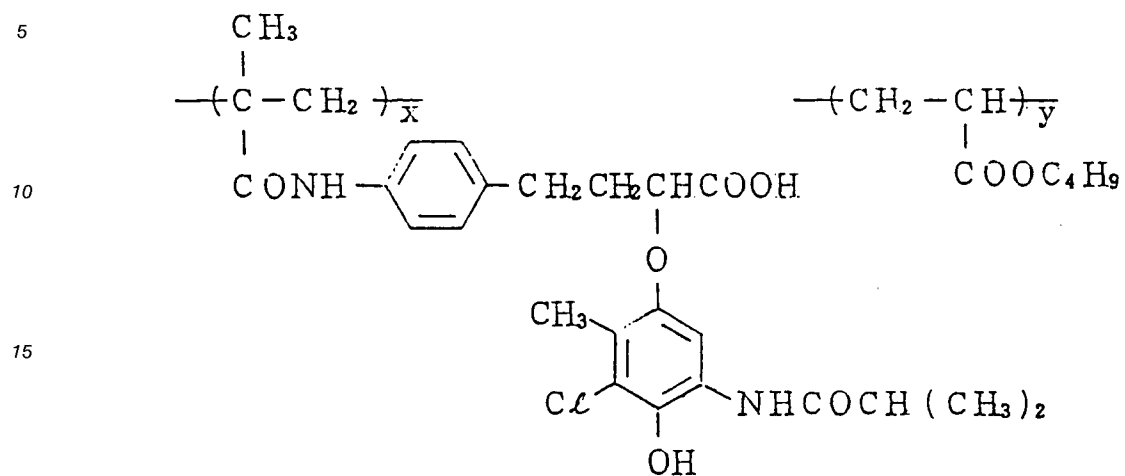

x : 60 weight%

y : 40 weight%


PM - 6

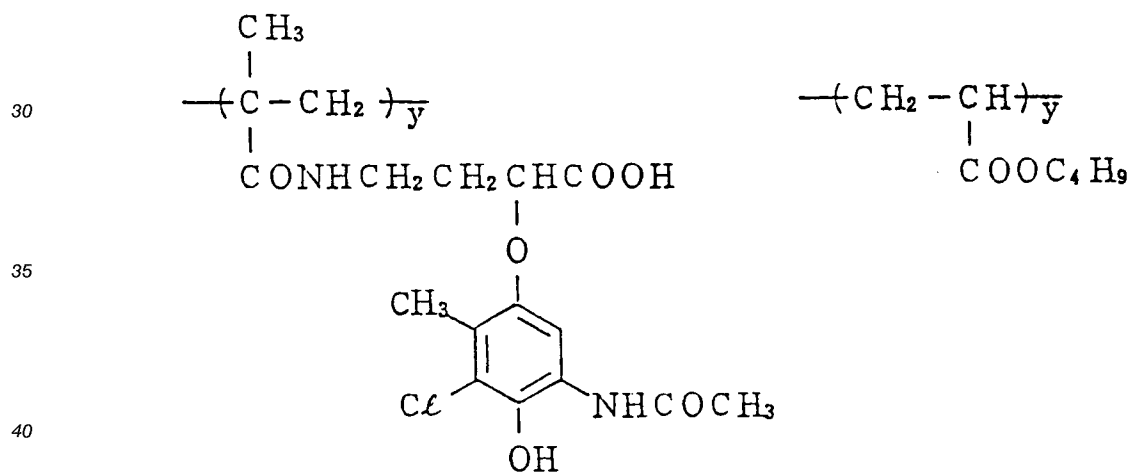

x : 50 weight%

y : 50 weight%


PM - 7

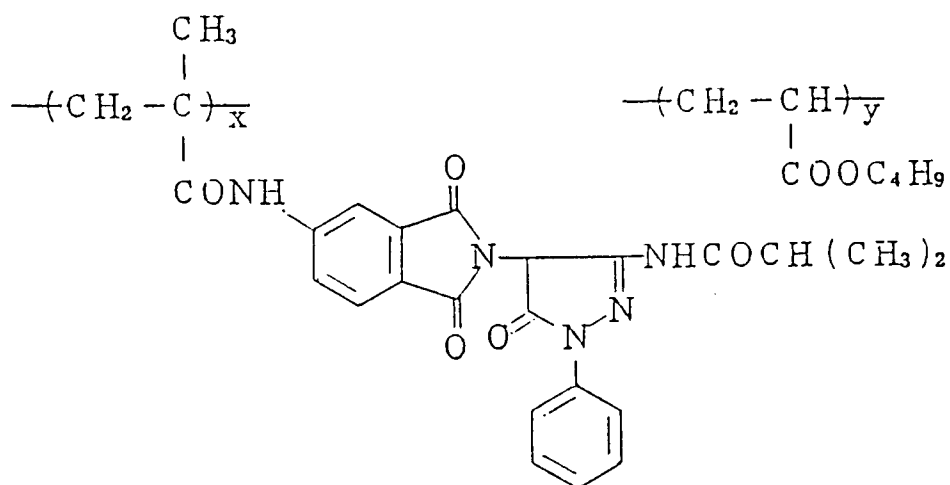

x : 50 weight%

y : 50 weight%

PM - 8

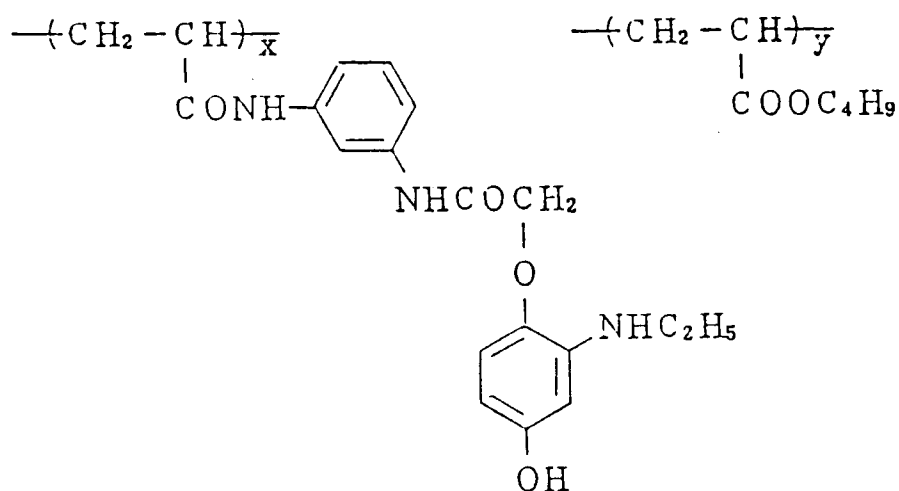


x : 50 weight%


y : 50 weight%

The coupler residues defined by Cp₁ or Cp₂ in the above general formulae (4'), (5') and (6') are, more specifically, the groups represented by the following general formulae.


General formula (7')




General formula (8')

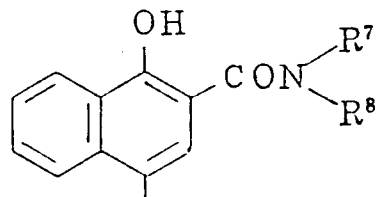


General formula (9')




General formula (10')




General formula (11')




General formula (12')

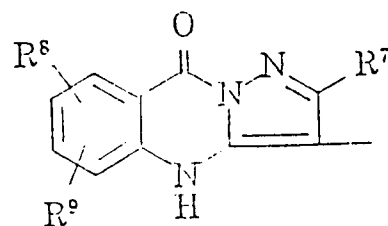


General formula (13')




General formula (14')



General formula (15')



General formula (16')




In these formulae, R^7 , R^8 , R^9 and R^{10} independently represent any of a hydrogen atom, halogen atom, alkyl group, cycloalkyl group, aryl group, acyl group, alkyloxycarbonyl group, aryloxycarbonyl group, alkylsulfonyl group, arylsulfonyl group, carbamoyl group, sulfamoyl group, acyloxy group, amino group, alkoxy group, aryloxy group, cyano group, alkylsulfonyl group, arylsulfonyl group, ureide group, alkylthio group, arylthio group, carboxy group, sulfon group or heterocyclic residue. Each of these groups may be substituted with a hydroxyl group, carboxyl group, sulfonyl group, alkoxy group, cyano group, nitro group, alkyl group, aryl group, aryloxy group, acyloxy group, acyl group, sulfamoyl group, carbamoyl group, imide group or halogen atom.


These substituents are selected in compliance with a requirement for Cp_1 and Cp_2 . As mentioned previously, one of the substituents in Cp_1 is preferably a ballast group, and substituents in Cp_2 should be preferably determined so as to make the molecular weight of Cp_2 less than 700, preferably, less than 500, less, in order to enhance the diffusibility of the dye to be formed.

Positive type dye-supplying materials include oxidizing dye-emitting compounds represented by the following general formula (17').


General formula (17')

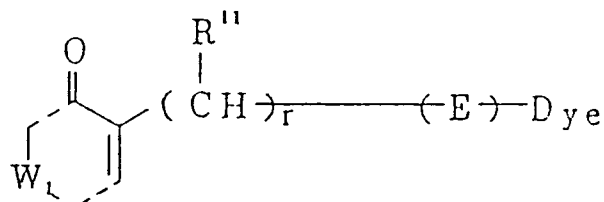

In the formula, W_1 represents a group of atoms required for forming a quinone ring (this ring may have substituents thereon); R^{11} represents an alkyl group or hydrogen atom; E represents




(wherein R¹³ represents an alkyl group or hydrogen atom; and R represents an oxygen atom or




or - SO₂ -; r represents 0 or 1; and Dye has the same meaning as in the general formula (2'). The typical examples of the compounds are disclosed in Japanese Patent O.P.I. Publications No. 166954/1984, No. 154445/1984 and include the following compounds.

Example dye-supplying materials


(24)

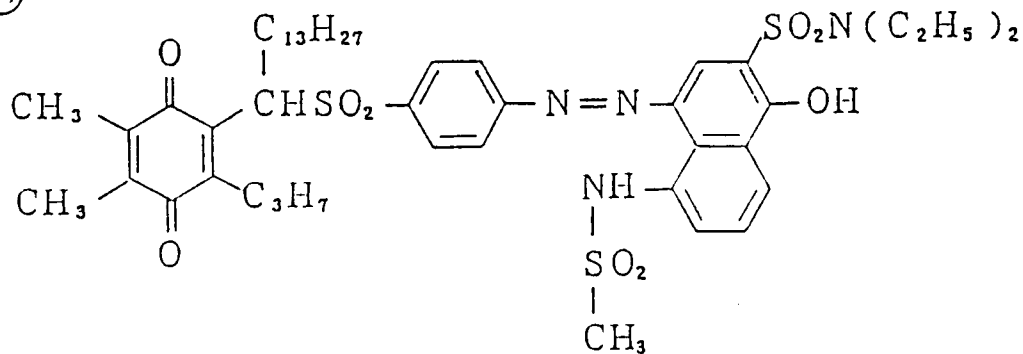

(25)

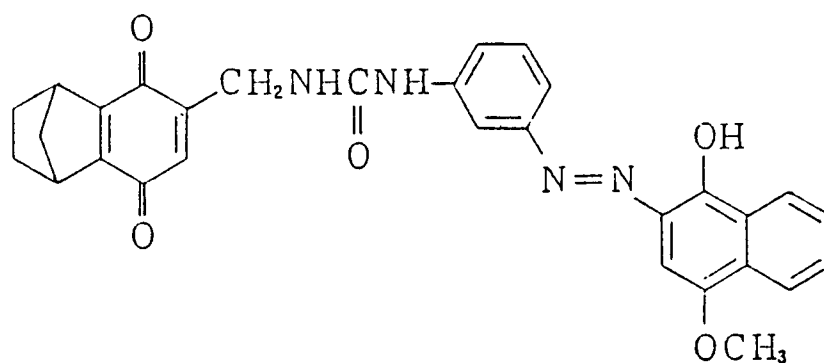


(26)

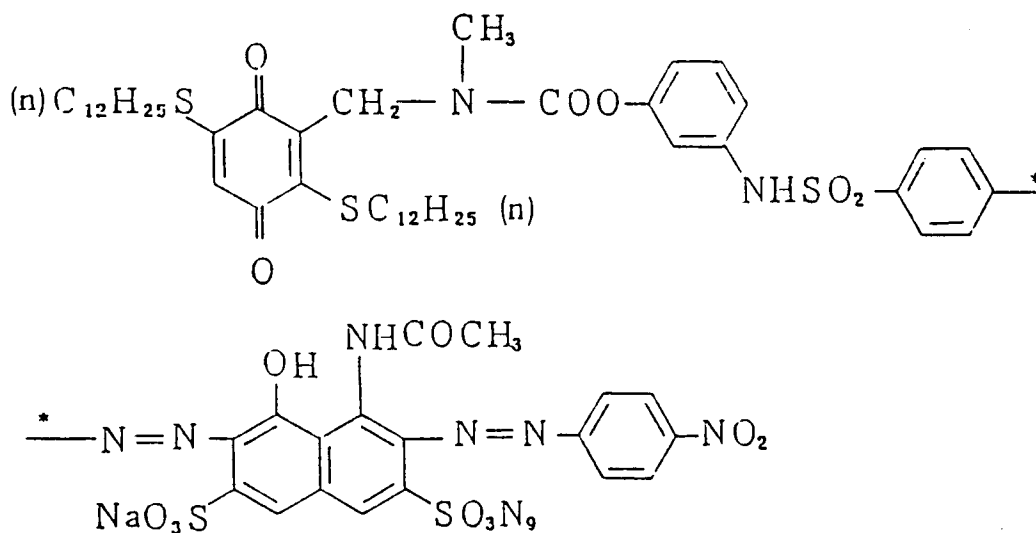

Other positive type dye-supplying materials are the compounds represented by the following general formula (18') each of which loses a dye-emitting capacity when oxidized.


General formula (18')

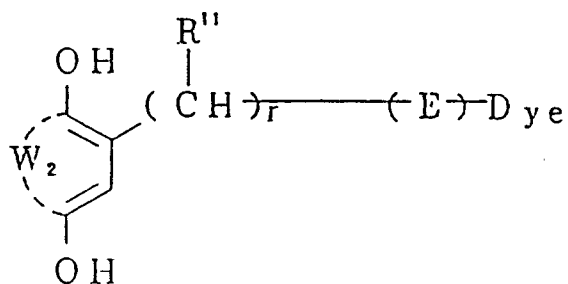


In the formula, W_2 represents a group of atoms required for forming a benzene ring (possibly having substituents thereon); and R^{II} , r , E , Dye are same as those in the general formula (17'). The typical examples of such a compound is disclosed in Japanese Patent O.P.I. Publications No. 124327/1984 and No. 152440/1984. For example, the following compounds are available.

Example dye-supplying materials

(27)

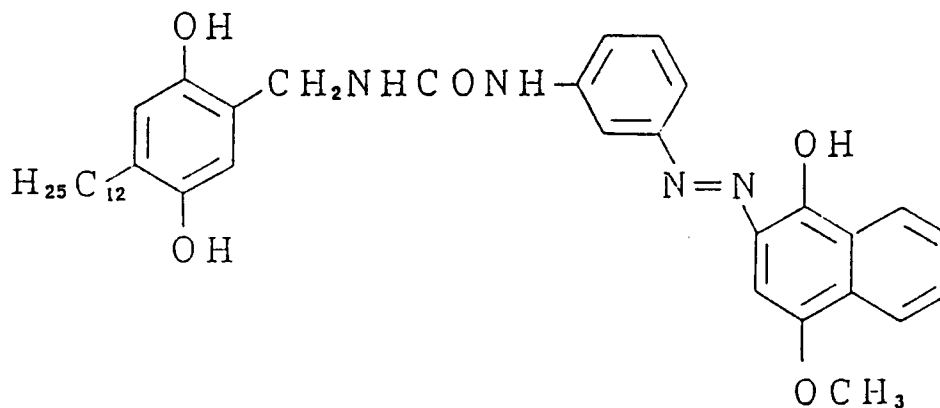


(28)

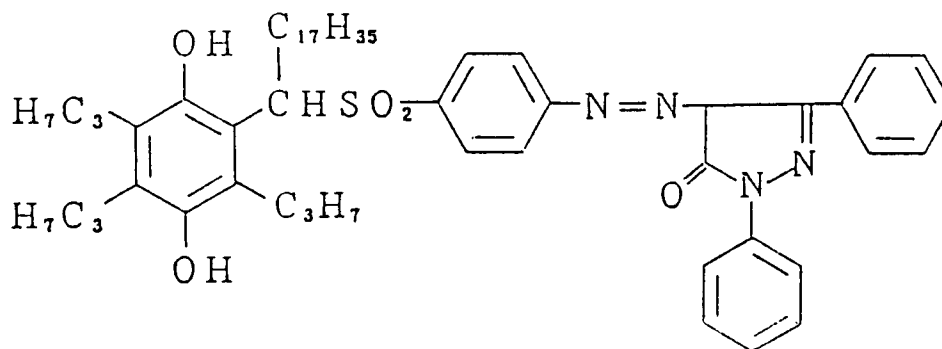

Still other positive type dye-supplying material are the compounds represented by the following general formula (19').


General formula (19')

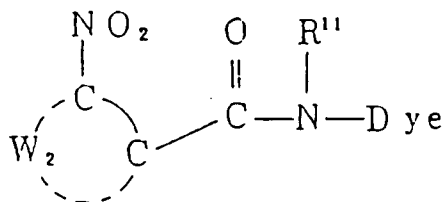



In this formula, above, W_2 , R^{11} and Dye are identical to those in the general formula (18'). The typical examples of these compounds are disclosed in Japanese Patent O.P.I. Publications No. 154445/1984 and others, wherein the following compounds are available.

Example dye-supplying materials

(29)

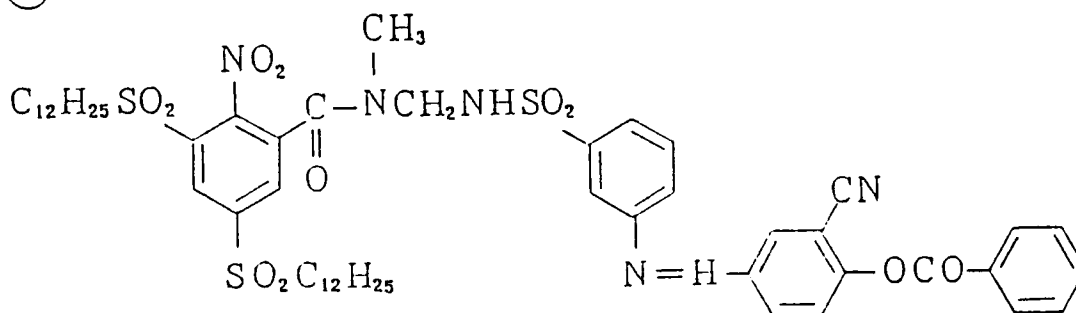

(30)

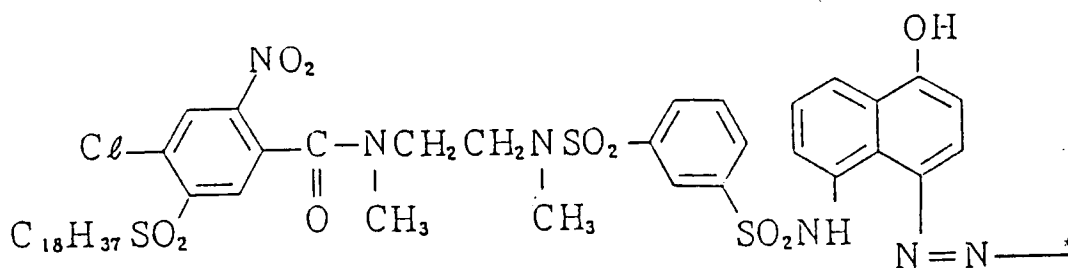

The residues of diffusible dye represented by Dye in the above general formulae (2'), (3'), (4'), (17'), (18') and (19') are hereinunder described more in detail. Such diffusible dye residue has molar weight of less than 800, or more favorably, less than 600, to ensure the diffusibility of the dye, and is available as the residues of azo dye, azomethine dye, anthraquinone dye, naphthoquinone dye, styryl dye, nitro dye, quinoline dye, carbonyl dye, phthalocyanine dye. Such a dye residue may be in the form, where during the thermal developing or transferring it is temporarily rendered shortwave sensitive. Also, it is advantageous that these dye residues are the chelating dye residues, as disclosed in Japanese Patent O.P.I. Publications No. 48765/1984 and No. 124337/1984, since they can enhance the light-fastness of image.

These dye-supplying materials may be used singly or in combination. The amount to be used is not restrictive and may be in accordance with the following factors: the type of dye-supplying material; whether the materials are used singly or more than two are used combinedly; whether the photographic structural layer of light-sensitive material of the invention is of single layer type or multilayer type. As a guideline, the amount is 0.005 to 50 g, preferably 0.1 to 10 g per m² similar layer.


A method of incorporating the dye-supplying material into the photographic structural layers of a thermal developing material of the invention is arbitrarily determined. The examples of such a method to add the similar material into an emulsion to form the above layers are as follows: a method, wherein a compound is firstly dissolved in a low-boiling solvent (such as methanol, ethanol or ethyl acetate) or high-boiling solvent (such as dibutyl phthalate, dioctyl phthalate or tricresyl phosphate), then, subjected to an ultrasonic dispersion; a method, wherein a dye-supplying material is dissolved in an aqueous alkali solution (for example a 10% aqueous sodium hydroxide solution), and then neutralized by a mineral acid (for example hydrochloric acid or nitric acid); a method, wherein a compound is dispersed together with an aqueous solution of suitable polymer (for example, polyvinyl butyral or polyvinyl pyrrolidone) by means of a ball mill.

As the reducing agents for the thermal developing light-sensitive materials of the invention, those reducing agents conventionally used in a field of thermal developing light-sensitive material can be used.

If the dye-supplying materials used for the thermal developing light-sensitive materials of the invention are dye-supplying materials, as disclosed in Japanese Patent O.P.I. Publications No. 186744/1982, No. 79247/1983, No. 149046/1983, No. 149047/1983, No. 124339/1984, No. 181345/1984, No. 2950/1985, emitting or forming a diffusible dye by coupling with the oxidized product of reducing agent, the following are useful: p-phenylenediamine and p-aminophenol developing agents, phosphoroamidephenol and sulfonamidephenol developing agents, sulfonamideaniline developing agents, hydrazone color developing agents, as disclosed in U.S. Patents No. 3,531,286, 3,761,270, 3,764,328, Research Disclosure Nos. 12146, 15108 and 15127, and Japanese Patent O.P.I. Publications No. 27132/1981. Also the color developing agent precursors disclosed in U.S. Patents No. 3,342,599, 3,719,492, Japanese Patent O.P.I. Publications No. 135628/1978 and No. 79035/1982 can be advantageously used.

Particularly preferred reducing agents include reducing agents represented by the following general formula (1') as disclosed in Japanese Patent O.P.I. Publication No. 146133/1981.

General formula (1')

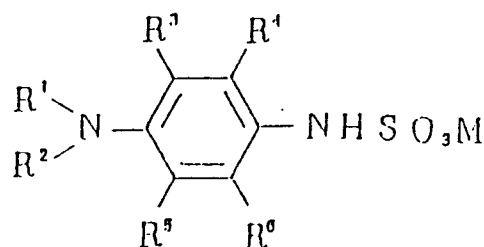

In the formula, R¹ and R² independently represent a hydrogen atom, or an alkyl group, having 1 - 30 carbon atoms (preferably 1 - 4 carbon atoms) and possibly be substituted, R¹ and R² may be bonded together to form a heterocycle, R³, R⁴, R⁵ and R⁶ independently represent a hydrogen atom, halogen atom, hydroxyl group, amino group, alkoxy group, acylamino group, sulfonamide group, alkylsulfonamide group, or an alkyl group having 1 - 30 carbon atoms (preferably 1 - 4 carbon atoms) and possibly be substituted, R³ and R⁴, or R⁵ and R⁶ may be bonded together to form a heterocycle, M represents an alkali metal atom, ammonium group, nitrogen-containing organic base or a compound having quaternary nitrogen.


The nitrogen-containing organic base in the above general formula (1') is an organic compound having a basic nitrogen atom capable of forming a salt with an inorganic salt. Amine compounds are particularly important organic bases. Such amine compounds are as follows: chained amine compounds such as a primary amine, secondary amine and tertiary amine; as cyclic amine compounds, the well known examples of typical heterocyclic organic base, such as a pyridine, quinoline, piperidine and imidazole. In addition, the compounds such as hydroxylamine, hydrazine, amizine and the like are useful as the chained amines. As the salts of nitrogen-containing organic base, the inorganic salts for example, hydrochloride, sulfate and nitrate) of the above-mentioned organic bases are favorably used.

At the same time, as the compounds having a quaternary nitrogen in the above general formula, the


salts or hydroxydes of nitrogen compound having a tetravalent covalent bond.

The typical preferred examples of the reducing agents represented by the above general formula (1') are listed below.


(R - 1)




(R - 2)




(R - 3)

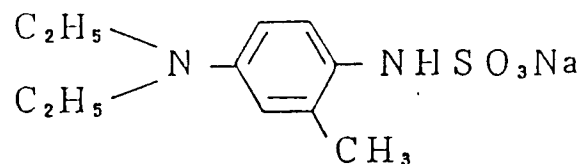


(R - 4)

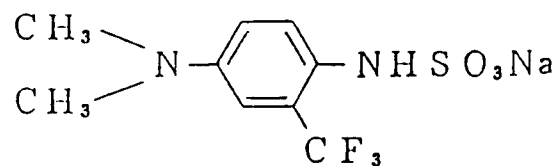


(R - 5)

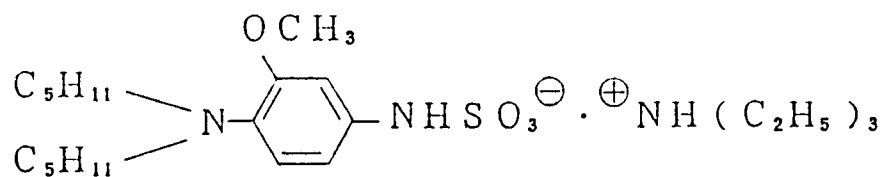


(R - 6)

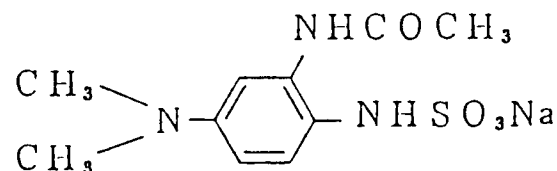


(R - 7)




(R - 8)

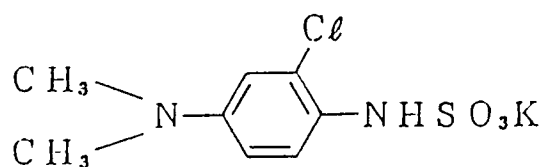


(R - 9)

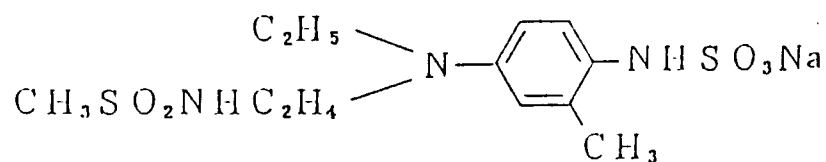


(R - 10)

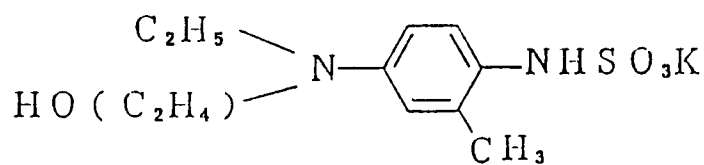


(R - 11)

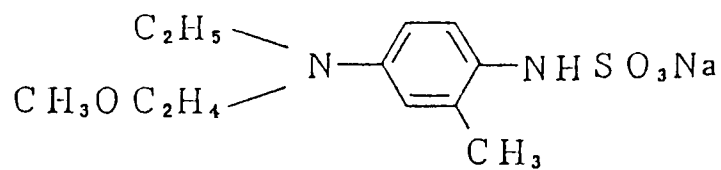


(R - 12)

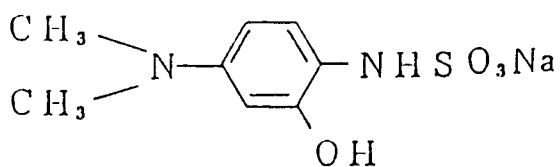


(R - 13)

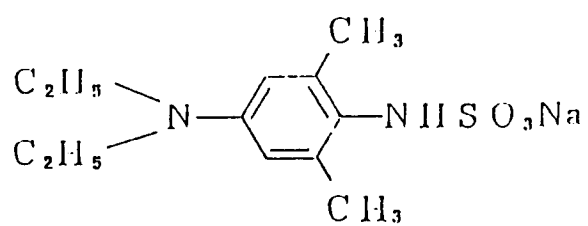


(R - 14)

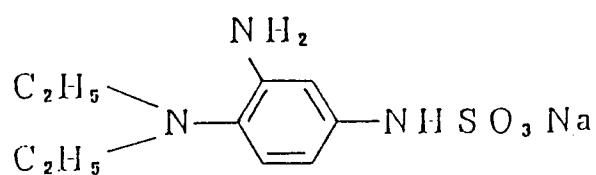


(R - 15)

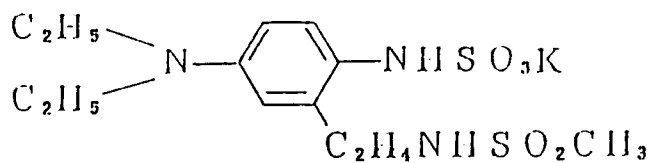


(R - 16)

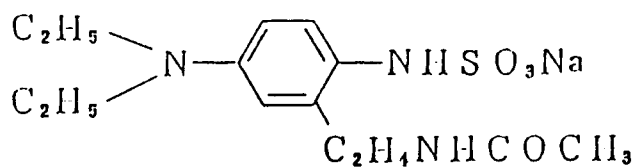


(R - 17)




(R - 18)




(R - 19)

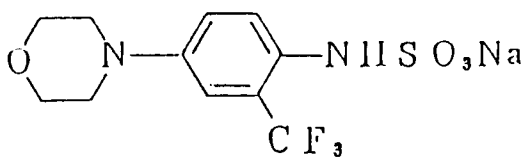


(R - 20)




(R - 21)

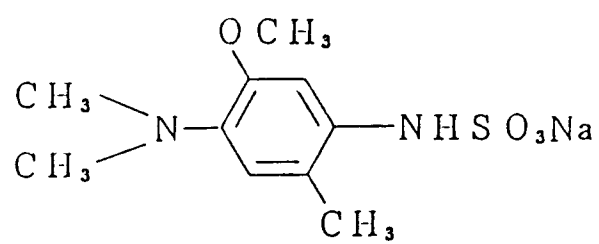


(R - 22)

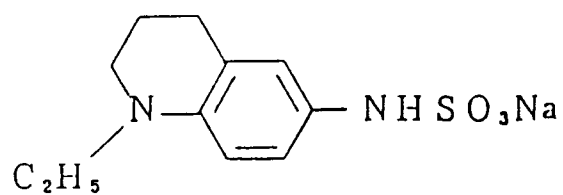


(R - 23)

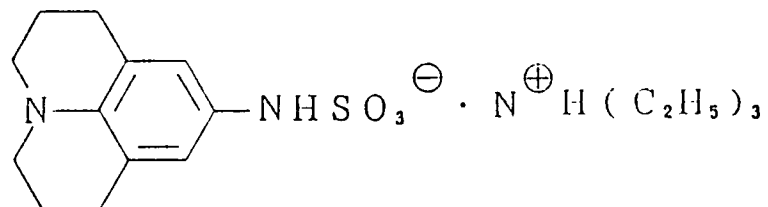


(R - 24)

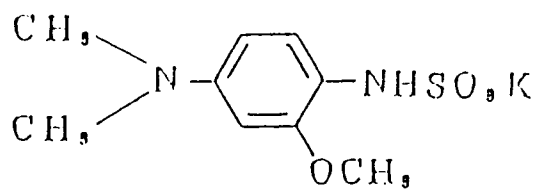


(R - 25)

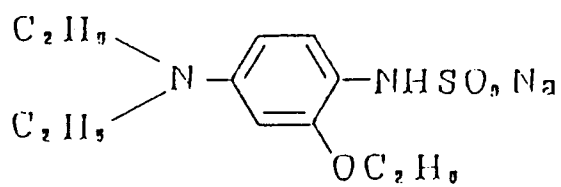


(R - 26)

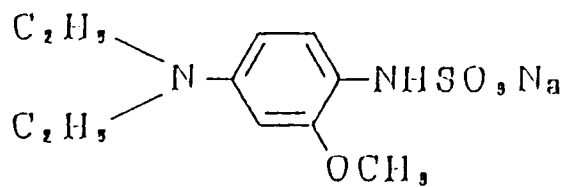


(R - 27)

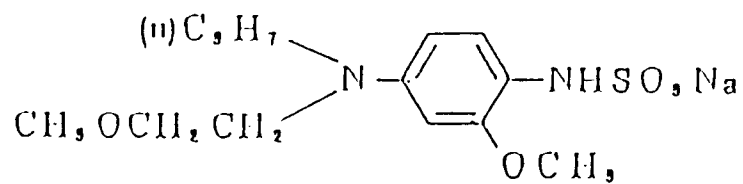


(R - 28)

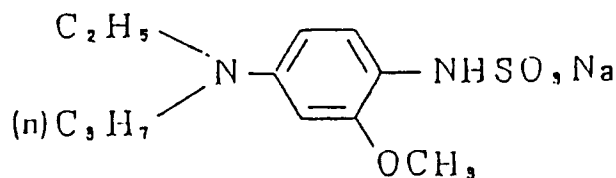

(R - 29)

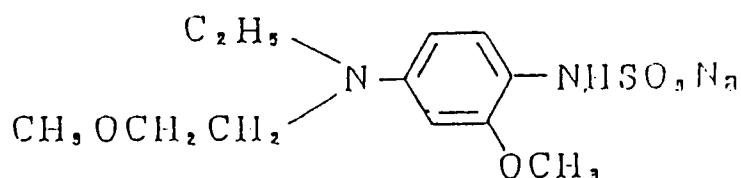

(R - 30)

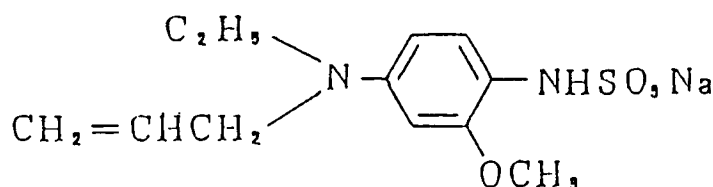

The above reducing agents represented by the above general formula (1') can be synthesized by known methods, for example a method described in Houben-Weyl, Methoden der Organischen Chemie, Band XI/2, pp. 645 - 703.

In addition, more than two types of the above reducing agents can be used simultaneously, or a black-and-white developing agent mentioned later can be used together with the reducing agents for the purposes including the enhanced developability.

If the dye-supplying materials used in the invention are, as disclosed in Japanese Patent O.P.I. Publications No. 179840/1982, No. 58543/1983, No. 152440/1984, No. 154445/1984 and the like, the compounds emitting dye when oxidized, or the compounds losing the dye-emitting capacity when oxidized, or the compounds emitting dye when reduced (or, merely a silver image is formed), the developing agents, described below, can be used.

The examples of such a developing agent are as follows: phenols such as p-phenylphenol, p-methoxyphenol, 2,6-di-tert-butyl-p-cresol, N-methyl-p-aminophenol; sulfonamidephenols such as 4-benzenesulfonamidephenol, 2-benzenesulfonamidephenol, 2,6-dichloro-4-benzenesulfonamidephenol and 2,6-dibromo-4-(p-toluenesulfonamide) phenol; polyhydroxybenzenes such as hydroquinone, tert-butylhydroquinone, 2,6-dimethylhydroquinone, chlorohydroquinone, carboxyhydroquinone, cathecol and 3-carboxycathecol; naphthols (such as α -naphthol, β -naphthol, 4-aminonaphthol, 4-methoxynaphthol; hydroxybinaphthyls and methylenebisnaphthols such as 1,1'-dihydroxy-2,2'-binaphthyl, 6,6'-dibromo-2,2'-dihydroxy-1,1'-binaphthyl, 6,6'-dinitro-2,2'-dihydroxy-1,1'-binaphthyl, 4,4'-dimethoxy-1,1'-dihydroxy-2,2'-binaphthyl, bis(2-hydroxy-1-naphthyl) methane; methylenebisphenols such as 1,1-bis(2-hydroxy-3,5-

dimethyl-phenyl)-3,5,5-trimethylhexane, 1,1-bis(2-hydroxy-3-tert-butyl-5-methylphenyl) methane, 1,1-bis(2-hydroxy-3,5-di-tert-butyl-phenyl) methane, 2,6-methylenebis(2-hydroxy-3-tert-butyl-5-methylphenyl)-4-methylphenol, α -phenyl- α,α -bis(2-hydroxy-3-tert-butyl-5-methylphenyl) methane, 1,1-bis(2-hydroxy-3,5-dimethylphenyl)-2-methylpropane, 1,1,5,5-tetrakis(2-hydroxy-3,5-dimethylphenyl)-2,4-ethylpentane, 2,2-bis(4-hydroxy-3,5-dimethylphenyl) propane, 2,2-bis(4-hydroxy-3-methyl-t-tert-butylphenyl) propane, 2,2-bis(4-hydroxy-3,5-di-tert-butyl-phenyl) propane; ascorbic acid; 3-pyrazolidones; a pyrazolone; hydrazone; para-phenylenediamine.

These developing agents may be used singly or more than two of them may be simulatenously used.

The amount of the reducing agent used in the thermal developing light-sensitive material of the invention depends on the type of light-sensitive silver halide to be used, the type of silver salt of organic acid, the types of additives, however, the amount is usually 0.01 - 1500 mol, preferably, 0.1 - 200 mol per mol light-sensitive silver halide.

The examples of binders used in the thermal light-sensitive material of the invention are synthetic or natural high molecular substances, such as polyvinyl butyral, polyvinyl acetate, ethylcellulose, polymethyl methacrylate, celluloseacetate butylate, polyvinyl alcohol, polyvinyl pyrrolidone, gelatin and phthalated gelatin. These may be used singly, or more than two of them may be combinedly used. In particular, the combined use of gelatin or derivative thereof and hydrophilic polymer such as polyvinyl pyrrolidone or polyvinyl alcohol is advantageous. Or, the following binders, as disclosed in Japanese Patent O.P.I. Publication No. 229556, are more advantageous.

Such binders independently have gelatin and polypyrrolidone polymer. Such polyvinyl pyrrolidone polymer may be polyvinyl pyrrolidone which is homopolymer of vinyl pyrrolidone, or may be copolymer (possibly, graft copolymer) of vinyl pyrrolidone and at least one of other copolymerizable monomers. Such a polymer can be used regardless of a degree of polymerization thereof. Such polyvinyl pyrrolidone may be substituted polyvinyl pyrrolidone. The preferred polyvinyl pyrrolidone has a molecular weight of 1,000 - 400,000. Other monomers copolymerizable with vinyl pyrrolidone are as follows: acrylic acid and methacrylic acid, and alkyl ester thereof such as (metha) acrylic esters; vinyl monomers, such as vinyl alcohol, vinyl acetate, vinylimidazole, (metha)acrylamide, vinylcarbinol, vinyl alkylether. In addition, it is desirable that at least 20% (in terms of weight %, applicable hereinunder) of copolymeric component comprises polypyrrolidone. The preferred example of such a copolymer has a molecular weight of 5,000 - 400,000.

Gelatin may be treated with either lime or acids, and the examples of which include modified gelatin such as pig skin gelatin, hide gelatin or those esterificated and phenylcarbamoilyzed.

In the above-mentioned binder, the preferred gelatin component in the total binder is 10 - 90 weight%, more favorably, 20 - 60 weight%, and the preferred amount of vinyl pyrrolidone is 5 - 90 weight%, or more favorably 10 - 80 weight%.

The above binder may contain other high molecular substances. The preferred examples of such mixture are as follows: a mixture comprising gelatine, and polyvinyl pyrrolidone having a molecular weight of 1,000 - 400,000, and at least one of other high molecular substances; a mixture comprising gelatin, and vinyl pyrrolidone copolymer having a molecular weight of 5,000 - 400,000, and at least one of other high molecular substances. The examples of such useful substance are as follows: polyvinyl alcohol, polyacrylamide, polymethacrylamide, polyvinyl butyral, polyethylene glycol, polyethylene glycol ester; proteins such as cellulose derivatives; natural materials including saccharides such as starch and gum arabic; and others. Such materials may be contained in the binder at a rate of 0 - 85 weight%, or preferably, 0 - 70 weight%.

In addition, the above vinyl pyrrolidone polymers may be cross-linked polymers, but in this case, they are preferably applied on a support and then cross-linked (including the progress of the cross-linking reaction while they are allowed to stand).

The amount of binder to be used is usually 0.05 - 50 g, or preferably, 0.1 - 10 g per m² of one layer.

Also, the preferred amount of binder to be used is at a ratio of 0.1 - 10 g, preferably, 0.25 - 4 g per one g dye-supplying material.


The examples of useful supports used for the thermal developing light-sensitive material of the invention are as follows; synthetic plastic films, such as a polyethylene film, cellulose acetate film, polyethylene teerphthalate film and polyvinyl chloride film; paper supports, such as photographic paper, printing paper, baryta paper, resin-coated paper; supports obtained by applying and setting electron beam-setting resin composite upon any of the above supports.

With the thermal lght-sensitive material of the invention, if the similar material is of a transfer type using an image-receiving member, various heat-melting solvents should be preferably contained in the thermal developing light-sensitive material of the invention and/or image-receiving member. The heat-melting solvent is a compound to promote the thermal development and/or the thermal transfer. As the examples of

such a compound, the organic compound individually having polarity are available as disclosed in, for example, compounds as disclosed in U.S. Patents No. 3,347,675, No. 3,667,959, Research Disclosure No. 17643 (XII), Japanese Patent O.P.I. Publication No. 229556/1984, Japanese Patent Application No. 47787/1984. Among them, those useful for the invention are urea derivatives (such as dimethylurea, diethylurea and phenylurea), amide derivatives (such as acetamide and benzamide), polyvalent alcohols (such as 1,5-pentanediol, 1,6-pentanediol, 1,2-cyclohexanediol, pentaerythritol and trimethylolethane) or polyethylene glycol.

Furthermore, as a heat-melting solvent useful for the invention, a compound represented by the general formula (S) is available.

General formula (S)

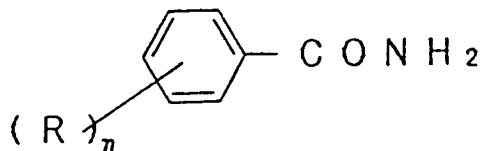

In this formula, n represents 1 or 2. When n = 1, R represents a group, having 3 to 8, or favorably, 4 to 6 carbon atoms, such as an alkyl group (for example, i-propyl group, n-butyl group, t-butyl group, n-amyl group, i-amyl group, n-hexyl group, n-octyl group or to-octyl group), alkenyl group (for example, allyl group, crotyl group or i-crotyl group), alkoxy group (for example, n-butoxy group, n-amyloxy group, i-amyloxy group or n-hexyloxy group) or alkenyloxy group (for example, allyloxy group, crotyloxy group or i-crotyloxy group). When n = 2, R represents a group, having 2 to 4 carbon atoms, such as an alkyl group (for example, ethyl group, propyl group or t-butyl group) or alkoxy group (for example, ethoxy group, n-propoxy group or n-butoxy group) or an alkenyloxy group having 3 to 4 carbon atoms (for example, allyloxy group, crotyloxy group or i-crotyloxy group). Additionally, when n = 2, the both groups independently represented by R may be identical or different to each other.

The typical examples of a compound of the invention represented by the above general formula are as follows: p-i-propylbenzamide, p-n-butylbenzamide, p-t-butylbenzamide, p-n-amylbenzamide, p-n-hexylbenzamide, p-n-octylbenzamide, p-allylbenzamide, p-n-butoxybenzamide, o-n-butoxybenzamide, m-n-butoxybenzamide, o-n-amyloxybenzamide, p-n-amyloxybenzamide, p-i-amyloxybenzamide, p-allyloxybenzamide, p-crotyloxybenzamide, o-i-crotyloxybenzamide, 3,5-diethylbenzamide, 3-ethyl-5-ethoxybenzamide, 2,4-diethoxybenzamide, 2,4-dipropoxybenzamide, 3,5-dipropoxybenzamide, 2,6-dipropoxybenzamide, 3,4-dibutoxybenzamide, 2,4-diallyloxybenzamide, 2,4-dicrotyloxybenzamide and 2,4-di-i-crotyloxybenzamide.










The compound of the invention represented by the above general formula (S) is synthesized with R-substituted benzoic acid, R-substituted benzoate, R-substituted cyanobenzene or the like in compliance with a synthesizing method disclosed for example in Synthetic Organic Chemistry, pp. 565-589, by R.B. Wagner and H.D. Zook. Also the compound may be prepared by allowing hydroxybenzamide or dihydroxybenzamide to react with alkyl halide or alkenyl halide.








Among the above examples, the following water-insoluble solid heat melting solvents are more favorably used.

The water-insoluble solid heat melting solvents are compounds which are solid at a normal temperature but turn liquid at a higher temperature (higher than 60°C, preferably higher than 100°C, and in particular, higher than 130°C, but less than 250°C) and they also have an inorganic-organic ratio ("Organic Schematics", by Yoshio Kohda, Sanyo Shuppan Co., Ltd., 1984) of 0.5 - 3.0, preferably, 0.7 - 2.5, and in particular, 1.0 - 2.0, as well as the water-solubility, at a normal temperature.







The typical examples of the water-insoluble solid heat melting solvent are listed below. However, the scope of the invention is not limited only to these examples.

Example water-insoluble solid heat melting solvents

		Melting point (°C)	Inorganic/ organic
5	$C(Cl)_3CONH_2$	141°	1.44
10		128°	1.54
15		140°	2.25
20		161°	2.25
25		110°	1.19
30		160°	1.34
35		130°	1.31
40		168°	1.02
45		113~115°	1.34
50		137°	1.27
55			

		Melting point (°C)	Inorganic/ organic
5		151~153°	1.5 4
10	$\text{CH}_3\text{CONH}-$  $-\text{NHCOCH}_3$	over 290°C	1.3 4
15		156°	1.3 4
20		152~154°	1.2 6
25		130°	1.3 1
30			
35		166°	0.8 8
40	$\text{CH}_3\text{O}-$ 	164~167°	1.4 7
45		141~142°	1.3 4
50			
55			

		Melting point (°C)	Inorganic/ organic
5	<chem>CC(=O)Nc1ccc(Cl)cc1</chem>	180°	1.13
10	<chem>CC(=O)Nc1ccc(O)cc1</chem>	161°	1.97
15	<chem>CC(=O)Nc1ccc(C)cc1</chem>	150°	1.19
20	<chem>CC(=O)Nc1ccccc1O</chem>	140°	1.97
25	<chem>NC(=O)c1ccccc1</chem>	147°	1.68
30	<chem>NC(=O)c1ccc(C)cc1</chem>	143°	1.47
35	<chem>NC(=O)Cc1ccccc1</chem>	149°	1.47
40	<chem>NS(=O)(=O)c1ccccc1</chem>	154°	2.13
45	<chem>NS(=O)(=O)c1ccc(C)cc1</chem>	137°	1.82
50			
55			

		Melting point (°C)	Inorganic/ organic
5		110°	1.13
10	$\text{CH}_3\text{--}\langle\text{benzene ring}\rangle\text{--SO}_2\text{NHC}_2\text{H}_4\text{NHSO}_2\text{--}\langle\text{benzene ring}\rangle\text{--CH}_3$	168°	1.59
15		162~163°	2.15
20			
25		238°	1.72
30		233°	2.34
35		137°	1.70
40			
45		226°	2.18

Many compounds used as the water-insoluble solid heat melting solvents are market-available, and be readily synthesized by the concerned manufacturers.

There is no mandatory method for adding the water-insoluble solid hot solvent into the light-sensitive material of the invention. The useful methods include a method, wherein the solvent is pulverized and distributed with a ballmill or sandmill, then added into the material, a method wherein the solvent is solved into an appropriate solvent to be added into the material, a method wherein the solvent is dissolved in high boiling solvent to prepare oil-in-water dispersion which is added into the material. However, the solvent should be favorably pulverized and distributed with a ballmill or sandmill, then added into the material, while its form, solid grains, are kept unchanged.

The layers where the above water-insoluble heat melting solvent is added include the light-sensitive silver halide layers, intermediate layers, protective layer, and an image receiving layer comprising image

receiving member, in compliance with a requirement to ensure these layers may perform individual purposes.

The amount of addition of water-insoluble heat melting solvent is usually 10 - 500 weight%, or preferably, 50 - 300 weight% per amount of binder.

Even if a melting point of water-insoluble solid heat melting solvent of the invention is higher than a thermal developing temperature, it can be satisfactorily used as a heat melting solvent, because it has been added into the binder, and this arrangement lowers the melting point.

In addition to the above-mentioned components, the thermal developing light-sensitive material of the invention may, in compliance with a requirement, contain various additives.

The examples of such additives are as follows: a melt-former, such as acetamide and imide succinate, as disclosed in U.S. Patent No. 3,438,776; compounds, such as polyalkylene glycol, as disclosed in U.S. Patent No. 3,666,477 and Japanese Patent O.P.I. Publication No. 19525/1976; water-insoluble polar organic compounds such as lactones respectively having a - CO - group, - SO₂ - group and - SO - group, whose melting points being more than 20 ° C, as disclosed in U.S. Patent No. 3,667,959; and others.

The examples further include the following; benzophenone derivatives disclosed in Japanese Patent O.P.I. Publication No. 115540/1974; phenol derivatives disclosed in Japanese Patent O.P.I. Publications No. 24829/1978 and No. 60223/1978; carboxylic acids disclosed in Japanese Patent O.P.I. Publication No. 118640/1983; polyvalent alcohols disclosed in Japanese Patent O.P.I. Publication No. 198038/1983; sulfamoylamide compounds disclosed in Japanese Patent O.P.I. Publication No. 84236/1984; and others.

In addition, compounds known as toners in the field of thermal developing light-sensitive material may be incorporated as development accelerator into the thermal developing light-sensitive material of the invention. As disclosed in Japanese Patent O.P.I. Publications No. 4928/1971, No. 6077/1971, No. 5019/1974, No. 5020/1974, No. 91215/1974, No. 107727/1974, No. 2524/1975, No. 67132/1975, No. 67641/1975, No. 114217/1975, No. 33722/1977, No. 99813/1975, No. 1020/1978, No. 55115/1978, No. 76020/1978, No. 125014/1978, No. 156523/1979, No. 156524/1979, No. 156525/1979, No. 156526/1979, No. 4060/1980, No. 4061/1980, No. 32015/1980, West German Patents No. 2,140,406, 2,141,063, 2,220,618, U.S. Patents No. 3,847,612, 3,782,941, 4,201,582, Japanese Patent O.P.I. Publications No. 207244/1982, No. 207245/1982, No. 189628/1983 and No. 193541/1983, the examples of toner are as follows; phthaladione, phthalimide, pyrazolone, quinazolinone, N-hydroxynaphthalimide, benzoxadine, naphthoquinadione, 2,3-dihydro-phthaladione, 2,3-dihydro-1,3-oxadine-2,4-dione, oxypyridine, aminopyridine, hydroxyquinoline, aminoquinoline, isocarbostyryl, sulfonamide, 2H-1,3-benzothiadine-2,4-(3H)dione, benzotriazine, mercaptotriazole, dimercaptotetrazapentalene, aminomercaptotriazole, acylaminomercaptotriazole, phthalic acid, naphthalic acid phthalamine acid, and; mixtures of more than one of the above-mentioned and imidazole compounds; mixtures involving not only at least one of acids or acid anhydrides, such as phthalic acids or naphthalic acid, but phthaladine compounds; mixtures involving any of phthaladine and maleic acid, itaconic acid, quinolic acid or genthidinic acid.

The examples of useful anti-fogging agents are as follows: higher aliphatic compounds (such as behenic acid or stearic acid) and the like) disclosed in U.S. Patent No. 3,645,739; mercuric salts disclosed in Japanese Patent Examined Publication No. 11113/1982; N-halogen compounds (such as N-halogenoacetamide or N-halogenoimide succinate) disclosed in Japanese Patent O.P.I. Publication No. 47419/1976; mercapto compound-emitting compounds disclosed in U.S. Patent No. 3,700,457 and Japanese Patent O.P.I. Publication No. 50725/1976; arylsulfonic acids (such as benzenesulfonic acid) disclosed in Japanese Patent O.P.I. Publication No. 125016/1974; lithium carboxylates (such as lithium laurate) disclosed in Japanese Patent O.P.I. Publication No. 47419/1976; oxidizing agents (such as perchlorate, inorganic peroxide and persulfate) disclosed in British Patent No. 1,455,271 and Japanese Patent O.P.I. Publication No. 101019/1975; sulfinic or thiosulfonic acids disclosed in Japanese Patent O.P.I. Publication No. 19825/1978; 2-thiouracils disclosed in Japanese Patent O.P.I. Publication No. 3232/1976; element sulfur disclosed in Japanese Patent O.P.I. Publication No. 26019/1976; disulfide and polysulfide compounds disclosed in Japanese Patent O.P.I. Publication No. 42529/1976, No. 81124/1976 and No. 93149/1980; rosins and diterpenes disclosed (such as abiethinic acid and pimalic acid) disclosed in Japanese Patent O.P.I. Publication No. 57435/1976; polymeric acids independently having a free carboxyl group or sulfonic group, as disclosed in Japanese Patent O.P.I. Publication No. 104338/1976; thiazolinethione disclosed in U.S. Patent No. 4,138,265; 1,2,4-triazole or 5-mercapto-1,2,4-triazole disclosed in Japanese Patent O.P.I. Publication No. 140833/1980 as well as U.S. Patent No. 4,137,079; thioisulfates disclosed in Japanese Patent O.P.I. Publication No. 140833/1980; 1,2,3,4-triazoles disclosed in Japanese Patent O.P.I. Publication No. 142331/1980; dihalogen compounds or trihalogen compounds disclosed in Japanese Patent O.P.I. Publications No. 46441/1984, No. 573233/1984 and No. 57234/1984; thiol compounds disclosed in Japanese Patent O.P.I. Publication No. 111636/1984.

The examples of other preferred anti-fogging agents are as follows; hydroquinone derivatives (such as di-t-octylhydroquinone, dodecanylhydroquinone), disclosed in Japanese Patent Application No. 56506/1984; the combined use, as disclosed in Japanese Patent Application No. 66380/1984, involving hydroquinone derivative and benzotriazole derivative (for example, 4-sulfobenzotriazole and 5-carboxytriazole).

5 The examples of still other particularly advantageous anti-fogging agent are as follows: restrainers, as disclosed in Japanese Patent Application No. 262177, independently having a hydrophilic group; polymer restrainers disclosed in Japanese Patent Application No. 263564/1985; compounds as disclosed in Japanese Patent Application No. 263565/1985, individually having a ballast group.

10 The examples of useful silver image stabilizer are as follows: polyhalogenated organic oxidizing agents (such as tetrabromobutane and tribromoquinalidine) disclosed in U.S. Patent No. 3,707,377; 5-methoxycarbonylthio-1-phenyl-tetrazoles disclosed in Belgium Patent No. 768,071; monohalogenated compounds (such as 2-bromo-2-trylsulfonylacetamide) disclosed in Japanese Patent O.P.I. Publication No. 119624/1975; bromine compounds (such as 2-bromomethylsulfonyl-benzothiazole and 2,4-bis-(tribromomethyl)-6-methyltriazine) disclosed in Japanese Patent O.P.I. Publication No. 120328/1975; 15 tribromoethanol disclosed in Japanese Patent O.P.I. Publication No. 46020/1978. In addition, monohalogenated organic anti-fogging agents for silver halide emulsions as disclosed in Japanese Patent O.P.I. Publication No. 119624/1975 may be used.

20 The examples of other useful image stabilisers are as follows: as disclosed in U.S. Patents No. 3,220,846, No. 4,082,555 and No. 4,088,496, Japanese Patent O.P.I. Publication No. 22625/1975. Research Disclosure No. 12021, No. 15168, No. 15567, No. 15732, No. 15733, No. 15734 and No. 15766, the compounds, so-called activator precursors, being capable of releasing a basic substance by heat, and being typified by the compounds being capable of releasing a base by decarbonation due to heat, such as guanidiumtrichloro acetate, aldonamide compounds such as galactonamide, amineimides, 2-carboxycarboxamide and other compounds; sodium phosphate base forming agents disclosed in Japanese Patent O.P.I. Publications No. 130745/1981 and No. 132332/1981; compounds being capable of forming amine by 25 intramolecular nucleophilic reaction as disclosed in British Patent No. 2,079,480; aidoximecarbamates disclosed in Japanese Patent O.P.I. Publication No. 157637/1984; hydroxamic acid carbamates disclosed in Japanese Patent O.P.I. Publication No. 166943/1984; base-releasing agents disclosed in Japanese Patent O.P.I. Publications No. 180537/1984, No. 174830/1984 and No. 195237/1984.

30 Furthermore, irithiuronium compounds, s-carbamoyl compounds of mercapto-containing compounds, and nitrogen-containing heterocyclic compounds, as disclosed in U.S. Patents No. 3,301,678, No. 3,506,444, No. 3,824,103 and No. 3,844,788, Research Disclosure No. 12035 and No. 18016, may be used to stabilize the image. Additionally, to accelerate the developing or to stabilize the image, the following may be used; as disclosed in U.S. Patents No. 3,669,670, No. 4,012,260, No. 4,060,420 and No. 4,207,392, Research 35 Disclosure No. 15109 and No. 17711, the nitrogen-containing organic bases called activator-stabilizers or activator stabilizer precursors, for example α -sulfonyl acetate of 2-aminothiazoline, or trichloro acetate and acylhydrozine compound.

40 In addition, as disclosed in Japanese Patent O.P.I. Publications No. 130745/1981 and No. 218443/1984, the development may be exercised in the presence of only a small amount of water, or to develop the light-sensitive material of the invention, a small amount of water may be sprayed or applied onto the material for supplying water thereto, before the material is heated. Furthermore, as mentioned in U.S. Patent No. 3,312,550 and others, the material may be developed with a hot steam, or a blast containing moisture. Or, otherwise, as disclosed in Japanese Patent Examined Publication No. 26582/1969, a compound having 45 crystalization water such as sodium phosphate $12\text{H}_2\text{O}$ or ammonium alum. $24\text{H}_2\text{O}$ may be contained in the thermal developing light-sensitive material.

The similar light-sensitive material may also have various additives and coating aids such as an anti-halation dye, fluorescent whitening agent, hardeners, anti-static agent, plasticizer and spreading agent.

50 In order to improve the film property, the thermal developing light-sensitive material of the invention may contain colloidal silica in the heat developing light-sensitive layer and/or non-light-sensitive layers (such as a subbing layer, intermediate layers and protective layer).

The colloidal silica useful for the invention is the colloid solution of silicic anhydride having a mean grain size or trichloro acetate and acylhydrozine compound.

55 In addition, as disclosed in Japanese Patent O.P.I. Publications No. 130745/1981 and No. 218443/1984, the development may be exercised in the presence of only a small amount of water, or to develop the light-sensitive material of the invention, a small amount of water may be sprayed or applied onto the material for supplying water thereto, before the material is heated. Furthermore, as mentioned in U.S. Patent No. 3,312,550 and others, the material may be developed with a hot steam, or a blast containing moisture. Or, otherwise, as disclosed in Japanese Patent Examined Publication No. 26582/1969, a compound having

crystalization water such as sodium phosphate. $12\text{H}_2\text{O}$ or ammonium alum. $24\text{H}_2\text{O}$ may be contained in the thermal developing light-sensitive material.

The similar light-sensitive material may also have various additives and coating aids such as an anti-halation dye, fluorescent whitening agent, hardeners, anti-static agent, plasticizer and spreading agent.

5 In order to improve the film property, the thermal developing light-sensitive material of the invention may contain colloidal silica in the heat developing light-sensitive layer and/or non-light-sensitive layers (such as a subbing layer, intermediate layers and protective layer).

10 The colloidal silica useful for the invention is in the form of a colloid solution comprising silicic anhydride grains having a mean grain size of 3 - 120 μm and a dispersion medium mainly composed of water. The main component of the solution is SiO_2 (silicon dioxide). Such colloidal silica is disclosed in Japanese Patent O.P.I. Publications No. 109336/1981, No. 123916/1978, No. 112732/1978 and No. 100226/1978. The preferred amount of colloidal silica to be used is, in terms of dry weight, 0.05 - 2.0 against the amount of binder in the layer made of the mixture involving such colloidal silica and the binder.

15 Organic fluoro compounds may be incorporated into the thermal developing light-sensitive layer and/or non-light-sensitive-layers (such as the subbing layer, intermediate layers and protective layer) of the thermal developing light-sensitive material of the invention, in order to improved the film property of the layers.

20 The useful organic fluoro compounds used for the invention are disclosed in U.S. Patents No. 3,589,906, No. 3,666,478, No. 3,754,924, No. 3,775,126 and No. 3,850,640, West German OLS Patents No. 1,924,665, No. 1,961,638 and No. 2,124,262, British Patent No. 1,330,356, Belgium Patent No. 742,680, Japanese Patent O.P.I. Publications No. 7781/1971, No. 9715/1973, No. 46733/1974, No. 133023/1974, No. 99529/1975, No. 160034/1975, No. 43131/1976, No. 129229/1976, No. 106419/1976, No. 84712/1978, No. 111330/1979, No. 109336/1981, No. 30536/1984 and No. 45441/1984, Japanese Patent Examined Publications No. 9303/1972, No. 43130/1973 and No. 5887/1974.

25 Anti-static agents can be added into the thermal developing light-sensitive layer and/or non-light-sensitive layers (such as the subbing layer, intermediate layers and protective layer) of the thermal developing light-sensitive material of the invention.

30 The preferred anti-static agents for the invention are the compounds disclosed in British Patent No. 1,466,600, Research Disclosure No. 15840, No. 16258 and No. 16630 issues, U.S. Patents No. 2,327,828, No. 2,861,056, No. 3,206,312, No. 3,245,833, No. 3,428,451, No. 3,775,126, No. 3,963,498, No. 4,025,342, No. 4,025,463, No. 4,025,691, No. 4,025,704,

Ultraviolet absorbents can be added into the thermal developing light-sensitive layer and/or non-light-sensitive layers (such as the subbing layer, intermediate layers and protective layer) of the thermal developing light-sensitive material of the invention.

35 The examples of useful ultraviolet absorbent for the invention are as follows: benzophenone compounds such as those disclosed in Japanese Patent O.P.I. Publication No. 2784/1971, U.S. Patents No. 3,215,530 and No. 3,698,907; butadiene compounds such as those disclosed in U.S. Patent No. 4,045,229; 4-thiazolidone compounds such as those disclosed in U.S. Patents No. 3,314,794 and No. 3,352,681; aryl-substituted benzotriazole compounds such as those disclosed in Japanese Patent Examined Publications No. 10466/1958, No. 1687/1966, No. 26187/1967, No. 29620/1969 and No. 41572/1973, Japanese Patent 40 O.P.I. Publications No. 95233/1979 and No. 142975/1982, U.S. Patents No. 3,253,921, No. 3,533,794, No. 3,754,919, No. 3,794,493, No. 4,009,038, No. 4,220,711 and No. 4,323,633, Research Disclosure No. 22519 issue; benzoxazole compounds such as those disclosed in U.S. Patent No. 3,700,455; cinnamate compounds such as those disclosed in U.S. Patents No. 3,705,805 and No. 3,707,375, Japanese Patent O.P.I. Publication No. 49029/1977. Additionally, those disclosed in U.S. Patent No. 3,499,762 and Japanese Patent 45 O.P.I. Publication No. 48535/1979 can be used too. Furthermore, ultraviolet absorbing couplers (such as α -naphthol cyan-dye forming couplers), ultraviolet absorbing polymers (such as those disclosed in Japanese Patent O.P.I. Publications No. 111942/1983, No. 178351/1983, No. 181041/1983, No. 19945/1984 and No. 23344/1984.

50 Hardeners can be added into the thermal developing light-sensitive layer and/or non-light-sensitive layers (such as the subbing layer, intermediate layers and protective layer) of the thermal developing light-sensitive material of the invention.

According to the invention, the examples of useful hardeners are as follows: aldehyde or aziridine hardeners such as those disclosed in PB Report No. 19,921, U.S. Patents No. 2,950,197, No. 2,964,404, No. 2,983,611 and No. 3,271,175, Japanese Patent Examined Publication No. 40898/1971, Japanese Patent 55 O.P.I. Publication No. 91315/1974; isoxazoles such as those disclosed in U.S. Patent No. 331,609; epoxy hardeners such as those disclosed in U.S. Patent No. 3,047,394, West German Patent No. 1,085,663, British Patent No. 1,033,518, and Japanese Patent Examined Publication No. 35495/1973; vinylsulfone hardeners such as those disclosed in Photographic Business Report No. 19,920, West German Patents No. 1,100,942,

No. 2,337,412, No. 2,545,722, No. 2,635,518, No. 2,742,308 and No. 2,749,260, British Patent No. 1,251,091, Japanese Patent Applications No. 54236/1970 and No. 110996/1973, U.S. Patents No. 3,539,644 and No. 3,490,911; acryloyl hardeners such as those disclosed in Japanese Patent Application No. 27949/1973 and U.S. Patent No. 3,640,720; carbodiimide hardeners such as those disclosed in U.S. Patents
 5 No. 2,938,892, No. 4,043,818, No. 4,061,499, Japanese Patent Examined Publication No. 38715/1971, Japanese Patent Application No. 15095/1974; triazine hardeners such as those disclosed in West German Patents No. 2,410,973 and No. 2,553,915, U.S. Patent No. 3,325,287, and Japanese Patent O.P.I. Publication No. 12722/1977. In addition, maleimide-, acethylene-, methansulfonate- and N-methylol hardeners may be also singly used, or otherwise, more than two of such hardeners may be combinedly used. The
 10 examples of advantageous combination are disclosed in West German Patents No. 2,447,587, No. 2,505,746 and No. 2,514,245, U.S. Patents No. 4,047,957, No. 3,832,181 and No. 3,840,370, Japanese Patent O.P.I. Publications No. 43319/1973, No. 63062/1975 and No. 127329/1977, and Japanese Patent Examined Publication No. 32364.

High polymer hardeners can be added into the thermal developing light-sensitive layer and/or non-light-sensitive layers (such as the subbing layer, intermediate layers and protective layer) of the thermal developing light-sensitive material of the invention. Examples of useful high polymer hardeners are as follows: as disclosed in U.S. Patent No. 3,396,029 and others, polymers having an aldehyde group (for example, copolymer of acroleine) polymers having dichlorotriazine group, as disclosed in U.S. Patent No. 3,362,827, and Research Disclosure No. 17333 (1978); polymers having an epoxy group, as disclosed in
 20 U.S. Patent No. 3,623,878; polymers having an active vinyl group or a precursor of such an active vinyl group, as disclosed in Research Disclosure No. 16725 (1978), U.S. Patent No. 4,161,407, Japanese Patent O.P.I. Publications No. 65033/1979 and No. 142524/1981; polymers having an active ester group.

In order to improve the film property, the thermal developing light-sensitive material of the invention may contain polymer latex in the heat developing light-sensitive layer and/or non-light-sensitive layers (such as a subbing layer, intermediate layers and protective layer).
 25

The examples of useful polymer latex, according to the invention, include polymethyl acrylate, polyethyl acrylate, poly-n-butyl acrylate, copolymer of ethylacrylate and acrylic acid, copolymer of vinylidene chloride and butyl acrylate, copolymer of butyl acrylate and acrylic acid, copolymer of vinyl acetate and butyl acrylate, copolymer of vinyl acetate and ethyl acrylate, copolymer of ethyl acrylate and 2-acrylamide.

The preferred mean grain size of polymer latex grains is 0.02 - 0.2 μm . The amount of polymer latex to be used is, in terms of dry weight, 0.03 - 0.5 per amount of binder in the layer where the latex is incorporated.
 30

In order to improve the film property, the thermal developing light-sensitive material of the invention may contain various surface active agents in the heat developing light-sensitive layer and/or non-light-sensitive layers (such as a subbing layer, intermediate layers and protective layer).
 35

The surface active agents used for the invention are whichever of anionic, amphoteric or nonionic surface active agents.

The preferred examples of anionic surface active agent, having any of acid groups such as carboxy group, sulfo group, phospho group, sulfate and phosphate include alkyl carbonate, alkyl sulfonate, alkylbenzene sulfonate, alkyl naphthalene sulfonate, alkyl sulfate, alkyl phosphate, N-acyl-N-alkyltaurine, sulfosuccinate, sulfoalkylpolyoxyethylenealkylphenyl ether, polyoxyethylenealkylphosphate
 40

The preferred examples of cationic surface active agent include alkyl amine salt, aliphatic or aromatic quaternary ammonium salt, heterocyclic quaternary ammonium salts such as pyridinium and imidazolium, aliphatic phosphonium or sulfonium salt, or phosphonium or sulfonium having a heterocycle.

The preferred examples of amphoteric surface active agent include amino acid, aminoalkylsulfonic acid, aminoalkyl sulfate, aminoalkyl phosphate and alkylbetaine.
 45

The preferred examples of nonionic surface active agent include saponine (steroid class), alkyleneoxide derivative (such as polyethylene glycol, polyethylene glycol-polypropylene glycol condensate, polyethyleneglycolalkylethers or polyethyleneglycolalkylarylethers, polyethyleneglycol esters, polyethyleneglycolsorbitan esters, polyalkyleneglycolalkylamines or amides, polyethyleneoxide-adducts of silicon), glycidol derivatives (such as alkenylsuccinic polyglyceride and alkylphenolpolyglyceride), aliphaticates of polyvalent alcohol and alkyl esters of sugar.
 50

In order to improve the developability, transfer property of image forming dye, and optical properties, non-light-sensitive silver halide grains may be incorporated into the thermal developing light-sensitive layer and/or non-light-sensitive layers (such as a subbing layer, intermediate layers and protective layer) of the thermal developing light-sensitive material of the invention.
 55

The non-light-sensitive silver halide grains used for the invention may have any silver halide composition arbitrarily containing any of silver chloride, silver bromide, silver iodide, silver iodo-bromide, silver

chloro-bromide and silver chloro-bromo-iodide. The preferred average grain size of such non-light-sensitive silver halide grains is less than 0.3 μm . The amount of such silver halide to be added is, in terms of silver-converted value, at a rate of 0.02 - 3 g per m^2 of a layer where the silver halide is incorporated.

In order to improve the film property, the thermal developing light-sensitive material of the invention may contain vinyl polymer, having a carboxyl group or sulfo group and disclosed in Japanese Patent O.P.I. Publication No. 104338/1976, in the heat developing light-sensitive layer and/or non-light-sensitive layers (such as a subbing layer, intermediate layers, and protective layer).

The amount of such vinyl polymer to be used is, in terms of dry weight ratio, 0.05 - 2.0 against amount of binder in the layer where such vinyl polymer is added.

Favorably, the thermal developing light-sensitive material of the invention should be provided with a protective layer.

Various additives used in the photographic art are added into the protective layer of the invention. The examples of useful additive include various matting agents, colloidal silica, lubricants, organic fluoro compounds (in particular, fluorine surface active agent), anti-static agents, ultraviolet absorbers, high boiling organic solvent, antioxidants, hydroquinone derivatives, polymer latex, surface active agents (including high molecular surface active agents), hardeners (including high molecular hardeners), organic silver grains and non-light-sensitive silver halide grains.

The matting agent used in the protective layer of the invention is made of fine particles of inorganic or organic substance. This agent is added in the thermal developing light-sensitive material in order to coarse the surface and provide it with a mat texture. In compliance with a method well known in the art, a matting is used in order to prevent the mutual sticking of light-sensitive material during preparation, storage and actual use, or the generation of triboelectricity which may occur due to the contact and friction with or peeling off from a similar or different type of light-sensitive material. The typical examples of matting agent are as follows; silicon dioxide disclosed in Japanese Patent O.P.I. Publication No. 46316/1975; alkali soluble matting agents, such as alkyl methacrylate-methacrylic acid copolymer, disclosed in Japanese Patent O.P.I. Publications No. 7231/1978, No. 66937/1973 and No. 8894/1985; alkali soluble polymer, having an anionic group, disclosed in Japanese Patent O.P.I. Publication No. 166341/1973; mixture of, as disclosed in Japanese Patent O.P.I. Publication No. 145935/1973, more than two types of fine particles each type having individual Moh's hardness; combination of oil drops and fine particles as disclosed in Japanese Patent O.P.I. Publication No. 1447734/1973; combination of more than two types of spherical grain matting agent, each type having an individual average grain size, disclosed in Japanese Patent O.P.I. Publication No. 149356/1984; combination of fluorine surface active agent and matting agent, as disclosed in Japanese Patent O.P.I. Publication No. 44411/1981; organic matting agents disclosed in British Patent No. 1,055,713, U.S. Patents No. 1,939,213, No. 2,221,873, No. 2,268,662, No. 2,322,037, No. 2,376,005, No. 2,391,181, No. 2,701,245, No. 2,992,101, No. 3,079,257, No. 3,262,782, No. 3,443,946, No. 3,516,832, No. 3,539,344, No. 3,591,379, No. 3,754,924 and No. 3,767,448, Japanese Patent O.P.I. Publications No. 106821/1974 and No. 14835/1972; inorganic matting agents disclosed in West Germany Patent No. 2,529,321, British Patents No. 760,775 and No. 1,260,772, U.S. Patents No. 1,201,905, No. 2,192,241, No. 3,053,662, No. 3,062,649, No. 3,257,206, No. 3,322,555, No. 3,353,958, No. 3,370,951, No. 3,411,907, No. 3,437,484, No. 3,523,022, No. 3,615,554, No. 3,635,714, No. 3,769,020, No. 4,021,245 and No. 4,029,504; matting agents independently having unique properties, as disclosed in Japanese Patent O.P.I. Publications No. 7781/1971, No. 106821/1974, No. 6017/1976, No. 116143/1978, No. 100226/1978, No. 14835/1982, No. 82832/1982, No. 70426/1978 and No. 149357/1984, Japanese Patent Examined Publication No. 9053/1982, and EP - 107,378 issue.

The matting agent should be added into the protective layer of the invention at a rate of 10 mg - 2.0 g, or more favorably, 20 mg - 1.0 g per m^2 layer. The preferred average grain size of the matting agent is 0.5 - 10 μm , or more specifically, 1.0 - 6 μm .

More than two types of the above matting agents may be combinedly used.

The lubricants used in the protective layer of the invention include solid paraffin, oil, surface active agent, natural wax and synthesized wax, and more specifically, those preferred are disclosed in the following: French Patent No. 2,180,465, British Patents No. 955,061, No. 1,143,118, No. 1,270,578, No. 1,320,564 and No. 1,320,757, Japanese Patent O.P.I. Publications No. 5017/1974, No. 141623/1976, No. 159221/1979 and No. 81841/1981, Research Disclosure No. 13969 issue, U.S. Patents No. 1,263,722, No. 2,588,765, No. 2,739,891, No. 3,018,178, No. 3,042,522, No. 3,080,317, No. 3,082,087, No. 3,121,060, No. 3,222,178, No. 3,295,979, No. 3,489,567, No. 3,516,832, No. 3,658,573, No. 3,679,411 and No. 3,870,521.

To improve the film deposition, or to improve the vulnerability or to enhance to sliding property, the protective layer of the invention may contain oil-in water dispersion having oil drops of emulsified and dispersed water-insoluble compound, such as high-boiling organic solvent. In addition, photographic

additives may be added into such oil-in-water dispersion, in compliance with a requirement. The preferred examples of such high boiling organic solvent are as follows: as disclosed in U.S. Patents No. 2,322,027, No. 2,533,514 and No. 2,882,157, Japanese Patent Examined Publication No. 23233/1971, British Patents No. 958,441 and No. 1,222,753, U.S. Patents No. 2,353,262, No. 3,676,142 and No. 3,700,454, Japanese Patent O.P.I. Publications No. 82078/1975 and No. 141623/1976, esters (such as phthalates, phosphates and aliphates), amides (such as aliphatic amide and sulfonic amide), others, alcohols, paraffins and others.

The useful binders used in the protective layer of the invention are synthetic or natural high molecular substances, such as polyvinyl butyral, vinyl polyacetate, ethylcellulose, polymethyl methacrylate, celluloseacetatebutylate, polyvinyl alcohol, polyvinyl pyrrolidone, polyethylxazoline, polyacrylamide, gelatin and phthalated gelatin. These may be singly used, or more than two of them may be combinedly used.

In particular, it is preferably to use gelatin (including gelatin derivative), polyvinylpyrrolidone (preferably, having a molecular weight of 1000 - 400000), polyvinyl alcohol (preferably, having a molecular weight of 1000 - 100000) and polyoxazoline (preferably, having a molecular weight of 1000 - 800000). These may be singly used, or otherwise, a composite binder having more than two of them may be used. More specifically, a binder exclusively composed of gelatin, or a binder composed of gelatin as well as a hydrophilic polymer, having high compatibility with gelatin, such as the above polyvinyl pyrrolidone, polyvinyl alcohol and polyoxazoline.

Gelatin may be lime-treated, or acid-treated gelatin, or ion exchange-treated gelatin, or may be ossein gelatin, pig-skin gelatin, hyde-gelatin, or any of the modified gelatins, such as the estrified or phenylcarbamoyl gelatin derived from the any of the above natural gelatins.

The preferred film thickness of the protective layer of the invention is 0.05 - 5 μm , or more specifically, 0.1 - 1.0 μm . The protective layer may comprise single layer or more than two layers.

It is also preferable that the hardness of the protective layer be set larger than that of the light-sensitive layer in order to enhance the film hardness and to prevent the damage in the film. As a method to set the film hardness of protective layer larger than that of light-sensitive layer, in other words, as a method to control the film hardness of individual layers, the method to use a diffusion-resistant hardeners, whereby, by incorporating such diffusion-resistant hardeners into the protective layer, the film hardness of protective layer can be made larger than that of light-sensitive layer. As a diffusion-resistant hardener, high-molecular hardeners are known in the art, and the examples of such useful hardener are disclosed in U.S. Patents No. 3,057,723, No. 3,396,029 and No. 4,161,407, Japanese Patent O.P.I. Publications No. 50528/1983, and others.

With another method to control the film hardness of individual layer, the film hardness of protective layer can be made larger than that of light-sensitive layer, wherein a diffusible hardener (such as vinylsulfone hardener) is incorporated only in the protective layer, or the amount of hardener in the protective layer is set larger than that in the light-sensitive layer, whereby being applied by the multi-layer coating method, the multi-layered emulsions are drastically dried.

An image-receiving layer of the image-receiving member being capable of receiving dyes, in the thermal developing light-sensitive layer, released or formed by the thermal development is satisfactorily used in the invention. For forming such a layer, the polymers having, for example, tertiary amine or quaternary ammonium salt, in particular, the polymers disclosed in U.S. Patent No. 3,709,690 are favorably used. More specifically, one example of polymer independently having ammonium salt, is a polymer comprising polystyrene-co-N,N,N-tri-n-hexyl-N-vinyl and benzylammoniumchloride at a ratio of 1 : 4 to 4 : 1, or more favorably, 1 : 1. As an example of a polymer having tertiary amine, polyvinyl pyridine and the like are available. The typical image-receiving layer for diffusion transfer is prepared by applying the blend involving a polymer containing ammonium salt, tertiary amine or the like, and gelatin or polyvinyl alcohol, onto a support. Still other examples of useful dye-receiving material include, as disclosed in Japanese Patent O.P.I. Publications No. 207250/1982 and the like, those comprising heat-resistant organic high-molecular material whose glass transition temperature is higher than 40 °C and lower than 250 °C.

Such a polymer may be disposed as an image receiving layer on a support, or the polymer itself may be used as a support.

The examples of the above-mentioned heat-resistant organic high molecular material are as follows; polystyrene, polystyrene derivative having a substituent with less than four carbon atoms, polyvinyl cyclohexane, polyvinyl benzene, polyvinyl pyrrolidone, polyvinyl carbazole, polyallyl benzene, polyvinyl alcohol; polyacetals such as polyvinylformal and polyvinyl butyral; polyvinyl chloride, chlorinated polyethylene, poly-tri-chloro-fluorinated ethylene, polyacrylonitrile, poly-N,N-dimethylallylamide; polyacrylates having a p-cyanophenyl group, pentachlorophenyl group or 2,4-dichlorophenyl group; polyesters such as polyacrylchloro acrylate, polymethyl methacrylate, polyethyl methacrylate, polypropyl methacrylate, polyisopropyl methacrylate, polyisobutyl methacrylate, polytert-butyl methacrylate, polycyclohexyl methacrylate,

polyethyleneglycol dimethacrylate, poly-2-cyano-ethylmethacrylate, polyethylene terephthalate; polysulfones; polycarbonates such as bisphenol-A-polycarbonate; polyanhydrides; polyamides; cellulose acetates. Additionally, the synthetic polymers respectively having a glass transition point of less than 40°C and disclosed in Polymer Handbook, Second Edition, compiled by J. Brandrup, H. Immergut, published from
 5 John Wiley & Sons, are also useful. Usually, the Preferred molecular weights of the above high molecular materials are within a range of 2000 to 200000. These high molecular materials may be singly used, or a blend of involving more than two of them may be used, or otherwise, more than two of them may be formed into a copolymer to be used.

The examples of useful polymers are as follows: cellulose acetate such as triacetate, diacetate and the
 10 like; polyamides composed of heptamethylene diamine and terephthalic acid, fluorenediporopylamine and adipic acid, hexamethylenediamine and diphenic acid, hexamethylenediamine and isophthalic acid, or of another combination; polyesters composed of diethylene glycol and diphenylcarboxylic acid, bis-p-carboxyphenoxybutane and ethylene glycol, or of another combination; polyethylene terephthalate; polycarbonate. Such polymers may be of modified types. In addition, polyethylene terephthalate modified with cyclohex-
 15 anedimethanol, methoxypolyethyleneglycol, 1,2-dicarbomethoxy-4-benzenesulfonic acid are useful.

The examples of especially favorable image receiving layer are as follows; a layer, as disclosed in Japanese Patent O.P.I. Publications No. 223425/1984, composed of vinyl chloride; a layer, as disclosed in Japanese Patent O.P.I. Publications No. 19138/1985, composed of polycarbonate and plasticizer.

Using these polymers, a support also serving as an image receiving layer (image receiving member)
 20 may be formed. In this case, the support may be composed of single layer, or of a plurality of layers.

As an image-receiving support, a transparent support or an opaque support may be arbitrarily used. The examples of a support useful for this purpose are as follows; films made of polyethylene terephthalate, polycarbonate, polystyrene, polyvinyl chloride, polyethylene or polypropylene;

a support made of one of above materials and containing colorant such as titanium oxide, barium
 25 sulfate, calcium carbonate or talc; baryta paper; RC paper made of a paper having a lamination of thermoplastic resin containing colorant; cloth; glass; metal such as aluminum;

a support comprising any of such a support on which colorant-containing electron-setting resin component is applied and set; a support comprising such a support on which coat of colorant-containing layer is formed.

30 Allowing the use as an image-receiving member without any modification, because of the resin layer readily used as an image-receiving layer, the following supports are especially advantageous; a support comprising a paper sheet, applied and dried thereonto, an electron-setting resin component containing colorant; a support comprising a paper sheet, provided thereon, a colorant-containing layer, onto which an electronsetting resin component is applied and dried.

35 If the invention is applied to the thermal developing color light-sensitive material, any of the above-mentioned various polymers also serving as a mordant for a dye image may be used as an image-receiving layer. Such an image-receiving layer may be either an independent image-receiving component formed on an appropriate support and having an image-receiving layer, or a single layer which is a part of the thermal developing color light-sensitive material. If necessary, the light-sensitive material may have an opaque layer
 40 (reflective layer), which is used to reflect radiant ray such as visible ray strong enough for enabling the visual observation of a dye image in an image-receiving layer. The opaque layer (reflective layer) may contain various chemical agents, such as titanium oxide, to provide enough reflection.

The image-receiving layer in the image-receiving member may be the similar layer which is peeled off from the thermal developing light-sensitive layer. Otherwise, after the thermal developing color light-
 45 sensitive material is subjected to the imagewise exposure, the image-receiving layer placed on the thermal developing light-sensitive layer can be uniformly developed by heat. Additionally, after the thermal developing color light-sensitive material is subjected to the imagewise exposing as well as uniform thermal developing, the image-receiving layer placed on the material is heated with a temperature lower than the developing temperature, so as to transfer the dye image emitted from or formed by the dye supplying
 50 material onto the light-sensitive material.

After the imagewise exposure, the thermal developing light-sensitive material of the invention is readily developed, by subjecting to a temperature usually of 80 - 200°C, or favorably, 100 - 170°C, for 1 - 180 seconds, or favorably, 1.5 - 120 seconds. The transfer of diffusible dye onto the image-receiving layer may be effected simultaneously with the thermal developing, simply by contactly placing the image-receiving
 55 layer of the image-receiving member onto the light-sensitive surface of the light-sensitive material during the developing. Or, otherwise, the similar transfer may be also effected after the thermal developing, by simply heating the light-sensitive material closely placed onto the image-receiving member, or by supplying water onto the material, and closely contacting the material and the image-receiving member, then, if

necessary, subjecting them to reheating. Additionally, the preheating at a temperature of 70 - 180 °C before the exposing may be also effected. Also, as mentioned in Japanese Patent O.P.I. Publication No. 143339/1985 and Japanese Patent Examined Publication No. 3644/1985, the light-sensitive material and the image-receiving member may be independently preheated immediately before the thermal developing/transferring, in order to ensure the mutual contact between them.

For the thermal developing light-sensitive material may be exposed by various means. The latent image is obtained by the imagewise exposing with the radiant ray involving visible ray. Usually, the light-sources useful for conventional color print, such as tungsten lamp, mercury-vapor lamp, xenon lamp, laser beam and CRT beam may be used.

Every method, useful for the conventional thermal developing light-sensitive material, can be used as a means for heating. The typical methods are as follows: a heating method to contact the material with a heated block, plate, heat-roller or heat drum; a heating method, wherein the material is subjected to high-temperature atmosphere; a method to use high-frequency heating; a method, wherein an electroconductive layer containing an electroconductive material such as carbon black is formed on the rear surface of the light-sensitive material of the invention, or on the rear surface of the heat transfer image receiving member, whereby the Joule heat derived from the electrical current flowing through the electroconductive material is utilized. There is no specific heating pattern. Accordingly, a once preheated light-sensitive material may be later reheated, or the similar material may be subjected to a heating program for a short time at a high temperature, or for a long time at a low temperature, or a heating program, wherein the temperature is repeatedly raised then dropped, or, otherwise the similar material may be heated intermittently. However, the simpler procedure is advantageous. Additionally, a method, wherein the exposing and the heating are simultaneously effected, may be employed.

Further, the thermal developing light-sensitive material of the present invention may be processed by the use of an automatic processing apparatus as shown in Fig. 1.

Naturally, the compound of the invention is also effective for the thermal light-sensitive material (dry silver) with which and image is formed only on silver.

[EXAMPLES OF THE INVENTION]

The present invention is hereinunder described in detail with the reference to the examples, however, the scope of embodiment of the invention is not limited only to these examples.

Example - 1

[Preparation of light-sensitive silver halide]


Into a mixer disclosed in Japanese Patent O.P.I. Publications No. 92523/1982 and No. 92524/1982, a solution A containing 20 g ossein gelatin, 1000 ml distilled water and ammonia, 500 ml aqueous solution B containing 11.62 g potassium iodide and 130.9 g potassium bromide and 500 ml, and 500 ml aqueous solution C containing one mol silver nitrate and ammonia were poured while the pAg and pH being kept constant. Additionally, by controllingly adding the solutions B and C, the cubic core grains individually having 7 mol% silver iodide content and an average diameter of 0.15 μm were prepared. Next, with the same procedure, the 0.05 μm thick shell having one mol% silver halide content was formed on an individual core grain, thus cubic core/shell silver iodo-bromide grains individually having an average diameter of 0.2 μm were prepared. (The degree of mono-dispersion was 8%.) The yield after water-rinsing and desalination was 700 ml.

[Preparation of light-sensitive silver halide dispersion (1)]

The silver halide grains, prepared in the above step, were sensitized in accordance with the sulfur sensitization using sodium thiosulfate in the presence of the light-sensitive silver halide dispersion having the following composition was prepared.

Above light-sensitive silver halide	700 ml
Gelatin	32 g
Sodium thiosulfate	10 mg
0.5% methanol solution of spectral sensitizing dye (1)	170 ml
Distilled water to prepare 2820 ml solution	

Spectral sensitizing dye (1)

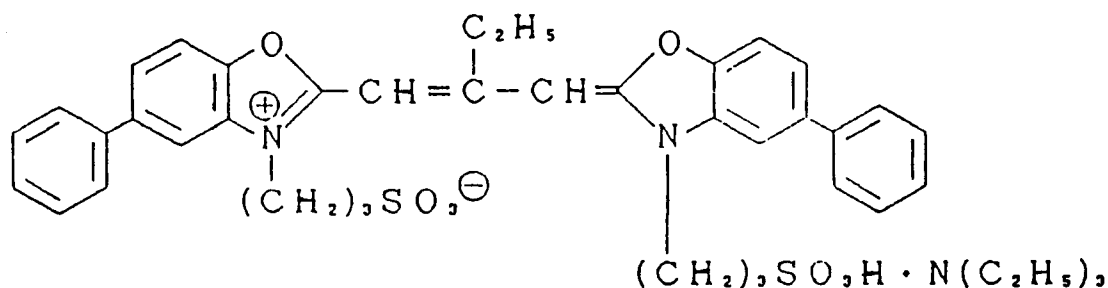

[Preparation of organic silver salt dispersion]

28.8 g 5-methylbenzotriazole silver prepared by allowing 5-methylbenzotriazole to react with silver nitrate in water-methanol mixture solvent, and 150 ml water containing 16.0 g poly-N-vinylpyrrolidone were emulsified by using an alumina ball mill at the pH of 5.5 in order to prepare 200 ml 5-methylbenzotriazole silver dispersion.


[Preparation of dispersion of magenta-dye supplying material]

46.6 g example dye supplying material (PM - 4) and 2.5 g 2,5-di-t-octylhydroquinone were dissolved in 200 ml ethyl acetate, whereby the solution was blended with 124 ml aqueous solution containing 5 weight% of Alkanol XC (manufactured by DuPont) and 720 ml aqueous solution containing 30.5 g of phenylcarbamoyl gelatin (manufacture by, type 17819PC), whereby the resultant solution was emulsified with an ultrasonic homogenizer, then ethyl acetate was removed by distillation and the pH of solution was adjusted to 5.5. In this way, 795 ml of magenta-dye-supplying material dispersion (1) was prepared.

[Preparation of reducing agent solution (1)]

23.2 g example reducing agent (R - 11), 14.6 g poly(N-vinylpyrrolidone) (molecular weight, 30000) and 0.6 g of the following fluorine surface active agent were dissolved in water, whereby the pH was adjusted to 5.5, thus 250 ml of the reducing agent solution (1) was prepared.

Fluorine surface active agent



(m and n respectively represent 2 or 3)

[Preparation of heat melting solvent dispersion]

430 g of p-tolamide, and 1410 ml aqueous solution containing 1.0 weight% polyvinylpyrrolidone (K - 90) were emulsified by using a ball mill, thus the heat melting solvent dispersion was prepared.

[Preparation of thermal developing light-sensitive material (1)]

6.0 ml light-sensitive silver halide dispersion, 4.20 ml organic silver dispersion, 26.5 ml of dye-supplying material dispersion (1), 4.2 ml reducing agent solution, and 14.8 g heat melting solvent dispersion, each having been prepared in above steps, as well as 7.6 ml of 10% aqueous solution containing a mixture of phenylcarbamoyl gelatin and gelatin were blended together. Next, as a hardener, a solution prepared in the following manner was added into the above mixture; tetra(vinylsulfonylmethyl)-methane was allowed to react with tarine at a ratio of 1 : 1 (weight ratio), then the reaction product was dissolved in 1% aqueous phenylcarbamoyl gelatin solution, whereby the resultant solution was treated so as to have 3 weight% tetra(vinylsulfonylmethyl)methane, then the solution was further treated with 2.50 ml of 10% citric acid so as to have the pH level of 5.5. Subsequently, the prepared coating solution was applied and dried onto a subbing layer provided on a 180 μ m thick photographic polyethylene terephthalate film so that the rate of coated silver is 1.31 g/m². Furthermore, upon the above layer was formed a protective layer by using the above phenylcarbamoyl gelatin, gelatin, poly(N-vinylpyrrolidone) and p-tolamide.

Next, the thermal developing light-sensitive materials (2) through (13) were prepared in a manner identical to that for the thermal developing light-sensitive material (1) except that for each of these materials the compounds represented by the general formulae (1) and (2) according to the invention were correspondingly added in compliance with the combinations as listed in Table - 1.

[Preparation of image-receiving member (1)]

The image-receiving member (1) was prepared by applying and drying ethylene chloride solution containing polycarbonate (L - 1250; molecular weight, 25000; manufactured by Teijin Kasei Co., Ltd. onto a photographic baryta paper so that the rate of coated polycarbonate became 15.0 g/m².

The above thermal developing light-sensitive materials (1) through (13) were exposed with the light through optical stepwedge, whereby each material was combined with the image-receiving member (1) then subjected to the thermal developing with a thermal developing machine (Developer module, Model 277, manufactured by 3M) for one minute at 150 °C, then immediately the thermal developing light-sensitive material was removed from the image-receiving member. As a result, a stepwedge patterned, magenta-colored negative image was formed on the polycarbonate surface on the image-receiving member. Also, each of the similar light-sensitive materials having been allowed to stand for 30 hours under a high temperature (50 °C) and a high humidity (80% relative humidity) was treated likewise. Then, with the samples both those not allowed to stand and those allowed to stand for 30 hours, the reflective green densities were measured by a photographic densitometer (PDA - 65, manufactured by Konishiroku Photo Industry Co., Ltd.). The minimum densities (fogging), maximum densities, and the desensitization ratios due to standing are listed in Table - 1, wherein the densitization ratio was determined by the following expression.

$$\text{Standing-oriented desensitization ratio} = (1 - \text{post-standing sensitivity/pre-standing sensitivity}) \times 100 [\%]$$

Table - 1

The figure in () indicates the amount of addition per mol silver halide in terms of mol.

Light-sensitive material Sample No.	Desensitization ratio (%)	Compounds of formula (1) and (2)		Minimum density (fogging)	Maximum density	After standing	
						Minimum density (fogging)	Maximum density
1 (Comparison)	65	Without addition		0.34	2.24	0.42	2.26
2 (Comparison)	53	A-45 (1.0×10^{-3})		0.40	2.31	0.59	2.37
3 (Comparison)	52	A-45 (5.0×10^{-3})		0.57	2.35	0.84	2.41
4 (Comparison)	56	A-49 (1.0×10^{-3})		0.39	2.26	0.53	2.31
5 (Comparison)	61	A-4 (1.0×10^{-3})	A-45 (1.0×10^{-3})	0.35	2.22	0.48	2.26
6 (Comparison)	51	A-49 (1.0×10^{-3})	A-6 (1.0×10^{-3})	0.38	2.31	0.55	2.38
7 (Comparison)	40	A-4 (1.0×10^{-3})	Without addition	0.18	2.19	0.25	2.16
8 (Comparison)	31	Without addition	B-4 (5.0×10^{-3})	0.16	2.25	0.25	2.26
9 (Invention)	11	A-4 (1.0×10^{-3})	B-4 (5.0×10^{-3})	0.12	2.20	0.14	2.22
10 (Invention)	9	A-4 (1.0×10^{-3})	B-14 (5.0×10^{-3})	0.14	2.20	0.14	2.18
11 (Invention)	13	A-4 (1.0×10^{-3})	B-30 (5.0×10^{-3})	0.12	2.19	0.13	2.17
12 (Invention)	5	A-3 (2.0×10^{-3})	B-15 (5.0×10^{-3})	0.13	2.22	0.14	2.23
13 (Invention)	7	A-3 (2.0×10^{-3})	B-28 (5.0×10^{-3})	0.14	2.24	0.15	2.26
14 (Invention)	12	A-45 (1.0×10^{-3})	B-4 (5.0×10^{-3})	0.19	2.30	0.21	2.31
15 (Invention)	15	A-57 (1.0×10^{-3})	B-4 (5.0×10^{-3})	0.17	2.28	0.19	2.27
16 (Invention)	16	A-59 (1.0×10^{-3})	B-15 (5.0×10^{-3})	0.16	2.27	0.15	2.27

It is apparent from the results in Table - 1 that, when compared to each of the comparison thermal developing light-sensitive materials not having the compound of the invention or having only one of the compound of the invention represented by general formula (1) and the compound of the invention represented by general formula (2), the thermal developing light-sensitive material of the invention features low fogging in spite of its high maximum density, and shows smaller variation in both the minimum density (fogging) and the maximum density even stored under a high temperature and a high humidity, and that the light-sensitive material of the invention also features a low desensitization ratio. In essence, it is apparent that the thermal developing light-sensitive material of the invention has the excellent shelf life.

Example 2

Using the light-sensitive silver halide grains prepared in Example 1, the light-sensitive silver halide dispersion was prepared in a manner identical to that of Example 1, except that the sulfur sensitization for the light-sensitive silver halide dispersion (1) was exercised in the presence of the compound A - 28 of the invention which was used at a rate of 1.0×10^{-3} per mol silver halide. Then, the light-sensitive material (14) was prepared in a manner identical to that of Example 1, except that the light-sensitive silver halide dispersion (2) was used in the place of the light-sensitive silver halide dispersion (1).

Additionally, the thermal developing light-sensitive materials (15) through (21) were prepared in a

manner identical to that of the thermal developing light-sensitive material, except that the compounds of the invention represented by the general formula (1) or (2) were correspondingly used in compliance with the combinations listed in Table - 2.

Each sample of the above thermal developing light-sensitive materials (14) through (21) was stored
5 under a high temperature and a high humidity identical to those of Example 1, then exposed and subjected
to the thermal developing using the image-receiving member (1). The reflective green density of the
negative magenta image formed on the image receiving member was measured by a photographic
densitometer (PDA - 65, manufactured by Konishiroku Photo Industry Co., Ltd.). The results of minimum
densities (fogging), maximum densities, and the desensitization ratios are listed in Table - 2.

10

15

20

25

30

35

40

45

50

55

Table 2

The figure in () indicates the amount of addition per mol silver halide in terms of mol.

Light-sensitive material Sample No.	Desensitization ratio (%)	Compounds of formula (1) and (2)		Minimum density (fogging)	Maximum density	After standing Minimum density (fogging) Maximum density	
14 (Comparison)	59	Without addition		0.28	2.20	0.36	2.26
15 (Comparison)	42	(a) (1.0×10^{-3})		0.38	2.27	0.45	2.37
16 (Comparison)	48	A-4 (1.0×10^{-3})		0.27	2.13	0.38	2.17
17 (Invention)	9	B-4 (5.0×10^{-3})		0.13	2.23	0.15	2.26
18 (Invention)	11	B-5 (5.0×10^{-3})		0.14	2.22	0.16	2.24
19 (Invention)	11	B-8 (5.0×10^{-3})		0.14	2.20	0.14	2.26
20 (Invention)	9	A-3 (1.0×10^{-3})	B-15 (5.0×10^{-3})	0.13	2.21	0.16	2.22
21 (Invention)	7	B-5 (3.0×10^{-3})	B-15 (3.0×10^{-3})	0.12	2.24	0.13	2.28
25 (Invention)	13	A-57 (1.0×10^{-3})	B-15 (5.0×10^{-3})	0.15	2.31	0.15	2.30


As can be understood from the results in Table - 2, the light-sensitive material of the invention shows excellent performance, even when the compound of the invention represented by the general formula (1) is added in the material before the chemical sensitization.

Example 3


[Preparation of light-sensitive silver halide dispersion]

Using the light-sensitive silver halide grains identical to those of Example 1, three types of silver halide emulsions each spectrally sensitized to have a color sensitivity respectively to blue, green and red were prepared in a manner identical to that of Example 1, except that the above-mentioned spectral sensitizing dye (1) was used as the spectral green sensitizing dye, and that the following spectral sensitizing dyes were used.

Spectral blue sensitizing dye

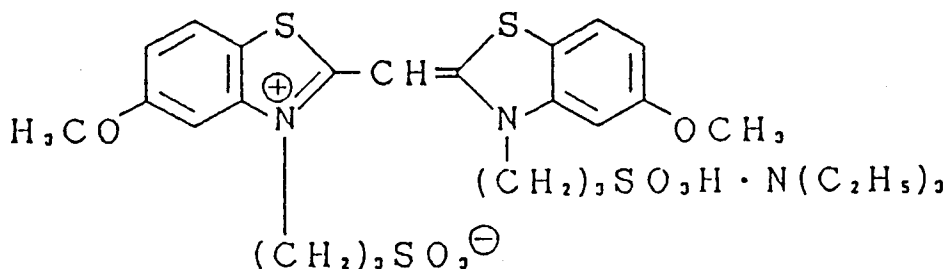

Spectral red sensitizing dye

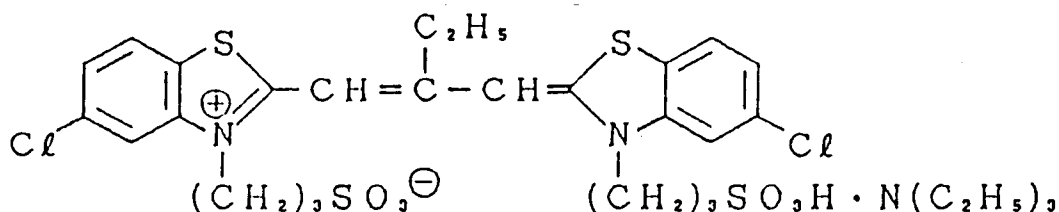

[Preparation of yellow dye-supplying-material dispersion (1) and cyan dye-supplying-material dispersion (1)]

By replacing 46.9 g of the sample dye-supplying material (PM - 4) respectively with 23.3 g of yellow dye-supplying material (PM - 1) and 45.9 g of cyan dye-supplying material (PM - 5), yellow dye-supplying material dispersion (1) and cyan dye-supplying material dispersion (1) were correspondingly prepared.


[Preparation of anti-color stain agent dispersion (1)]

25.0 g of anti-color stain agent (SC - 1) was dissolved in 80 ml of ethyl acetate, which was blended with 254 ml of aqueous solution containing 50 ml of 5 weight% Alkanol XC and 12.0 g gelatin, whereby the mixture was emulsified by using an ultrasonic homogenizer, then ethyl acetate was removed by distillation, so as to prepare anti-color stain agent dispersion (1).


[Preparation of yellow filter dye dispersion (1)]

20.0 g of yellow filter dye having the following chemical structure was dissolved in 120 ml of ethyl acetate, which was blended with 250 ml of aqueous solution containing 50 ml of 5 weight% Alkanol XC and 9.0 g/l of phenylcarbonyl gelatin, whereby the mixture was emulsified by using an ultrasonic homogenizer, then ethyl acetate was removed by distillation, so as to prepare 300 ml of yellow filter dye dispersion (1).

Yellow filter dye

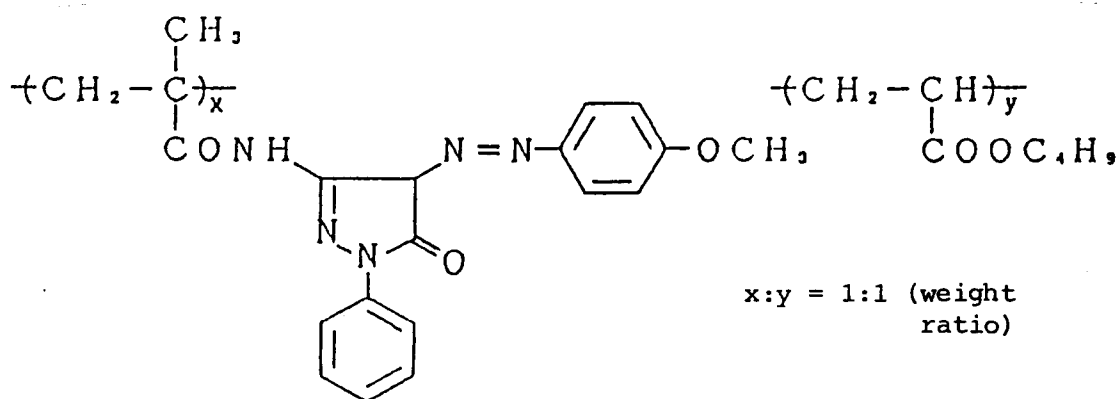

SC - 1

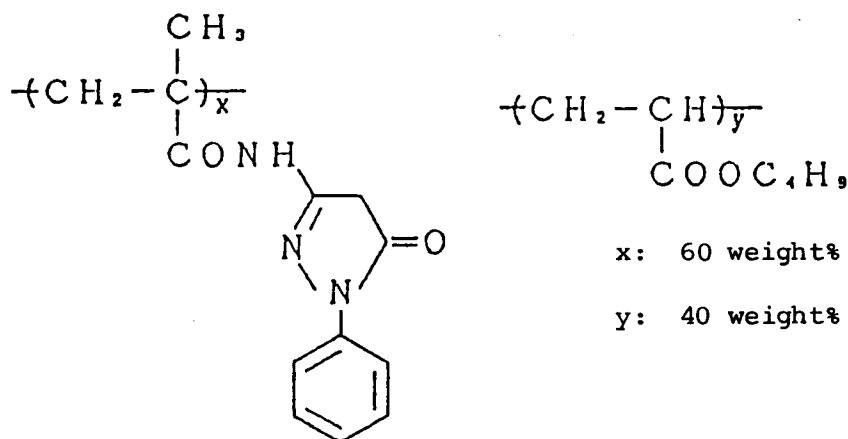

Using these dispersions, the thermal developing light-sensitive materials (22) through (31) independently having the multi-layer constitution listed in Table - 3 were prepared, when the compounds of the invention respectively represented by the general formulae (1) and (2) were added, in compliance with the combination listed in Table - 4, into the corresponding materials.

The above thermal developing light-sensitive materials (22) through (31) were exposed with the 2000 CMS exposure through optical step-wedge, whereby each material was combined with the image-receiving member (1) then subjected to the thermal developing with a thermal developing machine (Developer module, Model 277, manufactured by 3M) for one minute at 150°C, then immediately the thermal developing light-sensitive material was removed from the image-receiving member. With each sample, the blue-, green- and red-reflective densities on the polycarbonate surface of image-receiving member were measured by a photographic densitometer (PDA - 65, manufactured by Konishiroku Photo Industry, Co., Ltd.). The results are listed in Table - 5.

Table - 3

The figure in () represents the coated amount per one m²

Protective layer	Gelatin (0.94 g), phenylcarbamoyl gelatin (0.16 g), poly-N-pyrrolidone (0.32 g), reducing agent R - 11 (0.22 g), p-tolamide (1.22 g)
Blue-sensitive emulsion layer	Blue-sensitive silver iodo-bromide (silver-converted value, 0.43 g), 5-methylbenzotriazole silver (1.45 g), yellow dye-supplying material PM - 1 (0.94 g), reducing agent R - 11 (0.60 g), di-t-octylhydroquinone (0.10 g), gelatin (1.30 g), phenylcarbamoyl gelatin (0.43 g), poly-N-vinylpyrrolidone (0.87 g), p-tolamide (2.17 g), polyethylene glycol (1.08 g)
Intermediate layre	Anti-color stain agent (0.20 g), yellow filter dye (0.56 g), reducing agent R - 11 (0.22 g), gelatin (0.49 g), phenylcarbamoyl gelatin (0.28 g), poly-N-pyrrolidone (0.32 g), p-tolamide (0.81 g), polyethylene glycol (0.41 g)
Green-sensitive emulsion layer	Green-sensitive silver iodo-bromide (silver-converted value, 0.29 g), 5-methylbenzotriazole silver (0.96 g), magenta dye-supplying material PM - 4 (1.26 g), reducing agent R - 11 (0.40 g), di-to-octylhydroquinone (0.07 g), gelatin (0.87 g), phenylcarbamoyl gelatin (0.87 g), poly-N-vinylpyrrolidone (0.58 g), p-tolamide (1.45 g), polyethylene glycol (0.72 g)
Intermediate layer	Anti-color stain agent (0.20 g), reducing agent R - 11 (0.22 g), gelatin (0.49 g), phenylcarbamoyl gelatin (0.16 g), poly-N-pyrrolidone (0.32 g), p-tolamide (0.81 g), polyethylene glycol (0.41 g)
Red-sensitive emulsion layer	Red-sensitive silver iodo-bromide (silver-converted value, 0.43 g), 5-methylbenzotriazole silver (1.45 g), cyan dye-supplying material PM - 5 (1.84 g), reducing agent R - 11 (0.60 g), di-t-octylhydroquinone (0.10 g), gelatin (1.30 g), phenylcarbamoyl gelatin (0.43 g), poly-N-vinylpyrrolidone (0.87 g), p-tolamide (2.17 g), polyethylene glycol (1.08 g)
Subbing layer	Gelatin (0.49 g), phenylcarbamoyl gelatin (0.16 g), poly-N-pyrrolidone (0.32 g), reducing agent R - 11 (0.22 g)
Support	180 μ m thick transparent polyethylene terephthalate film having latex undercoat

These layers independently contain small amount of surface active agent as well as gelatin hardener in addition to the above components.

Table - 4

The figure in () represents the amount of addition per mol silver halide [mol] or amount coated [g/cm²].

Sample No.	Subbing layer	Red-sensitive emulsion layer	Intermediate layer	Green-sensitive emulsion layer	Intermediate layer	Blue-sensitive emulsion layer	Protective layer
22 (Comparison)	Without addition	Without addition	Without addition	Without addition	Without addition	Without addition	Without addition
23 (Comparison)	Without addition	(a) (1.0 x 10 ⁻³)	Without addition	(a) (1.0 x 10 ⁻³)	Without addition	(a) (1.0 x 10 ⁻³)	Without addition
24 (Comparison)	Without addition	A-2 (1.0 x 10 ⁻³)	Without addition	A-2 (1.0 x 10 ⁻³)	Without addition	A-2 (1.0 x 10 ⁻³)	Without addition
25 (Comparison)	A-2 (1.0 x 10 ⁻³)	A-2 (1.0 x 10 ⁻³)	A-2 (1.0 x 10 ⁻³)	A-2 (1.0 x 10 ⁻³)	A-2 (1.0 x 10 ⁻³)	A-2 (1.0 x 10 ⁻³)	A-2 (1.0 x 10 ⁻³)
26 (Comparison)	Without addition	B-5 (5.0 x 10 ⁻³)	Without addition	B-5 (5.0 x 10 ⁻³)	Without addition	B-5 (5.0 x 10 ⁻³)	Without addition
27 (Invention)	Without addition	A-2 (1.0 x 10 ⁻³)	Without addition	A-2 (1.0 x 10 ⁻³)	Without addition	A-2 (1.0 x 10 ⁻³)	Without addition
28 (Invention)	Without addition	A-3 (1.0 x 10 ⁻³)	Without addition	A-3 (1.0 x 10 ⁻³)	Without addition	A-3 (1.0 x 10 ⁻³)	Without addition
29 (Invention)	Without addition	A-4 (1.0 x 10 ⁻³)	Without addition	A-4 (1.0 x 10 ⁻³)	Without addition	A-4 (1.0 x 10 ⁻³)	Without addition
30 (Invention)	A-4 (1.0 x 10 ⁻³)	A-4 (1.0 x 10 ⁻³)	A-4 (1.0 x 10 ⁻³)	A-4 (1.0 x 10 ⁻³)	A-4 (1.0 x 10 ⁻³)	A-4 (1.0 x 10 ⁻³)	A-4 (1.0 x 10 ⁻³)
31 (Invention)	A-4 (1.0 x 10 ⁻³)	B-4 (6.0 x 10 ⁻³)	A-4 (1.0 x 10 ⁻³)	B-4 (6.0 x 10 ⁻³)	A-4 (1.0 x 10 ⁻³)	B-4 (6.0 x 10 ⁻³)	A-4 (1.0 x 10 ⁻³)
36 (Invention)	Without addition	A-45 (1.0 x 10 ⁻³)	Without addition	A-45 (1.0 x 10 ⁻³)	Without addition	A-45 (1.0 x 10 ⁻³)	Without addition
37 (Invention)	A-47 (1.0 x 10 ⁻³)	B-4 (6.0 x 10 ⁻³)	A-3 (1.0 x 10 ⁻³)	B-4 (6.0 x 10 ⁻³)	B-4 (1.0 x 10 ⁻³)	A-3 (6.0 x 10 ⁻³)	B-4 (1.0 x 10 ⁻³)

Table - 5

Light-sensitive material Sample No.	Before standing		After standing	
	Minimum density (fogging)	Maximum density	Minimum density (fogging)	Maximum density
22 (Comparison)	B 0.36 G 0.29 R 0.32	B 2.05 G 1.96 R 2.03	B 0.47 G 0.36 R 0.42	B 2.09 G 1.99 R 2.04
23 (Comparison)	B 0.54 G 0.39 R 0.45	B 2.11 G 2.01 R 2.06	B 0.64 G 0.46 R 0.55	B 2.14 G 2.05 R 2.10
24 (Comparison)	B 0.29 G 0.22 R 0.24	B 2.01 G 1.94 R 1.98	B 0.36 G 0.31 R 0.34	B 1.96 G 1.88 R 1.90
25 (Comparison)	B 0.25 G 0.18 R 0.20	B 1.98 G 1.93 R 1.96	B 0.36 G 0.30 R 0.33	B 1.93 G 1.88 R 1.90
26 (Comparison)	B 0.26 G 0.18 R 0.20	B 2.08 G 2.00 R 2.02	B 0.32 G 0.26 R 0.28	B 2.02 G 1.96 R 1.98
27 (Invention)	B 0.22 G 0.16 R 0.18	B 2.11 G 2.02 R 2.07	B 0.21 G 0.15 R 0.18	B 2.12 G 2.05 R 2.08
28 (Invention)	B 0.23 G 0.17 R 0.19	B 2.09 G 2.00 R 2.04	B 0.23 G 0.18 R 0.19	B 2.10 G 2.02 R 2.05
29 (Invention)	B 0.21 G 0.16 R 0.18	B 2.08 G 1.99 R 2.03	B 0.22 G 0.17 R 0.19	B 2.10 G 2.00 R 2.05
30 (Invention)	B 0.21 G 0.16 R 0.17	B 2.07 G 1.99 R 2.04	B 0.23 G 0.18 R 0.19	B 2.06 G 1.99 R 2.03
31 (Invention)	B 0.22 G 0.17 R 0.19	B 2.10 G 2.02 R 2.06	B 0.22 G 0.16 R 0.18	B 2.11 G 2.01 R 2.05
36 (Invention)	B 0.27 G 0.25 R 0.23	B 2.21 G 2.19 R 2.16	B 0.29 G 0.26 R 0.23	B 2.22 G 2.18 R 2.16
37 (Invention)	B 0.22 G 0.20 R 0.18	B 2.15 G 2.11 R 2.12	B 0.22 G 0.21 R 0.18	B 2.14 G 2.10 R 2.11


It is apparent from the results in Table - 5 that, when compared to each of the comparison thermal developing light-sensitive materials not having the compound of the invention or having only one of the compound of the invention represented by general formula (1) and the compound of the invention represented by general formula (2), the thermal developing light-sensitive material of the invention features limited fluctuation in the minimum density (fogging) as well as the maximum density even when stored under a high temperature and a high humidity. In essence, it is apparent that the thermal developing light-sensitive material of the invention has the excellent shelf life.

Example 4

30.0 g of example dye-supplying material was dissolved in a mixture of 30.0 g dimethyluramide 90.0 ml ethyl acetate, which was blended with 800 ml of aqueous solution containing 100 ml of 5 weight% Alkanol XC (manufactured by DuPont) and 36.0 g gelatin, whereby the mixture was emulsified by using an ultrasonic homogenizer, then ethyl acetate was removed by distillation, and water was added, so as to prepare 900 ml of yellow dye-supplying-material dispersion (2). In a similar manner, with example dye-supplying materials ③ and , magenta dye-supplying-material dispersion (2) and cyan dye-supplying material dispersion (2) were correspondingly prepared.

30.0 g of the following anti-color stain agent (SC - 2) was dissolved in a mixture of 15.0 g tricresyl phosphate and 90 ml ethyl acetate, which was blended with 500 ml of aqueous solution containing 50 ml of 5 weight% Alkanol XC and 20.0 g gelatin, whereby the mixture was emulsified by using an ultrasonic homogenizer, then ethyl acetate was removed by distillation, so as to prepare 600 ml of anti-color stain agent dispersion (2).

Anti-color stain agent (SC - 2)

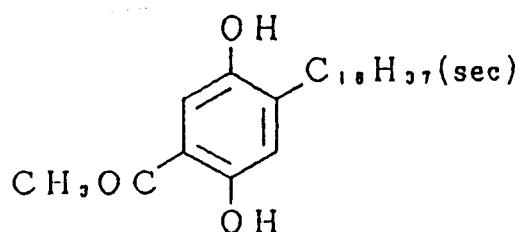

Using these dispersion, as well as silver halide emulsions and 5-methylbenzotriazole silver emulsions both identical to those in Example 4, the multi-layered thermal developing light-sensitive materials (32) through (41) whose layer constitutions being listed in Table - 6 were prepared. Additionally, the compounds listed in Table - 7 were added into the corresponding light-sensitive materials.

Table - 6

The figure in () represents an amount coated per m²

5	Second protec- tive layer	Gelatin (0.36 g), SiO ₂ (0.24 g)
10	First protec- tive layer	Gelatin (0.44 g), anti-color stain agent SC - 2 (0.2 g)
15	Blue-sensitive emulsion layer	Blue-sensitive silver iodo-bromide (silver-converted value, (0.38 g), 5-methylbenzotriazole silver (0.85 g), example dye-supplying material (0.7 g), reducing agent R' (10 mg), potassium 2-sec-pentadecylhydroquinone-5-sulfonate (0.1 g), gelatin (0.70 g), phenylcarbamoyl gelatin (0.70 g), polyethylene glycol (0.25 g), guanidinetrichloroacetic acid (0.60 g)
20	Intermediate layer	Anti-clor stain agent SC - 2 (0.4 g), guanidinetrichloroacetic acid (0.15 g), gelatin (0.40 g), phenylcarbamoyl gelatin (0.28 g)
25	Green-sensitive emulsion layer	Green-sensitive silver iodo-bromide (silver-converted value, 0.50 g), 5-methylbenzotriazole silver (1.11 g), example dye-supplying material (0.5 g), reducing agent R' (13 mg), potassium 2-sec-pentadecylhydroquinone-5-sulfonate (0.1 g), gelatin (0.60 g), phenylcarbamoyl gelatin (0.60 g), polyethylene glycol (0.2 g), guanidinetrichloroacetic acid (0.75 g)
30	Intermediate layer	Anti-color stain agent SC - 2 (0.4 g), guanidinetrichloroacetic acid (0.15 g), gelatin (0.40 g), phenylcarbamoyl gelatin (0.28 g)
35	Red-sensitive emulsion layer	Red-sensitive silver iodo-bromide (silver-converted value, 0.62 g), 5-methylbenzotriazole silver (1.38 g), example dye-supplying material (0.4 g), reducing agent R' (16 mg), potassium 2-sec-pentadecylhydroquinone-t-sulfonate (0.1 g), gelatin (0.70 g), phenylcarbamoyl gelatin (0.70 g), polyethylene glycol (0.2 g), guanidinetrichloroacetic acid (0.90 g)
	Support	180 μ m thick transparent polyethylene terephthalate film having latex undercoat

These layers independently contain small amounts of surface active agent as well as gelatin hardener in addition to the above components.

R': 4-hydroxymethyl-4-methyl-1-phenyl-3-pyrazolidinone

Table - 7

The figure in () represents the amount of addition per mol silver halide [mol] or amount coated [g/cm²].

Sample No.	Red-sensitive emulsion layer	Intermediate layer	Green-sensitive emulsion layer	Intermediate layer	Blue-sensitive emulsion layer	First protective layer	Second protective layer
32 (Comparison)	Without addition	Without addition	Without addition	Without addition	Without addition	Without addition	Without addition
33 (Comparison)	(b) (1.0×10^{-3})	Without addition	(b) (1.0×10^{-3})	Without addition	(b) (1.0×10^{-3})	Without addition	Without addition
34 (Comparison)	A-3 (1.0×10^{-3})	Without addition	A-3 (1.0×10^{-3})	Without addition	A-3 (1.0×10^{-3})	Without addition	Without addition
35 (Comparison)	B-28 (5.0×10^{-3})	Without addition	B-28 (1.0×10^{-3})	Without addition	B-28 (1.0×10^{-3})	Without addition	Without addition
36 (Comparison)	A-3 (1.0×10^{-3}) (b) (5.0×10^{-3})	Without addition	A-3 (1.0×10^{-3}) (b) (5.0×10^{-3})	Without addition	A-3 (1.0×10^{-3}) (b) (5.0×10^{-3})	Without addition	Without addition
37 (Invention)	A-3 (1.0×10^{-3}) B-5 (5.0×10^{-3})	Without addition	A-3 (1.0×10^{-3}) B-5 (5.0×10^{-3})	Without addition	A-3 (1.0×10^{-3}) B-5 (5.0×10^{-3})	Without addition	Without addition
38 (Invention)	A-3 (1.0×10^{-3}) B-34 (5.0×10^{-3})	Without addition	A-3 (1.0×10^{-3}) B-34 (5.0×10^{-3})	Without addition	A-3 (1.0×10^{-3}) B-34 (5.0×10^{-3})	Without addition	Without addition
39 (Invention)	A-4 (1.0×10^{-3}) B-4 (5.0×10^{-3})	Without addition	A-4 (1.0×10^{-3}) B-4 (5.0×10^{-3})	Without addition	A-4 (1.0×10^{-3}) B-4 (5.0×10^{-3})	Without addition	Without addition
40 (Invention)	A-4 (1.0×10^{-3}) B-15 (5.0×10^{-3})	A-3 (1.0×10^{-3})	A-4 (1.0×10^{-3}) B-15 (5.0×10^{-3})	A-3 (1.0×10^{-3})	A-4 (1.0×10^{-3}) B-15 (5.0×10^{-3})	A-3 (1.0×10^{-3})	Without addition
41	B-34 (5.0×10^{-3})	A-3 (1.0×10^{-3})	B-34 (5.0×10^{-3})	A-3 (1.0×10^{-3})	B-34 (5.0×10^{-3})	A-3 (1.0×10^{-3})	Without addition
48 (Invention)	A-45 (1.0×10^{-3}) B-4 (5.0×10^{-3})	Without addition	A-45 (1.0×10^{-3}) B-4 (5.0×10^{-3})	Without addition	A-45 (1.0×10^{-3}) B-4 (5.0×10^{-3})	Without addition	Without addition

Next, by sequentially applying and drying the following layers onto a paper support having a 200 μm thick polyethylene coat, so as to prepared the image-receiving member (2).

- (1) Neutralization layer having polyacrylic acid (7.0 g/m^2)
- (2) Timing layer having cellulose acetate (4.0 g/m^2)
- (3) Layer having a copolymer (3.0 g/m^2) comprising styrene and N-benzyl-N,N-dimethyl-N(3-maleidepropyl) ammonium chloride at a ratio of 1 : 1, and acid-treated gelatin (3.0 g/m^2)

(4) Layer having urea (4.0 g/m²) and polyvinyl alcohol (saponification rate, 98%) (3.0 g/m²)

These layers independently contain small amounts of surface active agent as well as gelatin hardener in addition to the above components.

The above thermal developing light-sensitive materials (32) through (41) were exposed with the 4000
 5 CMS exposure through optical step-wedge, whereby each material was combined with the previously mentioned image-receiving member (2) then subjected to the thermal developing with a thermal developing machine for one minute at 140°C, then immediately the thermal developing light-sensitive material was removed from the image-receiving member. With each sample, the reflective density of a transfer dye image formed on an image-receiving member was measured by a photographic densitometer (PDA - 65,
 10 manufactured by Konishiroku Photo Industry Co., Ltd.). The results are listed in Table - 8.

Table - 8


Light-sensitive material Sample No.	Before standing		After standing	
	Minimum density (fogging)	Maximum density	Minimum density (fogging)	Maximum density
32 (Comparison)	B 0.18 G 0.16 R 0.17	B 2.06 G 2.01 R 1.98	B 0.27 G 0.23 R 0.25	B 1.73 G 1.69 R 1.68
33 (Comparison)	B 0.32 G 0.29 R 0.31	B 2.01 G 2.07 R 2.04	B 0.54 G 0.51 R 0.54	B 2.19 G 2.16 R 2.15
34 (Comparison)	B 0.13 G 0.12 R 0.12	B 1.98 G 1.94 R 1.89	B 0.20 G 0.19 R 0.20	B 2.03 G 1.97 R 1.94
35 (Comparison)	B 0.12 G 0.11 R 0.12	B 2.09 G 2.06 R 2.01	B 0.19 G 0.17 R 0.18	B 2.12 G 2.08 R 2.03
36 (Comparison)	B 0.26 G 0.23 R 0.24	B 1.96 G 1.92 R 1.86	B 0.43 G 0.37 R 0.39	B 2.08 G 2.06 R 2.00
37 (Invention)	B 0.12 G 0.09 R 0.11	B 2.08 G 2.04 R 2.02	B 0.13 G 0.11 R 0.12	B 2.09 G 2.05 R 2.03
38 (Invention)	B 0.11 G 0.10 R 0.11	B 2.07 G 2.04 R 2.01	B 0.12 G 0.12 R 0.13	B 2.09 G 2.05 R 2.01
39 (Invention)	B 0.12 G 0.09 R 0.10	B 2.09 G 2.05 R 2.03	B 0.12 G 0.10 R 0.11	B 2.10 G 2.07 R 0.24
40 (Invention)	B 0.11 G 0.09 R 0.09	B 2.06 G 2.02 R 2.00	B 0.11 G 0.10 R 0.10	B 2.05 G 2.02 R 2.00
41 (Invention)	B 0.12 G 0.10 R 0.11	B 2.07 G 2.04 R 2.02	B 0.13 G 0.11 R 0.11	B 2.08 G 2.06 R 2.05
48 (Invention)	B 0.15 G 0.14 R 0.13	B 2.14 G 2.10 R 2.08	B 0.16 G 0.14 R 0.14	B 2.15 G 2.09 R 2.08

It is apparent from the results in Table - 8, the thermal developing light-sensitive material of the invention features a high density, suppressed fogging, and does not show deteriorated fogging even when stored under a high temperature and a high humidity, and the maximum density is stably maintained. In essence, it is apparent that the thermal developing light-sensitive material of the invention has the excellent shelf life.

Claims

1. A thermal developing light-sensitive material comprising a support, and provided thereon, photographic structural layers comprising at least one layer containing light-sensitive silver halide, said photographic structural layer comprising a compound represented by general formula (1);


Formula (1)



in which X_1 represents a residual group of a photographic restrainer, L_1 is a single bond or a divalent group and A is a hydrogen atom, an amino group, a hydroxyl group, a carboxyl group or a salt thereof, a sulfo group or a salt thereof or a sulfin group or a salt thereof;

and a compound represented by general formula (2);

Formula (2)




in which X_2 represents a residual group of a photographic restrainer, L_2 is a divalent group and B is a ballast group, wherein the compound represented by general formula (1) is contained in said material in a quantity of 10^{-7} to 10^{-1} mol with respect to 1 mol of said light-sensitive silver halide and wherein the compound represented by general formula (2) is contained in said material in a quantity of 10^{-5} to 10^{-1} mol with respect to 1 mol of said light-sensitive silver halide.

2. The thermal developing light-sensitive material of claim 1, wherein said residual group of a photographic restrainer is selected from a residual group of an organic compound of which silver salt has a solubility constant (pKsp) of not less than 10 at 25° C in water.


3. The thermal developing light-sensitive material of claim 1, wherein said residual group represented by X_1 or X_2 is a mono-valent residue of a photographic restrainer represented by general formula (4) or (8) below;

Formula (4)



wherein R^1 is selected from the group consisting of a hydrogen atom, an alkyl group having 1 to 7 carbon atoms, and an aryl group, n is 1 or 2, R^2 and R^3 are independently selected from the group consisting of a hydrogen atom, an alkyl group having 1 to 7 carbon atoms, an aryl group having 1 to 7 carbon atoms and a nitro group provided that R^2 and R^3 may be combined with each other to form a 5- or 6-membered ring;


formula (8)



wherein Y is selected from the group consisting of oxygen, sulfur, a



group and a




group,

R¹ is a thiol group or a -NHR⁴ group, R² and R³ are independently selected from the group consisting of a hydrogen atom, an alkyl group having 1 to 7 carbon atoms, an aryl group having 1 to 7 carbon atoms and a nitro group provided that R² and R³ may be combined with each other to form a 5- or 6-membered ring and R⁴ is selected from the group consisting of a hydrogen, an alkyl group having 1 to 7 carbon atoms and an aryl group.

4. The thermal developing light-sensitive material of claim 1, wherein L₁ in formula (1) and L₂ in formula (2) is selected from the group consisting of an alkylene group having 1 to 7 carbon atoms, an alkenylene group, an arylene group, an imino group, a carbonyl group, a sulfonyl group, an ether group and any combination thereof.

5. The thermal developing light-sensitive material of claim 1, wherein said compound represented by general formula (1) is selected from the group of compounds represented by general formula (19);
Formula (19)

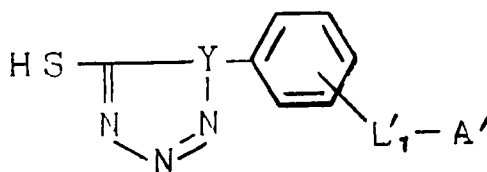

wherein, L₁' and A' respectively have the same meanings as L₁ and A in formula (1) and Y is a nitrogen atom or a carbon atom.

6. The thermal developing light-sensitive material of claim 1, wherein said ballast group is an aliphatic or aromatic hydrocarbon group having at least 8 carbon atoms.

7. The thermal developing light-sensitive material of claim 6, wherein said ballast group has 6 to 40 carbon atoms.

8. The thermal developing light-sensitive material of claim 6, wherein said ballast group is an alkyl group having 8 to 40 carbon atoms.


9. The thermal developing light-sensitive material of claim 6, wherein said ballast group is an alkyl group

substituted by a hydrophilic group consisting of a sulfo group and having 8 to 30 carbon atoms.


10. The thermal developing light-sensitive material of claim 1, wherein said compound represented by the general formula (1) is contained in said material in a quantity of 10^{-5} to 10^{-2} mol with respect to 1 mol of said light-sensitive silver halide.

11. The thermal developing light-sensitive material of claim 1, wherein said compound represented by the general formula (2) is contained in said material in a quantity of 10^{-4} to 10^{-2} mol with respect to 1 mol of said light-sensitive silver halide.

12. A thermal developing light-sensitive material comprising a support, and provided thereon, at least one photographic structural layer including a light-sensitive silver halide emulsion layer, said photographic structural layer comprising a reducing agent, a dye-supplying material, a compound represented by general formula (1);
Formula (1)



in which X_1 represents a residual group of a photographic restrainer, L_1 is a single bond or a divalent group and A is a hydrogen atom, an amino group, a hydroxyl group, a carboxyl group or a salt thereof, a sulfo group or a salt thereof or a sulfin group or a salt thereof;
and a compound represented by general formula (2);
Formula (2)



in which X_2 represents a residual group of a photographic restrainer, L_2 is a divalent group and B is a ballast group, wherein the compound represented by general formula (1) is contained in said material in a quantity of 10^{-7} to 10^{-1} mol with respect to 1 mol of said light-sensitive silver halide and wherein the compound represented by general formula (2) is contained in said material in a quantity of 10^{-5} to 10^{-1} mol with respect to 1 mol of said light-sensitive silver halide.


13. The thermal developing light-sensitive material of claim 12, wherein said photographic structural layer further comprises an organic silver salt which can be one having therein an imino group.

14. The thermal developing light-sensitive material of claim 13, wherein said organic silver salt is a silver salt of a benzotriazole derivative.

15. The thermal developing light-sensitive material of claim 14, wherein said organic silver salt is a silver salt of a benzotriazole derivative.

16. The thermal developing light-sensitive material of claim 15, wherein said organic silver salt is a silver salt of a compound selected from the group consisting of 5-methyl benzotriazole or a derivative thereof, a sulfobenzotriazole or a derivative thereof and a N-alkylsulfamoyl benzotriazole or a derivative thereof.

17. The thermal developing light-sensitive material of claim 15, wherein said dye supplying material is a compound represented by general formula (5');
Formula (5')



wherein Cp_2 is an organic group which is capable of forming a diffusible dye upon reaction with an oxidation product of a reducing agent, F is a divalent bonding group and B is a ballasting group.


18. The thermal developing light-sensitive material of claim 15, wherein said light-sensitive emulsion layer contains a light-sensitive silver halide grain having a grain size of 0.001 to 1.5 μm .

19. The thermal developing light-sensitive material of claim 15, wherein said light-sensitive emulsion layer

contains a light-sensitive silver halide grain having a grain size of 0.01 to 0.5 μm .

20. The thermal developing light-sensitive material of claim 15, wherein said reducing agent is a compound selected by the general formula (1');
5

Formula (1')

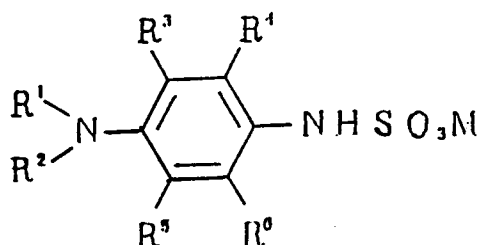

wherein R¹ and R² are independently selected from the group consisting of a hydrogen atom and a substituted or unsubstituted alkyl group having 1 to 30 carbon atoms; R³, R⁴, R⁵ and R⁶ are independently selected from the group consisting of a hydrogen atom, a halogen atom, a hydroxyl group, an amino group, an alkoxy group, an acylamide group, a sulfonamide group, an alkylsulfonamide group, and an alkyl group which may be substituted, provided that R¹ and R², R³ and R⁴, and R⁵ and R⁶ may respectively be combined with each other to form a heterocyclic ring; and M is selected from the group consisting of an alkali metal atom, an ammonium group, a nitrogen-containing organic salt group and a compound containing a quadrivalent nitrogen.

21. A method of thermally developing light-sensitive material according to claim 12, characterised in that the imagewise exposed material is heated to a temperature of 80 to 200 °C for 1 to 180 seconds.

22. The method according to claim 21, wherein said imagewise exposed material is heated to a temperature of 100 to 170 °C for 1.5 to 120 seconds.

Revendications

1. Matériau photosensible à développement thermique comprenant un support et, sur ce dernier, des couches de structure photographiques comprenant au moins une couche contenant un halogénure d'argent photosensible, ladite couche de structure photographique comprenant un composé représenté par la formule générale (1) :
Formule (1)

X₁-L₁-A

dans laquelle X₁ représente un groupe résiduel d'un retardateur photographique, L₁ est une simple liaison ou un groupe divalent et A est un atome d'hydrogène, un groupe amino, un groupe hydroxyle, un groupe carboxyle ou un de ses sels, un groupe sulfo ou un de ses sels ou un groupe sulfine ou un de ses sels;

et un composé représenté par la formule générale (2) :
Formule (2)

X₂-L₂-B


dans laquelle X₂ représente un groupe résiduel d'un retardateur photographique, L₂ est un groupe divalent et B est un groupe de lest, matériau dans lequel le composé représenté par la formule générale (1) est contenu, dans ledit matériau, en une quantité de 10⁻⁷ à 10⁻¹ mole par mole dudit halogénure d'argent photosensible et dans lequel le composé représenté par la formule générale (2) est contenu, dans ledit matériau, en une quantité de 10⁻⁵ à 10⁻¹ mole par mole dudit halogénure d'argent photosensible.

2. Matériau photosensible à développement thermique selon la revendication 1, dans lequel ledit groupe


résiduel d'un retardateur photographique est choisi parmi un groupe résiduel d'un composé organique dont le sel d'argent a une constante de solubilité (pKsp) non inférieure à 10 à 25 ° C dans l'eau.

3. Matériau photosensible à développement thermique selon la revendication 1, dans lequel ledit groupe résiduel représenté par X_1 ou par X_2 est un résidu monovalent d'un retardateur photographique représenté par la formule générale (4) ou (8) ci-dessous :

Formule (4)



dans laquelle R^1 est choisi dans le groupe constitué par un atome d'hydrogène, un groupe alkyle comportant 1 à 7 atomes de carbone et un groupe aryle, n est égal à 1 ou 2, R^2 et R^3 sont choisis indépendamment dans le groupe constitué par un atome d'hydrogène, un groupe alkyle comportant 1 à 7 atomes de carbone, un groupe aryle comportant 1 à 7 atomes de carbone et un groupe nitro, à condition que R^2 et R^3 puissent être associés l'un à l'autre pour former un noyau à 5 ou 6 chaînons; Formule (8)



dans laquelle Y est choisi dans le groupe constitué par un atome d'oxygène, de soufre, et un groupe



ou




R^1 est un groupe thiol ou un groupe $-\text{NHR}^4$, R^2 et R^3 sont choisis indépendamment dans le groupe constitué par un atome d'hydrogène, un groupe alkyle comportant 1 à 7 atomes de carbone, un groupe aryle comportant 1 à 7 atomes de carbone et un groupe nitro, à condition que R^2 et R^3 puissent être associés l'un à l'autre pour former un noyau à 5 ou 6 chaînons, et R^4 est choisi dans le groupe constitué par un atome d'hydrogène, un groupe alkyle comportant 1 à 7 atomes de carbone et un groupe aryle.

4. Matériau photosensible à développement thermique selon la revendication 1, dans lequel L_1 , dans la formule (1), et L_2 , dans la formule (2), sont choisis dans le groupe constitué par un groupe alkylène comportant 1 à 7 atomes de carbone, un groupe alcénylène, un groupe arylène, un groupe imino, un groupe carbonyle, un groupe sulfonyle, un groupe éther et une combinaison quelconque de ceux-ci.

5. Matériau photosensible à développement thermique selon la revendication 1, dans lequel ledit composé représenté par la formule générale (1) est choisi dans le groupe de composés représenté par la formule générale (19) :

Formule (19)

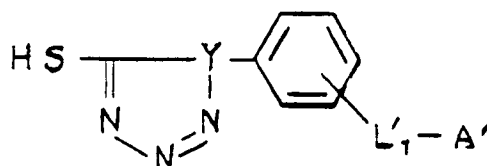

10 dans laquelle L_1' et A' ont respectivement les mêmes significations que L_1 et A dans la formule (1) et Y est un atome d'azote ou un atome de carbone.

15 6. Matériau photosensible à développement thermique selon la revendication 1, dans lequel ledit groupe de lest est un groupe hydrocarboné aliphatique ou aromatique comportant au moins 8 atomes de carbone.

7. Matériau photosensible à développement thermique selon la revendication 6, dans lequel ledit groupe de lest comporte 8 à 40 atomes de carbone.

20 8. Matériau photosensible à développement thermique selon la revendication 6, dans lequel ledit groupe de lest est un groupe alkyle comportant 8 à 40 atomes de carbone.

25 9. Matériau photosensible à développement thermique selon la revendication 6, dans lequel ledit groupe de lest est un groupe alkyle substitué par un groupe hydrophile constitué d'un groupe sulfo et comportant 8 à 30 atomes de carbone.

30 10. Matériau photosensible à développement thermique selon la revendication 1, dans lequel ledit composé représenté par la formule générale (1) est contenu dans ledit matériau en une quantité de 10^{-5} à 10^{-2} mole par mole dudit halogénure d'argent photosensible.

11. Matériau photosensible à développement thermique selon la revendication 1, dans lequel ledit composé représenté par la formule générale (2) est contenu dans ledit matériau en une quantité de 10^{-4} à 10^{-2} mole par mole dudit halogénure d'argent photosensible.

35 12. Matériau photosensible à développement thermique comprenant un support et, sur ce dernier, au moins une couche de structure photographique comprenant une couche d'émulsion d'halogénure d'argent photosensible, ladite couche de structure photographique comprenant un agent réducteur, une substance chromogène, un composé représenté par la formule générale (1) :

Formule (1)

40 X_1-L_1-A

45 dans laquelle X_1 représente un groupe résiduel d'un retardateur photographique, L_1 est une simple liaison ou un groupe divalent et A est un atome d'hydrogène, un groupe amino, un groupe hydroxyle, un groupe carboxyle ou un de ses sels, un groupe sulfo ou un de ses sels ou un groupe sulfine ou un de ses sels;

et un composé représenté par la formule générale (2) :

Formule (2)

50 X_2-L_2-B

55 dans laquelle X_2 représente un groupe résiduel d'un retardateur photographique, L_2 est un groupe divalent et B est un groupe de lest, matériau dans lequel le composé représenté par la formule générale (1) est contenu, dans ledit matériau, en une quantité de 10^{-7} à 10^{-1} mole par mole dudit halogénure d'argent photosensible et dans lequel le composé représenté par la formule générale (2) est contenu, dans ledit matériau, en une quantité de 10^{-5} à 10^{-1} mole par mole dudit halogénure d'argent photosensible.

13. Matériau photosensible à développement thermique selon la revendication 12, dans lequel ladite couche de structure photographique comprend, en outre, un sel d'argent organique qui peut être un sel renfermant un groupe imino.

14. Matériau photosensible à développement thermique selon la revendication 13, dans lequel ledit sel d'argent organique est un sel d'argent d'un dérivé de benzotriazole.

15. Matériau photosensible à développement thermique selon la revendication 14, dans lequel ledit sel d'argent organique est un sel d'argent d'un dérivé de benzotriazole.

16. Matériau photosensible à développement thermique selon la revendication 15, dans lequel ledit sel d'argent organique est un sel d'argent d'un composé choisi dans le groupe constitué par le 5-méthylbenzotriazole ou un de ses dérivés, un sulfobenzotriazole ou un de ses dérivés et un N-alkylsulfamoylbenzotriazole ou un de ses dérivés.

17. Matériau photosensible à développement thermique selon la revendication 15, dans lequel ladite substance chromogène est un composé représenté par la formule (5') :

Formule (5')

$Cp_2-(F)-(B)$


dans laquelle Cp_2 est un groupe organique qui est capable de former un colorant diffusable par réaction avec un produit d'oxydation d'un agent réducteur, F est un groupe de liaison divalent et B est un groupe de lest.

18. Matériau photosensible à développement thermique selon la revendication 15, dans lequel ladite couche d'émulsion photosensible contient un grain d'halogénure d'argent photosensible ayant une granulométrie de 0,001 à 1,5 μm .

19. Matériau photosensible à développement thermique selon la revendication 15, dans lequel ladite couche d'émulsion photosensible contient un grain d'halogénure d'argent photosensible ayant une granulométrie de 0,01 à 0,5 μm .

20. Matériau photosensible à développement thermique selon la revendication 15, dans lequel ledit agent réducteur est un composé représenté par la formule générale (1') :

Formule (1')

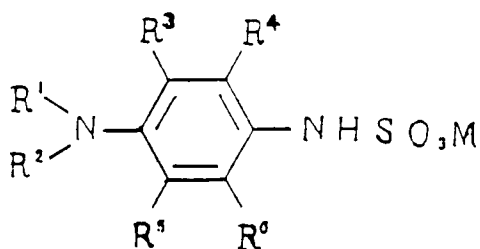

dans laquelle R^1 et R^2 sont choisis indépendamment dans le groupe constitué par un atome d'hydrogène et un groupe alkyle substitué ou non substitué comportant 1 à 30 atomes de carbone; R^3 , R^4 , R^5 et R^6 sont choisis indépendamment dans le groupe constitué par un atome d'hydrogène, un atome d'halogène, un groupe hydroxyle, un groupe amino, un groupe alcoxy, un groupe acylamide, un groupe sulfonamide, un groupe alkylsulfonamide et un groupe alkyle qui peut être substitué, à condition que R^1 et R^2 , R^3 et R^4 , et R^5 et R^6 puissent être respectivement associés l'un à l'autre pour former un noyau hétérocyclique; et M est choisi dans le groupe constitué par un atome de métal alcalin, un groupe ammonium, un groupe sel organique azoté et un composé contenant un azote tétravalent.

21. Procédé de développement thermique d'un matériau photosensible selon la revendication 12, caractérisé en ce que le matériau exposé à une image est chauffé à une température de 80 à 200 °C pendant 1

à 180 secondes.

22. Procédé selon la revendication 21, dans lequel ledit matériau exposé à une image est chauffé à une température de 100 à 170 °C pendant 1,5 à 120 secondes.


5

Patentansprüche

10

1. Wärmeentwickelbares lichtempfindliches Material, bestehend aus einem Träger und darauf aufgetragenen, mindestens eine Schicht mit lichtempfindlichem Silberhalogenid enthaltenden fotografischen Strukturschichten, wobei eine solche fotografische Strukturschicht eine der allgemeinen Formel (1) entsprechende Verbindung:

Formel (1)




15

worin X_1 für eine Restgruppe eines fotografischen Verzögerers, L_1 für eine Einfachbindung oder eine zweiwertige Gruppe und A für ein Wasserstoffatom, eine Aminogruppe, eine Hydroxylgruppe, eine Carboxylgruppe oder deren Salz, eine Sulfogruppe oder deren Salz oder eine Sulfingruppe oder deren Salz stehen,

20

und eine der allgemeinen Formel (2) entsprechende Verbindung enthält:

Formel (2)



25

worin X_2 für eine Restgruppe eines fotografischen Verzögerers, L_2 für eine zweiwertige Gruppe und B für eine Ballastgruppe stehen, dadurch gekennzeichnet, daß die der allgemeinen Formel (1) entsprechende Verbindung in besagtem Material in einer Menge von 10^{-7} bis 10^{-1} Mol bezogen auf 1 Mol lichtempfindliches Silberhalogenid vorliegt, und daß die der allgemeinen Formel (2) entsprechende Verbindung in besagtem Material in einer Menge von 10^{-5} bis 10^{-1} Mol bezogen auf 1 Mol lichtempfindliches Silberhalogenid vorliegt.

30


2. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 1, worin besagte Restgruppe eines fotografischen Verzögerers unter Restgruppen organischer Verbindungen ausgewählt ist, deren Silber-salz eine Löslichkeitskonstante (pKsp) von mindestens 10 bei 25 °C in Wasser aufweist.

35

3. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 1, worin besagte, als X_1 oder X_2 bezeichnete Restgruppe ein einwertiger Rest eines der folgenden allgemeinen Formel (4) oder (8) entsprechenden fotografischen Verzögerers ist:

Formel (4)

40




45

50

worin R^1 aus der ein Wasserstoffatom, eine Alkylgruppe mit 1 bis 7 Kohlenstoffatomen und eine Arylgruppe umfassenden Gruppe ausgewählt ist, n für 1 oder 2 steht sowie R^2 und R^3 unabhängig voneinander aus der ein Wasserstoffatom, eine Alkylgruppe mit 1 bis 7 Kohlenstoffatomen, eine Arylgruppe mit bis zu 7 Kohlenstoffatomen und eine Nitrogruppe umfassenden Gruppe ausgewählt sind, mit der Maßgabe, daß R^2 und R^3 miteinander zu einem 5- oder 6-gliedrigen Ring kombiniert sein können,

55


Formel (8)



worin Y aus der Sauerstoff, Schwefel eine



Gruppe und eine




Gruppe umfassenden Gruppe ausgewählt ist, R^1 eine Thiolgruppe oder eine $-NHR^4$ -Gruppe darstellt, R^2 und R^3 unabhängig voneinander aus der ein Wasserstoffatom, eine Alkylgruppe mit 1 bis 7 Kohlenstoffatomen, eine Arylgruppe mit bis zu 7 Kohlenstoffatomen und eine Nitrogruppe umfassenden Gruppe ausgewählt sind, mit der Maßgabe, daß R^2 und R^3 miteinander zu einem 5- oder 6-gliedrigen Ring kombiniert sein können, und R^4 aus der Wasserstoff, eine Alkylgruppe mit 1 bis 7 Kohlenstoffatomen und eine Arylgruppe umfassenden Gruppe ausgewählt ist.

4. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 1, worin L_1 in der Formel (1) und L_2 in der Formel (2) aus der eine Alkylengruppe mit 1 bis 7 Kohlenstoffatomen, eine Alkenylengruppe, eine Arylengruppe, eine Iminogruppe, eine Carbonylgruppe, eine Sulfonylgruppe, eine Ethergruppe und beliebige Kombinationen davon umfassenden Gruppe ausgewählt sind.

5. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 1, worin jene der allgemeinen Formel (1) entsprechende Verbindung aus der Gruppe von der allgemeinen Formel (19) entsprechenden Verbindungen ausgewählt ist:

Formel (19)

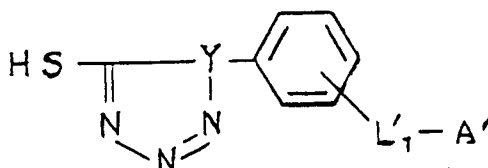

worin L'_1 bzw. A' dieselben Bedeutungen wie L_1 bzw. A in der Formel (1) haben und Y ein Stickstoff- oder Kohlenstoffatom ist.

6. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 1, worin besagte Ballastgruppe eine aliphatische oder aromatische Kohlenwasserstoffgruppe mit mindestens 8 Kohlenstoffatomen ist.

7. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 6, worin diese Ballastgruppe 8 bis 40 Kohlenstoffatome aufweist.

8. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 6, worin diese Ballastgruppe eine Alkylgruppe mit 8 bis 40 Kohlenstoffatomen ist.


9. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 6, worin diese Ballastgruppe eine Alkylgruppe mit 8 bis 30 Kohlenstoffatomen ist, die durch eine aus einer Sulfogruppe bestehende

hydrophile Gruppe substituiert ist.


10. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 1, worin besagte, der allgemeinen Formel (1) entsprechende Verbindung in besagtem Material in einer Menge von 10^{-5} bis 10^{-2} Mol bezogen auf 1 Mol lichtempfindliches Silberhalogenid vorliegt.

11. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 1, worin besagte, der allgemeinen Formel (2) entsprechende Verbindung in diesem Material in einer Menge von 10^{-4} bis 10^{-2} Mol bezogen auf 1 Mol lichtempfindliches Silberhalogenid vorliegt.

12. Wärmeentwickelbares lichtempfindliches Material, bestehend aus einem Träger und mindestens einer darauf aufgetragenen fotografischen Strukturschicht mit einer lichtempfindlichen Silberhalogenidemulsionsschicht, wobei diese fotografische Strukturschicht ein Reduktionsmittel, ein farbstofflieferndes Material, eine der allgemeinen Formel (1) entsprechende Verbindung:
Formel (1)



worin X_1 für eine Restgruppe eines fotografischen Verzögerers, L_1 für eine Einfachbindung oder eine zweiwertige Gruppe und A für ein Wasserstoffatom, eine Aminogruppe, eine Hydroxylgruppe, eine Carboxylgruppe oder deren Salz, eine Sulfogruppe oder deren Salz oder eine Sulfingruppe oder deren Salz stehen,
und eine der allgemeinen Formel (2) entsprechende Verbindung enthält:



worin X_2 für eine Restgruppe eines fotografischen Verzögerers, L_2 für eine zweiwertige Gruppe und B für eine Ballastgruppe stehen, dadurch gekennzeichnet, daß die der allgemeinen Formel (1) entsprechende Verbindung in besagtem Material in einer Menge von 10^{-7} bis 10^{-1} Mol bezogen auf 1 Mol lichtempfindliches Silberhalogenid vorliegt, und daß die der allgemeinen Formel (2) entsprechende Verbindung in besagtem Material in einer Menge von 10^{-5} bis 10^{-1} Mol bezogen auf 1 Mol lichtempfindliches Silberhalogenid vorliegt.


13. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 12, worin besagte fotografische Strukturschicht ferner ein gegebenenfalls eine Iminogruppe tragendes organisches Silbersalz enthält.

14. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 13, worin dieses organische Silbersalz ein Silbersalz eines Benztriazolderivats ist.

15. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 14, worin dieses organische Silbersalz ein Silbersalz eines Benztriazolderivats ist.

16. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 15, worin dieses organische Silbersalz ein Silbersalz einer Verbindung ist, die aus der 5-Methylbenztriazol oder Derivate davon, ein Sulfobenztriazol oder Derivate davon und ein N-Alkylsulfamoylbenztriazol oder Derivate davon umfassenden Gruppe ausgewählt ist.

17. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 15, worin besagtes farbstofflieferndes Material eine der allgemeinen Formel (5') entsprechende Verbindung ist:
Formel (5')




worin Cp_2 eine organische Gruppe ist, die bei Reaktion mit einem Oxidationsprodukt eines Reduktionsmittels einen diffundierbaren Farbstoff bilden kann, F eine zweiwertige Verknüpfungsgruppe und B eine Ballastgruppe ist.

18. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 15, worin besagte lichtempfindliche

Emulsionsschicht lichtempfindliche Silberhalogenidkörner einer Korngröße von 0,001 bis 1,5 μm enthält.

19. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 15, worin besagte lichtempfindliche Emulsionsschicht lichtempfindliche Silberhalogenidkörner einer Korngröße von 0,01 bis 0,5 μm enthält.

20. Wärmeentwickelbares lichtempfindliches Material nach Anspruch 15, worin besagtes Reduktionsmittel eine der allgemeinen Formel (1') entsprechende Verbindung ist:
Formel (1')

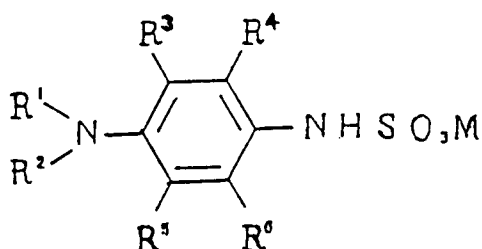

worin R¹ und R² unabhängig voneinander aus der ein Wasserstoffatom und substituierte oder unsubstituierte Alkylgruppen mit 1 bis 30 Kohlenstoffatomen umfassenden Gruppe ausgewählt sind, R³, R⁴, R⁵ und R⁶ unabhängig voneinander aus der ein Wasserstoffatom, ein Halogenatom, eine Hydroxylgruppe, eine Aminogruppe, eine Alkoxygruppe, eine Acylamidgruppe, eine Sulfonamidgruppe, eine Alkylsulfonamidgruppe und eine gegebenenfalls substituierte Alkylgruppe umfassenden Gruppe ausgewählt sind, mit der Maßgabe, daß R¹ und R², R³ und R⁵ bzw. R⁴ und R⁶ miteinander zu einem heterocyclischen Ring kombiniert sein können, und M aus der ein Alkalimetallatom, eine Ammoniumgruppe, eine stickstoffhaltige organische Salzgruppe und eine Verbindung mit vierwertigem Stickstoff umfassenden Gruppe ausgewählt ist.

21. Methode zur Wärmeentwicklung lichtempfindlichen Materials nach Anspruch 12, dadurch gekennzeichnet, daß das bildweise belichtete Material 1 bis 180 Sekunden auf eine Temperatur von 80 bis 200 °C erhitzt wird.

22. Methode nach Anspruch 21, worin dieses bildweise belichtete Material 1,5 bis 120 Sekunden lang auf eine Temperatur von 100 bis 170 °C erhitzt wird.

Fig.1

