




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>5</sup> : <b>H04B 7/00</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 92/14308</b> (43) International Publication Date: 20 August 1992 (20.08.92)</p>
<p>(21) International Application Number: PCT/US92/00396 (22) International Filing Date: 16 January 1992 (16.01.92) (30) Priority data: 648,476 31 January 1991 (31.01.91) US (71) Applicant: MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US). (72) Inventors: ERICKSON, Paul, M. ; 842 Yorkshire Drive, Hanover Park, IL 60103 (US). CRISLER, Kenneth, J. ; 2116 Kentucky Court, Wheaton, IL 60187 (US). HESS, Garry, Carson ; 38W711 Hogan Hill, Elgin, IL 60123 (US). THRO, Stuart, Wells ; 410 Crest Drive, Cary, IL 60013 (US).</p>		<p>(74) Agents: PARMELEE, Steven, G. et al.; Motorola, Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US). (81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), MC (European patent), NL (European patent), SE (European patent).</p> <p><b>Published</b> <i>With international search report.</i></p>

(54) Title: METHOD FOR PROVIDING SERVICE ACCESS INFORMATION IN A COMMUNICATION SYSTEM

(57) Abstract

A method of providing a radio communicating unit (120) with information regarding radio communication services. The radio communication unit transmits a request (335) regarding availability of one or more specific radio communication services. The radio communication unit then receives information (340) regarding availability of the specified radio communication services.

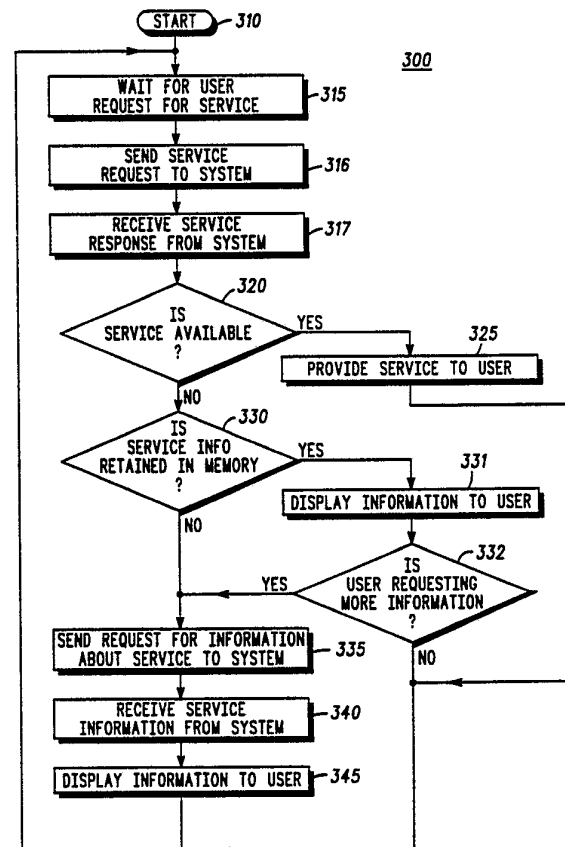

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	ML	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	RO	Romania
CA	Canada	IT	Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

5

↓

**METHOD FOR PROVIDING SERVICE ACCESS INFORMATION  
IN A COMMUNICATION SYSTEM**

10

**Field of the Invention**

This invention relates generally to RF communication systems, including but not limited to methodologies that permit a communication unit to access a plurality of communication services.

**Background of the Invention**

RF communication systems are well understood in the art. Such systems provide a wide variety of communication services including group voice communications, telephone interconnect, and data communications among many others. It is typical for any given RF communication system to only provide a subset of all possible communication services based on cost, available RF bandwidth, and other factors. Further, within an RF communication system encompassing multiple communication sites, all of the communication services provided by the system may not be available at all sites or at a given site all of the time.

A communication unit, operating in an RF communication system as described, may from time to time request certain communication services. Generally, if the requested service is not available, the request is denied. The user of the communication unit may then choose to repeat the request in other locations or at another time in hopes of gaining access to the requested communication service. It is possible that a large number of subsequent requests may be required before the user succeeds, if in fact success is ever achieved. This process wastes communication resources for the failed service requests, and also contributes to frustration for the user trying to access the communication system.

It should be noted that some prior art communication systems provide for special responses to users when the requested service is only temporarily unavailable. However, these methods apply only to the special case of services that are unavailable for a substantially short period of time.

#### Summary of the Invention

Briefly, according to the invention, a method of providing a radio communication unit with information regarding radio communication services is disclosed herein.

Pursuant to one embodiment, the radio communication unit transmits a request regarding availability of one or more specific radio communication services. The radio communication unit then receives

information regarding availability of the specified radio communication services.

Pursuant to a second embodiment, the radio communication unit determines if appropriate  
5 information regarding availability of one or more specific radio communication services is currently retained by the radio communication unit. If not, the radio communication unit transmits a request regarding  
10 availability of one or more specific radio communication services. The radio communication unit then receives information regarding availability of the specified radio communication services.

#### Brief Description of the Drawings

15

FIG. 1 comprises a block diagram of an RF communication system utilizing the principles of the present invention.

20 FIG. 2 comprises a block diagram of a communication unit of the communication system of Figure 1.

FIG. 3 is an operation flow chart of the communication unit of Figure 2 according to the present invention.

25

#### Description of a Preferred Embodiment

Referring to FIG. 1, a communication system exemplifying the principles of the present invention can  
30 be seen as generally depicted by the numeral 100. The communication system (100) provides communication services to communication units (120) from a plurality

of communication sites (101-105). These communication sites (101-105) may comprise a variety of communication configurations including simple RF repeater installations or substantially independent radio systems such as a cellular system (105) that may itself also include further subordinate communication sites (131-133). Further, these communication sites (101-105) may be located in generally the same area or substantially distant from each other. Each communication site provides communication coverage for a limited geographic area. Generally the communication coverage comprises providing user communication services, including voice, data, video, or other communications, and control data communication capability to the communication units (120). The particular communication services available at each of the communication sites (101-105) will differ according to the equipment installed at each site and the priority assigned to different services as well as other appropriate factors. Further, the communication services available at a particular communication site will typically differ over time for similar reasons.

The communication messages within the system (100) comprise inbound and outbound user and control messages that are communicated on radio frequency (RF) communication channels. The inbound and outbound control messages may comprise such messages as communication service request, communication service grant, communication service availability inquiry, and other messages that facilitate orderly communication within the system (100). The user messages comprise

voice, data, video or other messages communicated between the users of the communication units (120).

As described herein, a communication unit (120) may be either a mobile or a portable radio communication device. Communication units (120) may be found at various times in different geographical locations, and hence within range of various communication sites (101-105). For example, as depicted in FIG. 1, the communication unit (120) could have access to communication site 2 (102). Accordingly, the communication unit (120) could have access to the communication services offered by that communication site (102) but could not have access to services offered uniquely by one of the other communication sites (101, 103, 104). For example, assume that the user of the communication unit (120) desires to send a video message and only communication site 4 (104) is capable of providing video communication services. At his current location, the user of the communication unit cannot obtain the desired service. The present invention provides a method whereby the user of the communication unit (120) is provided with information regarding the availability of such communication services as are not currently available to the unit.

In one embodiment of the invention, the availability information can be provided through the provision of a hub (110) that connects to each communication site (101-105) as shown in FIG. 1. The hub may be comprised of a digital computer or memory bank with one communication interface for each of the communication sites (101-105). Minimally, the hub

(110) must maintain information regarding the current and anticipated future availability of communication services at the communication sites. In other alternative embodiments, the hub may control the availability of services in the communication sites or provide other related services to the communication sites, such as user authorization. Thus the hub (110) may provide information regarding the temporal span and location that a particular communication service or set of communication services could be available to a communication unit (120).

In one embodiment, the user of the communication unit (120), upon finding that a desired communication service is not currently available within the service area of its current communication site (102), may initiate an inquiry into the system regarding the possible availability of the desired service in another location and/or at another time. This inquiry may take the form of a control message transmitted to the current communication site (102). The communication site then queries the hub (110) regarding availability of the desired service as determined upon reference to its data records. The hub returns a message to the communication site (102) indicating details of the availability of the desired service. These details may include location information, such as geographic coordinates or communication site identifiers, as well as time information, indicating where and when the desired service could be accessed by the communication unit (120). The communication site (102) then appropriately formats the information into a control message suitable for RF transmission to the

communication unit (120), where it is then displayed to the user.

The hub (110) may provide the availability information based on information provided by each communication site (101-105) and stored in the hub. Alternately, the information may be gathered as needed by polling each of the appropriate connected communication sites (101-105). This may be appropriate when the availability information depends on the specific communication unit (120) which placed the request or when such requests are relatively infrequent.

In yet another embodiment, when the connected communication site comprises a substantially independent system, such as a cellular system (105), the hub (110) may relay the request for information to the cellular system hub (130) for subsequent processing. The response received at the hub (110) from the cellular hub (130) is then relayed by the hub to the communication site for transmission to the requesting communication unit (120). Thus the hub (110) operates to appropriately route information from the connected cellular system hub (130) to the communication unit (120).

In another embodiment of the invention, the communication unit (120) may be enabled to retain certain information regarding communication service availability for future use. For example, the circumstances (time and location) relating to the last use of a given service may be stored within the communication unit (120). Other availability information may be retained from inquiries such as that

previously described. This stored information may then be presented to the user of the communication unit (120) when required. The user may then choose whether to accept the information or to initiate an inquiry for more information. For example, if the information is known to be substantially old, the user may desire to have more current information presented.

In another embodiment of the invention, the communication unit (120) may be enabled to request appropriate information regarding the availability of various communication services in advance of its intended use of such services. Further, the communication unit (120) may indicate in its request specific constraints on the time and/or location that a service will be required. For example, the user of the communication unit (120) in FIG. 1 may know in advance that it will be travelling to within the coverage area of communication site 5 (105). She may then request information regarding the availability of a desired communication service in Site 5.

Referring to FIG. 2, the communication unit (120) includes an RF receiver (201) that couples to an appropriate antenna (202) via a duplexer (209) to receive RF communication signals and describe above and provide a received signal (204). Received signal (204) are applied to a controller (205). The controller (205) operates on the received signal (204) in a known manner to separate the user and control data portions of the received signal (204). The user data signal (215) is applied to a user interface (214), which in the preferred embodiment processes the user data signal and routes appropriate signals to a speaker (218) to be rendered

audible. In other embodiments, the user interface (214) may operate to process signals associated with alternate user input and output devices such as data terminals and displays, voice recognizers, or  
5 combinations thereof. The user interface (214) could also include, for example, a keyboard to allow a user to enter information regarding a specific desired service, such a telephone interconnect, dispatch, encryption, site-to-site coverage, private call, and others.

10 Audio signals to be transmitted are routed from a microphone (217) to the user interface (214) for processing. The user interface may comprise a digital signal processor that transforms the audio signals into digital information, hereafter referred to as transmit  
15 user data (216). The transmit user data (216) is applied to the controller (205) which appropriately adds control information to the transmit user data (216) and provides a transmit signal (206). The transmit signal (206) is applied to a well known RF transmitter (207) which  
20 appropriately modulates and amplifies the transmit signal (206) for transmission by the antenna (202) via the duplexer (209).

The controller (205) is the heart of the communication device and operates to control the many  
25 circuits comprising the communication unit (120). The controller provides a mode control signal (219) to a mode controller (220) which operates to control the receiver (201) and the transmitter (207) via a receiver control signal (221) and a transmitter control signal  
30 (222), respectively. These signals cause the receiver (201) and the transmitter (207) to operate in a manner compatible with the RF communication requirements of

the current communication site (101-105). Likewise the mode controller operates to control the duplexer (209) (which may comprise a duplexing filter apparatus or a transmit/receive switch, as appropriate). The controller (205) may also apply display information (212) to a display (213). The display (213) serves as an output device for providing availability information to the user, and in the preferred embodiment would comprise an alphanumeric display device. A memory (210) operates to store information regarding communication service availability. The controller (205) may write new availability information into the memory (210) and may also read previously stored information from the memory (210).

Referring to FIG. 3, the operation of an exemplary communication unit (120) is described in conjunction with a flow chart (300). When the communication unit (120) initiates (310), it begins in an idle state, waiting for the user of the communication unit (120) to initiate a service request (315). Upon detecting a service request, the communication unit (120) first operates to determine if the requested communication service is available. A service request message (316) is sent to the communication site (101-105). (In an alternate embodiment, information stored in the memory (210) may enable the communication unit (120) to determine the service availability without transmitting a service request message as described.) Presuming that a service request message is sent, a response to the service request message is received (317). The response is examined (320) to determine if the requested communication service is currently available.

If the service is available, the communication unit (120) operates appropriately to provide the service to the user (325).

5 If the requested communication service is not available, the communication unit memory (210) is examined to determine if any information regarding the availability of the requested communication service is stored therein (330). If such information is found in memory (210), it is appropriately formatted and output  
10 to the user via the display (213) (331). After appropriately displaying the information, the user is polled to determine if additional information is desired (332). If no additional information is requested, the communication unit resumes the idle state (315). If  
15 additional information is requested, a request for information regarding availability of the requested communication service is sent to the communication site (101-105) (335). (This same function also executes if no information regarding the availability of the  
20 requested service is found in the memory (210) (330). Appropriate information regarding availability of the requested communication service is received from the communication system (100) via the current communication site (101-105) (340). The received  
25 information is appropriately formatted and output to the user via the display (213) (345), after which the communication unit returns to the idle state (315).

Accordingly, the present invention operates to provide information to the user of a communication unit  
30 (120) regarding the availability of various communication services in a plurality of communication

sites (101-105) which together constitute a communication system (100).

What is claimed is:

## Claims

1. A method of providing a radio communication unit  
with information regarding radio communication  
5 services, comprising the steps of:
  - (a) transmitting, from the radio communication  
unit, a request regarding availability of at least one  
specified radio communication service;
  - (b) receiving at the radio communication unit  
10 information regarding availability of the at least one  
specified radio communication service.

2. The method of claim 1, wherein the information includes geographic location regarding the other availability.
- 5 3. The method of claim 1, wherein the information includes temporal span regarding the other availability.

4. A method of providing a radio communication unit with information regarding radio communication services, comprising the steps of:
- 5 (a) determining that a need for a specific radio communication service exists;
  - (b) determining that the specific radio communication service is not presently available;
  - (c) transmitting, from the radio communication unit, a request regarding other availability of the  
10 specified radio communication service;
  - (d) receiving at the radio communication unit information regarding other availability of the specified radio communication service.
- 15 5. A method of providing a radio communication unit with information regarding radio communication services, comprising the steps of:
- (a) transmitting, from the radio communication unit, a request regarding availability of radio  
20 communication services in a service area distally located with respect to a present location of the radio communication unit;
  - (b) receiving at the radio communication unit information regarding availability of specific radio  
25 communication services.

6. The method of claim 5 wherein the request includes a request regarding availability of at least one specific communication service.

7. A method of providing a radio communication unit with information regarding radio communication services, comprising the steps of:

- 5 (a) determining that a need for a specific radio communication service exists;
- (b) determining that the specific radio communication service is not presently available;
- (c) determining whether any other information regarding availability of the specific radio  
10 communication service is currently retained by the radio communication unit;
- (d) when the other information is not available, transmitting, from the radio communication unit, a request regarding other availability of the specified  
15 radio communication service;
- (e) receiving at the radio communication unit information regarding other availability of the specified radio communication service.

8. A method of providing a radio communication unit with information regarding radio communication services, comprising the steps of:

5 (a) determining that a need for a specific radio communication service exists;

(b) determining that the specific radio communication service is not presently available;

10 (c) determining whether any other information regarding availability of the specific radio communication service is currently retained by the radio communication unit;

15 (d) when the other information is currently retained by the radio communication unit, presenting the other information to a user of the radio communication unit;


(e) when the other information is not available, transmitting, from the radio communication unit, a request regarding other availability of the specified radio communication service;

20 (f) receiving at the radio communication unit information regarding other availability of the specified radio communication service;

(g) providing the information to the user of the radio communication unit.

25

9. A method of providing a radio communication unit with information regarding radio communication services, comprising the steps of:
- 5 (a) determining that a need for a specific radio communication service exists;
  - (b) determining that the specific radio communication service is not presently available;
  - (c) determining whether any other information regarding availability of the specific radio  
10 communication service is currently retained by the radio communication unit;
  - (d) when the other information is currently retained by the radio communication unit, presenting the other information to a user of the radio communication  
15 unit;
  - (e) when either:
    - the other information is not available; or
    - the user commands;transmitting, from the radio communication unit, a  
20 request regarding other availability of the specified radio communication service;
  - (f) receiving at the radio communication unit information regarding other availability of the specified radio communication service;
  - 25 (g) providing the information to the user of the radio communication unit.

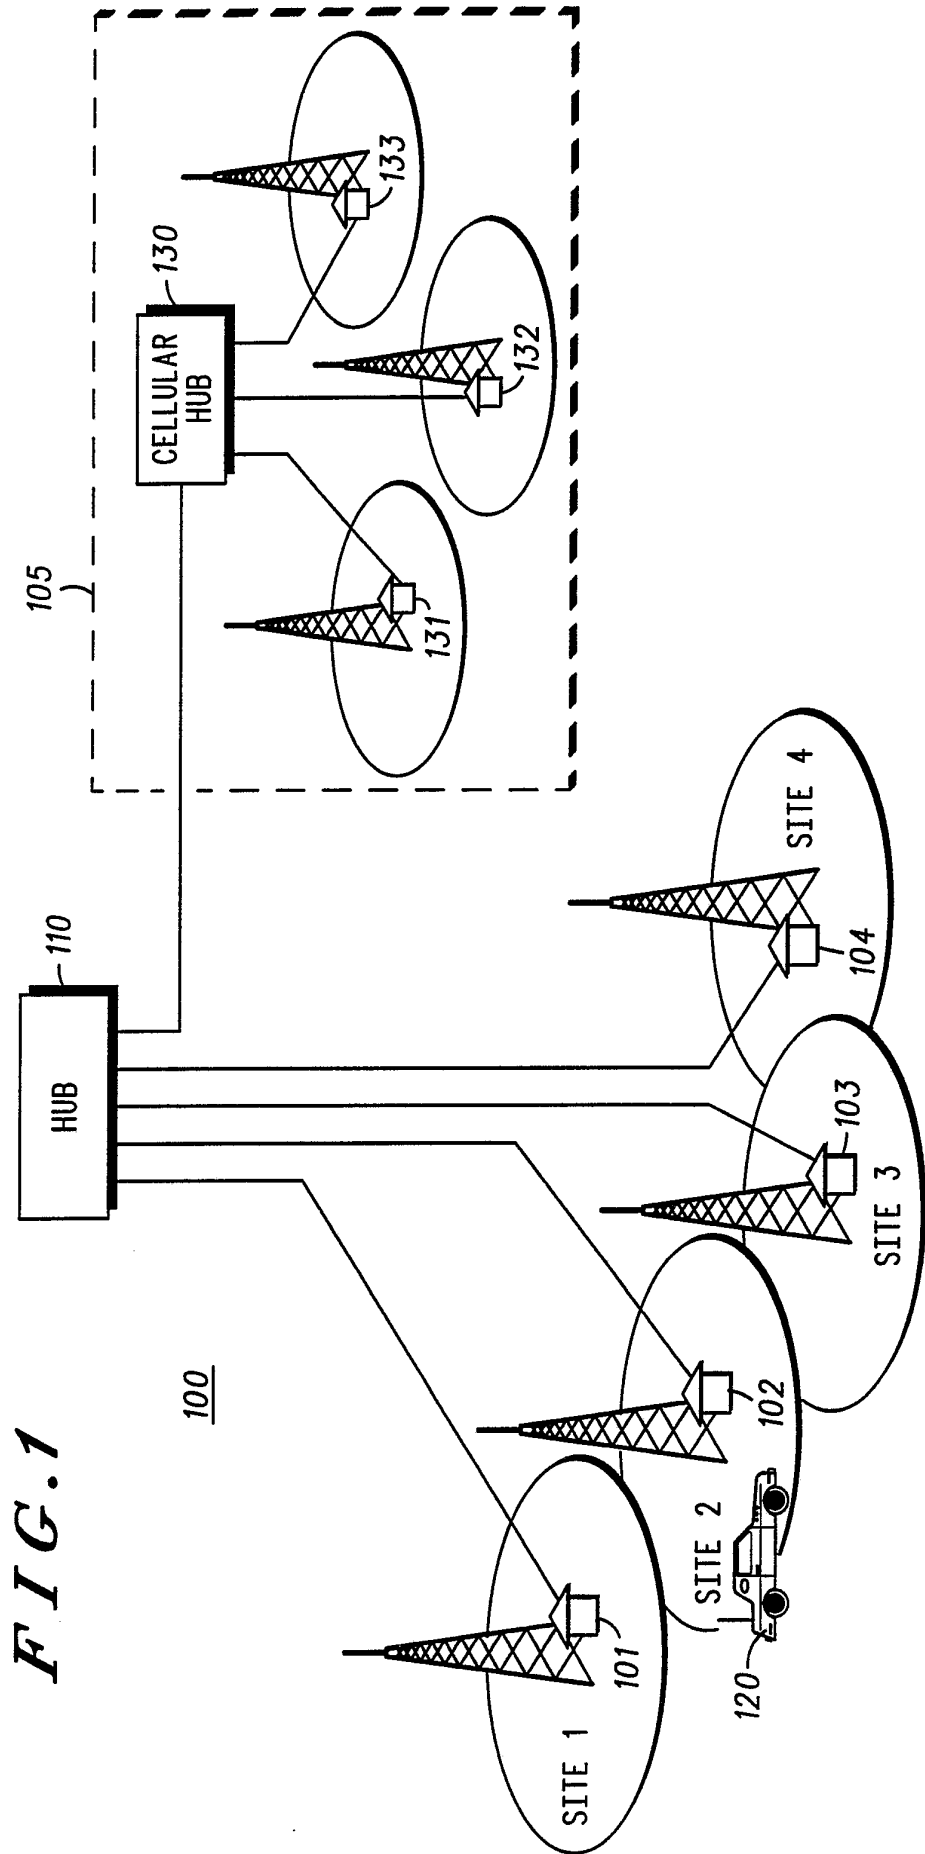

**FIG. 1**



3 / 3

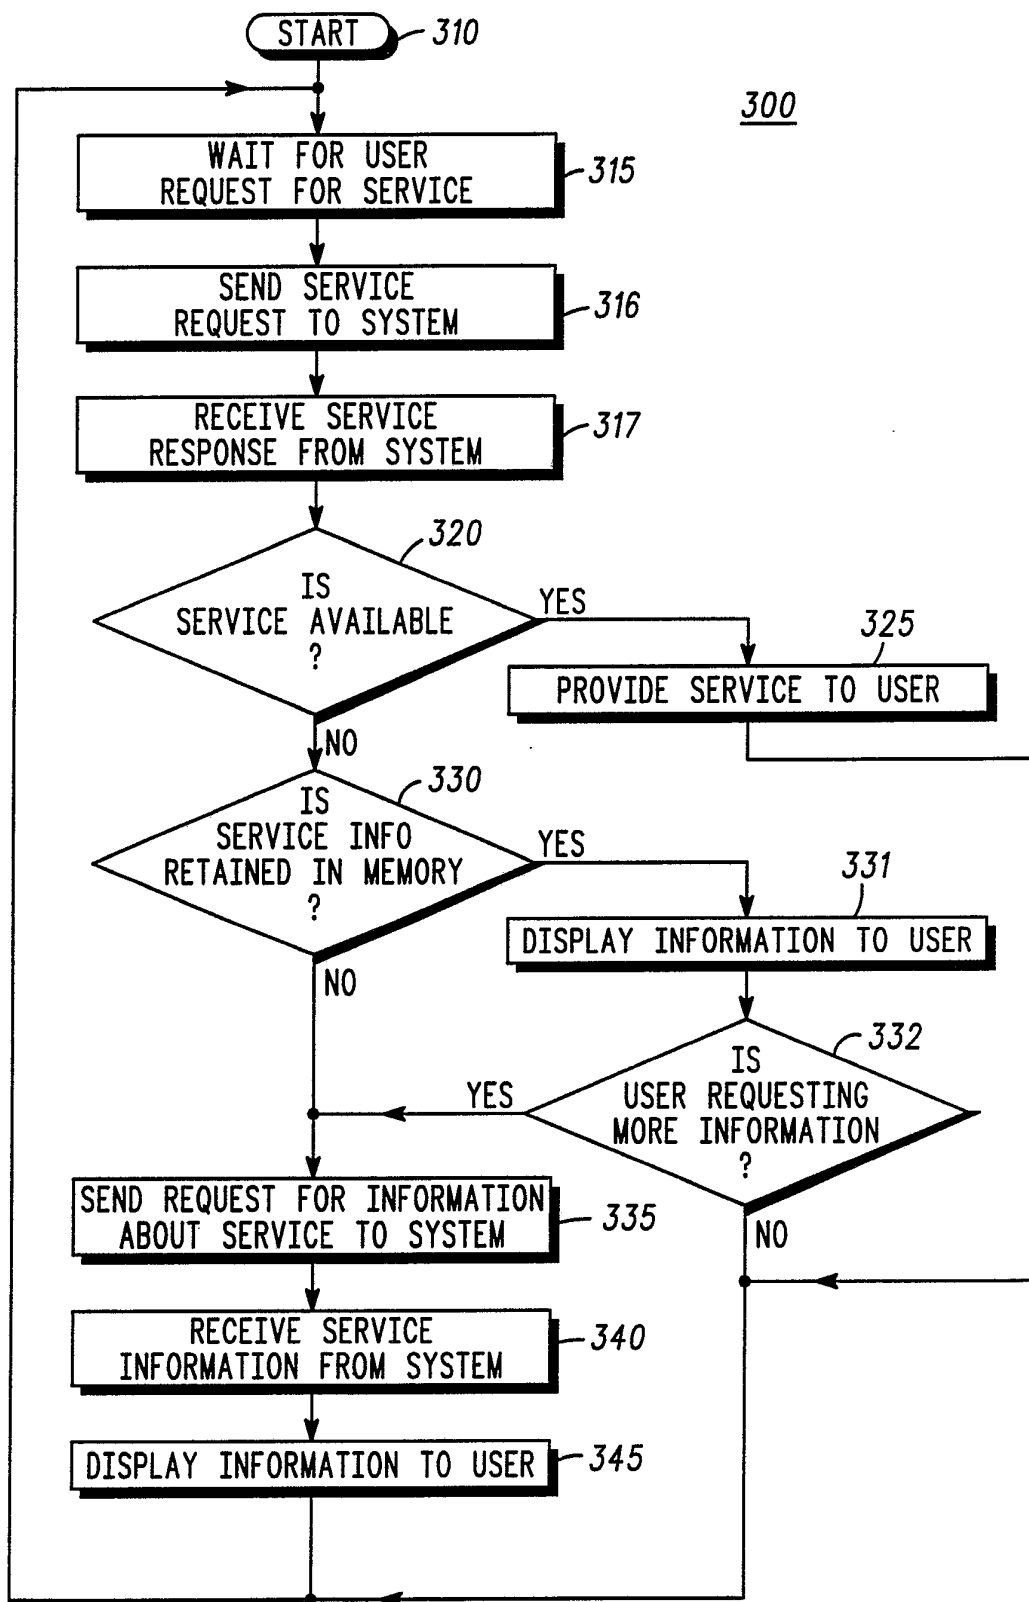


FIG. 3

# INTERNATIONAL SEARCH REPORT

International Application No. **PCT/US92/00396**

**I. CLASSIFICATION OF SUBJECT MATTER** (if several classification symbols apply, indicate all) <sup>6</sup>

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC (5): **H04B 7/00**  
 U.S.C.I.: **455: 54,56**

**II. FIELDS SEARCHED**

Minimum Documentation Searched <sup>7</sup>

Classification System

Classification Symbols

U.S.C.I.            **455: 33,34,54,56**  
                       **379: 59,60,63**

Documentation Searched other than Minimum Documentation  
 to the Extent that such Documents are Included in the Fields Searched <sup>8</sup>

**III. DOCUMENTS CONSIDERED TO BE RELEVANT <sup>9</sup>**

Category <sup>*</sup>	Citation of Document, <sup>**</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>
X	US, A, 4,012,597 (LYNK, JR. ET AL.) 15 March 1977 See entire document.	1, and 3-6
X,E	US, A, 5,093,926 (SASULA) 03 March 1992 See columns 2, 4 and 5.	1-2
X	Straw Man for Automatic Roaming Electronic Industries Association. TR-45.2 Cellular System Operation Working Group II, 18 June 1985, pp 1-24 See page 15.	1 and 4-6

<sup>\*</sup> Special categories of cited documents: <sup>10</sup>

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

**IV. CERTIFICATION**

Date of the Actual Completion of the International Search

Date of Mailing of this International Search Report

02 April 1992

**30 APR 1992**

International Searching Authority

Signature of Authorized Officer

ISA/US

*Lisa Charouel*  
 Lisa Charouel