

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2016/095028 A1

(43) International Publication Date

23 June 2016 (23.06.2016)

WIPO | PCT

(51) International Patent Classification:

B62M 6/60 (2010.01) B62M 6/80 (2010.01)  
B62M 6/70 (2010.01)

(21) International Application Number:

PCT/CA2015/051317

(22) International Filing Date:

14 December 2015 (14.12.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/574,121 17 December 2014 (17.12.2014) US

(71) Applicant: VELOMETRO MOBILITY INC. [CA/CA]; Suite 2600 Oceanic Plaza, 1066 West Hastings Street, Vancouver, British Columbia V6E 3X1 (CA).

(72) Inventors: FAILLE, Jonathan; 633 Beach Avenue, Gibsons, British Columbia V0N 1V9 (CA). BAKER, Kody Jensen; 801 - 150 15th Street East, North Vancouver, British Columbia V7L 4N9 (CA). CORNWELL-MOTT, Benjamin John; 204 - 1350 Haro Street, Vancouver, British Columbia V6E 1G2 (CA).

(74) Agent: JERMILOVA, Svetlana; 30 - 6331 No. 1 Roar, Richmond, British Columbia V7C 1T4 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

**Published:**

— with international search report (Art. 21(3))

(54) Title: DRIVETRAIN SYSTEM FOR AN ELECTRICALLY ASSISTED HUMAN POWERED VEHICLE

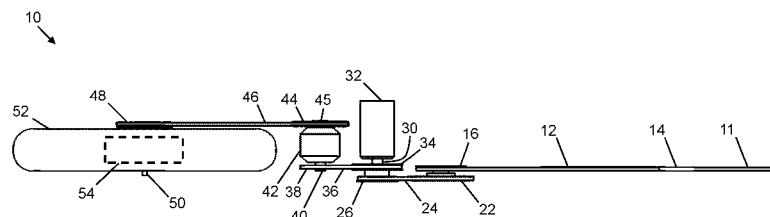


FIG. 2

(57) **Abstract:** Pedal power provided by the driver is delivered to the drive wheel of a vehicle, aided when necessary by an electric motor and transmission. A second electric motor adds regenerative braking functionality and the ability to drive the vehicle in reverse. The second motor may also be used to drive the vehicle forwards, and power to the two motors may be split to optimize the efficiency, torque or power output of the drivetrain system. A freewheel mechanism allows the vehicle to be driven forwards by the first motor without back-driving the crank. An optional second freewheel mechanism allows the vehicle to move forwards without back-driving the first motor and the crank.

## DRIVETRAIN SYSTEM FOR AN ELECTRICALLY ASSISTED HUMAN POWERED VEHICLE

### TECHNICAL FIELD

**[0001]** This application relates to human powered vehicles. In particular, it relates to

5 a drivetrain for a human powered, electrically assisted vehicle.

### BACKGROUND

**[0002]** Motorized pedal power vehicles consist of an attached motor and a transmission that is used to either power the vehicle unassisted, or to assist with

10 pedaling. An example of a motorized pedal power vehicle is a motorized bicycle.

Motorized bicycles have been gaining increasing attention in North America, Asia,

Europe and elsewhere throughout the world. Advantages include lower energy costs; reduction in other costs such as insurance, licenses, registration, parking; improved traffic flow; environmental friendliness; as well as various health benefits for the user.

15 **[0003]** Different types of motors and power sources can power motorized pedal

power vehicles. Common power sources include internal combustion engines fuelled by gasoline and/or diesel, steam engines, air engines, as well as electric motors. These power sources may be directly connected to an output shaft or geared to adjust the output speed and torque. Power can be applied to a drive wheel using different

20 methods: (1) The front or rear wheel may be powered directly by a power source built into the hub, wheel or rim. (2) A power source mounted within the vehicle's frame may drive the rear wheel via a mechanical power transmission system such as via "chain drives" (i.e. a sprocket with a chain), "belt drives" (e.g. a rubber belt), or "shaft drives" (i.e. directly coupled with a rigid shaft). (3) Power may be transferred to a wheel from a

25 motor mounted directly above, by bringing a powered roller or rubber belt into contact with the wheel or tire.

**[0004]** Commercially, motorized pedal power vehicles are marketed either as

complete designs or as add-on motor kits for use on unpowered vehicles. Lighter and more powerful batteries enable electric motors to be more commonly used in motorized

30 pedal power vehicles. As well, such technologies have proven useful for people with physical disabilities and/or restricted mobility such as arthritis and knee injuries.

**[0005]** Companies manufacture internal combustion engine motor conversion kits

for conventional bicycles. Examples include: (i) rear-engine, rack-mounted kits using a belt to drive the rear wheel; (ii) rack-mounted, chain-driven, geared transmission; as well as (iii) rack-mounts with either a tire roller-mount or a chain-driven, geared transmission.

5 **[0006]** Motorized bicycles using electric motors use batteries that are limited in capacity and range, thus pedaling is used to assist in propulsion. Such electric motor bicycle designs are increasingly popular, particularly in countries with heavy traffic congestion, aging populations and fuel shortages.

10 **[0007]** US Patent No. 3,921,467 to Matsuura describes a bicycle with a drive train located in the center of the cycle body that consists of a primary sprocket and final sprocket with a tensioner sprocket in between. Adding a secondary sprocket between the primary and final sprockets can modify the gear ratios of the drive train.

15 **[0008]** US Patent No. 6,352,131 to Lin describes a unidirectional rotating assembly that allows a chain-ring to rotate while the crank and axle remains still. This design enables the bike to be propelled while the crank is stationary and allows the users to still be able to shift gears.

20 **[0009]** US Patent No. 7,314,109 to Holland describes an electrically powered bicycle that includes a hub motor that is mounted to the bicycle frame by its axle. When the bicycle is coasting, the design will enable the rear wheel to drive the motor to provide downhill, regenerative braking capability. US Patent No. 7,461,714 to Holland also describes a frame-mounted motor that is connected to pedals and to a rear driven wheel through an intermediate jackshaft. A freewheel within this design can recharge batteries during braking or while coasting downhill.

25 **[0010]** US Patent Application Pub. No. 2010/0307851 to Lin further describes a power-assist system for a bicycle comprising of three components: a motor, a speed-reduction section, and a power-assist section. Such systems operate in four modes: (1) power-assist pedaling mode; (2) pedal only mode; (3) power-assist only mode; and (4) coasting no-power mode.

30 **[0011]** This background information is provided to reveal information believed by the applicant to be of possible relevance to the present invention. No admission is necessarily intended, nor should be construed, that any of the preceding information constitutes prior art against the present invention.

## SUMMARY OF INVENTION

**[0012]** The present invention is directed to a drivetrain for a human powered, electrically assisted vehicle, such as a tricycle. The drivetrain, which includes two electrical motors, reduces the effort that a person needs to exert to move a vehicle, increases the acceleration and efficiency of the vehicle, recovers electrical energy when the vehicle is braking, and powers the vehicle to move in reverse. It accomplishes these solutions while accommodating freewheel mechanisms that allow the crank to remain stationary while the vehicle moves forward. The use of two motors in the drivetrain allows them to be operated within their higher efficiency performance zones, allowing for greater overall efficiency of the motors when converting stored electrical energy to kinetic energy in order to drive the vehicle.

**[0013]** This arrangement allows for greater torque to be applied to the rear wheel, while staying within restrictive power limits compared with other methods, such as installing a single hub motor on the rear wheel or a single mid-mount motor that drives the rear wheel.

**[0014]** Disclosed herein is a drivetrain system for a human-powered vehicle comprising: a crank configured to be rotated by a human; a shaft driven by the crank; a drive wheel configured to be driven by the shaft; a first motor configured to power the shaft; a first freewheel mechanism connected between the crank and the shaft such that the first motor powers the shaft to drive the drive wheel forwards without back-driving the crank; and a second motor configured to power the drive wheel or a further drive wheel.

**[0015]** The drivetrain system may also include a second freewheel mechanism connected between the shaft and the drive wheel such that the drive wheel moves forwards without back-driving the first motor or the crank.

**[0016]** The drivetrain system may also comprise a transmission connected between one of: the first motor and the second freewheel mechanism; the second freewheel mechanism and the drive wheel; and the first freewheel mechanism and the first motor.

**[0017]** Also disclosed herein is a three-wheeled vehicle installed with a drivetrain system, the drivetrain system comprising: a crank configured to be rotated by a human;

a shaft driven by the crank; a drive wheel of a three-wheeled vehicle configured to be driven by the shaft; a first motor configured to power the shaft; a first freewheel mechanism connected between the crank and the shaft such that the first motor powers the shaft to drive the drive wheel of the three-wheeled vehicle forwards without back-driving the crank; and a second motor configured to power the drive wheel or a further drive wheel of the three-wheeled vehicle.

5 [0018] The vehicle may also include a second freewheel mechanism connected between the shaft and the drive wheel such that the drive wheel of the three-wheeled vehicle moves forwards without back-driving the first motor or the crank.

10 [0019] Further disclosed herein is a method for powering a human-powered vehicle comprising: driving a shaft with a first motor; driving a crank by a human, the crank driving the shaft via a first freewheel mechanism such that the first motor drives the shaft without back-driving the crank; driving a drive wheel by a second motor; and driving at least one of the drive wheel and a further drive wheel by the shaft, the shaft driving the at least one of the drive wheel and further drive wheel via a second 15 freewheel mechanism such that the at least one of the drive wheel and further drive wheel moves forwards without back-driving the first motor or the crank.

#### BRIEF DESCRIPTION OF DRAWINGS

20

[0020] The following drawings illustrate embodiments of the invention, which should not be construed as restricting the scope of the invention in any way.

[0021] FIG. 1 is a schematic diagram of a basic drivetrain system according to the invention.

25 [0022] FIG. 2 is a top view of a first exemplary embodiment of the drivetrain system.

[0023] FIG. 3 is a side view of the first exemplary embodiment of the drivetrain system.

[0024] FIG. 4 is a perspective view of the first exemplary embodiment of the drivetrain system.

30 [0025] FIG. 5 is a top view of a second exemplary embodiment of the drivetrain system.

[0026] FIG. 6 is a side view of the second exemplary embodiment of the drivetrain

system.

**[0027]** FIG. 7 is a perspective view of the second exemplary embodiment of the drivetrain system.

**[0028]** FIG. 8 is a top view of a third exemplary embodiment of the drivetrain system.

**[0029]** FIG. 9 is a side view of the third exemplary embodiment of the drivetrain system.

**[0030]** FIG. 10 is a perspective view of the third exemplary embodiment of the drivetrain system.

**[0031]** FIG. 11 is a schematic representation of an exemplary embodiment of a control system for the drivetrain systems, including its connected input and output modules.

## DESCRIPTION

15

### A. Glossary

**[0032]** Cadence – The rate at which a cyclist or other driver of a human-powered vehicle turns the pedals. Cadence is measured, for example, in revolutions per minute.

20 The cadence should be suitable for the cyclist, because, for example, spinning a crank too fast can be uncomfortable.

**[0033]** Back-Driving – When a driven wheel of a vehicle is rotated by means other than its primary driving mechanism, then back-driving refers to operating the primary driving mechanism as if it were powering the driven wheel. For example, a bicycle with 25 no freewheel mechanism that is moving downhill under the influence of gravity alone has a back-driven crank because it will be rotating, even though the cyclist will not be powering it.

**[0034]** Gear Motor – This is a motor with gears incorporated in order to reduce the output shaft speed and increase the output shaft torque.

30 B. Overview

**[0035]** Referring to FIG. 1, a simplified diagram of a basic drivetrain system for a

human-powered vehicle is shown, being incorporated in each of the three exemplary embodiments of drivetrain systems 10, 100 and 200 described in detail later in reference to FIGS. 2-4, 5-7 and 8-10, respectively. Included in the drivetrain system is a crank 1, which is configured to be powered by a human, for example using pedals

5 attached to it. The crank 1 drives, via a first freewheel mechanism 2, a shaft 3. The first freewheel mechanism 2 allows the shaft 3 to rotate in the forward direction without the crank being back-driven. The shaft 3 is also driven by a first motor 4, and may be powered completely by the first motor, partially by the first motor, or not at all by the first motor. Shaft 3 in turn drives, via an optional second freewheel mechanism 5, the drive 10 wheel 6. If included, the second freewheel mechanism 5 allows the drive wheel 6 to rotate in the forward direction without the first motor 4 or the crank 1 being back-driven. The drive wheel 6 is also driven by a second motor 7. The drive wheel 6 may be powered completely by the second motor 7, partially by the second motor, or not at all by the second motor. Furthermore, the drive wheel 6 may be driven in reverse by the 15 second motor 7. Drive power transmitted between the pedals, crank 1, shaft 3, motors 4, 7 and drive wheel 6 may either be direct or indirect depending on the embodiment.

15 **[0036]** If the drivetrain system does not include the optional second freewheel mechanism 5, then, when the drive wheel 6 is rotated in the forward direction, the first motor 4 and shaft 3 will be back-driven. However, the crank 1 will not be back-driven 20 due to the presence of the first freewheel mechanism 2.

20 **[0037]** An optional system control 8, generally representing a control system 300 described in detail later in reference to FIG. 11, is connected to the motors 4, 7 and the crank 1. The system control 8 takes inputs from one or more sensors on the crank 1 and motors 4, 7 and provides control signals to the motors. The control signals optimize 25 the amount of power used to drive the motors.

25 **[0038]** A transmission 9 may be included in the powertrain system, and may also be connected to the system control 8. If a transmission is included in the drivetrain system, then the second freewheel mechanism 5 will be required if the transmission cannot be back-driven. The transmission should therefore be installed in the drivetrain system 30 upstream of the second freewheel mechanism.

30 **[0039]** While a single drive wheel 6 has been shown, there may in some embodiments be two or more drive wheels. For example, the crank 1 and first motor 4 may drive the drive wheel 6, and the second motor 7 may drive a further drive wheel in

the same vehicle as the first drive wheel 6. This may be the case for a tricycle, for example, in which the two rear wheels are powered by different portions of the drivetrain system. In other embodiments, even in a tricycle, all of the crank 1, first motor 4 and second motor 7 may be configured to power a single drive wheel.

5 C. Exemplary Embodiments

**[0040]** Referring to FIGS. 2-4, an exemplary embodiment of the drivetrain system, generally designated 10, is shown in various views. Crank 11, which is fitted with pedals, is powered by a driver of a vehicle in which the drivetrain system 10 is installed. A belt or chain 12, tensioned by an idler wheel 14, connects the crank 11 to a wheel 16

10 that is mounted on an intermediate shaft 20. The intermediate shaft 20 is connected to a wheel 22, which in turn is connected by a belt or chain 24 to a first freewheel 26 on first motor shaft 30. Wheels 16, 22 may be of different sizes in order to provide suitable gearing. The mechanism of the first freewheel 26 allows the vehicle to move forward without the need to back-drive the crank 11. Connected to motor shaft 30 is a first  
15 electric motor 32 and further wheel 34. As the crank 1 is rotated in the forward direction, it causes both the intermediate shaft 20 and the first motor shaft 30 to rotate. The first electric motor 32, which may be a gear motor, may be powered to drive the first motor shaft 30 and wheel 34 in the forward direction (i.e. forward direction of the vehicle), either entirely or by adding power to the power that is provided by the driver turning the  
20 crank 1. If no electrical power is supplied to the first motor 32, it will still rotate as the crank is rotated.

**[0041]** Wheel 34 on first motor shaft 30 is connected by a belt or chain 36 to a wheel 38 that is mounted on a transmission input shaft 40. Transmission 42 is connected to and takes its drive input from input shaft 40. As the transmission shaft 40 is rotated, the  
25 transmission transfers power to wheel 44 mounted on the transmission output shaft 45. The transmission 42 is, for example, a variable gear ratio transmission, such as a continuously variable automatic transmission.

**[0042]** Wheel 44 is connected via belt or chain 46 to a second freewheel 48 mounted on the axle 50 of drive wheel 52. The optional mechanism of freewheel 48 allows the drive wheel 52 to rotate forwards without back-driving the first motor 32 or the crank 1. In some cases, the freewheel 48 is necessary because the transmission

may not be able to be back-driven.

**[0043]** A second motor 54, which may also be a gear motor, is connected directly to the drive wheel 52. The second motor 54 can be used to add power to the drive wheel 52 in either forward or reverse directions, and can also be used to recover energy by reducing vehicle speed, otherwise known as regenerative braking. Second motor 54 may be a hub motor or a wheel motor, and drives the drive wheel 52 directly. The second motor 54 is connected to the drive wheel 52 without a freewheel mechanism so that it can drive the drive wheel in both forward and reverse directions.

**[0044]** A second exemplary embodiment of the drivetrain system, generally designated 100, is shown in FIGS. 5-7, in different views. Much of the drivetrain system 100 is similar to that of the first embodiment 10, such as the crank 110 and first motor 132, which are used with the same arrangement of connecting shafts, belts, chains and/or wheels to provide human and electrical power respectively to the drive wheel 152 mounted on axle 150. One difference in drivetrain system 100 is that the second motor 154 is located off-axis from the axle 150 of the drive wheel 152. Second motor 154 drives wheel 160 that is connected via belt or chain 162 to wheel 164 mounted on the axle 150 of the drive wheel 152.

**[0045]** A third exemplary embodiment of the drivetrain system, generally designated 200, is shown in FIGS. 8-10. A driver pedals to turn the crank 210, which is connected to a shaft 212 which rotates when the crank is turned. The shaft 212 is connected to a freewheel mechanism 214, which allows the vehicle to move forwards without the crank 210 being back-driven. The freewheel mechanism 214 is in turn connected to shaft 216, which is connected via a universal joint 230 to first motor 232. The first motor 232 is in turn connected, via another optional freewheel mechanism 240 to the transmission 242. If desired, the freewheel mechanism 240 allows the drive wheel 252 to rotate forwards without back-driving the first motor 232 or the crank 210. The transmission 242 drives the transmission output shaft 244, which in turn rotates the drive wheel 252 mounted on axle 250. A second motor 254 of the drivetrain system 200 is connected to the drive wheel 252 to directly drive the drive wheel 252 in either a forward or reverse direction, and for regenerative braking.

**[0046]** Alternately, the second motor 254 may be located off-axis from the axle 250 of the drive wheel 252, as in the preceding drivetrain system 100 of FIGS 5-7. In this case, power to the drive wheel 252 may be supplied from the off-axis second motor 254

via a belt, chain or shaft.

#### D. Control System

**[0047]** Referring to FIG. 11, an exemplary embodiment of the control system, generally designated 300, is shown, with its main modules and connections to the

5 modules and components it controls. Corresponding ones of the components described below (such as motors 340, 342 and transmission 360) with reference to the control system 300 will be readily recognized in the exemplary embodiments of the drivetrain systems 10, 100 and 200 described in detail above. The control system 300 includes a system controller 305 for controlling first and second motors 340, 342 and 10 the transmission 360 of the control system 300. The system controller 305 controls these components in order to maximize vehicle performance under various driving conditions. For example, if the vehicle goes up a hill, the gear ratio will change to allow for higher torque to be applied to the drive wheel. Vice versa, at high vehicle speeds the gear ratio will change up to allow for lower user cadence at higher drive wheel speeds.

15 **[0048]** The system controller 305 receives inputs from the pedal module 310, which in turn receives its inputs from one or more sensors connected to the pedals and/or crank. Such sensors may be a cadence sensor 312 and a torque sensor 314.

**[0049]** The system controller 305 also receives inputs from the motor controller 320, and also provides outputs to it. The motor controller 320 receives inputs from various 20 sensors attached to the aforementioned components of the drivetrain systems 10, 100 and 200, such as a speed sensor 322 for the first motor 340, a speed sensor 324 for the second motor 342, a current sensor 326 for the first motor 340 and a current sensor 328 for the second motor 342. Based upon the inputs received from the sensors 322-328 and the input received from the system controller 305, the motor controller 320 sends 25 control signals to the first motor 340 and the second motor 342 in order to control the electrical power applied to them.

**[0050]** When the vehicle is using electrical power to drive, or assist with driving, the drive wheel, an optimizer module 370 in the system controller 305 calculates the optimum power split between the two motors 340, 342. Alternately, the optimizer 30 module 370 may be located in the motor controller 320. The split is calculated so that, as far as possible, both motors 340, 342 are being driven in their optimum efficiency

ranges while still achieving vehicle torque and power output as the user is expecting. If this is not possible, the motors are driven so that their combined efficiency is optimal.

**[0051]** The system controller 305 also receives inputs from the transmission 360,

which in turn receives inputs from a sensor 362 on its input shaft and a sensor 364 on

5 its output shaft. The transmission module 360, as a result of receiving signals from the sensors 362, 364 and from the system controller 305, sends output control signals to the gear ratio control module 366 in the transmission.

**[0052]** The control system 300 requires the driver to pedal backwards in order to

initiate reverse power from the motors, so that the driver must pedal faster than the

10 crank would normally rotate. This makes it so that the driver does not feel like the crank is being back-driven when the vehicle moves in reverse. When the vehicle is driven in reverse, the crank rotates in reverse. This may occur, for example, when the vehicle is rolling backwards downhill.

**[0053]** The system controller 305 and its connected modules may be embodied in

15 software, firmware and/or hardware.

#### E. Variations

**[0054]** Although the invention has been described in relation to rear wheel drive vehicles, it is also applicable to vehicles that are front wheel drive, which may also be rear-wheel steered. Besides use in three wheeled human powered vehicles, the

20 disclosed drivetrain could, however, be used in any mechanism or device that uses a driven wheel, such as wheel chairs and/or other assistive technologies and devices.

**[0055]** While many of the embodiments have been described in relation to a single drivetrain in which the three power sources (crank and two motors) power a single drive wheel, all of these embodiments may be split into the two portions of a drivetrain

25 system, in which the crank and first motor power one drive wheel and the second motor powers another drive wheel.

**[0056]** The first motor 32 could be attached to the intermediate shaft 20 by a belt, chain, shaft or gear, rather than in-line.

**[0057]** Freewheel mechanisms can be located in positions other than those depicted

30 in the embodiments described herein. For example, in drivetrain 1, instead of a freewheel mechanism being located in freewheel 48 on the axle 50, it may instead be

located at wheel 44.

**[0058]** The electric motors may be located in different positions to those that have been shown. For example, the first motor may be located between the transmission and drive wheel. As another example, the first motor may be located between the crank and the intermediate shaft. In other embodiments, the first motor may directly power the crank (i.e. the shaft of the crank) or directly power the intermediate shaft.

**[0059]** The drivetrain may also be used with motors other than electrical motors.

**[0060]** The second motor may be used to drive a second drive wheel. For example, on a tricycle, the drivetrain would be configured to drive a first drive wheel using the crank and the first motor and the second drive wheel using the second motor. The drivetrain system may also conceivably be split in a bicycle, for example, in which the crank and the first motor power the rear wheel and the second motor powers the front wheel.

**[0061]** If a transmission that allows reverse and forward power to be transferred back from the drive wheel through the transmission to the transmission input were used, then the drivetrain would retain its functionality without the need for a second motor. This would be accomplished by removing the freewheel between the drive wheel and the first motor. A freewheel would still be needed between the first motor and the crank to allow the vehicle to travel forward without back-driving the crank.

**[0062]** In general, unless otherwise indicated, singular elements may be in the plural and vice versa with no loss of generality.

**[0063]** Throughout the description, specific details have been set forth in order to provide a more thorough understanding of the invention. However, the invention may be practiced without these particulars. Some components may be omitted while others may be added, without departing from the invention. In other instances, well known elements have not been shown or described in detail to avoid unnecessarily obscuring the invention. Accordingly, the specification and drawings are to be regarded in an illustrative, rather than a restrictive, sense.

**[0064]** It will be further appreciated that the line between hardware, firmware and software is not always sharp, it being understood by those skilled in the art that the software implemented modules and processes described herein may be embodied in hardware, firmware, software, or any combination thereof. Such processes may be

controlled by coded instructions such as microcode and/or by stored programming instructions in one or more non-transient media readable by a computer or processor. The code modules may alternately be stored in any computer storage system or device, such as hard disk drives, solid-state memories, etc. The methods may alternatively be 5 embodied partly or wholly in specialized computer hardware, such as ASIC or FPGA circuitry.

**[0065]** It will be clear to one having skill in the art that variations to the specific details disclosed herein can be made, resulting in other embodiments that are within the scope of the invention disclosed. All parameters, dimensions and configurations described 10 herein are examples only and actual values of such depend on the specific embodiment. Accordingly, the scope of the invention is to be construed in accordance with the substance defined by the following claims.

## CLAIMS

1. A drivetrain system for a human-powered vehicle comprising:
  - a crank configured to be rotated by a human;
  - a shaft driven by the crank;
- 5 a drive wheel configured to be driven by the shaft;
- a first motor configured to power the shaft;
- a first freewheel mechanism connected between the crank and the shaft such that the first motor powers the shaft to drive the drive wheel forwards without back-driving the crank; and
- 10 a second motor configured to power the drive wheel or a further drive wheel.
2. The drivetrain system of claim 1, further comprising a second freewheel mechanism connected between the shaft and the drive wheel such that the drive wheel moves forwards without back-driving the first motor or the crank.
3. The drivetrain system of claim 2, further comprising a transmission connected between one of:
  - 15 the first motor and the second freewheel mechanism;
  - the second freewheel mechanism and the drive wheel; and
  - the first freewheel mechanism and the first motor.
4. The drivetrain system of claim 3, wherein the transmission is a continuously variable automatic transmission.
- 20 5. The drivetrain system of claim 1, wherein the crank drives the shaft directly.
6. The drivetrain system of claim 1, wherein the crank drives the shaft indirectly, via one or more of a belt, chain and intermediate shaft.
7. The drivetrain system of claim 1, wherein the first motor powers the shaft directly.
- 25 8. The drivetrain system of claim 1, wherein the first motor powers the shaft indirectly, via one or more of a belt, chain and further shaft.

9. The drivetrain system of claim 1, wherein the second motor powers the drive wheel directly.
10. The drivetrain system of claim 1, wherein the second motor powers the further drive wheel.
- 5 11. The drivetrain system of claim 1, wherein the second motor powers the drive wheel indirectly via a belt, chain or shaft.
12. The drivetrain system of claim 1, wherein the second motor is a hub motor.
13. The drivetrain system of claim 1, further comprising a universal joint connected between the first freewheel mechanism and the first motor.
- 10 14. The drivetrain system of claim 1, wherein the second motor is configured to drive the vehicle in a reverse direction.
15. The drivetrain system of claim 3, further comprising a controller connected to:
  - a sensor configured to sense pedal cadence;
  - a sensor configured to sense pedal torque;
  - 15 a sensor configured to sense speed of the first motor;
  - a sensor configured to sense speed of the second motor;
  - a sensor configured to sense current drawn by the first motor;
  - a sensor configured to sense current drawn by the second motor;
  - a sensor configured to sense input shaft speed of the transmission;
  - 20 a sensor configured to sense output shaft speed of the transmission;
  - the first and second motors; and
  - the transmission;wherein the controller is configured to optimize the combined efficiency of the first and second motors when both first and second motors are powering the vehicle.
- 25 16. The drivetrain system of claim 15, wherein the controller operates the second motor so as to reverse the vehicle when the crank is rotated in a reverse direction.
17. The drivetrain system of claim 1, wherein the second motor generates electrical energy when the vehicle is braked.

18. A three-wheeled vehicle installed with a drivetrain system, the drivetrain system comprising:

a crank configured to be rotated by a human;

a shaft driven by the crank;

5 a drive wheel of a three-wheeled vehicle configured to be driven by the shaft;

a first motor configured to power the shaft;

a first freewheel mechanism connected between the crank and the shaft such that the first motor powers the shaft to drive the drive wheel of the three-wheeled vehicle forwards without back-driving the crank; and

10 a second motor configured to power the drive wheel or a further drive wheel of the three-wheeled vehicle.

19. The vehicle of claim 18, the drivetrain system further comprising a second freewheel mechanism connected between the shaft and the drive wheel such that the drive wheel of the three-wheeled vehicle moves forwards without back-driving the first 15 motor or the crank.

20. The vehicle of claim 19, further comprising a transmission connected between:

the first motor and the second freewheel mechanism;

the second freewheel mechanism and the drive wheel; or

the first freewheel mechanism and the first motor.

20 21. The vehicle of claim 20, further comprising a controller connected to:

a sensor configured to sense pedal cadence;

a sensor configured to sense pedal torque;

a sensor configured to sense speed of the first motor;

a sensor configured to sense speed of the second motor;

25 a sensor configured to sense current drawn by the first motor;

a sensor configured to sense current drawn by the second motor;

a sensor configured to sense input shaft speed of the transmission;

a sensor configured to sense output shaft speed of the transmission;

the first and second motors; and

the transmission;  
wherein the controller is configured to optimize a combined efficiency of the first and second motors when both first and second motors are powering the vehicle.

22. A method for powering a human-powered vehicle comprising:

5        driving a shaft with a first motor;  
              driving a crank by a human, the crank driving the shaft via a first freewheel mechanism such that the first motor drives the shaft without back-driving the crank;  
              driving a drive wheel by a second motor;  
              driving at least one of the drive wheel and a further drive wheel by the shaft, the  
10      shaft driving the at least one of the drive wheel and the further drive wheel via a second freewheel mechanism such that the at least one of the drive wheel and the further drive wheel moves forwards without back-driving the first motor or the crank.

1/8

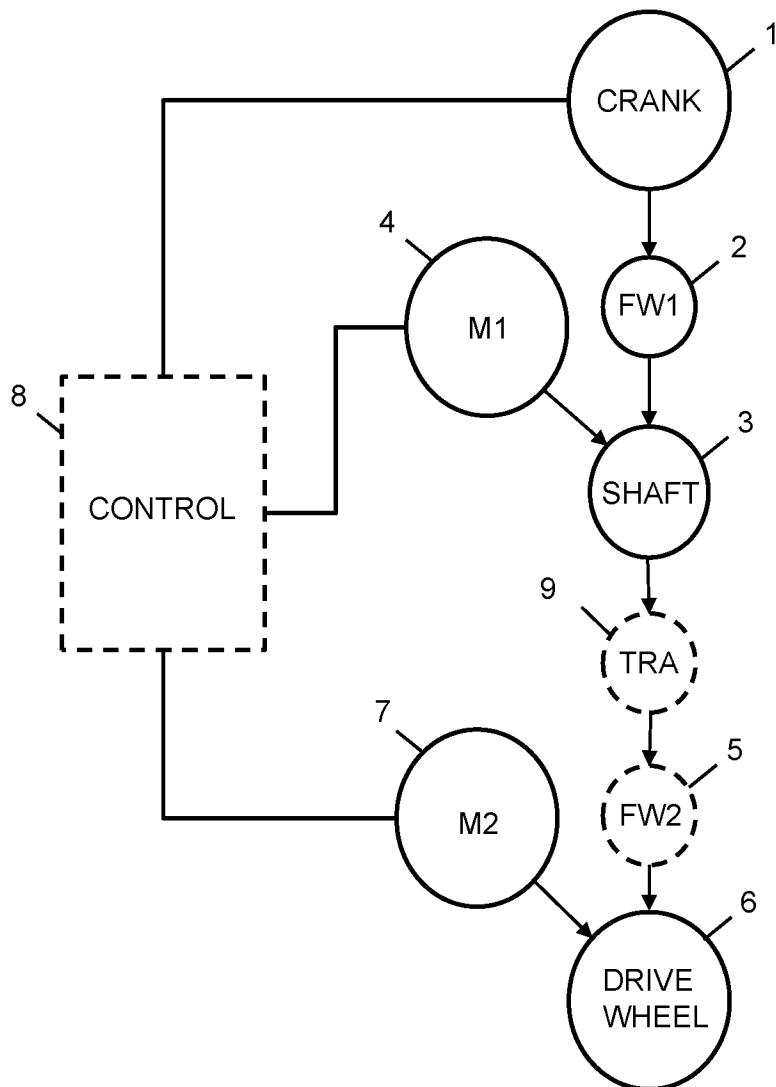


FIG. 1

2/8

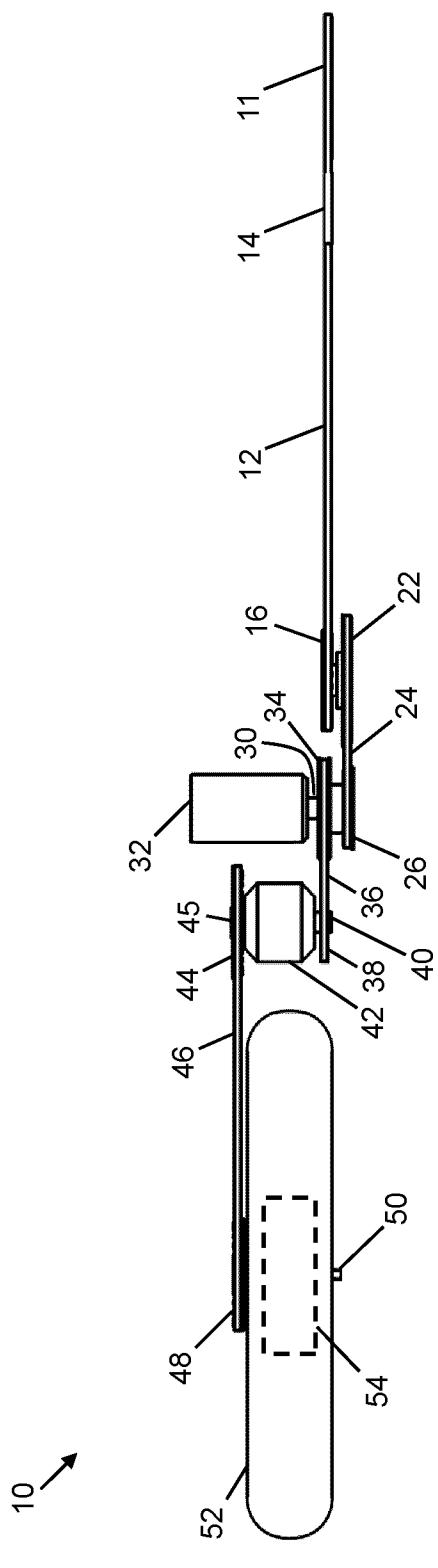


FIG. 2

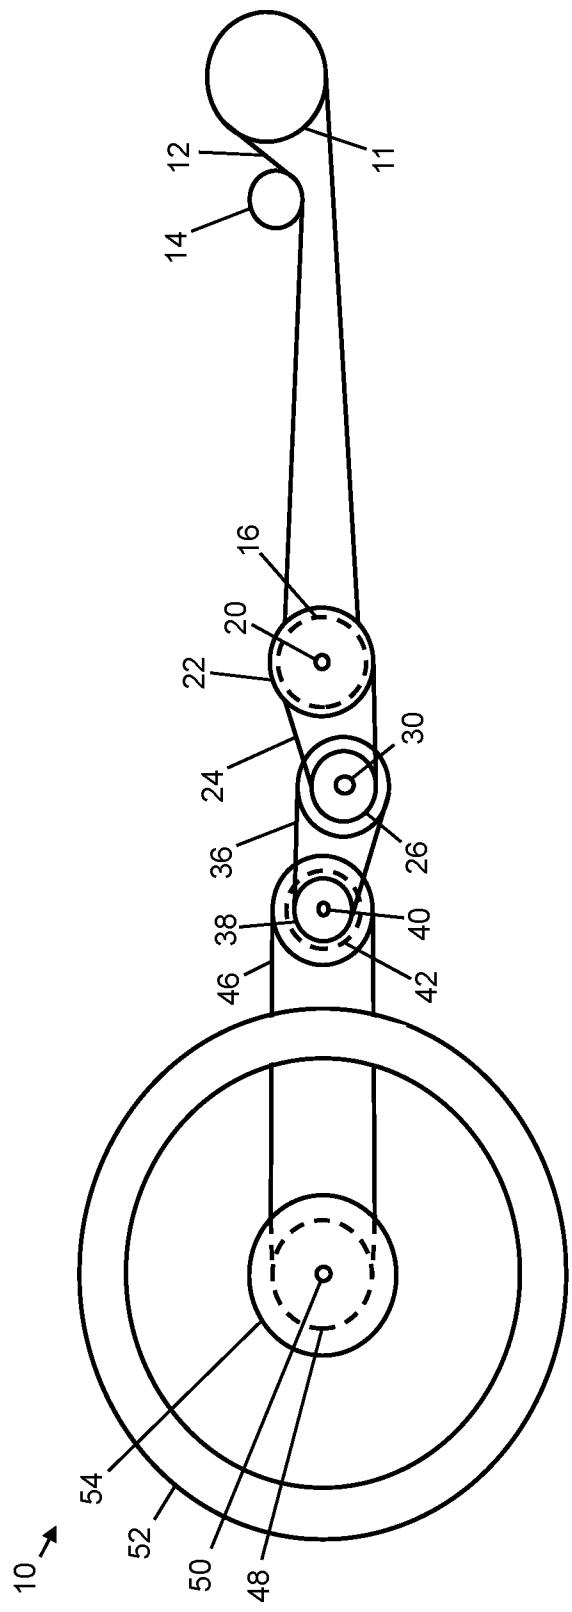


FIG. 3

3/8



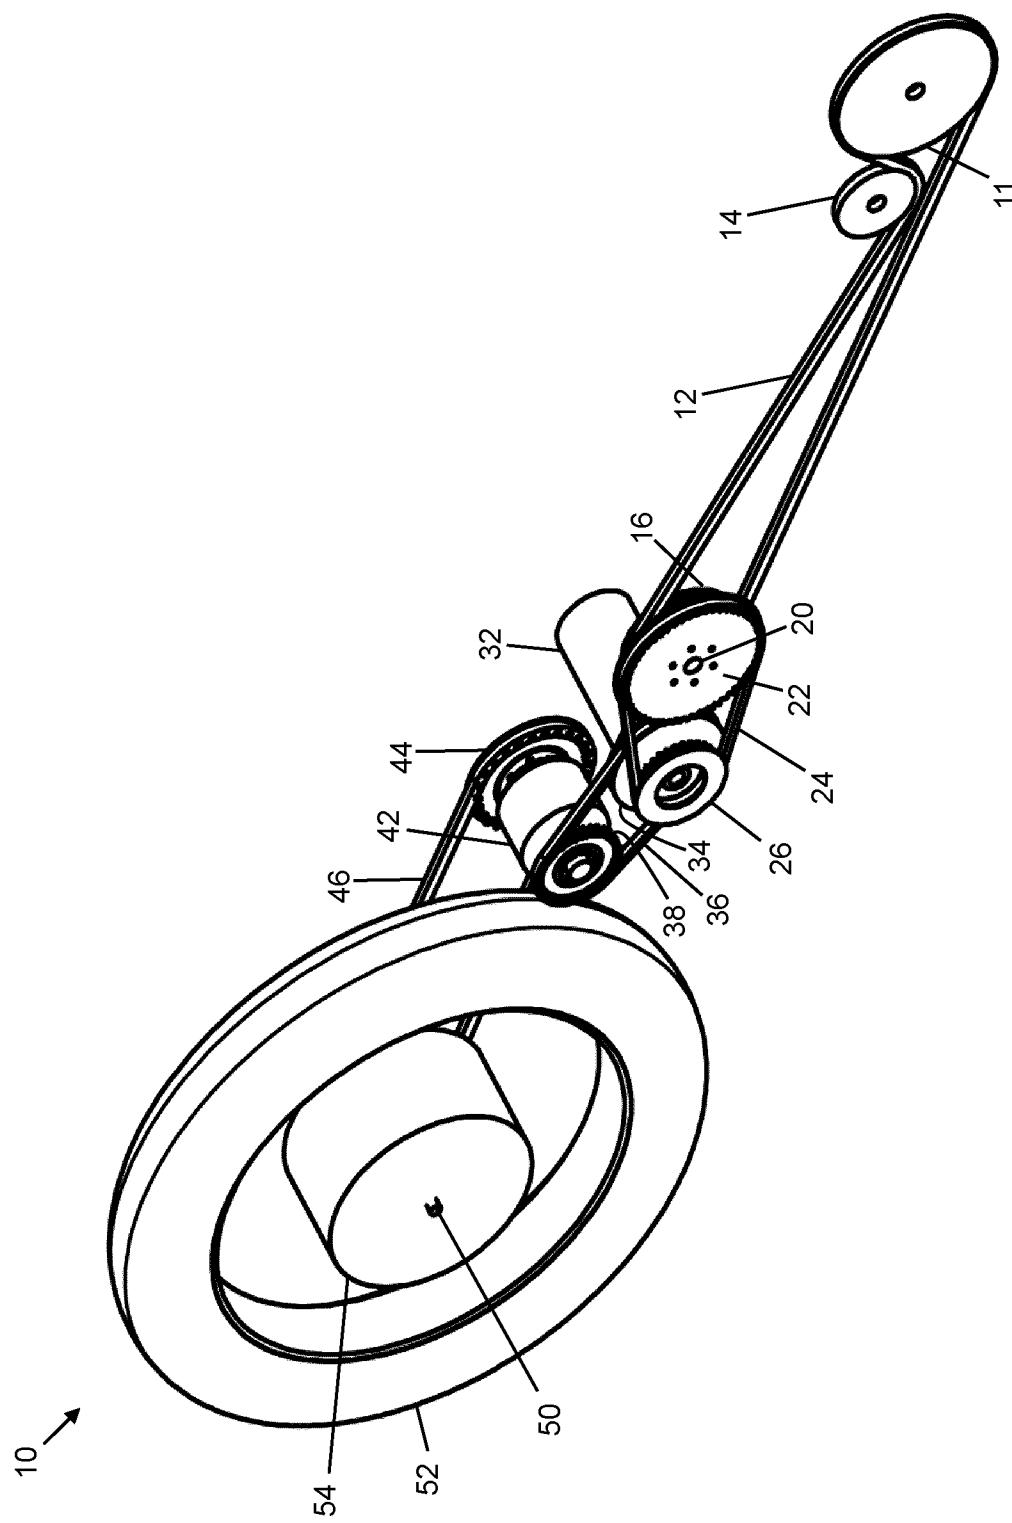


FIG. 4

4/8

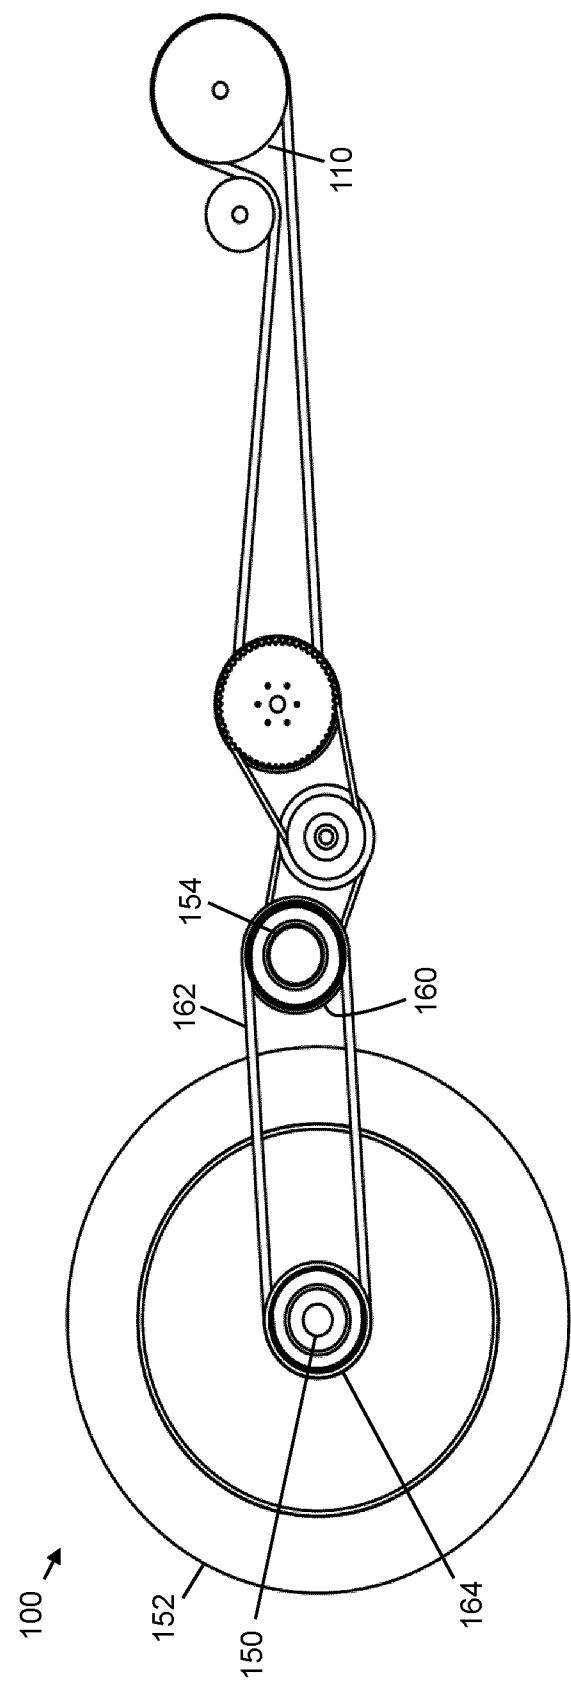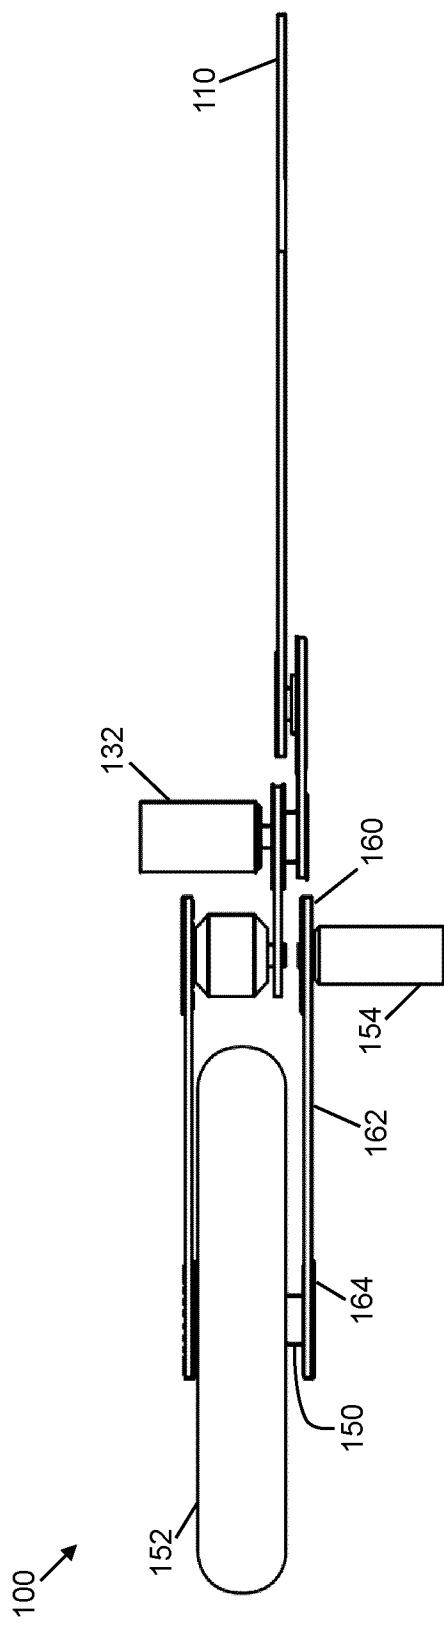

5/8

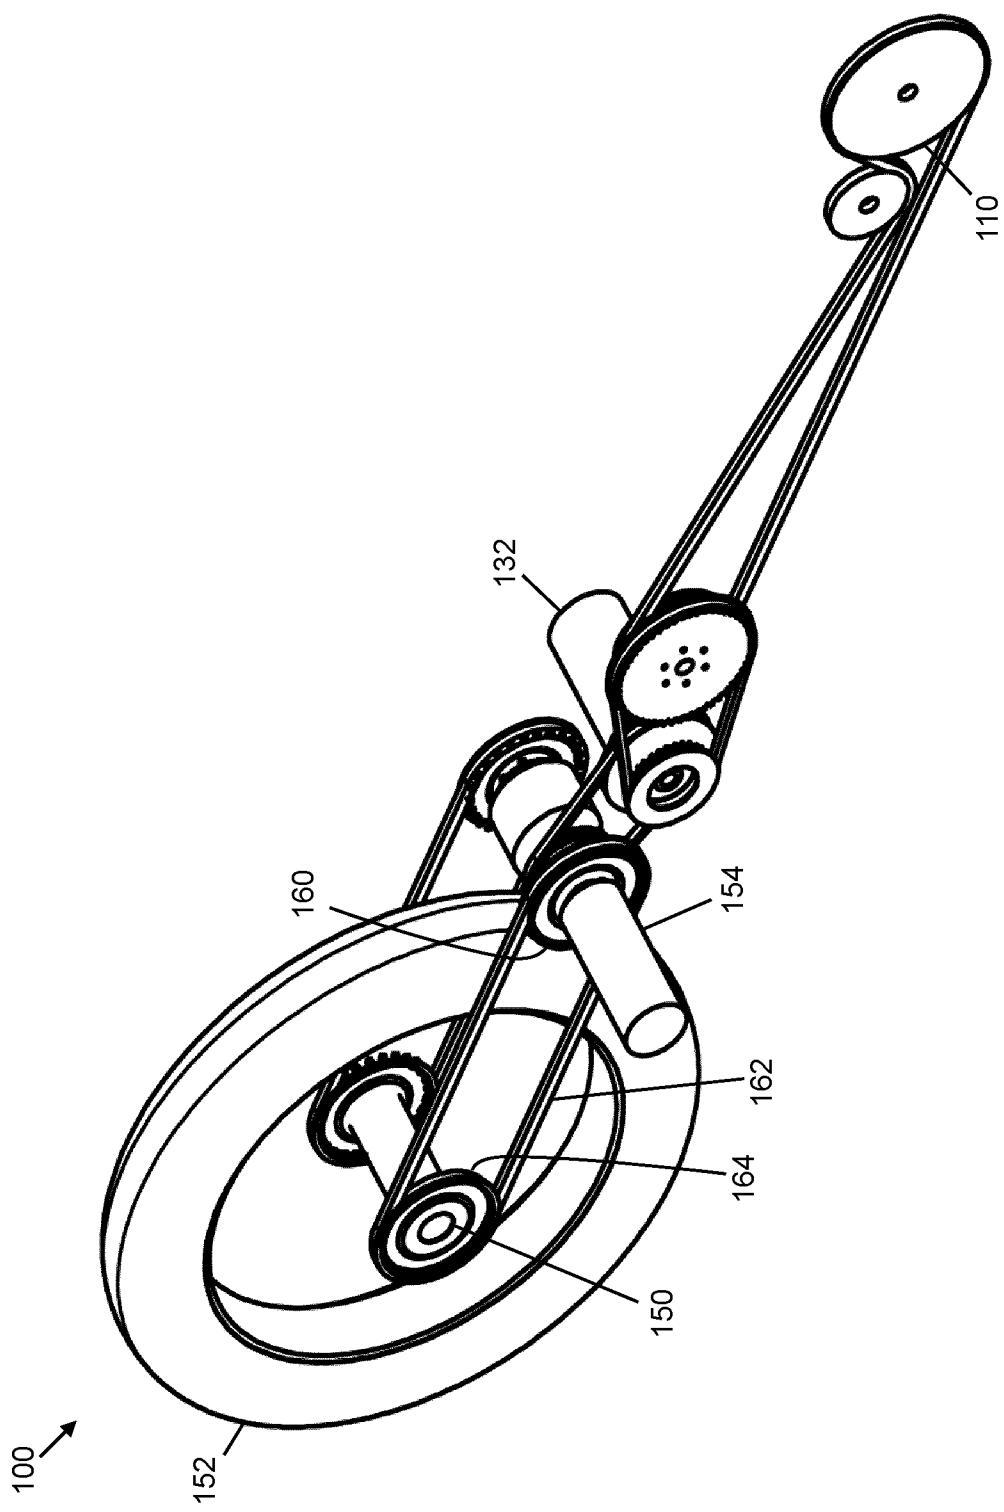


FIG. 7

6/8

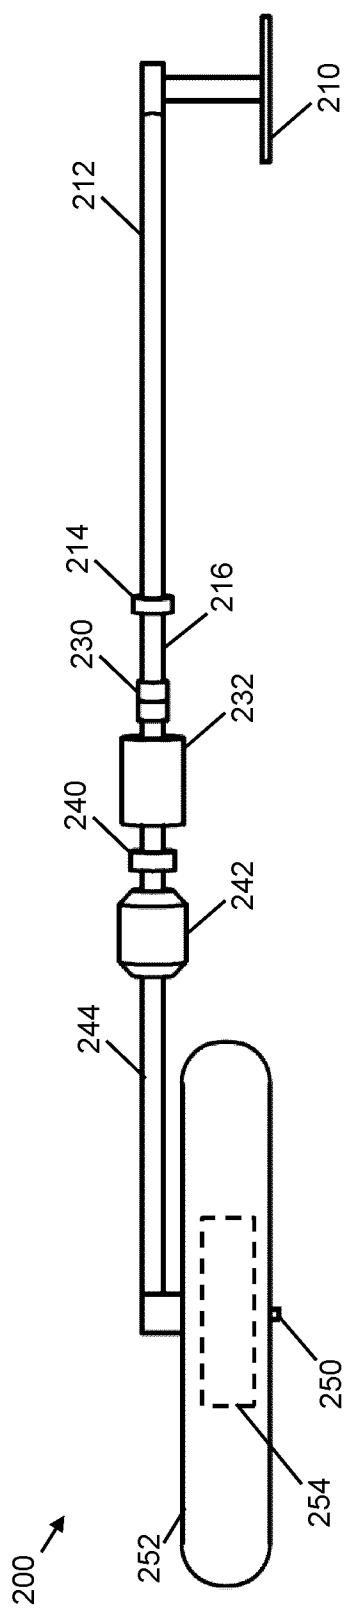


FIG. 8

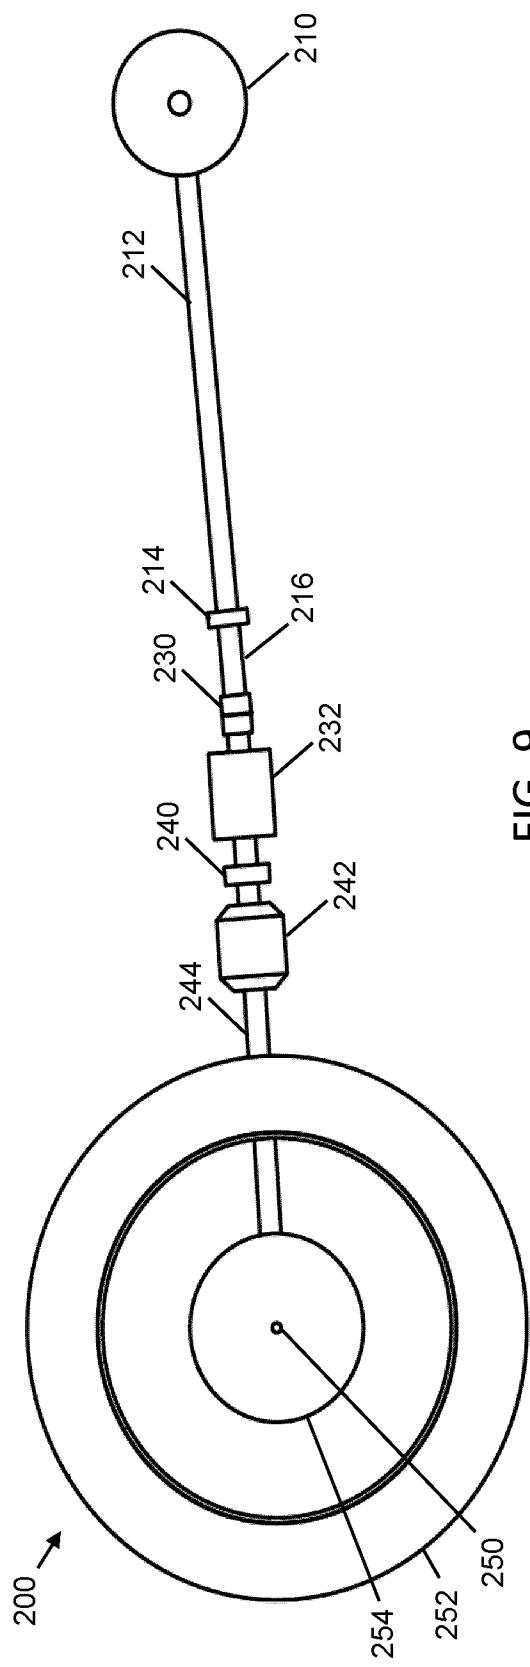


FIG. 9

7/8

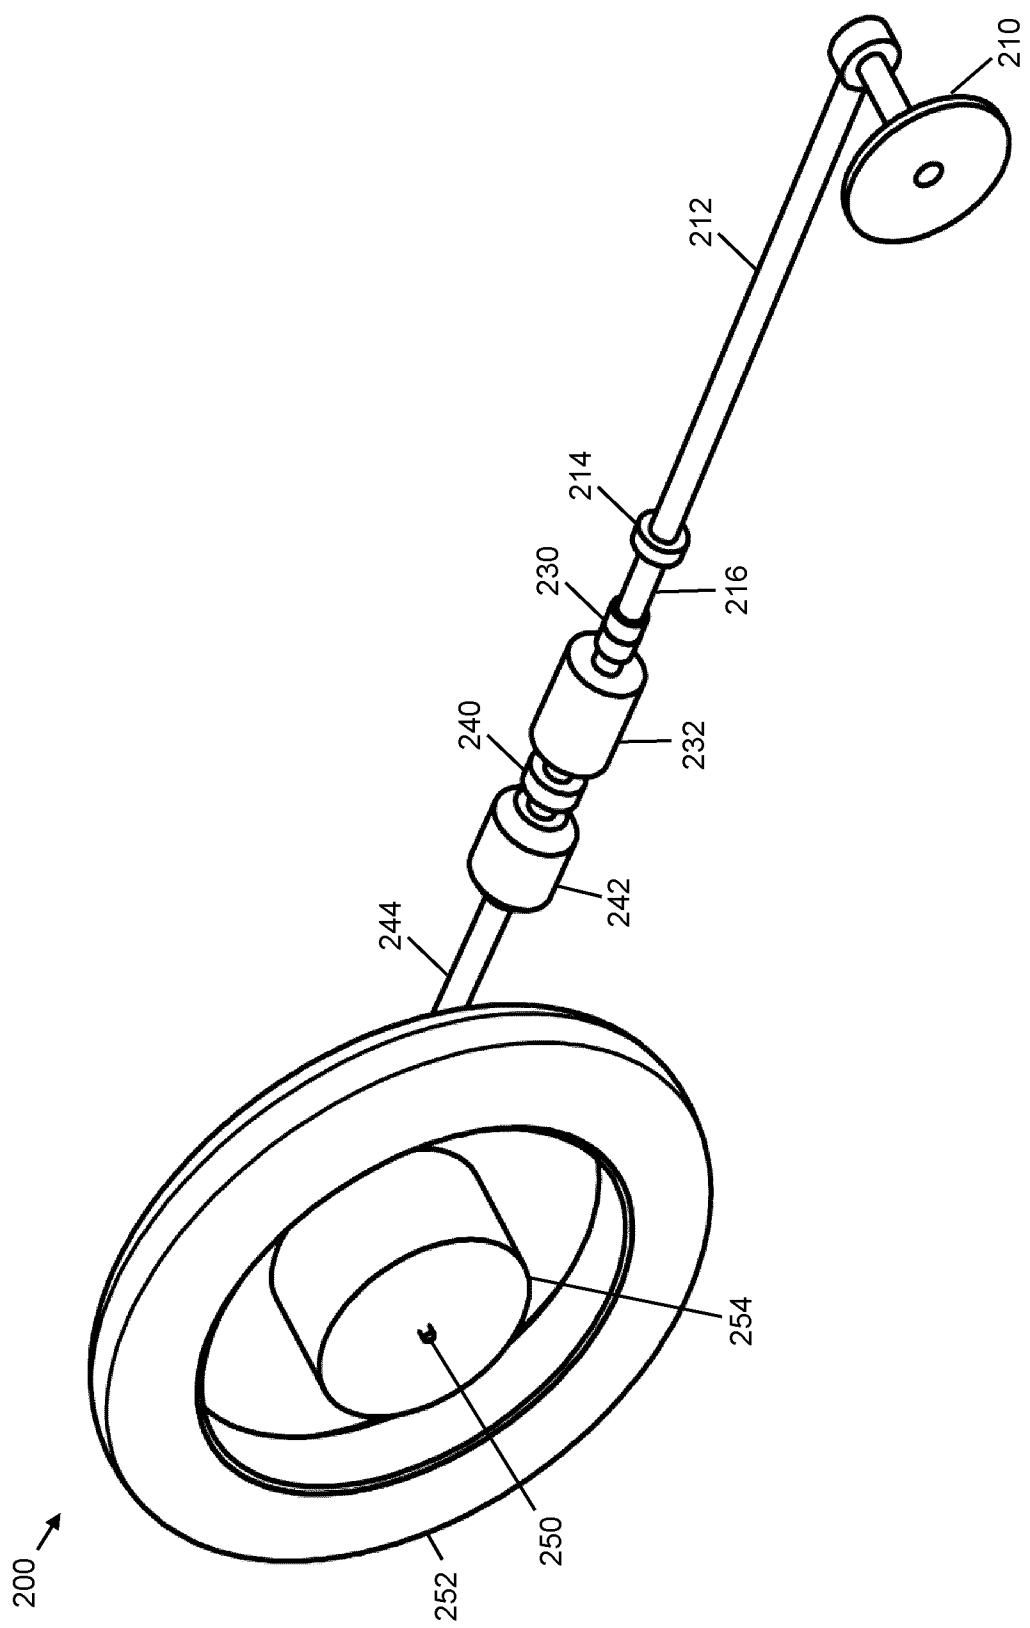


FIG. 10

8/8

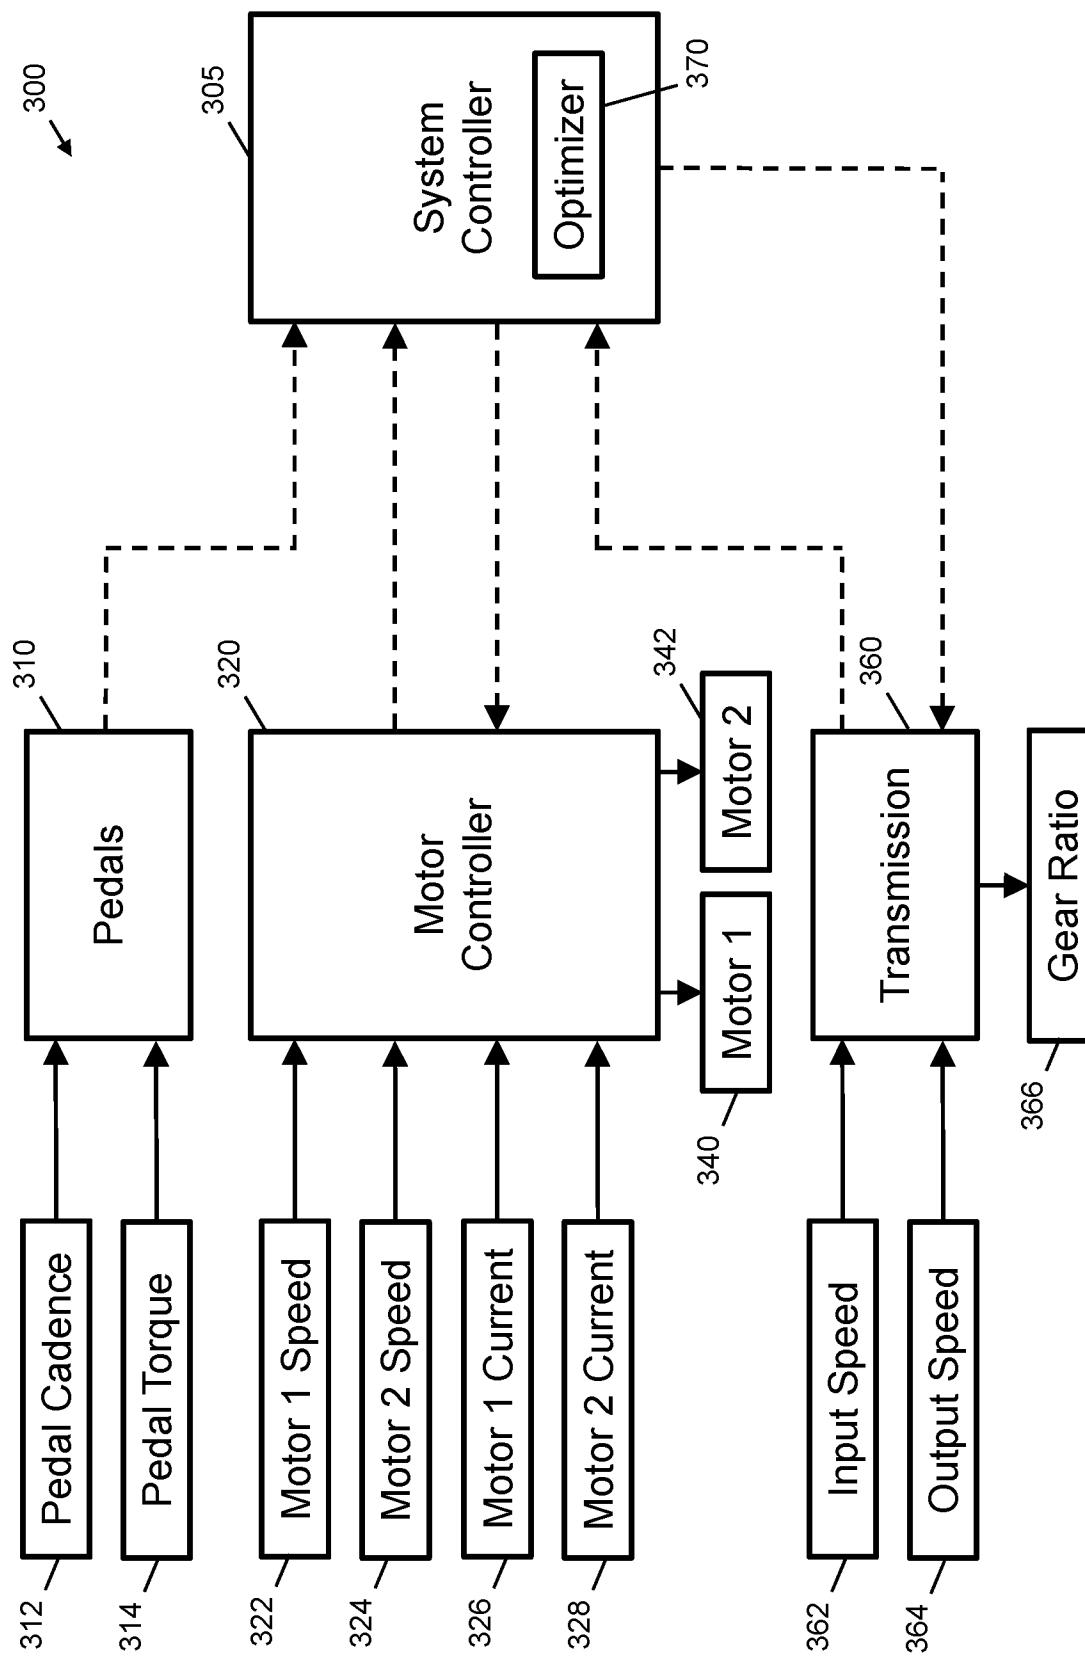


FIG. 11

**INTERNATIONAL SEARCH REPORT**

International application No.  
**PCT/CA2015/051317**

A. CLASSIFICATION OF SUBJECT MATTER  
IPC: **B62M 6/60** (2010.01), **B62M 6/70** (2010.01), **B62M 6/80** (2010.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC : **B62M 6/40** (2010.01), **B62M 6/55** (2010.01), **B62M 6/60** (2010.01), **B62M 6/65** (2010.01), **B62M 6/70** (2010.01), **B62M 6/80** (2010.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)

**DATABASES** : Questel Orbit (FAMPAT), Canadian Patent Database (CPS)

**KEYWORDS** : SECOND, +OTHER, ADDITIONAL, MOTOR

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 2014/0231163 A1 (STIEGER) 21 August 2014 (21-08-2014) * see whole document	1-3, 5-14, 18-20, 22 4, 15-17, 21
Y	US 7,661,501 B1 (PERDUE) 16 February 2010 (16-02-2010) * see whole document	4, 17
Y	US 2011/0001442 A1 (LEE et al.) 6 January 2011 (06-01-2011) * see whole document	15, 16, 21
A	US 7,156,780 B1 (FUCHS et al.) 2 January 2007 (02-01-2007) * see whole document	1-22
A	US 2010/0181130 A1 (CHOU) 22 July 2010 (22-07-2010) * see whole document	1-22

Further documents are listed in the continuation of Box C.

See patent family annex.

* "A" "E" "L" "O" "P"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance earlier application or patent but published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed	"T" "X" "Y" "“&”	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art document member of the same patent family
	Date of the actual completion of the international search 24 February 2016 (24-02-2016)		Date of mailing of the international search report 02 March 2016 (02-03-2016)
	Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 819-953-2476	Authorized officer  Casey Thomas (819) 639-7907	

**INTERNATIONAL SEARCH REPORT**

International application No.  
**PCT/CA2015/051317**

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2013/160477 A1 (DELEVAL) 31 October 2013 (31-10-2013) * see whole document	1-22

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
**PCT/CA2015/051317**

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US2014231163A1	21 August 2014 (21-08-2014)	US2014231163A1 US9079634B2 AT513282A4 AT513282B1 EP2767465A1	21 August 2014 (21-08-2014) 14 July 2015 (14-07-2015) 15 March 2014 (15-03-2014) 15 March 2014 (15-03-2014) 20 August 2014 (20-08-2014)
US7661501B1	16 February 2010 (16-02-2010)	None	
US2011001442A1	06 January 2011 (06-01-2011)	US2011001442A1 CN104067507A EP2812992A1 EP2812992A4 HK1198493A1 IN6878DEN2014A US2012133310A1 US88816613B2 US2012256568A1 US8957610B2 WO2011002482A1 WO2013119367A1 WO2013188009A1	06 January 2011 (06-01-2011) 24 September 2014 (24-09-2014) 17 December 2014 (17-12-2014) 16 December 2015 (16-12-2015) 08 May 2015 (08-05-2015) 22 May 2015 (22-05-2015) 31 May 2012 (31-05-2012) 26 August 2014 (26-08-2014) 11 October 2012 (11-10-2012) 17 February 2015 (17-02-2015) 06 January 2011 (06-01-2011) 15 August 2013 (15-08-2013) 19 December 2013 (19-12-2013)
US7156780B1	02 January 2007 (02-01-2007)	US7156780B1 AT258454T AU3414100A DE50005141D1 EP1165188A2 EP1165188B1 JP2002540868A WO0059773A2 WO0059773A3 WO0059773A9	02 January 2007 (02-01-2007) 15 February 2004 (15-02-2004) 23 October 2000 (23-10-2000) 04 March 2004 (04-03-2004) 02 January 2002 (02-01-2002) 28 January 2004 (28-01-2004) 03 December 2002 (03-12-2002) 12 October 2000 (12-10-2000) 12 July 2001 (12-07-2001) 02 August 2001 (02-08-2001)
US2010181130A1	22 July 2010 (22-07-2010)	None	
WO2013160477A1	31 October 2013 (31-10-2013)	WO2013160477A1 BE1020653A4 CN104520179A EP2841328A1 JP2015514635A TW201404657A US2015122565A1 US9254890B2	31 October 2013 (31-10-2013) 04 February 2014 (04-02-2014) 15 April 2015 (15-04-2015) 04 March 2015 (04-03-2015) 21 May 2015 (21-05-2015) 01 February 2014 (01-02-2014) 07 May 2015 (07-05-2015) 09 February 2016 (09-02-2016)