

(19)



SUOMI - FINLAND

(FI)

PATENTTI- JA REKISTERIHALLITUS

PATENT- OCH REGISTERSTYRELSEN

FINNISH PATENT AND REGISTRATION OFFICE

(10) FI 129342 B

(12) PATENTTIJULKAISU

PATENTSKRIFT

PATENT SPECIFICATION

(45) Patentti myönnetty - Patent beviljats - Patent granted

15.12.2021

(51) Kansainvälinen patenttiluokitus - Internationell patentklassifikation - International patent classification

G01N 21/03 (2006.01)

G02B 17/00 (2006.01)

G01N 21/31 (2006.01)

G01J 3/42 (2006.01)

G01N 29/24 (2006.01)

(21) Patenttihakemus - Patentansökning - Patent application

20155833

(22) Tekemispäivä - Ingivningsdag - Filing date

11.11.2015

(23) Saapumispäivä - Ankomstdag - Reception date

11.11.2015

(43) Tullut julkiseksi - Blivit offentlig - Available to the public

12.05.2017

(73) Haltija - Innehavare - Proprietor

1 • Teknologian tutkimuskeskus VTT Oy, Vuorimiehentie 3, 02150 ESPOO, SUOMI - FINLAND, (FI)

(72) Keksijä - Uppfinnare - Inventor

1 • Kääriäinen, Teemu, ESPOO, SUOMI - FINLAND, (FI)

2 • Manninen, Albert, ESPOO, SUOMI - FINLAND, (FI)

(74) Asiamies - Ombud - Agent

Espatent Oy, Kaivokatu 10 D, 00100 Helsinki

(54) Keksinnön nimitys - Uppfinningens benämning - Title of the invention

Pienitilavuuksinen moniheijastuskenno

Multipass-cell med liten volym

Low volume multipass cell



(56) Viitejulkaisut - Anförda publikationer - References cited

US 5121988 A, JP H0843305 A, JP 2003050202 A, US 2010107733 A1, US 5993549 A, US 5094533 A, US 2002057432 A1, US 2001051118 A1, GB 1168717 A, FR 2767195 A1, DE 10216047 A1, US 6067840 A, ROLLASON, A.J. et al. 'Multipass optical cavity for inverse Compton interactions', Nuclear Instruments and Methods in Physics Research A, 2004, vol. 526, no. 3, pp. 560-571.

(57) Tiivistelmä - Sammandrag - Abstract

Moniheijastuskenno (100), käsittäen rungon (10); ontelon (20) muodostettuna rungon sisään (10); ensimmäisen koveran pallomaisen, toroidisen tai sylinterimäisen peilin (30a) ontelon (20) ensimmäisessä päässä; ja toisen koveran pallomaisen, toroidisen tai sylinterimäisen peilin (30b) ontelon (20) vastakkaisessa päässä. Ensimmäinen peili (30a) ja toinen peili (30b) on järjestetty heijastamaan onteloon ensimmäisen (30a) tai toisen peilin (30b) ulkoreunan vierestä sisääntuleva säde ennaltamäärätyn määrän kertoja siten, että säde etenee merkittävästi yhdessä tasossa ensimmäisen (30a) ja toisen (30b) peilin välissä. Myös optinen detektorijärjestelmä, käsittäen moniheijastuskennon (100); optisen lähteen (110) järjestettynä johtamaan säde onteloon (20); ja detektorelementin (120) järjestettynä vastaanottamaan ontelosta (20) poistuva säde tai järjestettynä vastaanottamaan valon absorption myötä ontelossa (20) syntyvä akustinen signaali.

A multipass cell (100), comprising a body (10); a cavity (20) formed within the body (10); a first spherical or toroidal mirror (30a) at a first end of the cavity (20); and a second spherical, toroidal or cylindrical mirror (30b) at the opposite end of the cavity. The first mirror (30a) and the second mirror (30b) are configured to reflect a beam entering the cavity (20) next to an outer edge of the first (30a) or the second (30b) mirror a predetermined number of times so that the beam propagates substantially in a single plane between the first (30a) and the second (30b) mirror. Also an optical detection system comprising the multipass cell (100); an optical source (110) configured to direct a beam into the cavity (20); and a detector element (120) configured to receive the beam exiting the cavity (20) or configured to receive the acoustic signal generated by light absorption in the cavity (20).

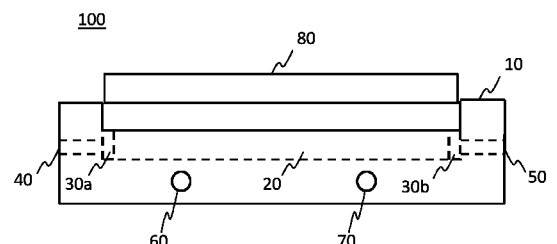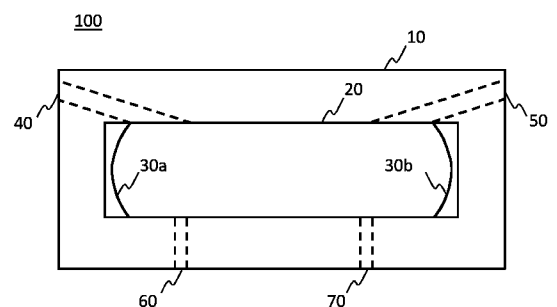

LOW VOLUME MULTIPASS CELL

TECHNICAL FIELD

5 **[0001]** The present application generally relates to optical detection. In particular, but not exclusively, the present application relates to a low volume optical multipass cell for use in optical detection, for example in laser spectroscopy.

BACKGROUND

10

[0002] This section illustrates useful background information without admission of any technique described herein being representative of the state of the art.

[0003] Sensitivity of optical detection, for example in laser spectroscopy, can
15 be improved by increasing the optical pathlength within the sample being analyzed. Such an increase of optical pathlength is conveniently obtained using a multipass cell. Conventional multipass cells, e.g. Herriott cells, are well known. Such conventional multipass cells require a large volume and are accordingly unsuitable for applications with limited space and/or low available sample volume.

20 **[0004]** Previously a multipass cell with circular beam pattern has been disclosed in patent publication US 7,876,443 B. Such a multipass cell can be fitted into a relatively low volume. However, such a cell is difficult to produce even with modest optical surface quality and accordingly such a cell is expensive.

[0005] A circular multipass cell constructed from separate sections has also
25 been previously presented in a journal article "*Versatile multipass cell for laser spectroscopic trace gas analysis*" by Manninen et. al. in Applied Physics B (2012) 109, p. 461-466. However, such a cell, while more cost-effective, requires very tasking alignment of the separate mirrors and problems arise with diffraction on the mirror edges.

30 **[0006]** Furthermore, concave mirrors opposite to one another have been disclosed in patent publication US 5,786,893 for use in focusing and pumping laser light from several sources into a sample region of a Raman spectrometer. US 5121988 discloses a particle flux counter apparatus utilizing light extinction. The apparatus utilizes two oppositely disposed cylindrical mirrors. US 5993549 discloses

an optical beam guidance system equipped with several elements for reflecting laser beam to permit the laser beam to pass several times through a heating zone. DE 10216047 discloses a multiple reflection optical cell, wherein reflection may rely on the intrinsic properties of the cell material or be achieved by coating with aluminum, silver or gold, as appropriate for the wavelength. ROLLASON, A.J. et al "Multipass optica lcavity for inverse Compton interactions", Nuclear Instruments and Methods in Physics Research A, 2004, vol 526, no 3, pp. 560-571 discloses a multipass cell and focusing beam in a focus point that need not be the same point on each trip.

[0007] It is the aim of the current invention to provide a multipass cell that mitigates for example the above problems of the state of the art and/or provides a high optical path to sample volume ratio.

SUMMARY

[0008] Various aspects of examples of the invention are set out in the claims.

[0009] According to a first example aspect of the present invention, there is provided a multipass cell, comprising

a body;

a cavity formed within the body;

a first spherical, toroidal or cylindrical mirror at a first end of the cavity; and

a second spherical, toroidal or cylindrical mirror at the opposite end of the cavity; wherein

the first mirror and the second mirror are configured to reflect a beam entering the cavity next to an outer edge of the first or the second mirror a predetermined number of times so that the beam propagates substantially in a single plane between the first and the second mirror.

[0010] The first mirror and the second mirror may be configured in such a way that prior to the first reflection from the first or second mirror and after the last reflection from the first or second mirror the beam propagates substantially in the same single plane.

[0011] The multipass cell may further comprise at least a first channel configured to allow a beam to enter the cavity.

[0012] The multipass cell may further comprise at least a second channel

configured to allow a beam to exit the cavity.

[0013] The multipass cell may further comprise means for introducing a sample in to the cavity.

[0014] The means for introducing a sample into the cavity may comprise a fluid inlet channel and a fluid outlet.

[0015] The multipass cell may further comprise a cover configured to cover the cavity.

[0016] The means for introducing a sample into the cavity may comprise perforations and/or porous material in the cover.

[0017] According to a second example aspect of the present invention, there is provided an optical detection system, comprising:

the multipass cell of the first aspect of the invention;

an optical source configured to direct a beam into the cavity; and

a detector element configured to receive the beam exiting the cavity or configured to receive the acoustic signal generated by light absorption in the cavity.

[0018] The optical source may comprise a tunable laser source configured to direct a laser beam of adjustable frequency or modulated intensity into the cavity.

[0019] The optical detection system may comprise a laser absorption spectrometer or a photoacoustic detector.

[0020] Different non-binding example aspects and embodiments of the present invention have been illustrated in the foregoing. The embodiments in the foregoing are used merely to explain selected aspects or steps that may be utilized in implementations of the present invention. Some embodiments may be presented only with reference to certain example aspects of the invention. It should be appreciated that corresponding embodiments may apply to other example aspects as well.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] For a more complete understanding of example embodiments of the present invention, reference is now made to the following descriptions taken in connection with the accompanying drawings in which:

[0022] Fig. 1a shows a schematic top view of a multipass cell according to

an embodiment of the invention;

[0023] Fig. 1b shows a schematic side view of a multipass cell according to an embodiment of the invention;

[0024] Fig. 2 shows a schematic principle view of a multipass cell according to an embodiment of the invention;

[0025] Fig. 3 shows a further schematic principle view of a multipass cell according to an embodiment of the invention;

[0026] Fig. 4 shows a further schematic principle view of a multipass cell according to an embodiment of the invention;

[0027] Fig. 5 shows a further schematic principle view of a multipass cell according to an embodiment of the invention;

[0028] Fig. 6 shows a schematic principle view of reflection spot patterns of a multipass cell according to an embodiment of the invention; and

[0029] Fig. 7 shows a schematic top view of an optical detection system according to an embodiment of the invention.

DETAILED DESCRIPTON OF THE DRAWINGS

[0030] The present invention and its potential advantages are understood by referring to Figs. 1 through 7 of the drawings. In this document, like reference signs denote like parts or steps.

[0031] Figs. 1a and 1b show a schematic top and side view, respectively, of a multipass cell 100 according to an embodiment of the invention. The multipass cell 100 comprises a body 10. The body 10 is made of a suitable material, in an embodiment material such as plastic, glass, metal or composite materials or a composition comprising several materials. A cavity 20 is formed in the body 10 of the multipass cell 100. In an embodiment the cavity 20 has a rectangular form. In a further embodiment, the cavity has a form different from a rectangle, for example a cross section of the cavity 20 is in an embodiment circular. In a further embodiment, the cavity is thinner in the middle than at the ends thereof in order to minimize the volume thereof.

[0032] The multipass cell 100 further comprises a first mirror 30a and a second mirror 30b at opposite ends of the cavity 20, i.e. the first mirror 30a at a first end and the second mirror 30b at the other, opposite, end. The first and second

mirrors 30a, 30b comprise concave spherical, toroidal, or cylindrical mirrors. In an embodiment, the mirrors 30a, 30b are positioned parallel to each other and perpendicular to the centerline of the cavity 20. In a further embodiment, the first and/or the second mirror is tilted with respect to the other mirror and/or with respect to a cross-sectional axis of the cavity 20. The mirrors 30a, 30b in an embodiment comprise materials such as dielectric material, aluminium and copper and are in an embodiment coated, e.g. with gold, silver or with a coating applied by thin film technology, to improve reflectivity. The mirrors 30a, 30b are easy to manufacture with high optical quality and cost-effectively.

[0033] The multipass cell 100 further comprises a first channel 40 and a second channel 50 configured to allow electromagnetic radiation, in an embodiment UV, visible or infrared light such as a laser beam, to enter and exit the cavity 20. In an embodiment, the first 40 and second 50 channel are positioned on the same side of the cavity 20 as shown in Fig. 1a. In a further embodiment, the first 40 and second 50 channel are positioned on opposite corners of the cavity 20. In a still further embodiment, the first 40 and second 50 channel are positioned at the same end of the cavity 20 on opposite sides thereof. In a yet further embodiment, the multipass cell 100 comprises only a single channel configured to allow light to enter and exit the cavity 20. In a yet further embodiment, the multipass cell 100 comprises a channel on each corner of the cavity. The first channel 40 is positioned in such a way that the light enters the cavity next to the outer edge of the first 30a or second 30b mirror, i.e. a beam entering the cavity passes close to the edge of the first 30a or second 30b mirror. The exact distance of the beam entering the cavity 20 from the edge of the mirror 30a, 30b depends on the angle in which the beam is to enter the cavity 20 and on the desired position at which the beam hits the opposite mirror 30a, 30b.

[0034] The multipass cell 100 further comprises means for introducing a sample into the cavity 20. In an example embodiment, the means comprise a fluid inlet 60 and a fluid outlet 70 configured to convey a fluid sample into and out of the cavity 20. In a further embodiment, the multipass cell 100 comprises a cover, or a lid, 80 configured to cover the cavity 20 and in an embodiment to seal the cavity 20 in fluid tight manner. In a further example embodiment, the cover 80 is porous and/or perforated in order to allow fluid, for example gas, to enter and exit the cavity 20.

[0035] The first 30a and second 30b mirror and the first channel 40 are

aligned in such a way that a beam, such as a beam of infrared laser, entering the cavity through the first channel 40 next to the outer edge of the first mirror 30a hits the second mirror 30b next to the opposite edge thereof. In an embodiment, the first 30a and the second 30b mirror are positioned at a distance corresponding to twice the radius of curvature of the first 30a and the second 30b mirror in such way that the beam is focused between the first 30a and the second 30b mirror. The first 30a and second 30b mirror are configured to reflect the beam entering the cavity next to an outer edge of the first 30a or the second 30b mirror a predetermined number of times so that the beam propagates substantially in a single plane between the first and the second mirror 30a, 30b and forms a substantially linear reflection spot pattern on the first 30a and the second 30b mirror. In an embodiment, the beam propagates in the cavity 20 prior to the first reflection from the first or second mirror 30a, 30b and after the last reflection from the first or second mirror 30a, 30b substantially in the same single plane. After several reflections, the beam exits the cavity next to the outer edge of the first 30a or the second 30b mirror depending on the position of the second channel 50. The number of reflections and the exit position depends on the alignment of the mirrors and the optical parameters thereof. In the following the propagation of a beam in the multipass cell 100 is explained further with reference to Figs 2 to 6.

[0036] Fig. 2 shows a schematic principle view of a multipass cell according to an embodiment of the invention. A beam 200 enters the cavity 20 just outside the edge of the first mirror 30a and hits the opposite edge of the second mirror 30b. The first 30a and second 30b mirror are configured to reflect the beam entering the cavity next to an outer edge of the first 30a or the second 30b mirror a predetermined number of times so that the beam 200 propagates substantially in a single plane between the first and the second mirror 30a, 30b and forms a substantially linear reflection spot pattern on the first 30a and the second 30b mirror. After several reflections, the beam 200 exits the cavity just outside the edge of the second mirror 30b on the same side of the cavity from which it entered.

[0037] Fig. 3 shows a further schematic principle view of a multipass cell according to an embodiment of the invention. A beam 300 enters the cavity 20 just outside the edge of the first mirror 30a and hits the opposite edge of the second mirror 30b. The first 30a and second 30b mirror are configured to reflect the beam entering the cavity next to an outer edge of the first 30a or the second 30b mirror a

predetermined number of times so that the beam 300 propagates substantially in a single plane between the first and the second mirror 30a, 30b and forms a substantially linear reflection spot pattern on the first 30a and the second 30b mirror. After several reflections, the beam 300 exits the cavity just outside the edge of the second mirror 30b on the opposite side of the cavity from which it entered.

[0038] Fig. 4 shows a further schematic principle view of a multipass cell according to an embodiment of the invention. A beam 400 enters the cavity 20 just outside the edge of the first mirror 30a and hits the opposite edge of the second mirror 30b. The first 30a and second 30b mirror are configured to reflect the beam entering the cavity next to an outer edge of the first 30a or the second 30b mirror a predetermined number of times so that the beam 400 propagates substantially in a single plane between the first and the second mirror 30a, 30b and forms a substantially linear reflection spot pattern on the first 30a and the second 30b mirror. After several reflections, the beam 400 exits the cavity just outside the edge of the first mirror 30a on the opposite side of the cavity from which it entered.

[0039] Fig. 5 shows a further schematic principle view of a multipass cell according to an embodiment of the invention. A beam 500 enters the cavity 20 just outside the edge of the first mirror 30a and hits the opposite edge of the second mirror 30b. The first 30a and second 30b mirror are configured to reflect the beam entering the cavity next to an outer edge of the first 30a or the second 30b mirror a predetermined number of times so that the beam 500 propagates substantially in a single plane between the first and the second mirror 30a, 30b and forms a substantially linear reflection spot pattern on the first 30a and the second 30b mirror. After several reflections, the beam 500 exits the cavity just outside the edge of the first mirror 30a on the same side of the cavity from which it entered. In an embodiment, the multipass cell 100 further comprises an optical element 90, such as a beamsplitter or a mirror, configured to reflect the light exiting the cavity 20 into a desired direction, for example away from the source of the beam 500 towards e.g. a detector element.

[0040] Fig. 6 shows a schematic principle view of reflection spot patterns of a multipass cell according to an embodiment of the invention. Fig 6 shows only the first mirror 30a with two example forms thereof. The first 30a and second 30b mirror are configured to reflect the beam entering the cavity next to an outer edge of the first 30a or the second 30b mirror a predetermined number of times so that the beam

propagates substantially in a single plane between the first and the second mirror 30a, 30b and forms a substantially linear reflection spot pattern on the first 30a and the second 30b mirror. Accordingly, the cavity 20 need not have a large height, i.e. volume, as the beam propagation does not require height in comparison with traditional multipass cells with an elliptic reflection spot pattern.

[0041] The number of reflections, and accordingly the optical pathlength attained, depends on the alignment of the mirrors 30a, 30b, the optical parameters of the mirrors 30a, 30b and the size of the cavity 20, as well as the entry angle of the beam 200. The number of reflections is accordingly chosen in accordance with the use of the multipass cell, i.e. the needed pathlength and the size of the cavity required. The minimum size of the cavity is somewhat limited by diffraction depending on the wavelength of the used radiation. An example minimum length of the cavity 20 is for example with mid-infrared radiation, i.e. wavelengths of about 3 to 5 μm , approximately from 10 μm to 100 μm . In an embodiment, the minimum height of the cavity is in the region of a few millimeters, for example 2 millimeters.

[0042] Fig. 7 shows a schematic top view of an optical detection system 700 according to an embodiment of the invention. In embodiment, the optical detection system is a laser spectrometer. In a further embodiment the optical detection system is a laser absorption spectrometer. In a still further embodiment, the optical detection system is a photoacoustic detector. The optical detection system 700 comprises a multipass cell 100 as hereinbefore described with reference to Figs. 1a to 6. The optical detection system 700 further comprises a source 110, for example a laser source configured to direct a beam into the cavity 20. In an embodiment, the source 110 comprises a tunable laser source, for example a mid-range infrared source, configured to direct a laser beam with adjustable frequency into the cavity 20 via the channel 40. The laser source 110 is of a conventional type. In a further embodiment, the laser source comprises a light emitting diode instead of a laser source. In a still further embodiment, the optical detection system 700 comprises several sources configured to direct a beam into the cavity 20 via a single or several channels.

[0043] The optical detection system 700 further comprises a detector element 120 configured to receive the beam exiting the cavity 20 via the channel 50. The detector element 120 comprises in an embodiment photodetectors and reference photodetectors and an interferometer. The detector element 120 is of a conventional type. In a further embodiment, the source 110 is configured to function

as the detector element as well using e.g. so called self-mixing technique. In a still further embodiment the detector element 120 comprises an acoustic detection arrangement for photoacoustic detection configured to receive the acoustic signal generated by light absorption in the cavity 20.

5 **[0044]** The optical detection system 700 with the multipass cell 100 according to the invention is used for example in absorption laser spectrometry for detecting isotopes in a gas. In such an application a small sample volume with large pathlength is required with small interferences. In a further example, the optical detection system 700 with the multipass cell 100 is used in detecting temporal
10 variations of concentration in which large sample exchange rates possible due to the small volume of the cavity 20 are required. In a still further example, the absorption laser spectrometry 700 with the multipass cell 100 is used in studying sample containing only a few molecules of the substance to be detected, which detection is possible due to the small amount of sample required as the volume of the cavity 20
15 is small and the pathlength large. In a yet further example, the multipass cell 100 according to the invention is scaled in such a way that it is installed in a handheld device, such as a mobile communications device, which is possible due to the small volume of the cavity 20.

20 **[0045]** Without in any way limiting the scope, interpretation, or application of the claims appearing below, a technical effect of one or more of the example embodiments disclosed herein is a simple alignment of the mirrors, i.e. the adjustment of distance and tilt thereof is straightforward. Another technical effect of one or more of the example embodiments disclosed herein is a robust multipass cell not sensitive to slight misalignment. Another technical effect of one or more of the
25 example embodiments disclosed herein is a cost-effective multipass cell with components being easy to manufacture with high optical quality. A still further technical effect of one or more of the example embodiments disclosed herein is scalability, i.e. the provision of large pathlength in small volume.

30 **[0046]** Although various aspects of the invention are set out in the independent claims, other aspects of the invention comprise other combinations of features from the described embodiments and/or the dependent claims with the features of the independent claims, and not solely the combinations explicitly set out in the claims.

[0047] It is also noted herein that while the foregoing describes example

embodiments of the invention, these descriptions should not be viewed in a limiting sense. Rather, there are several variations and modifications which may be made without departing from the scope of the present invention as defined in the appended claims.

CLAIMS

1. A multipass cell (100), comprising

a body (10);

a cavity (20) formed within the body (10);

at least a first channel (40) configured to allow a beam to enter the cavity (20);

a first concave spherical or toroidal mirror (30a) at a first end of the cavity (20); and

a second concave spherical or toroidal mirror (30b) at the opposite end of the cavity;

wherein the first mirror (30a) and the second mirror (30b) are configured to reflect a beam entering the cavity just outside an outer edge of the first (30a) or the second (30b) mirror a predetermined number of times so that the beam propagates substantially in a single plane between the first (30a) and the second (30b) mirror forming a substantially linear reflection spot pattern on the first (30a) and the second (30b) mirrors; **characterized** in that the first mirror (30a) and the second mirror (30b) are positioned at a distance corresponding to twice the radius of curvature of the first (30a) and the second (30b) mirrors in such a way that the beam is focused between the first (30a) and the second (30b) mirror.

2. The multipass cell (100) of claim 1, wherein the first mirror (30a) and the second mirror (30b) are configured in such a way that prior to the first reflection from the first (30a) or second (30b) mirror and after the last reflection from the first (30a) or second (30b) mirror the beam propagates substantially in the same single plane.

3. The multipass cell (100) of claim 1 or 2, further comprising at least a second channel (50) configured to allow a beam to exit the cavity (20).

4. The multipass cell (100) of any preceding claim, further comprising means for introducing a sample in to the cavity (20).

5. The multipass cell (100) of claim 4, wherein the means for introducing a sample into the cavity (20) comprise a fluid inlet (60) channel and a fluid outlet (70).

6. The multipass cell (100) of any preceding claim, further comprising a cover (80) configured to cover the cavity (20).

5 7. The multipass cell (100) of claim 6, wherein the means for introducing a sample into the cavity (20) comprise perforations and/or porous material in the cover (80).

10 8. An optical detection system, comprising:
the multipass cell of any preceding claim;
an optical source (110) configured to direct a beam into the cavity (20); and
a detector element (120) configured to receive the beam exiting the cavity (20) or
configured to receive the acoustic signal generated by light absorption in the
cavity (20).

15

9. The optical detection system of claim 8, wherein the optical source comprises a tunable laser source configured to direct a laser beam of adjustable frequency or modulated intensity into the cavity (20).

20 10. The optical detection system of claim 8 or 9, wherein the optical detection system comprises a laser absorption spectrometer or a photoacoustic detector.

Patenttivaatimukset

1. Moniheijastuskenno (100), käsittäen

rungon (10);

ontelon (20) muodostettuna rungon sisään (10);

ainakin ensimmäisen kanavan (40) järjestettynä mahdollistamaan säteen sisääntulo onteloon (20);

ensimmäisen koveran pallomaisen tai toroidisen peilin (30a) ontelon (20) ensimmäisessä päässä; ja

toisen koveran pallomaisen tai toroidisen peilin (30a) ontelon (20) vastakkaisessa päässä;

missä ensimmäinen peili (30a) ja toinen peili (30b) on järjestetty

heijastamaan onteloon juuri ensimmäisen (30a) tai toisen peilin (30b) ulkoreunan ulkopuolelta sisääntuleva säde ennaltamäärätyn määrän kertoja siten, että säde

etenee merkittävästi yhdessä tasossa ensimmäisen (30a) ja toisen (30b) peilin välissä muodostaen merkittävästi lineaarisen heijastuspistekuvion

ensimmäisessä (30a) ja toisessa (30b) peilissä; **tunnettu** siitä, että ensimmäinen peili (30a) ja toinen peili (30b) on sijoitettu toisistaan etäisyydelle, joka vastaa kaksinkertaisesti ensimmäisen (30a) ja toisen (30b) peilin kaarevuussädettä

siten, että säde fokusoituu ensimmäisen (30a) ja toisen (30b) peilin välille.

2. Moniheijastuskenno (100) vaatimuksen 1 mukaisesti, missä ensimmäinen peili (30a) ja toinen peili (30b) on järjestetty siten, että ennen ensimmäistä heijastusta ensimmäisestä (30a) tai toisesta (30b) peilistä ja viimeisen heijastuksen ensimmäisestä (30a) tai toisesta (30b) peilistä jälkeen säde etenee merkittävästi samassa yhdessä tasossa.

3. Moniheijastuskenno (100) vaatimuksen 1 tai 2 mukaisesti, edelleen käsittäen ainakin toisen kanavan (50) järjestettynä mahdollistamaan säteen poistuminen ontelosta (20).

4. Moniheijastuskenno (100) minkä tahansa aiemman vaatimuksen mukaisesti, edelleen käsittäen välineet näytteen lisäämiseksi onteloon (20).

5. Moniheijastuskenno (100) vaatimuksen 4 mukaisesti, missä välineet näytteen lisäämiseksi onteloon (20) käsittävät fluidin sisääntulokanavan (60) ja fluidiulostulon (70).
- 5 6. Moniheijastuskenno (100) minkä tahansa aiemman vaatimuksen mukaisesti, edelleen käsittäen kannen (80) järjestettynä peittämään ontelo (20).
7. Moniheijastuskenno (100) vaatimuksen 6 mukaisesti, missä välineet näytteen lisäämiseksi onteloon (20) käsittävät rei'ityksiä ja/tai huokoista materiaalia
- 10 kannessa (80).
8. Optinen detektorijärjestelmä, käsittäen:
moniheijastuskennon (100) minkä tahansa aiemman vaatimuksen mukaisesti;
optisen lähteen (110) järjestettynä suuntaamaan säde onteloon (20) ja
- 15 detektorielementin (120) järjestettynä vastaanottamaan ontelosta (20) poistuva säde tai järjestettynä vastaanottamaan valon absorption myötä ontelossa (20) syntyvä akustinen signaali.
9. Optinen detektorijärjestelmä vaatimuksen 8 mukaisesti, missä optinen lähde
- 20 käsittää säädettävän laserlähteen järjestettynä suuntaamaan säädettävätaajuksinen tai moduloitavan intensiteetin lasersäde onteloon (20).
10. Optinen detektorijärjestelmä vaatimuksen 8 tai 9 mukaisesti, missä optinen detektorijärjestelmä käsittää laserabsorptiospektrometrin tai fotoakustisen
- 25 detektorin.

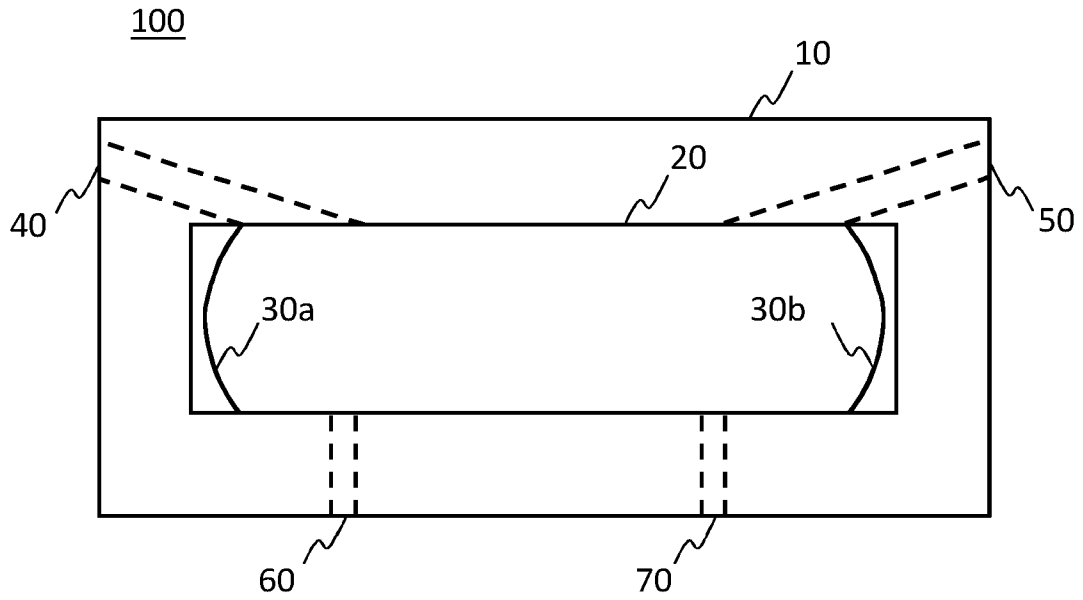


Fig. 1a

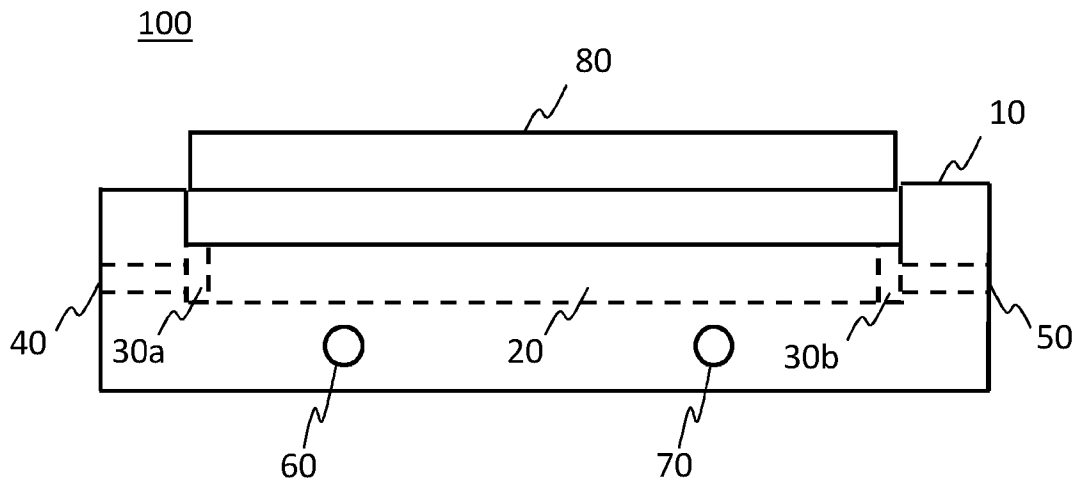


Fig. 1b

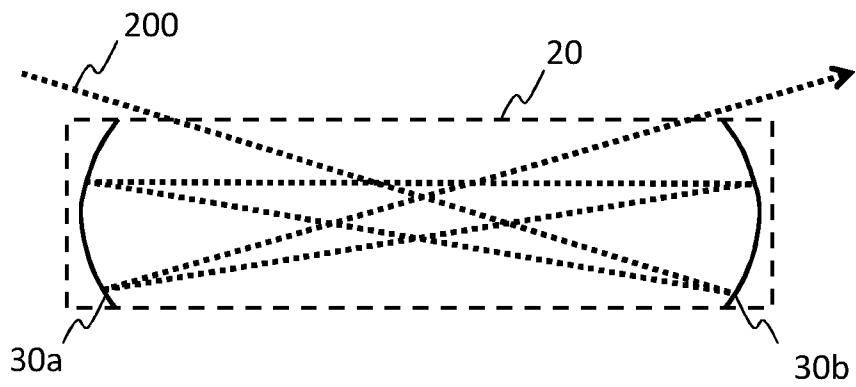


Fig. 2

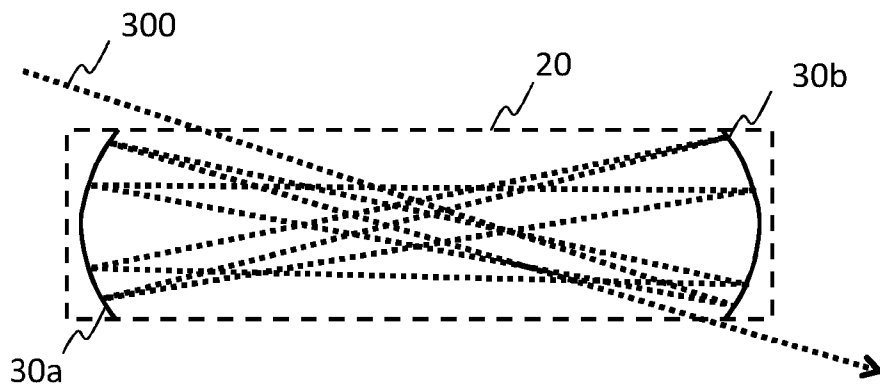


Fig. 3

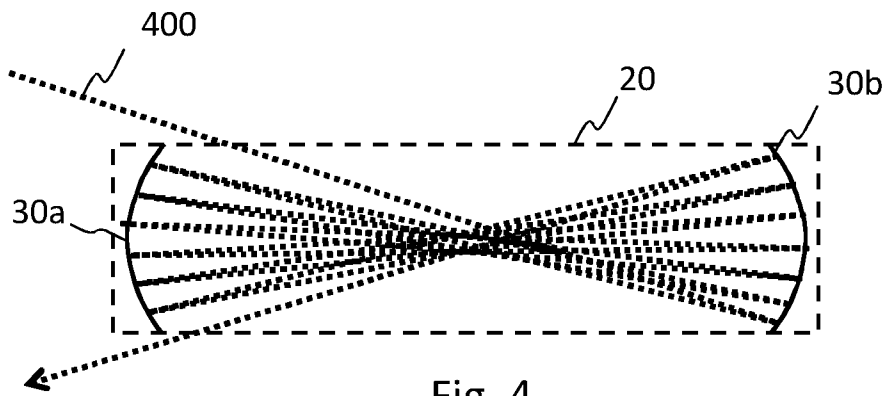


Fig. 4

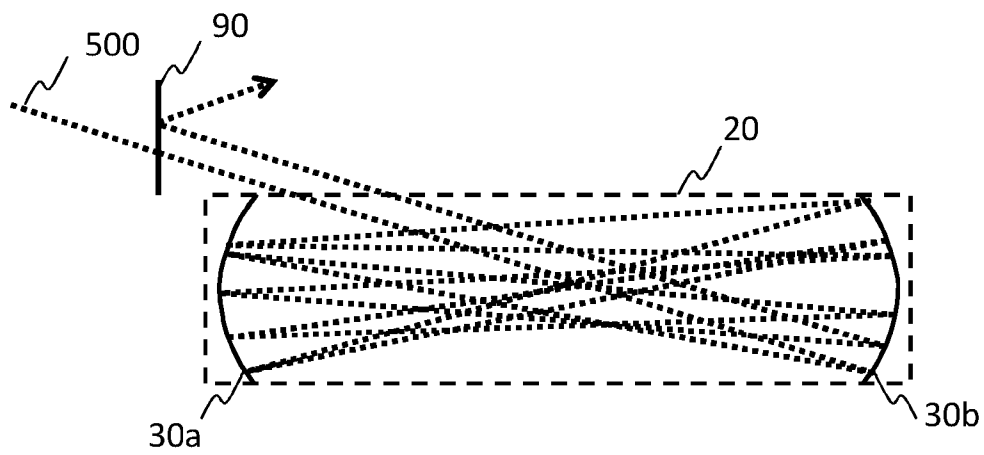


Fig. 5

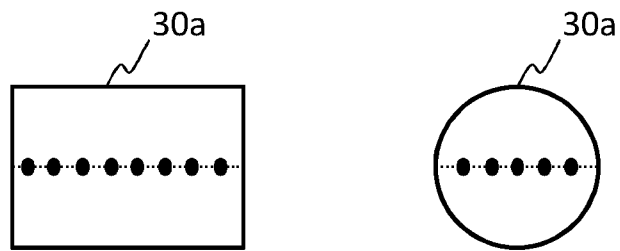


Fig. 6

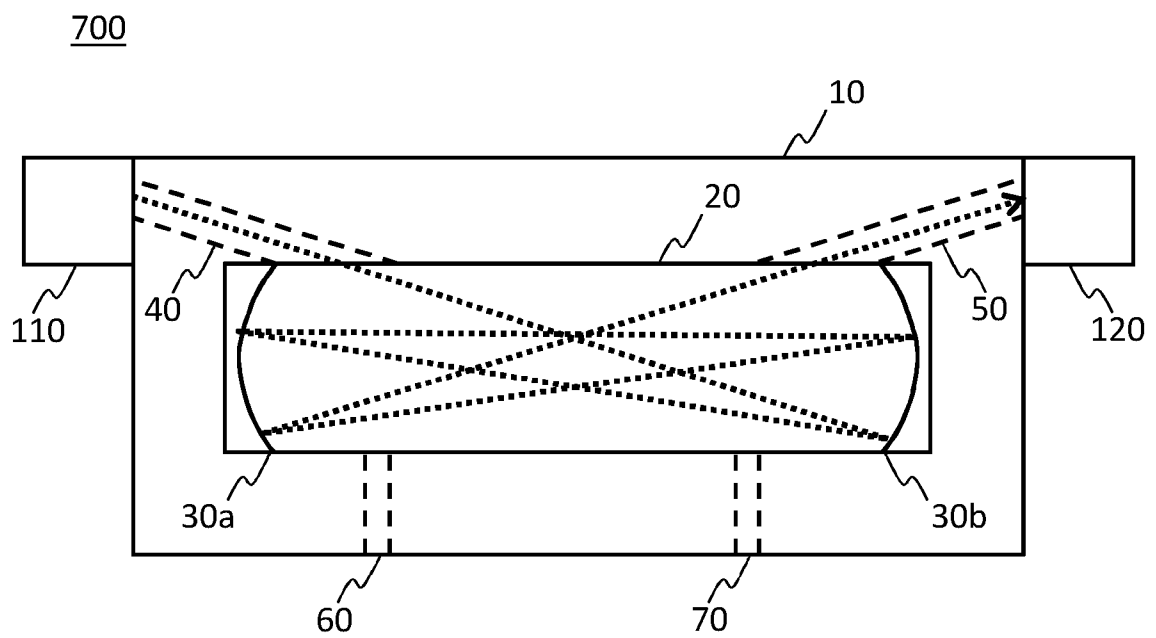


Fig. 7