




(86) Date de dépôt PCT/PCT Filing Date: 2008/11/24
 (87) Date publication PCT/PCT Publication Date: 2009/06/11
 (45) Date de délivrance/Issue Date: 2013/02/19
 (85) Entrée phase nationale/National Entry: 2010/06/02
 (86) N° demande PCT/PCT Application No.: US 2008/084457
 (87) N° publication PCT/PCT Publication No.: 2009/073422
 (30) Priorités/Priorities: 2007/12/05 (US60/992,340);
 2008/11/18 (US12/272,953)

(51) Cl.Int./Int.Cl. *B01D 53/62* (2006.01),
B01D 53/84 (2006.01)
 (72) Inventeurs/Inventors:
 GAL, ELI, US;
 BADE, OTTO M., NO;
 JAYAWEERA, INDIRA, US;
 KRISHNAN, GOPALA, US
 (73) Propriétaire/Owner:
 ALSTOM TECHNOLOGY LTD, CH
 (74) Agent: SMART & BIGGAR

(54) Titre : SYSTEME ET PROCEDE A BASE D'AMMONIAC REFROIDI ACTIVE PAR UN PROMOTEUR D'ELIMINATION DE CO₂ D'UN COURANT DE GAZ DE COMBUSTION
 (54) Title: PROMOTER ENHANCED CHILLED AMMONIA BASED SYSTEM AND METHOD FOR REMOVAL OF CO₂ FROM FLUE GAS STREAM

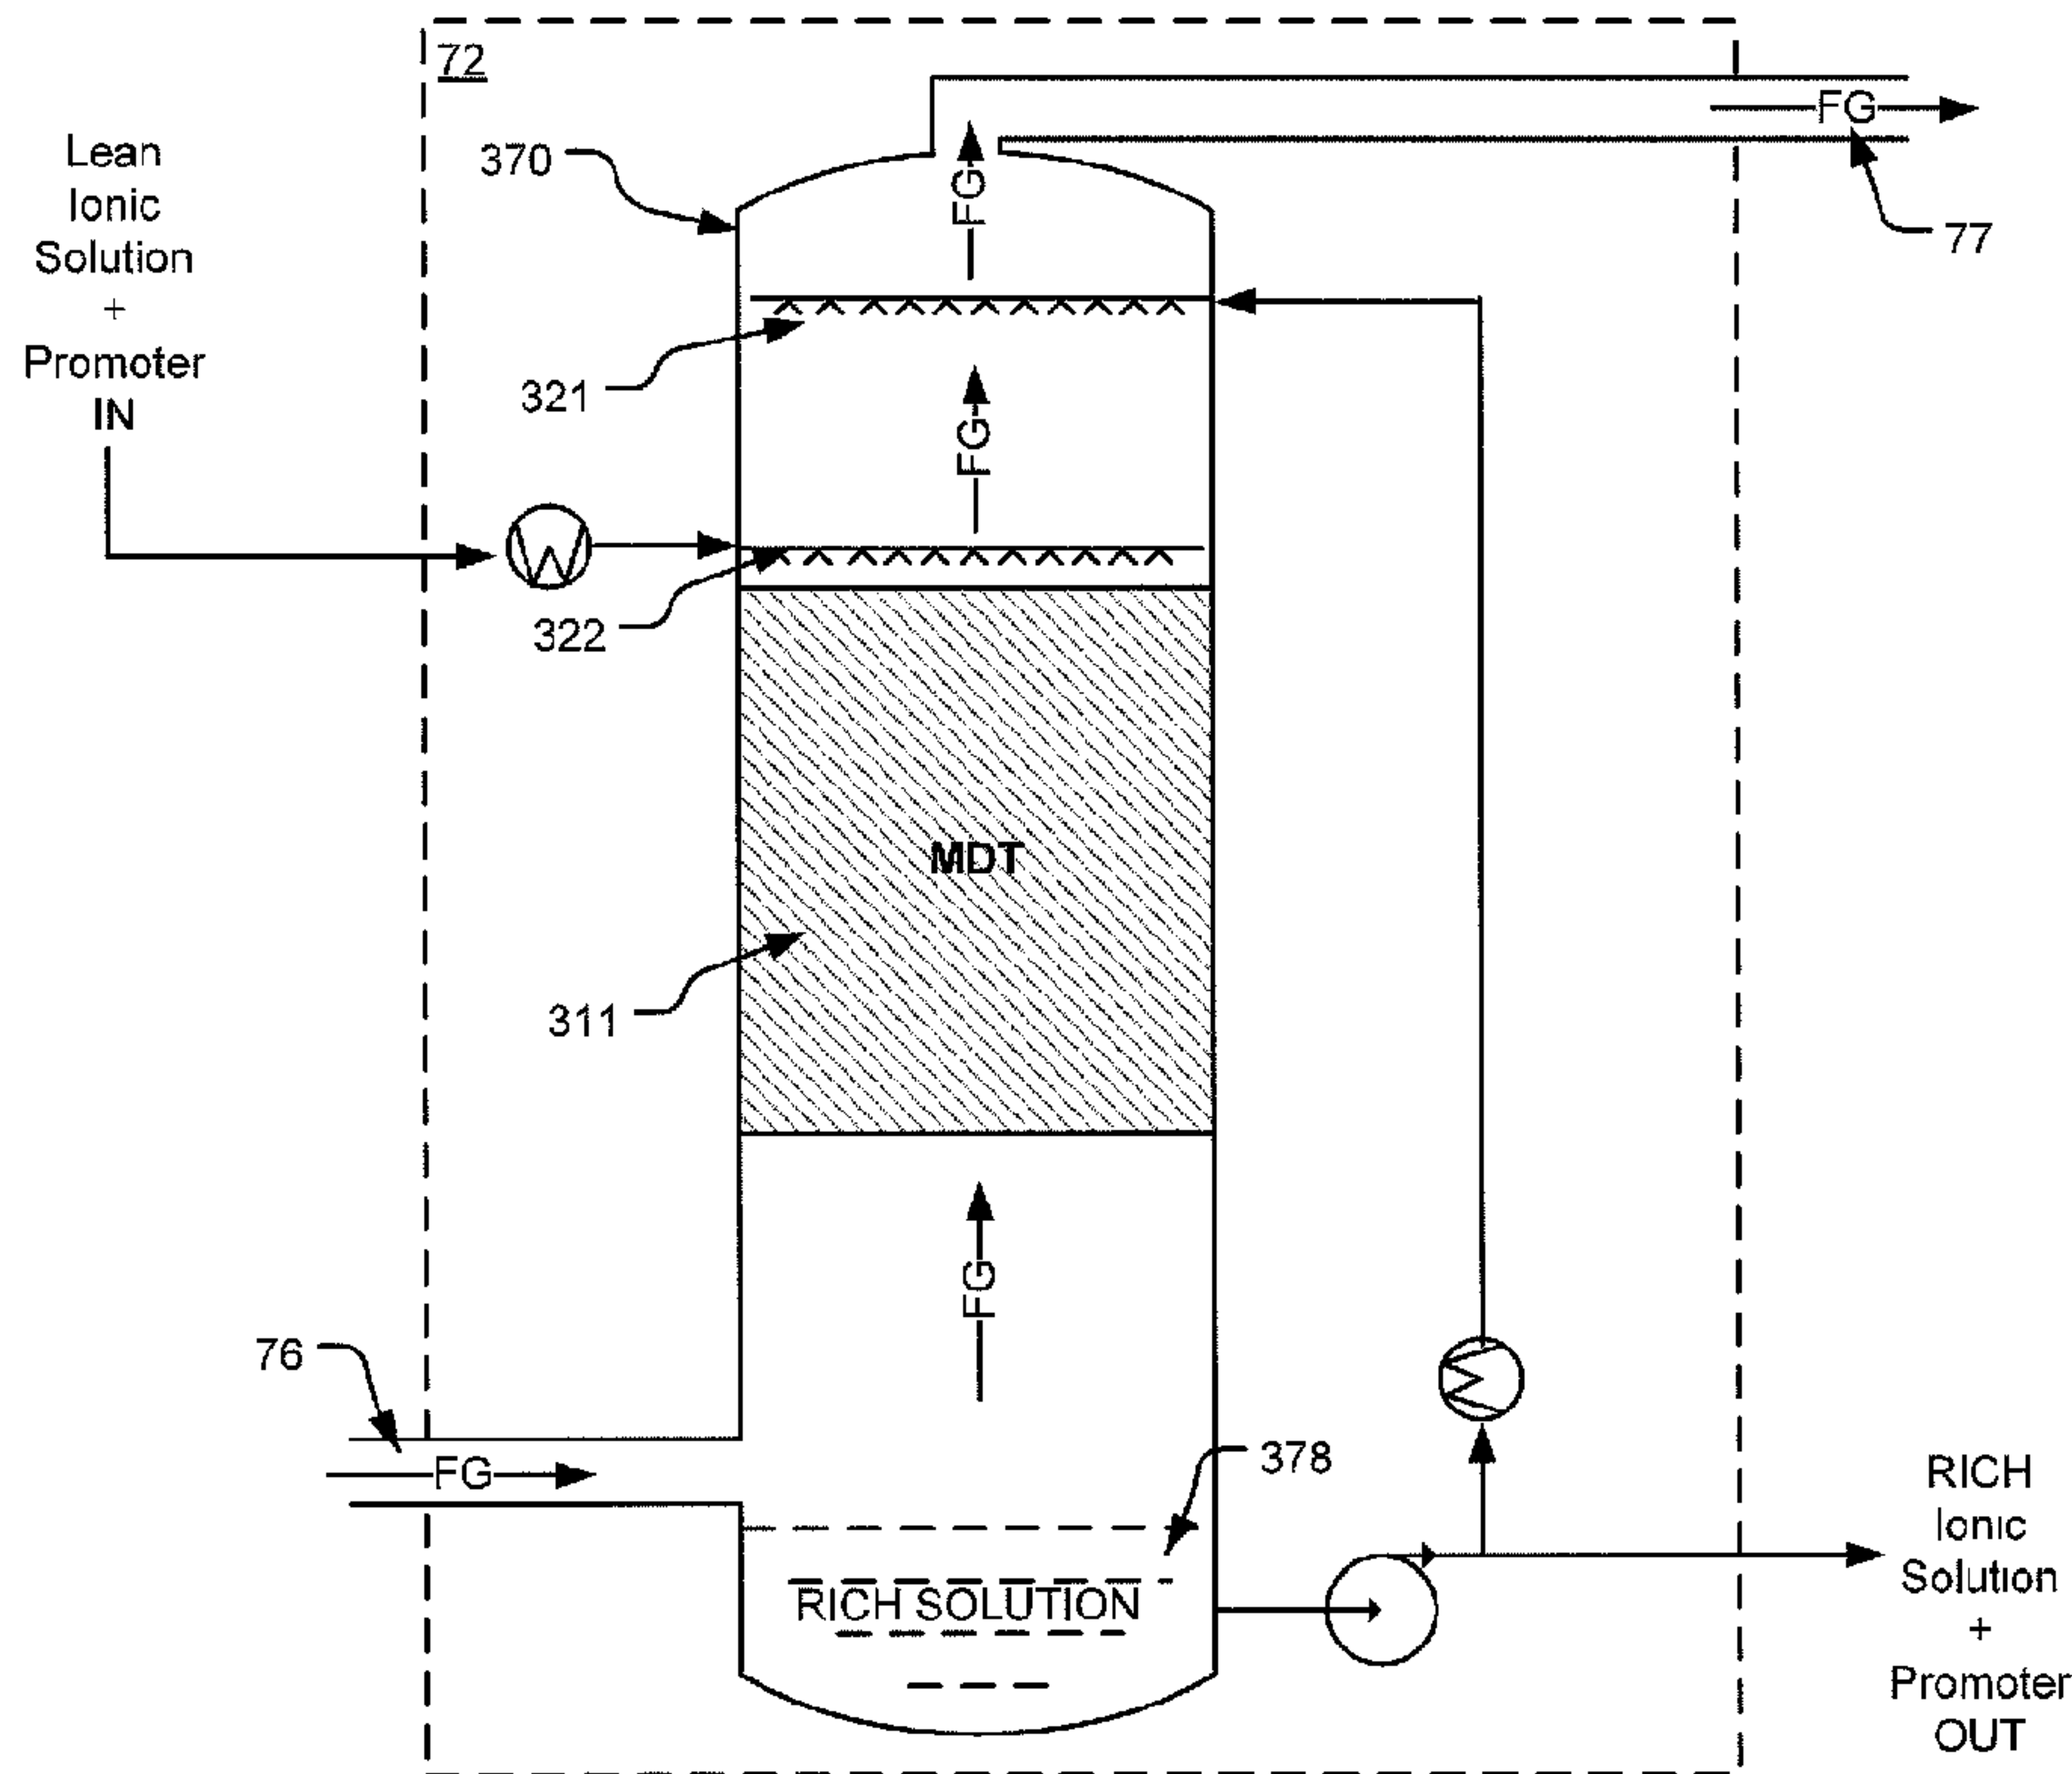

(57) Abrégé/Abstract:

A chilled ammonia based CO₂ capture system and method is provided. A promoter is used to help accelerate certain capture reactions that occur substantially coincident to and/or as a result of contacting a chilled ammonia based ionic solution with a gas stream that contains CO₂. The promoter can be piperazine or an enzyme system.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
11 June 2009 (11.06.2009)

PCT

(10) International Publication Number
WO 2009/073422 A1(51) International Patent Classification:
B01D 53/62 (2006.01) *B01D 53/84* (2006.01)(74) Agents: **BIDDLE, Robert P.** et al.; ALSTOM Power Inc.,
2000 Day Hill Road, Windsor, Connecticut 06095 (US).(21) International Application Number:
PCT/US2008/084457(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(22) International Filing Date:
24 November 2008 (24.11.2008)

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:
60/992,340 5 December 2007 (05.12.2007) US
12/272,953 18 November 2008 (18.11.2008) US(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).(71) Applicant (*for all designated States except US*): **ALSTOM TECHNOLOGY LTD** [CH/CH]; Brown Boveri Strasse 7, 5400 Baden (CH).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **GAL, Eli** [US/US]; 10245 Parkwood Drive, #8, Cupertino, California 95014 (US).**Published:**

— with international search report

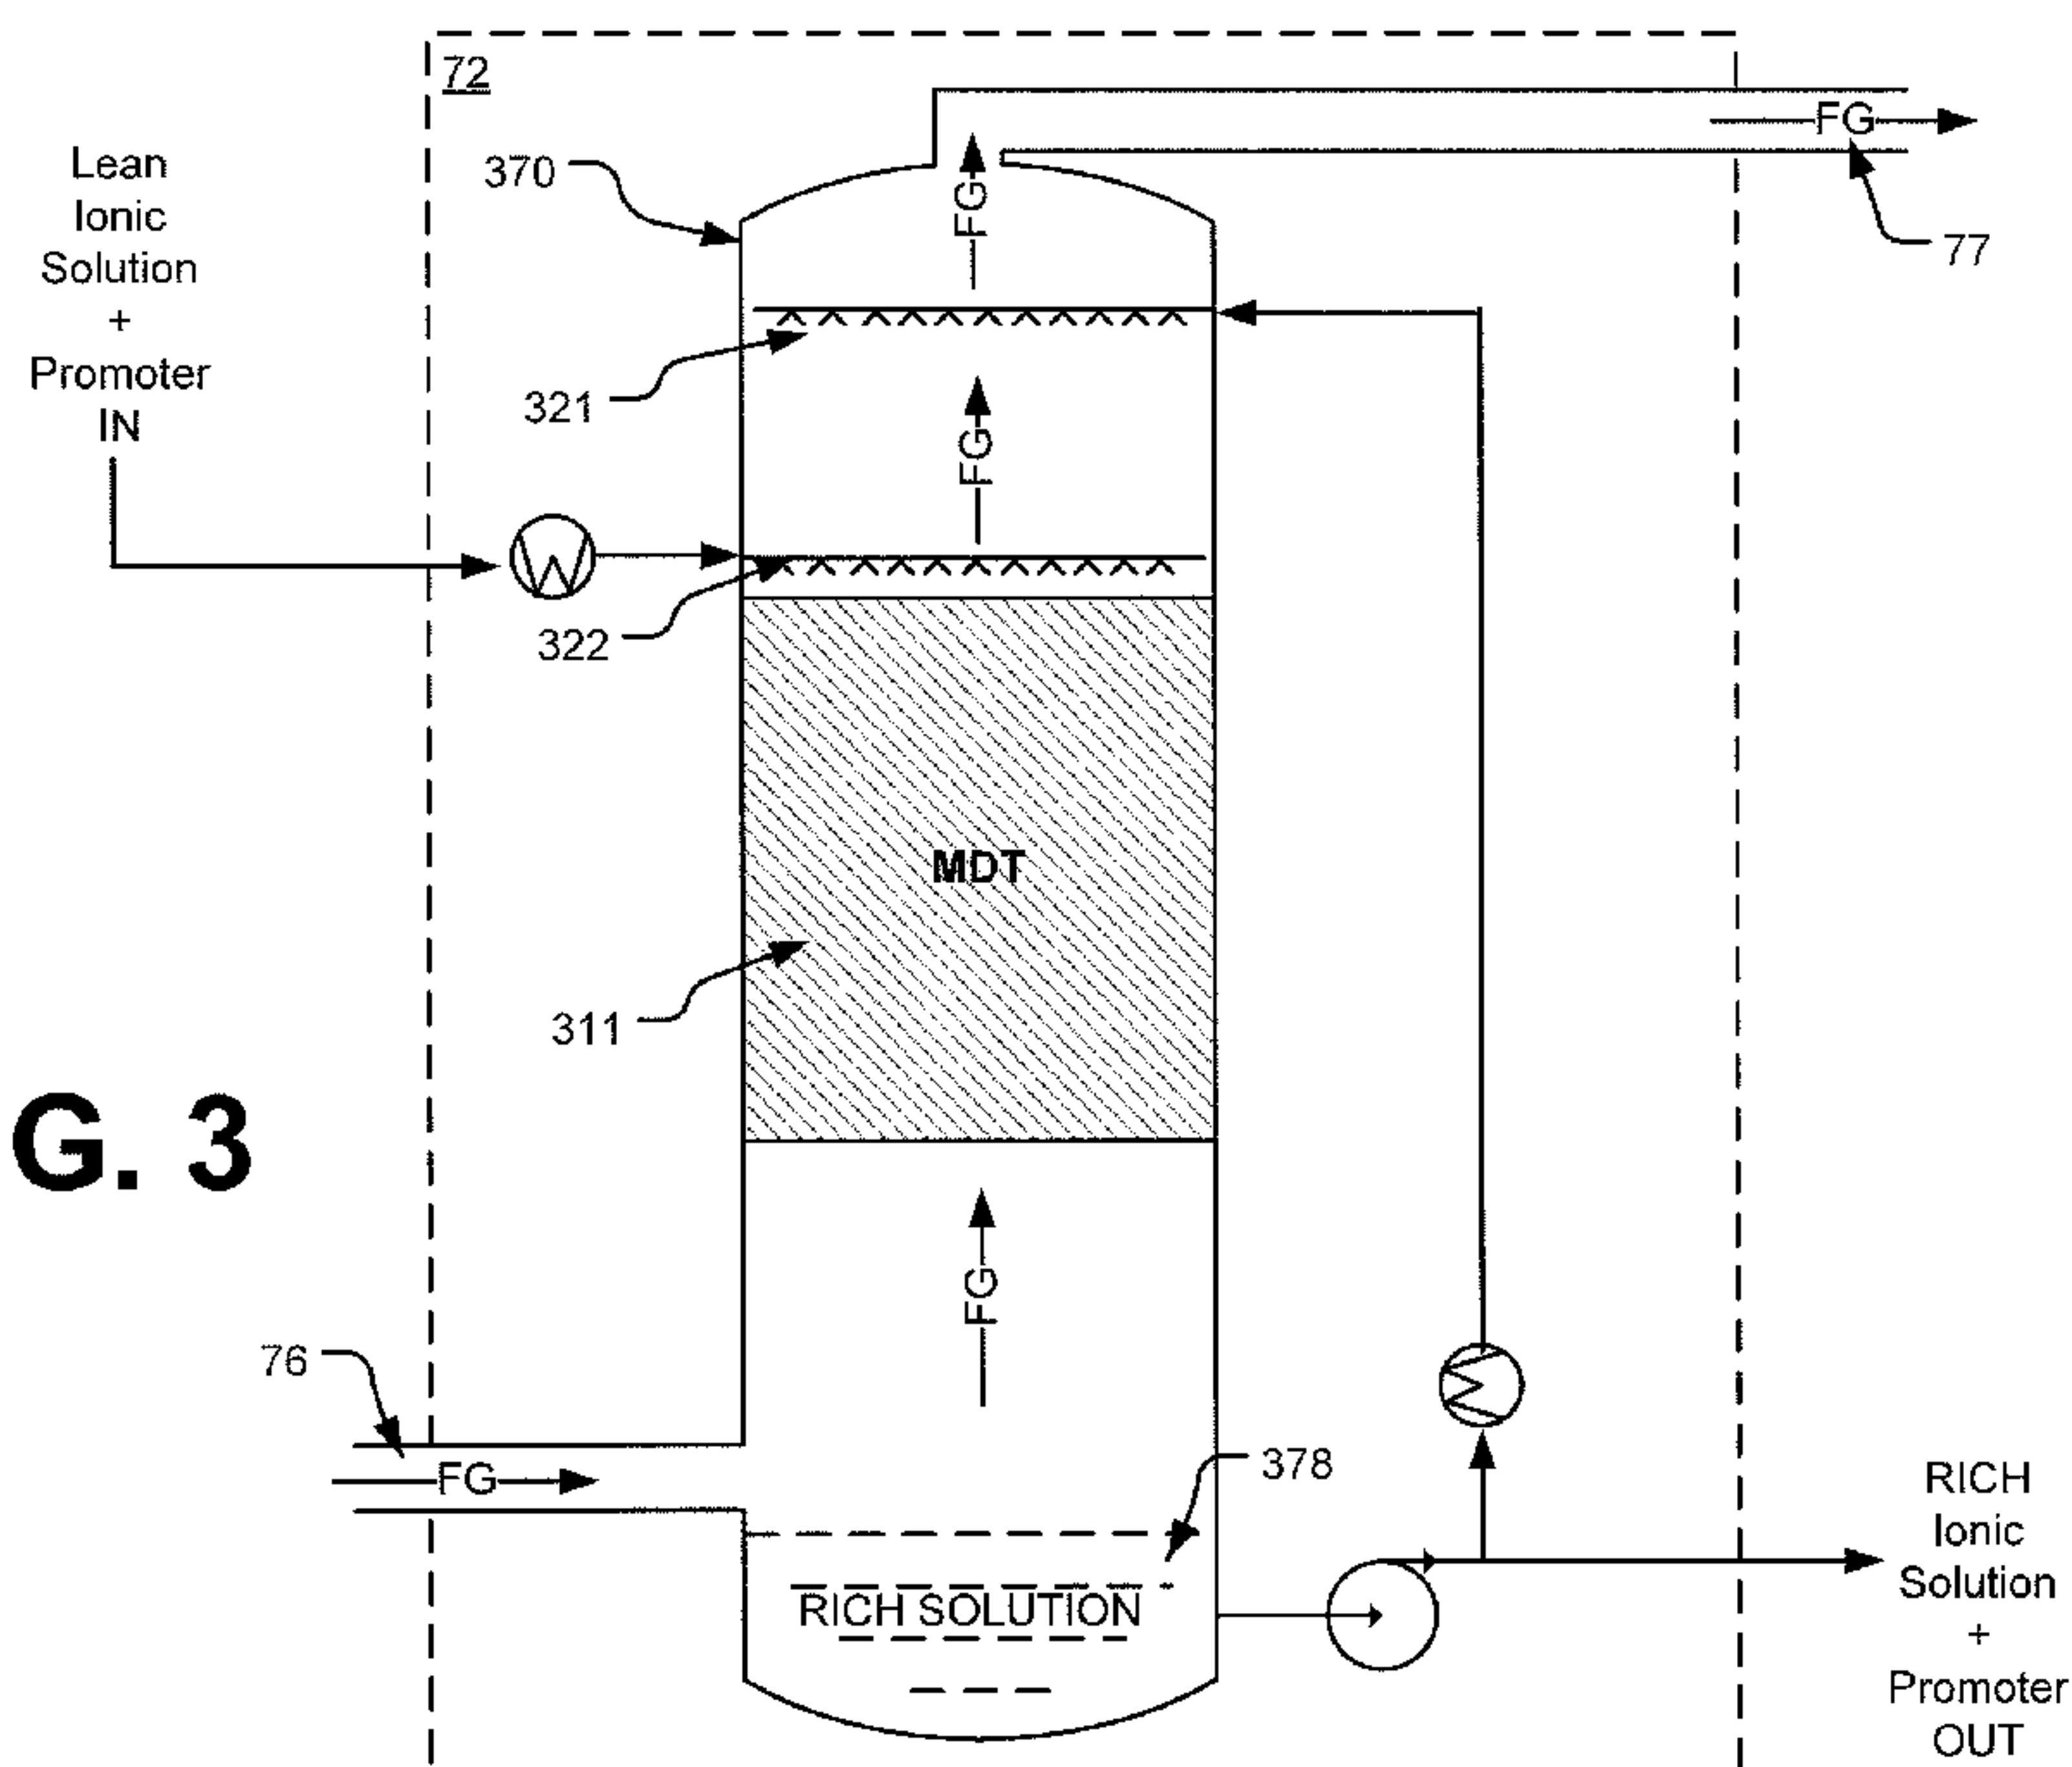(54) Title: PROMOTER ENHANCED CHILLED AMMONIA BASED SYSTEM AND METHOD FOR REMOVAL OF CO₂ FROM FLUE GAS STREAM**FIG. 3**(57) Abstract: A chilled ammonia based CO₂ capture system and method is provided. A promoter is used to help accelerate certain capture reactions that occur substantially coincident to and/or as a result of contacting a chilled ammonia based ionic solution with a gas stream that contains CO₂. The promoter can be piperazine or an enzyme system.

WO 2009/073422 A1

78396-121

Title of Invention

Promoter Enhanced Chilled Ammonia Based System and Method
For Removal of CO₂ From Flue Gas Stream

5

Inventor(s)

Eli Gal

Otto Morten Bade

Indira Jayaweera

Gopala Krishnan

10

Field of the Invention

The proposed invention relates to a system and method for removing carbon dioxide (CO₂) from a process gas stream containing carbon dioxide and sulphur dioxide. More particularly, the proposed invention is directed to a chilled ammonia based flue gas processing system for removing CO₂ from a flue gas stream. The proposed invention provides for contacting an ionic solution that includes a promoter with a flue gas stream.

Summary of the Invention

Embodiments of the present invention provide a system and method for capturing carbon dioxide (CO₂) from a process gas stream. Briefly described, in architecture, one embodiment of the system, among others, can be implemented so as to include absorber vessel configured to receive a flue gas stream; absorber vessel further configured to receive a supply of an absorbent solution.

78396-121

The absorber vessel includes a gas to liquid mass transfer device (MTD) configured to place the flue gas stream into contact with the absorbent solution.

Embodiments of the present invention can also be viewed as providing a method for removing CO₂ from a flue gas stream. In this regard, one embodiment of such a method, among others, can be broadly summarized by the following steps: combining a promoter with an absorbent ionic solution (ionic solution); contacting the combined promoter and ionic solution with a flue gas stream that contains CO₂; and regenerating the combined promoter and ionic solution to release the CO₂ absorbed from the flue gas.

According to one aspect of the present invention, there is provided a method of absorbing CO₂ from a flue gas, the method comprising: contacting a flue gas stream containing CO₂ with a lean absorbent solution, the lean absorbent solution including an ammonia containing ionic solution or slurry and a promoter including one of an amine or an enzyme, thereby producing a rich absorbent solution; and regenerating the rich absorbent solution to release the CO₂ from the rich absorbent solution, thereby producing the lean absorbent solution.

According to another aspect of the present invention, there is provided a method of increasing precipitation of ammonium bicarbonate solid particles from an ammonia solution in a chilled ammonia based system for the removal of CO₂ from a flue gas, the method comprising: adding a promoter including one of an amine and an enzyme to the ammonia solution, thereby increasing precipitation of ammonium bicarbonate solid particles from the ammonia solution.

Other systems, methods, features, and advantages of the present invention will be or become apparent to those with ordinary skill in the art upon examination of the following drawings and detailed description. It is intended that all such additional systems, methods, features, and advantages be included within this description, be within the scope of the present invention, and be protected by the accompanying claims.

Background

In the combustion of a fuel, such as coal, oil, peat, waste, etc., in a combustion plant, such as those associated with boiler systems for providing steam to a power plant, a hot process gas (or flue gas) is generated. Such a flue gas will often contain, among other things, carbon dioxide (CO₂). The negative environmental effects of releasing carbon dioxide to the atmosphere have been widely recognised, and have resulted in the development of processes adapted for removing carbon dioxide from the hot process gas generated in the combustion of the above mentioned fuels. One such system and process has previously been disclosed and is directed to a single-stage *Chilled Ammonia* based system and method for removal of carbon dioxide (CO₂) from a post-combustion flue gas stream.

Known Chilled Ammonia based systems and processes (CAP) provide a relatively low cost means for capturing/removing CO₂ from a gas stream, such as, for example, a post combustion flue gas stream. An example of such a system

and process has previously been disclosed in pending patent application PCT/US2005/012794 (International Publication Number: WO 2006/022885 / Inventor: Eli Gal)), filed on 12 April 2005 and titled *Ultra Cleaning of Combustion Gas Including the Removal of CO₂*. In this process the absorption of CO₂ from a
5 flue gas stream is achieved by contacting a chilled ammonia ionic solution (or slurry) with a flue gas stream that contains CO₂.

FIG. 1A is a diagram generally depicting a flue gas processing system 15 for use in removing various pollutants from a flue gas stream FG emitted by the combustion chamber of a boiler system 26 used in a steam generator system of, for example, a power generation plant. This system includes a CO₂ removal system 70 that is configured to remove CO₂ from the flue gas stream FG before emitting the cleaned flue gas stream to an exhaust stack 90 (or alternatively additional processing). It is also configured to output CO₂ removed from the flue gas stream FG. Details of CO₂ removal system 70 are generally depicted in FIG.
10 1B.

With reference to FIG. 1B, CO₂ removal System 70 includes a capture system 72 for capturing/removing CO₂ from a flue gas stream FG and a regeneration system 74 for regenerating ionic solution used to remove CO₂ from the flue gas stream FG. Details of capture system 72 are generally depicted in
20 FIG. 1C.

With reference to FIG. 1C a capture system 72 of a CO₂ capture system 70 (FIG. 1A) is generally depicted. In this system, the capture system 72 is a chilled ammonia based CO₂ capture system. In a *chilled ammonia* based system/method for CO₂ removal, an absorber vessel is provided in which an
25 absorbent ionic solution (ionic solution) is contacted with a flue gas stream (FG) containing CO₂. The ionic solution is typically aqueous and may be composed of, for example, water and ammonium ions, bicarbonate ions, carbonate ions, and/or carbamate ions. An example of a known CAP CO₂ removal system is generally depicted in the diagram of FIG. 1C.

30 With reference to FIG. 1C, an absorber vessel 170 is configured to receive a flue gas stream (FG) originating from, for example, the combustion chamber of

a fossil fuel fired boiler 26 (see FIG. 1A). It is also configured to receive a lean ionic solution supply from regeneration system 74 (see FIG. 1B). The lean ionic solution is introduced into the vessel 170 via a liquid distribution system 122 while the flue gas stream FG is also received by the absorber vessel 170 via flue gas inlet 76.




The ionic solution is put into contact with the flue gas stream via a gas-liquid contacting device (hereinafter, mass transfer device, MTD) 111 used for mass transfer and located in the absorber vessel 170 and within the path that the flue gas stream travels from its entrance via inlet 76 to the vessel exit 77. The gas-liquid contacting device 111 may be, for example, one or more commonly known structured or random packing materials, or a combination thereof.

Ionic solution sprayed from the spray head system 121 and/or 122 falls downward and onto/into the mass transfer device 111. The lean ionic solution feeding to the spray head system 122 and the recycled ionic solution feeding to spray head 121 can be combined and sprayed from one spray header. The ionic solution cascades through the mass transfer device 111 and comes in contact with the flue gas stream FG that is rising upward (opposite the direction of the ionic solution) and through the mass transfer device 111.

Once contacted with the flue gas stream, the ionic solution acts to absorb CO₂ from the flue gas stream, thus making the ionic solution "rich" with CO₂ (rich solution). The rich ionic solution continues to flow downward through the mass transfer device and is then collected in the bottom 78 of the absorber vessel 170. The rich ionic solution is then regenerated via regenerator system 74 (see FIG. 1B) to release the CO₂ absorbed by the ionic solution from the flue gas stream. The CO₂ released from the ionic solution may then be output to storage or other predetermined uses/purposes. Once the CO₂ is released from the ionic solution, the ionic solution is said to be "lean". The lean ionic solution is then again ready to absorb CO₂ from a flue gas stream and may be directed back to the liquid distribution system 122 whereby it is again introduced into the absorber vessel 170.

After the ionic solution is sprayed into the absorber vessel 170 via spray head system 122, it cascades downward onto and through the mass transfer device 111 where it is contacted with the flue gas stream FG. Upon contact with the flue gas stream the ionic solution reacts with CO₂ that may be contained in the flue gas stream. This reaction is exothermic and as such results in the generation of heat in the absorber vessel 170. This heat can cause some of the ammonia contained in the ionic solution to change into a gas. The gaseous ammonia then, instead of migrating downward along with the liquid ionic solution, migrates upward through the absorber vessel 170, along with and as a part of the flue gas stream and, ultimately, escaping via the exit 77 of the absorber vessel 170. The loss of this ammonia from the system (ammonia slip) decreases the molar concentration of ammonia in the ionic solution. As the molar concentration of ammonia decreases, so does the **R** value (NH₃-to- CO₂ mole ratio).

When a flue gas stream is contacted with the ionic solution, the carbon dioxide contained in the flue gas stream reacts to form bicarbonate ion by reacting with water (H₂O) and with hydroxyl ion (OH⁻). These "capture reactions" (Reaction 1 through Reaction 9, shown below) are generally described as follows:

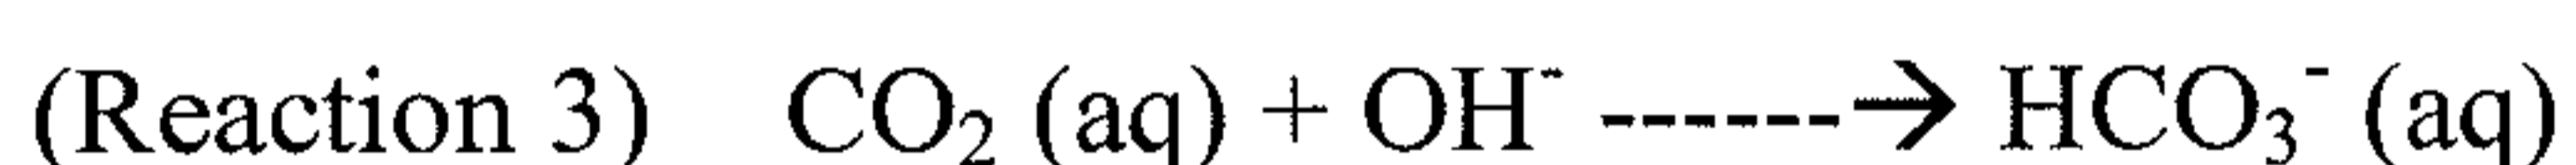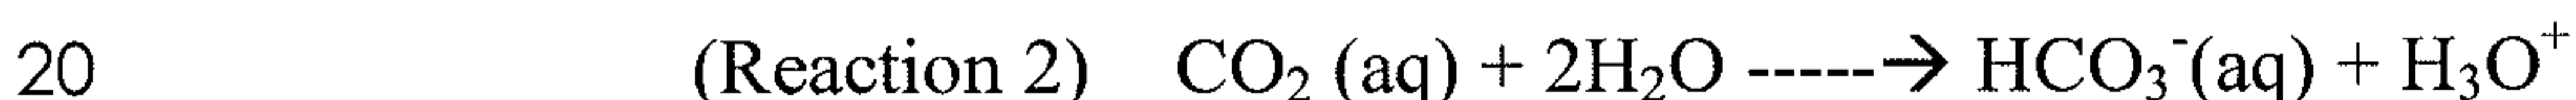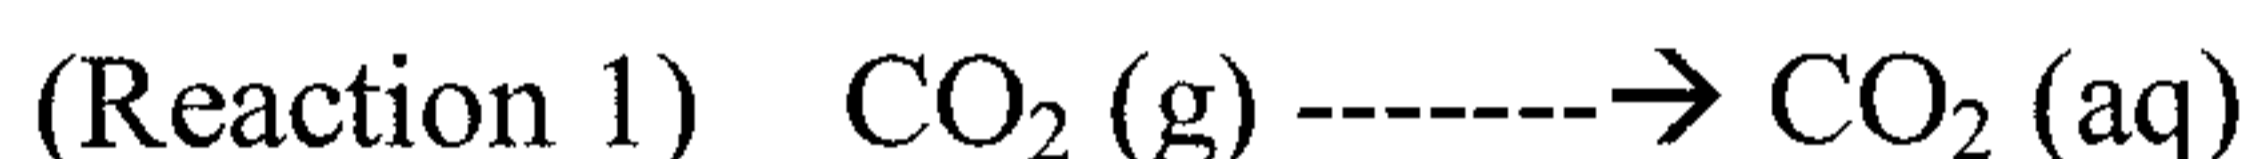





The reactions of the NH₃ and its ions and CO₂ occur in the liquid phase and are discussed below. However, in low temperature, typically below 70-80F and high ionic strength, typically 2-12M ammonia ions the bicarbonate produced in Reaction (2) and Reaction (3), reacts with ammonium ions and precipitates as ammonium bicarbonate when the ratio NH₃/CO₂ is smaller than 2.0 according to:



Reaction 2 is a slow reaction while Reaction 3 is a faster reaction. At high pH levels such as, for example when pH is greater than 10, the concentration of OH⁻ in the ionic solution is high and thus most of the CO₂ is captured through

reaction (3) and high CO₂ capture efficiency can be achieved. At lower pH the concentration of the hydroxyl ion OH⁻ is low and the CO₂ capture efficiency is also low and is based mainly on reaction (2).

In the Chilled Ammonia Based CO₂ Capture system(s)/method(s) the CO₂ in the flue gas stream is captured by contacting the flue gas stream with an aqueous ammonia solution allowing the CO₂ in the flue gas stream to directly react with the aqueous ammonia. At low R, typically less than about 2, and pH typically lower than 10, the direct reaction of CO₂ with ammonia contained in the ionic solution is the dominant mechanism for CO₂ capture. The first step in the CO₂ sequence capture is the CO₂ mass transfer from the gas phase to the liquid phase of reaction (1). In the liquid phase a sequence of reaction occur between the aqueous CO₂ and aqueous ammonia:

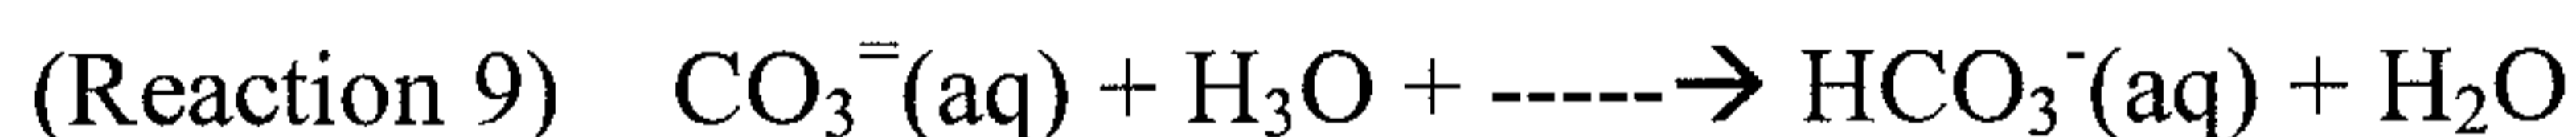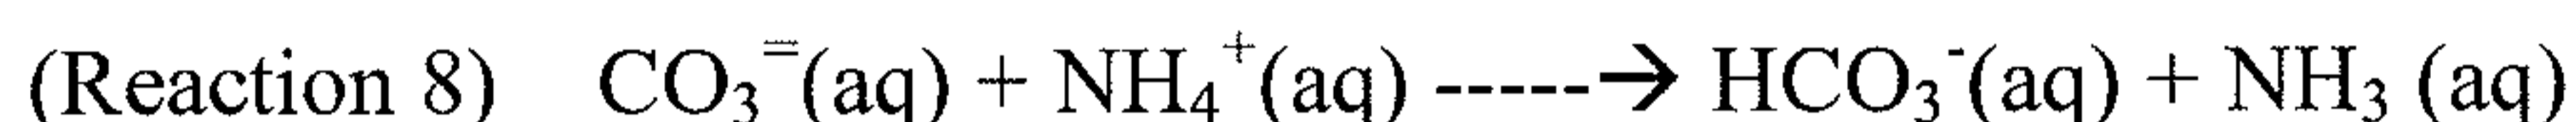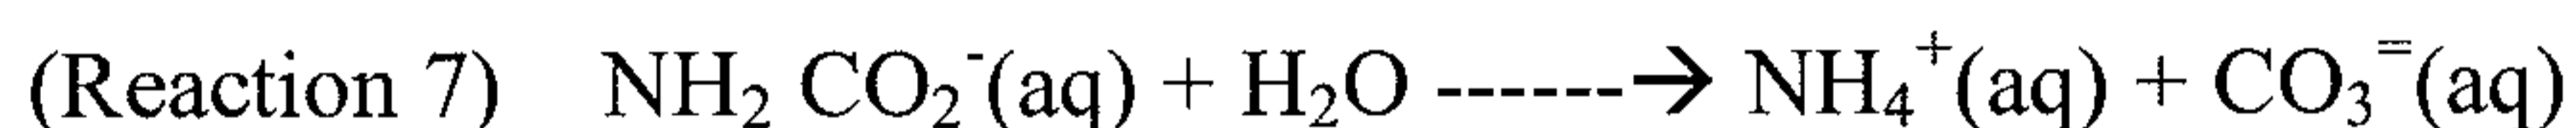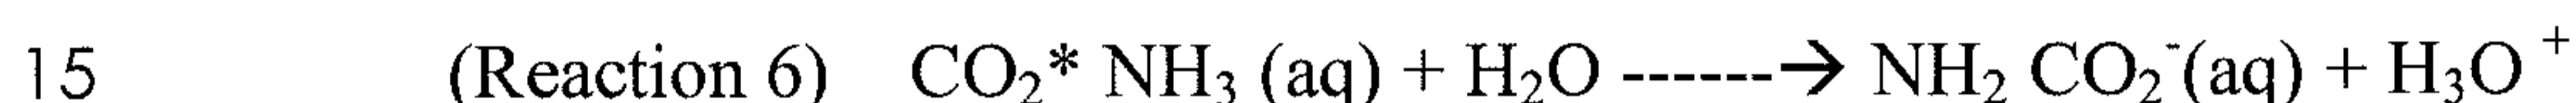

As described above the bicarbonate produced in Reaction (8) & Reaction (9) can react with ammonium ions to precipitate as solid ammonium bicarbonate based on Reaction (4), while the ammonia produced in Reaction (8) can react with additional CO₂ based on Reaction (5).

The sequence of the chain of reactions (5) through (9) is relatively slow and thus requires a large and expensive CO₂ capture device. The slow rate of CO₂ absorption is due to: 1) one or more slow reactions in the sequence of capture reactions (Reaction 1 thru Reaction 9); and 2) the accumulation of intermediate species, such as CO₂* NH₃ and NH₂ CO₂⁻, in the ionic solution. The accumulation of intermediate species slows the CO₂ capture process and results in lower CO₂ capture efficiency with a power generation facility. Thus, a heretofore unaddressed need exists in the industry to accelerate the rate of the

CO₂ capture reactions that allows significant reduction in the size and thus the cost of the CO₂ capture device and its auxiliary systems.

Further, features of the present invention will be apparent from the description and the claims.

5

Brief Description of The Drawings

Many aspects of the invention can be better understood with reference to the following drawings. The components in the drawings are not necessarily to scale, emphasis instead being placed upon clearly illustrating the principles of the present invention. Moreover, in the drawings, like reference numerals designate corresponding parts throughout the several views. The invention will now be described in more detail with reference to the appended drawings in which:

FIG. 1A is a diagram generally depicting a flue gas processing system 15 that includes a CO₂ removal system 70.

15 FIG. 1B is a diagram generally depicting further details of a CO₂ removal system 70 that includes a capture system 72 and a regeneration system 74.

FIG. 1C is a diagram generally depicting details of a capture system 72.

20 FIG. 2 is a graph that generally illustrates the capture efficiency of a system in which an ionic solution is used to capture CO₂ both with and without a promoter.

FIG. 3 is a diagram generally depicting an embodiment of a capture system 72 that includes an absorber system for contacting an ionic solution + promoter with a flue gas stream.

25




Discussion

The proposed invention is directed to a chilled ammonia based CO₂ capture system and method. More particularly, the proposed invention is directed to chilled ammonia based CO₂ capture system and method in which a promoter is used to help accelerate certain capture reactions that occur substantially coincident to and/or as a result of contacting a chilled ammonia based ionic solution with a gas stream that contains CO₂.

A system and method for removing CO₂ from a gas stream is proposed in which a chilled ammonia based ionic solution is provided that includes a promoter

to help accelerate certain chemical reactions that occur between CO₂ and ammoniated ionic solution, substantially coincident to and/or as a result of the contacting of the chilled ammonia based ionic solution with a gas stream that contains CO₂. In a preferred embodiment, an ionic solution is mixed with a promoter. This ionic solution-promoter mix is then contacted with a flue gas stream via, for example, a CO₂ capture absorber/absorber vessel.

The promoter acts to accelerate certain "capture reactions", namely the following reactions (Reaction 5 through Reaction 9) that take place:

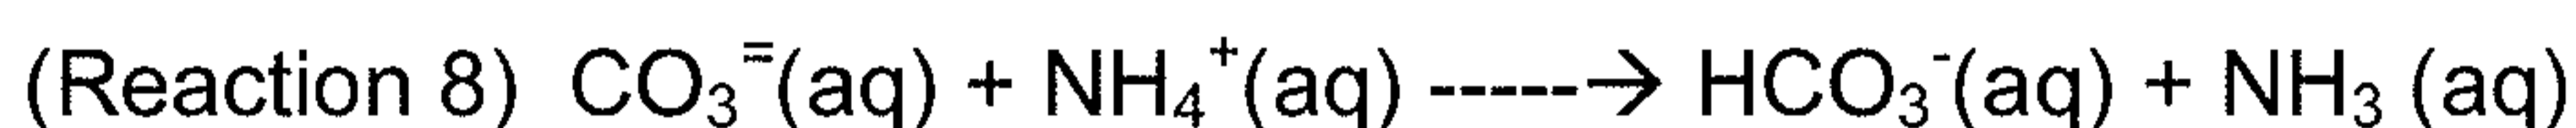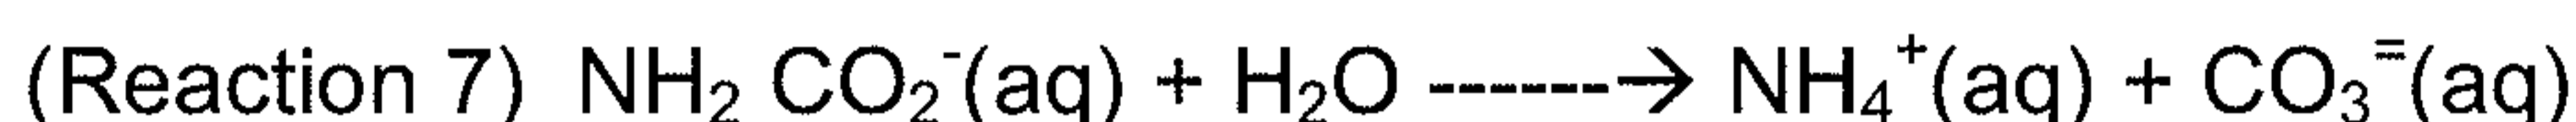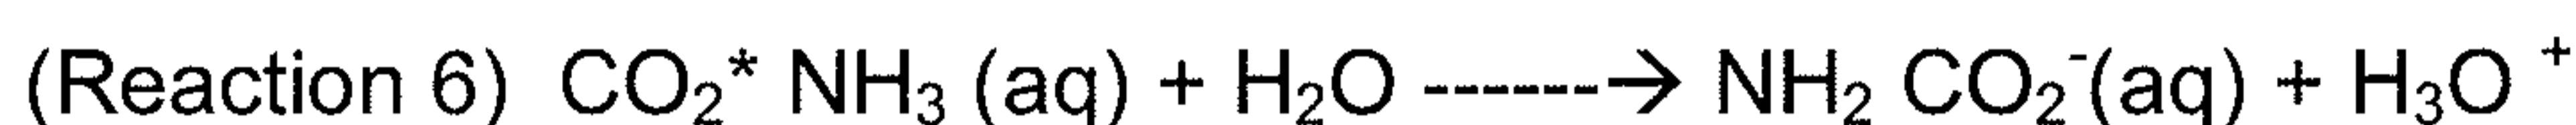

15 By accelerating the capture reactions (5) through (9), the proposed system is able to capture more CO₂ from a flue gas stream per unit of time, thereby allowing for more CO₂ to be removed from a flue gas stream.

In one embodiment of the proposed invention, the promoter that is used is an amine. This amine is mixed with the ionic solution and subsequently contacted with a flue gas stream containing CO₂. An example of a possible amine that may be used as a promoter includes, but is not limited to piperazine (PZ). In a further embodiment, the promoter that is used is an enzyme or enzyme system. In this embodiment the enzyme or enzyme system is mixed with the ionic solution and subsequently contacted with a flue gas stream containing CO₂. An example of an enzyme or enzyme system that may be used as a promoter includes, but is not limited to the Carbozyme permeator available from Carbozyme, Inc of 1 Deer Park Drive, Suite H-3, Monmouth Junction, NJ 08852.

Piperazine is a C₄N₂H₁₀ cyclical compound and has been used as a promoter for CO₂ capture in amine systems. Testing has indicated that piperazine is a very good promoter for use with ammoniated solutions to enhance

CO₂ capture and the production of ammonium bicarbonate. Adding 0.2 - 2.0 molar PZ, and preferably 0.4 -1.0 molar PZ, to the ionic solution provides a significant increase in CO₂ capture efficiency. It also provides an increase in precipitation of ammonium bicarbonate solid particles from the solution. Since the
5 ammonium bicarbonate is richer in CO₂ than the solution itself, (the NH₃/ CO₂ ratio of the solid particles is 1.0) the precipitation of the ammonium bicarbonate particles from the solution increases the NH₃/ CO₂ ratio and the pH of the solution resulting in leaner solution that can capture more CO₂.

The action of a PZ promoter in accelerating certain capture reactions may
10 allow for a significant reduction, by as much as 50-80%, in the physical size of the CO₂absorber vessel and associated equipment. It also allows for reduction in parasitic power consumption due to resulting reductions in pressure drop and liquid recycle rate in the absorber. In short, it allows for implementation and operation of a useful CO₂ capture system at a much lower cost.

15 FIG. 2 is a graphical representation of the relative CO₂ capture efficiency when ionic solution with and without promoter, such as PZ, is used. FIG. 2 shows that there is an increase in CO₂ capture efficiency when an ionic solution containing 0.45M PZ is contacted with a flue gas stream via an 11 ft packed absorber vessel as compared to not using PZ.

20 In Figure 2, at NH₃/ CO₂ mole ratio R=2.4 the CO₂ capture efficiency is 82% with 0.45M PZ and only 51% with no PZ. At R=2.0 efficiency drops to 74% with 0.45M PZ and to only 36% with no PZ. At R=1.8 efficiency is 66% with 0.45M PZ and only 23% with no PZ. At R=1.6 efficiency is still high with 0.45M PZ at 52% while efficiency with no PZ is less than 10% under the operating
25 conditions of the test.

The PZ promoter is stable in both absorption and regeneration conditions and regenerated solution containing PZ performs as well as fresh PZ in multiple CO₂ absorption cycles. By using an absorbent ionic solution that includes a chilled ammonia and a promoter, such as, for example piperazine, the CO₂
30 capture efficiency of a chilled ammonia based CO₂ capture system may be enhanced dramatically. Piperazine is stable under both low temperature absorption conditions and high pressure and temperature regeneration

conditions. Regenerated CO₂ lean solution containing piperazine appears to perform as well piperazine that is freshly injected into ammoniated solutions.

FIG. 3 is a diagram generally depicting an embodiment of a system configured to capture CO₂ from a flue gas stream in accordance with the invention.

5 With reference to FIG. 3, an absorber vessel 370 is configured to receive a flue gas stream (FG) originating from, for example, the combustion chamber of a fossil fuel fired boiler 26 (see FIG. 1A). It is also configured to receive a lean ionic solution + promoter supply from regeneration system 74 (see FIG. 1B). The lean ionic solution + promoter supply is introduced into the vessel 370 via a liquid
10 distribution system 322 while the flue gas stream FG is also received by the absorber vessel 370 via flue gas inlet 76.

The ionic solution + promoter is put into contact with the flue gas stream via a gas-liquid contacting device (hereinafter, mass transfer device, MTD) 311 used for mass transfer and located in the absorber vessel 370 and within the path
15 that the flue gas stream travels from its entrance via inlet 76 to the vessel exit 77. The gas-liquid contacting device 311 may be, for example, one or more commonly known structured or random packing materials, or a combination thereof.

Ionic solution + promoter sprayed from the spray head system 321 and/or
20 322 falls downward and onto/into the mass transfer device 311. The ionic solution cascades through the mass transfer device 311 and comes in contact with the flue gas stream FG that is rising upward (opposite the direction of the ionic solution + promoter) and through the mass transfer device 311.

Once contacted with the flue gas stream, the ionic solution + promoter acts
25 to absorb CO₂ from the flue gas stream, thus making the ionic solution + promoter "rich" with CO₂ (rich ionic + promoter solution). The rich ionic solution + promoter continues to flow downward through the mass transfer device and is then collected in the bottom 378 of the absorber vessel 370.

The rich ionic solution + promoter is then regenerated via regenerator
30 system 74 (see FIG. 1B) to release the CO₂ absorbed by the ionic solution from the flue gas stream. The CO₂ released from the ionic solution + promoter may then be output to storage or other predetermined uses/purposes. Once the CO₂

is released from the ionic solution + promoter, the ionic solution + promoter is said to be "lean". The lean ionic solution + promoter is then again ready to absorb CO₂ from a flue gas stream and may be directed back to the liquid distribution system 122 whereby it is again introduced into the absorber vessel
5 370.

After the ionic solution is sprayed into the absorber vessel 370 via spray head system 322, it cascades downward onto and through the mass transfer device 311 where it is contacted with the flue gas stream FG. Upon contact with the flue gas stream the ionic solution + promoter reacts with the CO₂ to thereby
10 capture and remove it from the flue gas stream.

It should be emphasized that the above-described embodiments of the present invention, particularly, any "preferred" embodiments, are merely possible examples of implementations, merely set forth for a clear understanding of the principles of the invention. Many variations and modifications may be made to
15 the above-described embodiment(s) of the invention without departing substantially from the spirit and principles of the invention. All such modifications and variations are intended to be included herein within the scope of this disclosure and the present invention and protected by the following claims.

20

78396-121

CLAIMS:

1. A method of absorbing CO₂ from a flue gas, the method comprising:

contacting a flue gas stream containing CO₂ with a lean absorbent solution, the lean absorbent solution including an ammonia containing ionic solution
5 or slurry and a promoter including one of an amine or an enzyme, thereby producing a rich absorbent solution; and

regenerating the rich absorbent solution to release the CO₂ from the rich absorbent solution, thereby producing the lean absorbent solution.
2. The method of claim 1, wherein the promoter includes piperazine.
- 10 3. The method of claim 2, wherein the promoter includes 0.2 - 2.0 molar piperazine.
4. The method of claim 3, wherein the promoter includes 0.4 -1.0 molar piperazine.
5. The method of claim 1, wherein the promoter is an enzyme system.
- 15 6. The method of claim 1, wherein the promoter increases precipitation of ammonium bicarbonate solid particles from the ammonia solution.

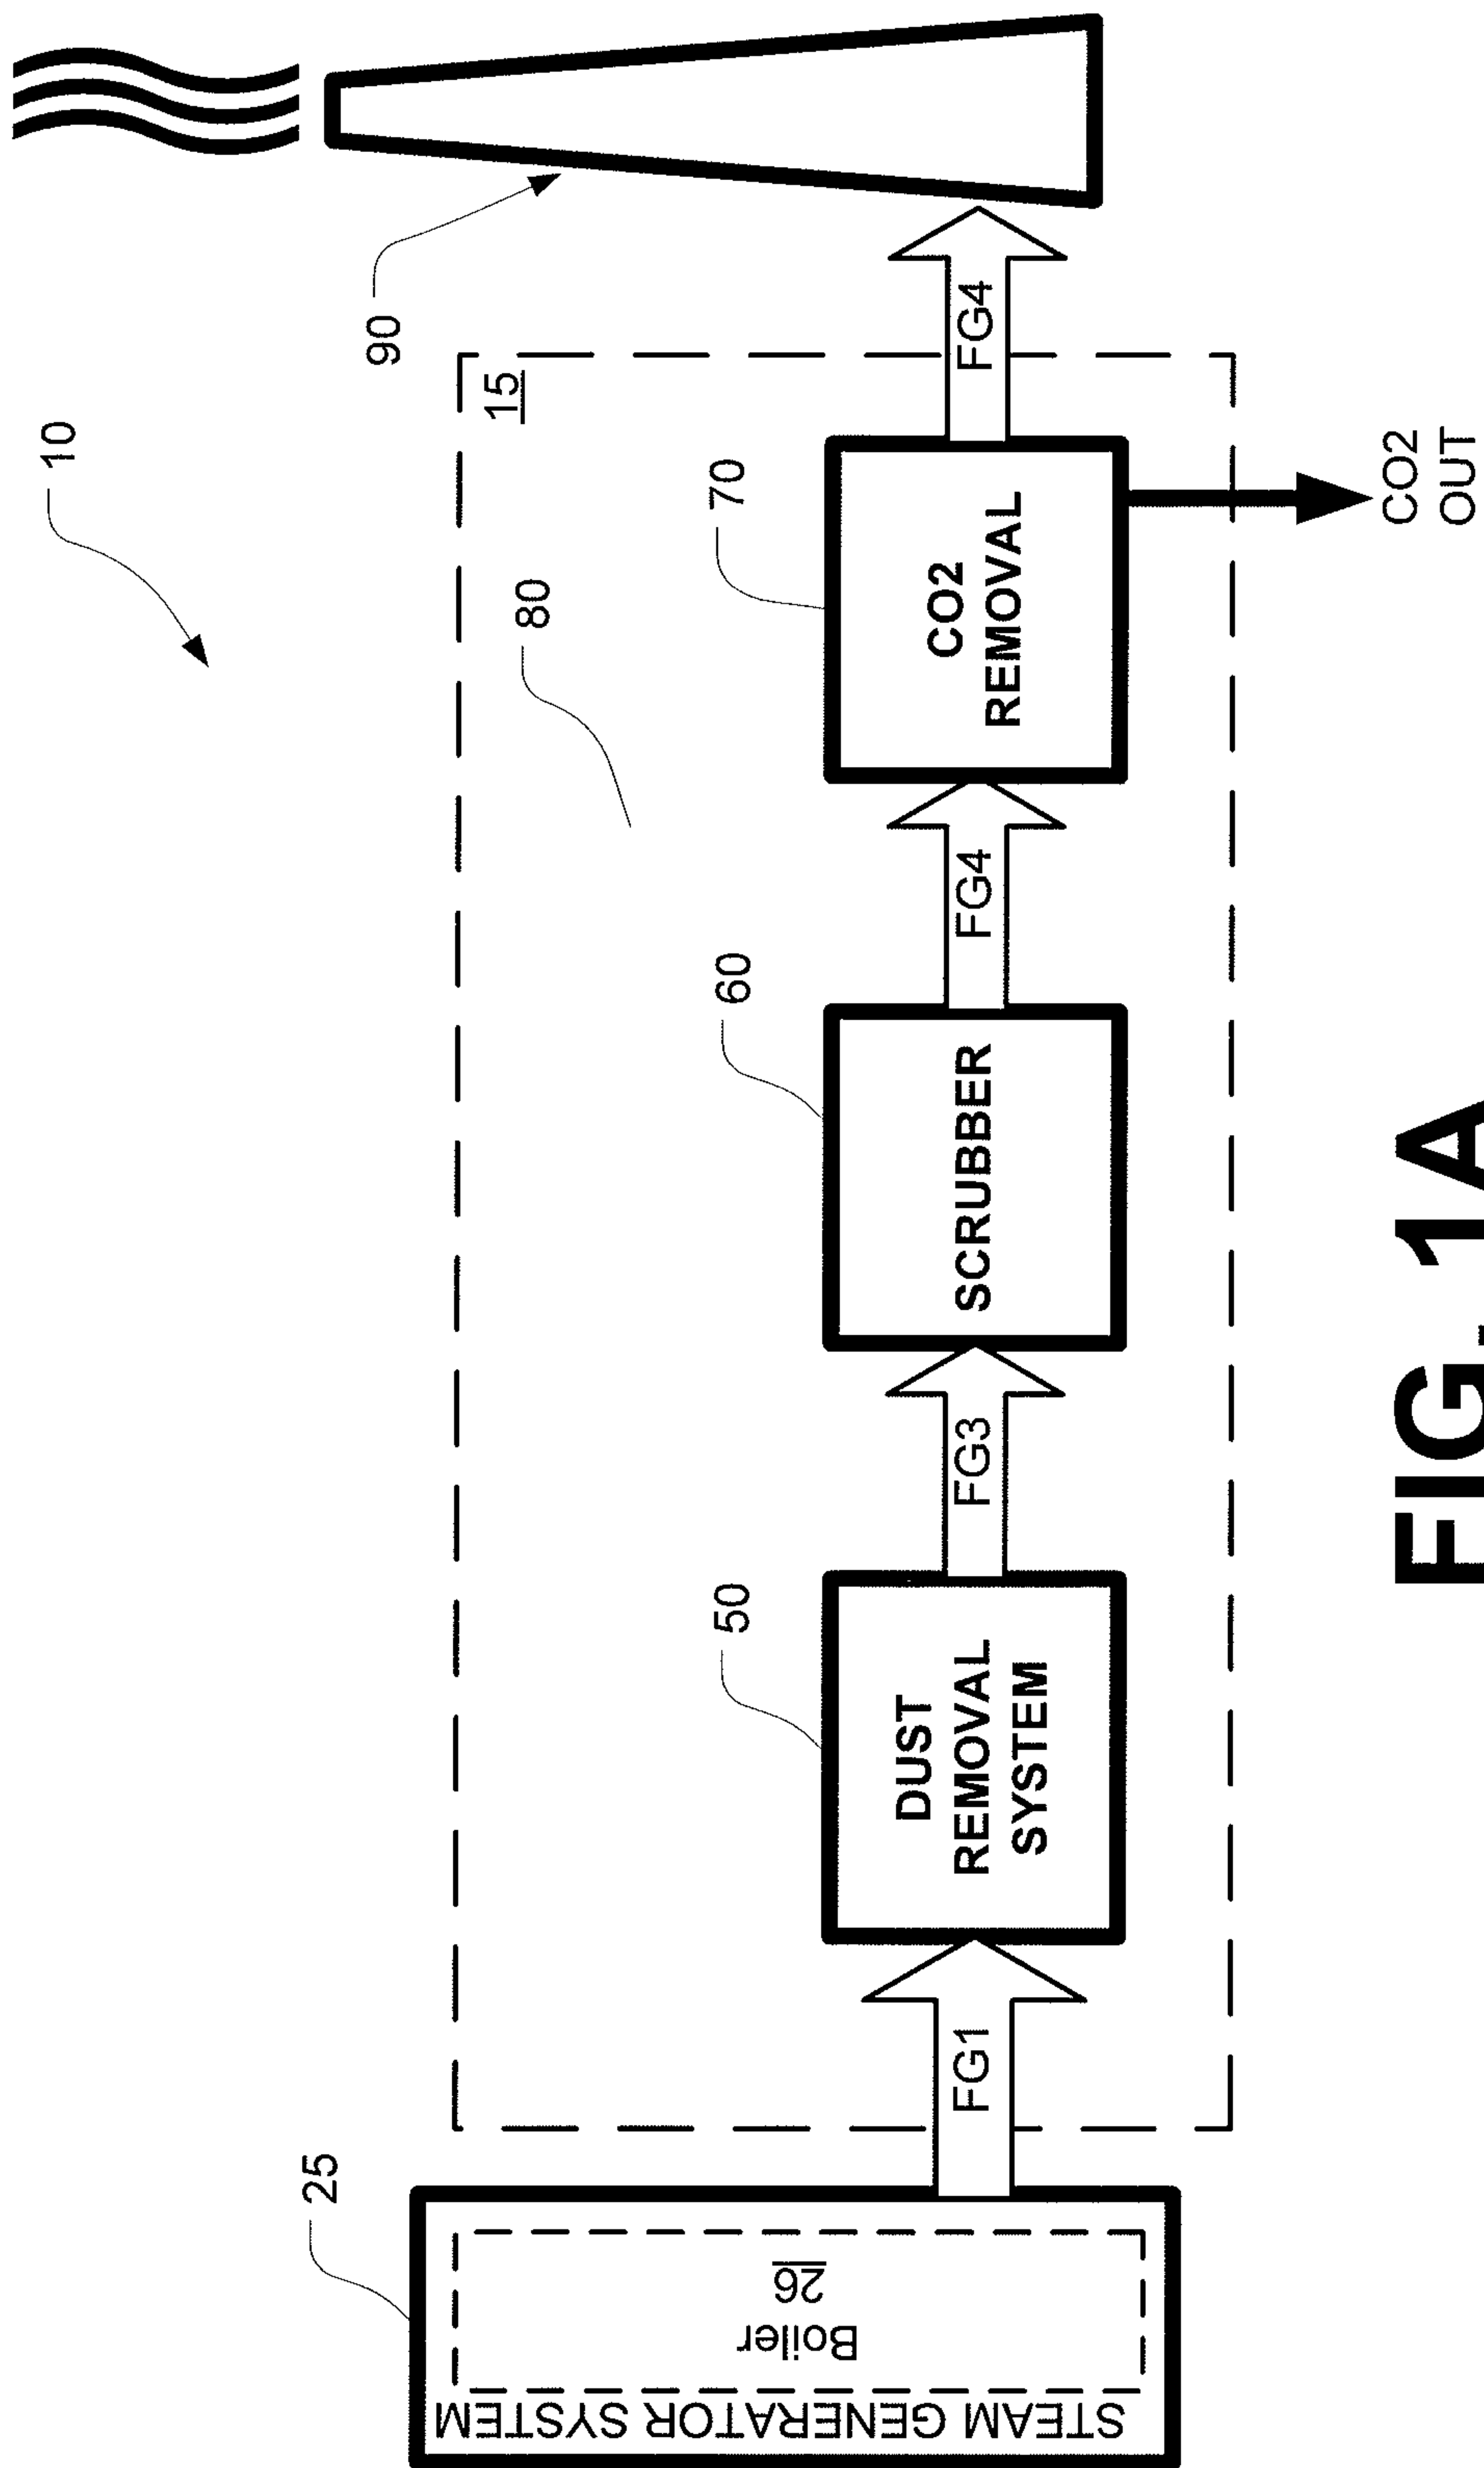


FIG. 1A

(Prior Art)

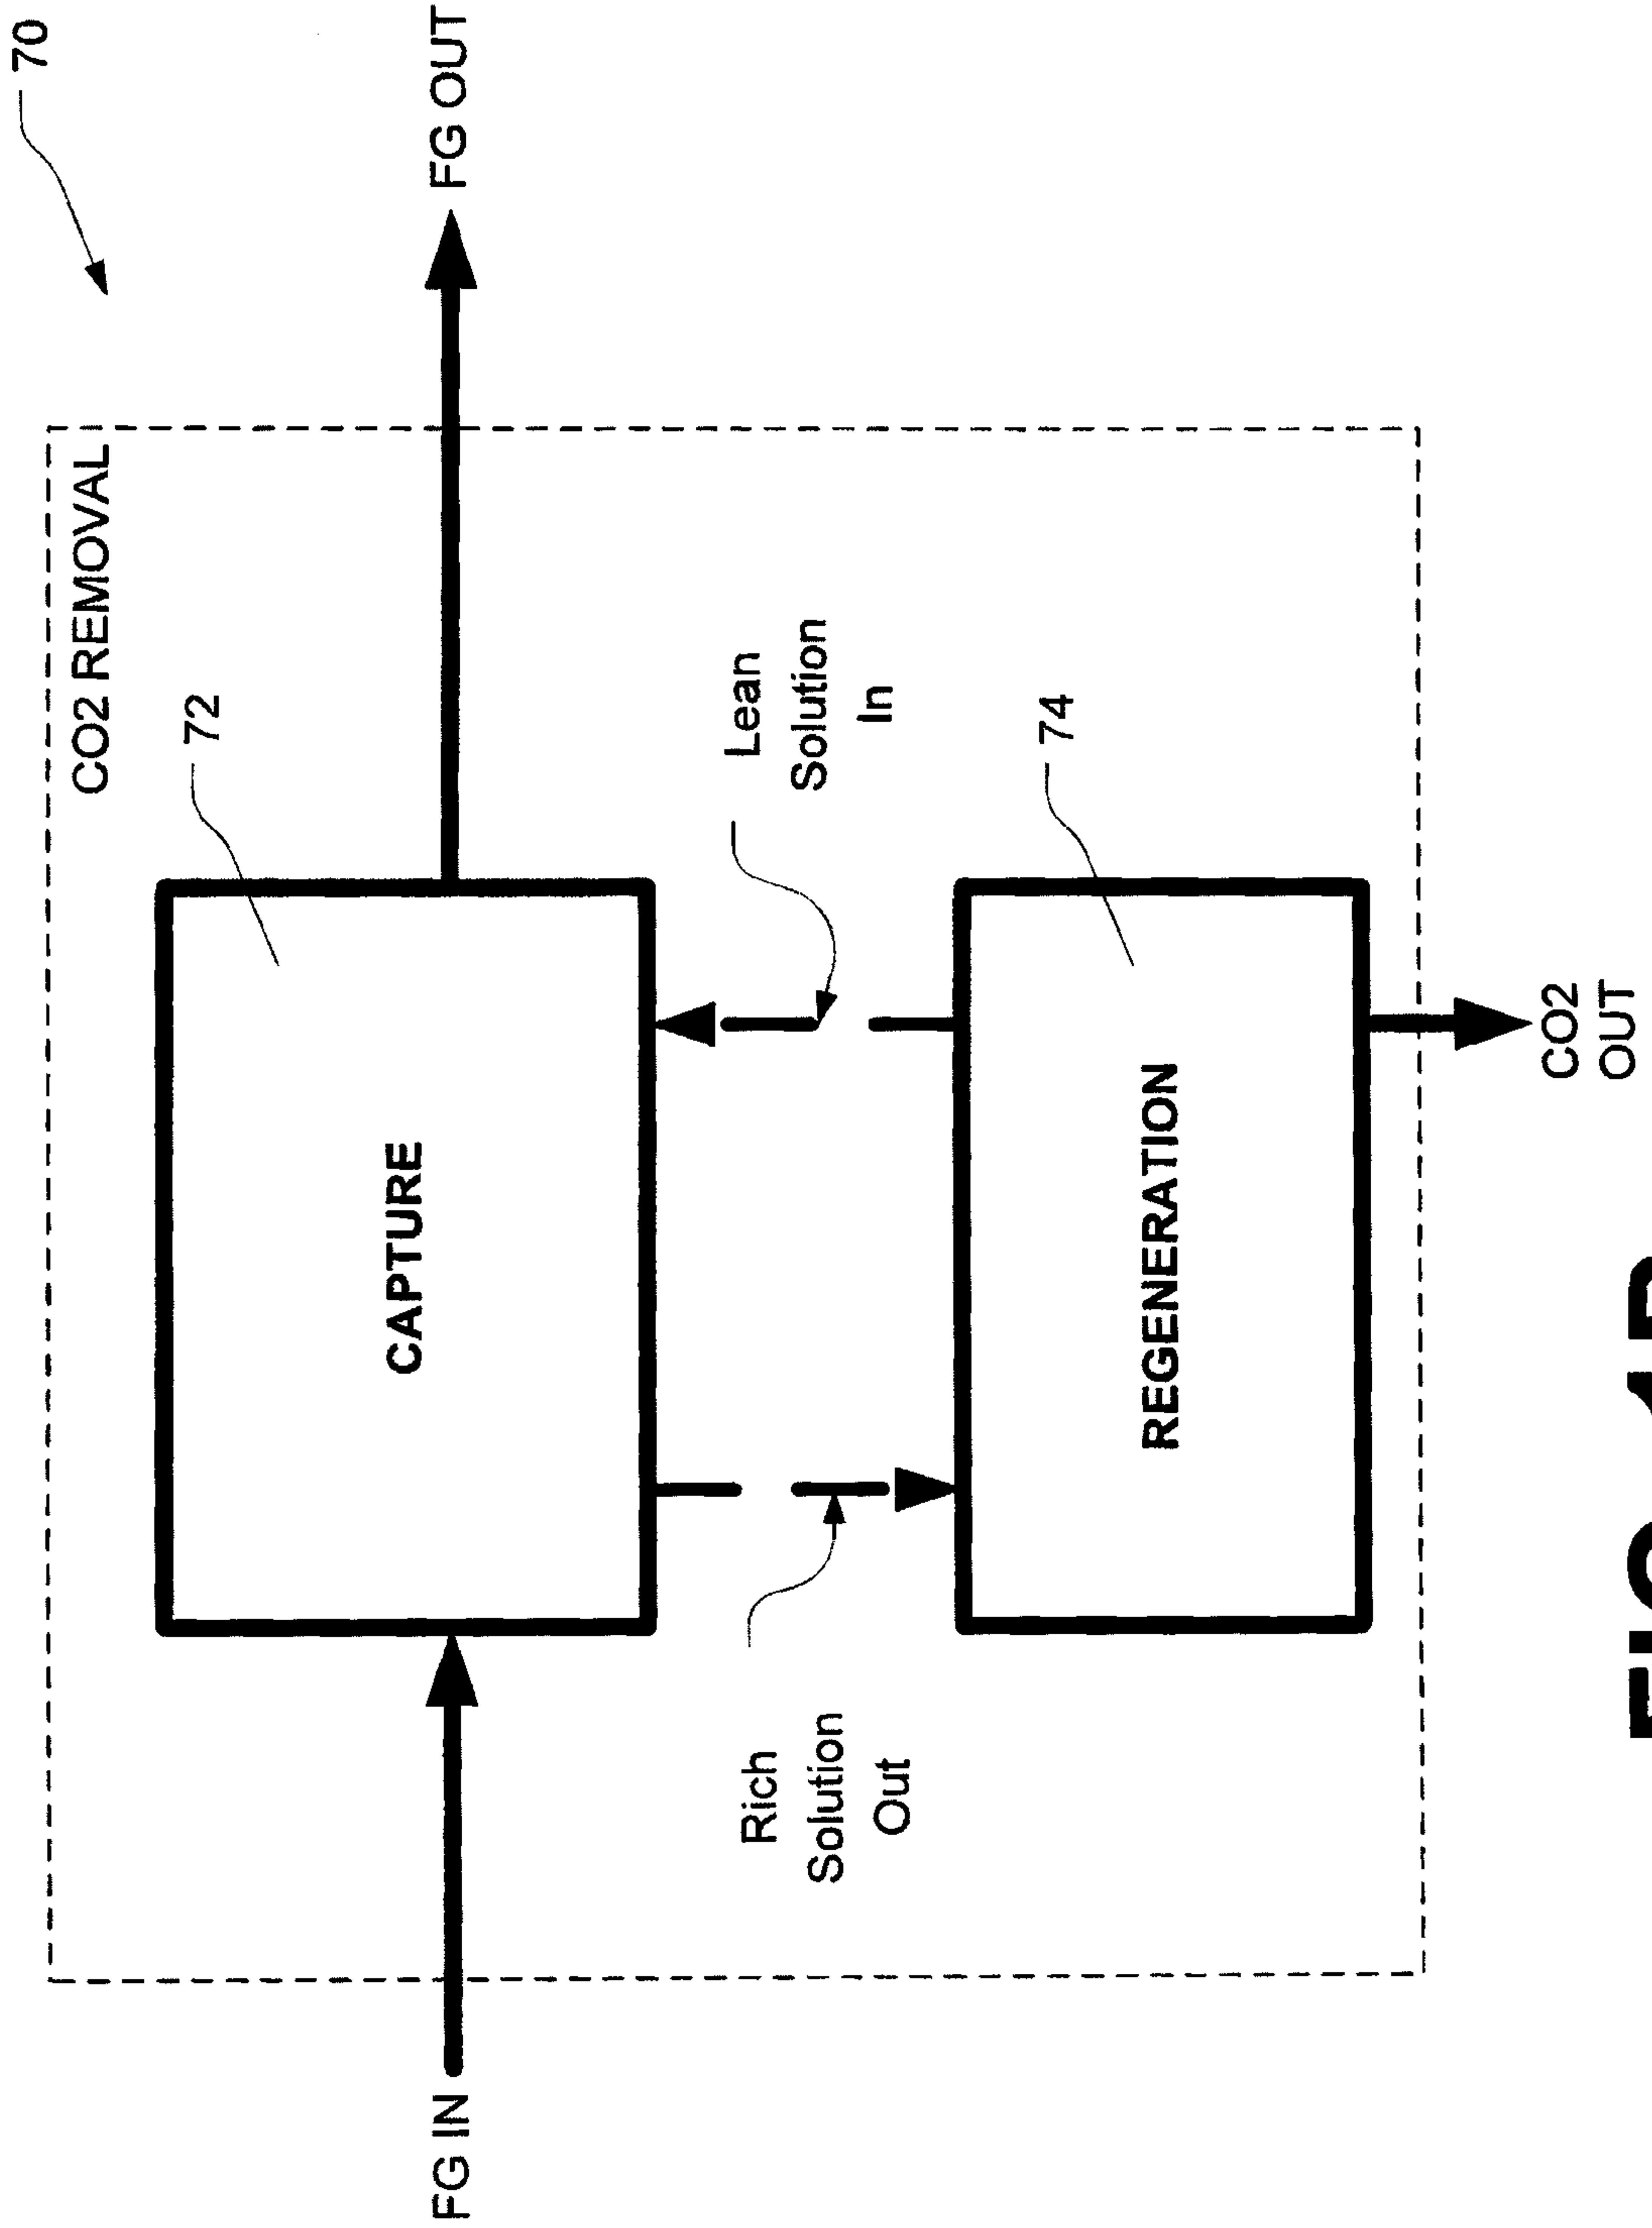


FIG. 1B
(Prior Art)

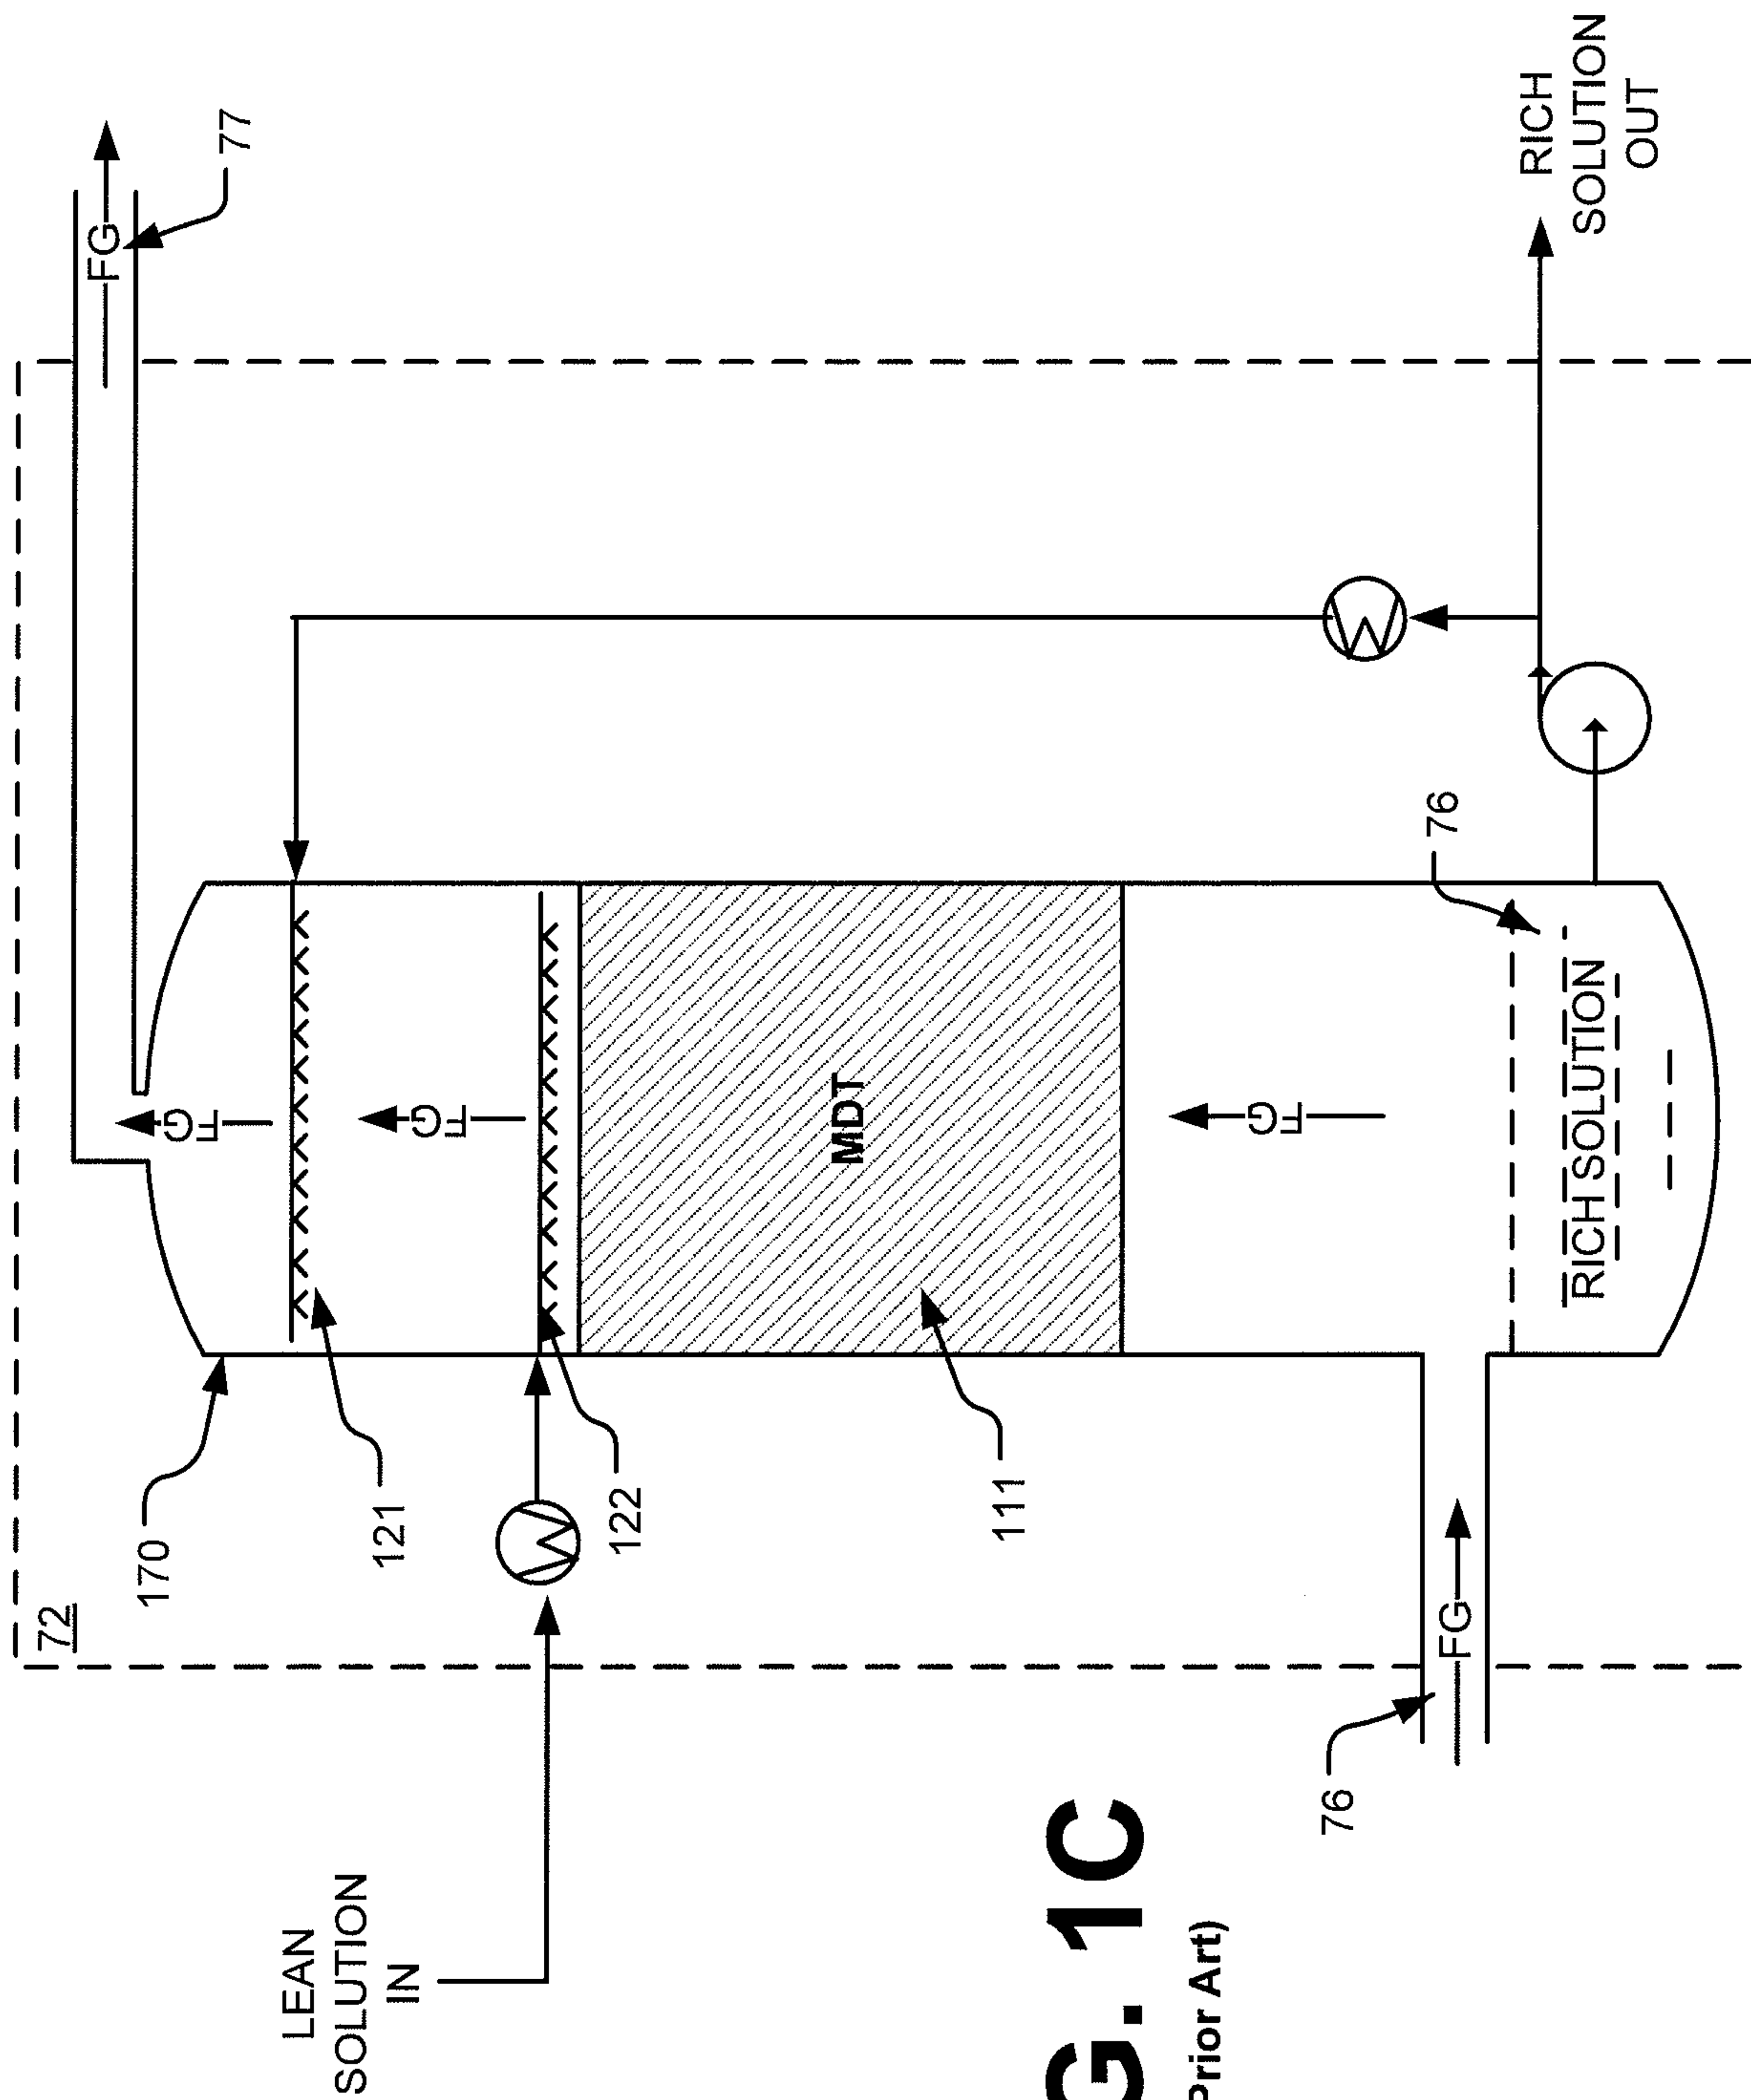


FIG. 1C
(Prior Art)

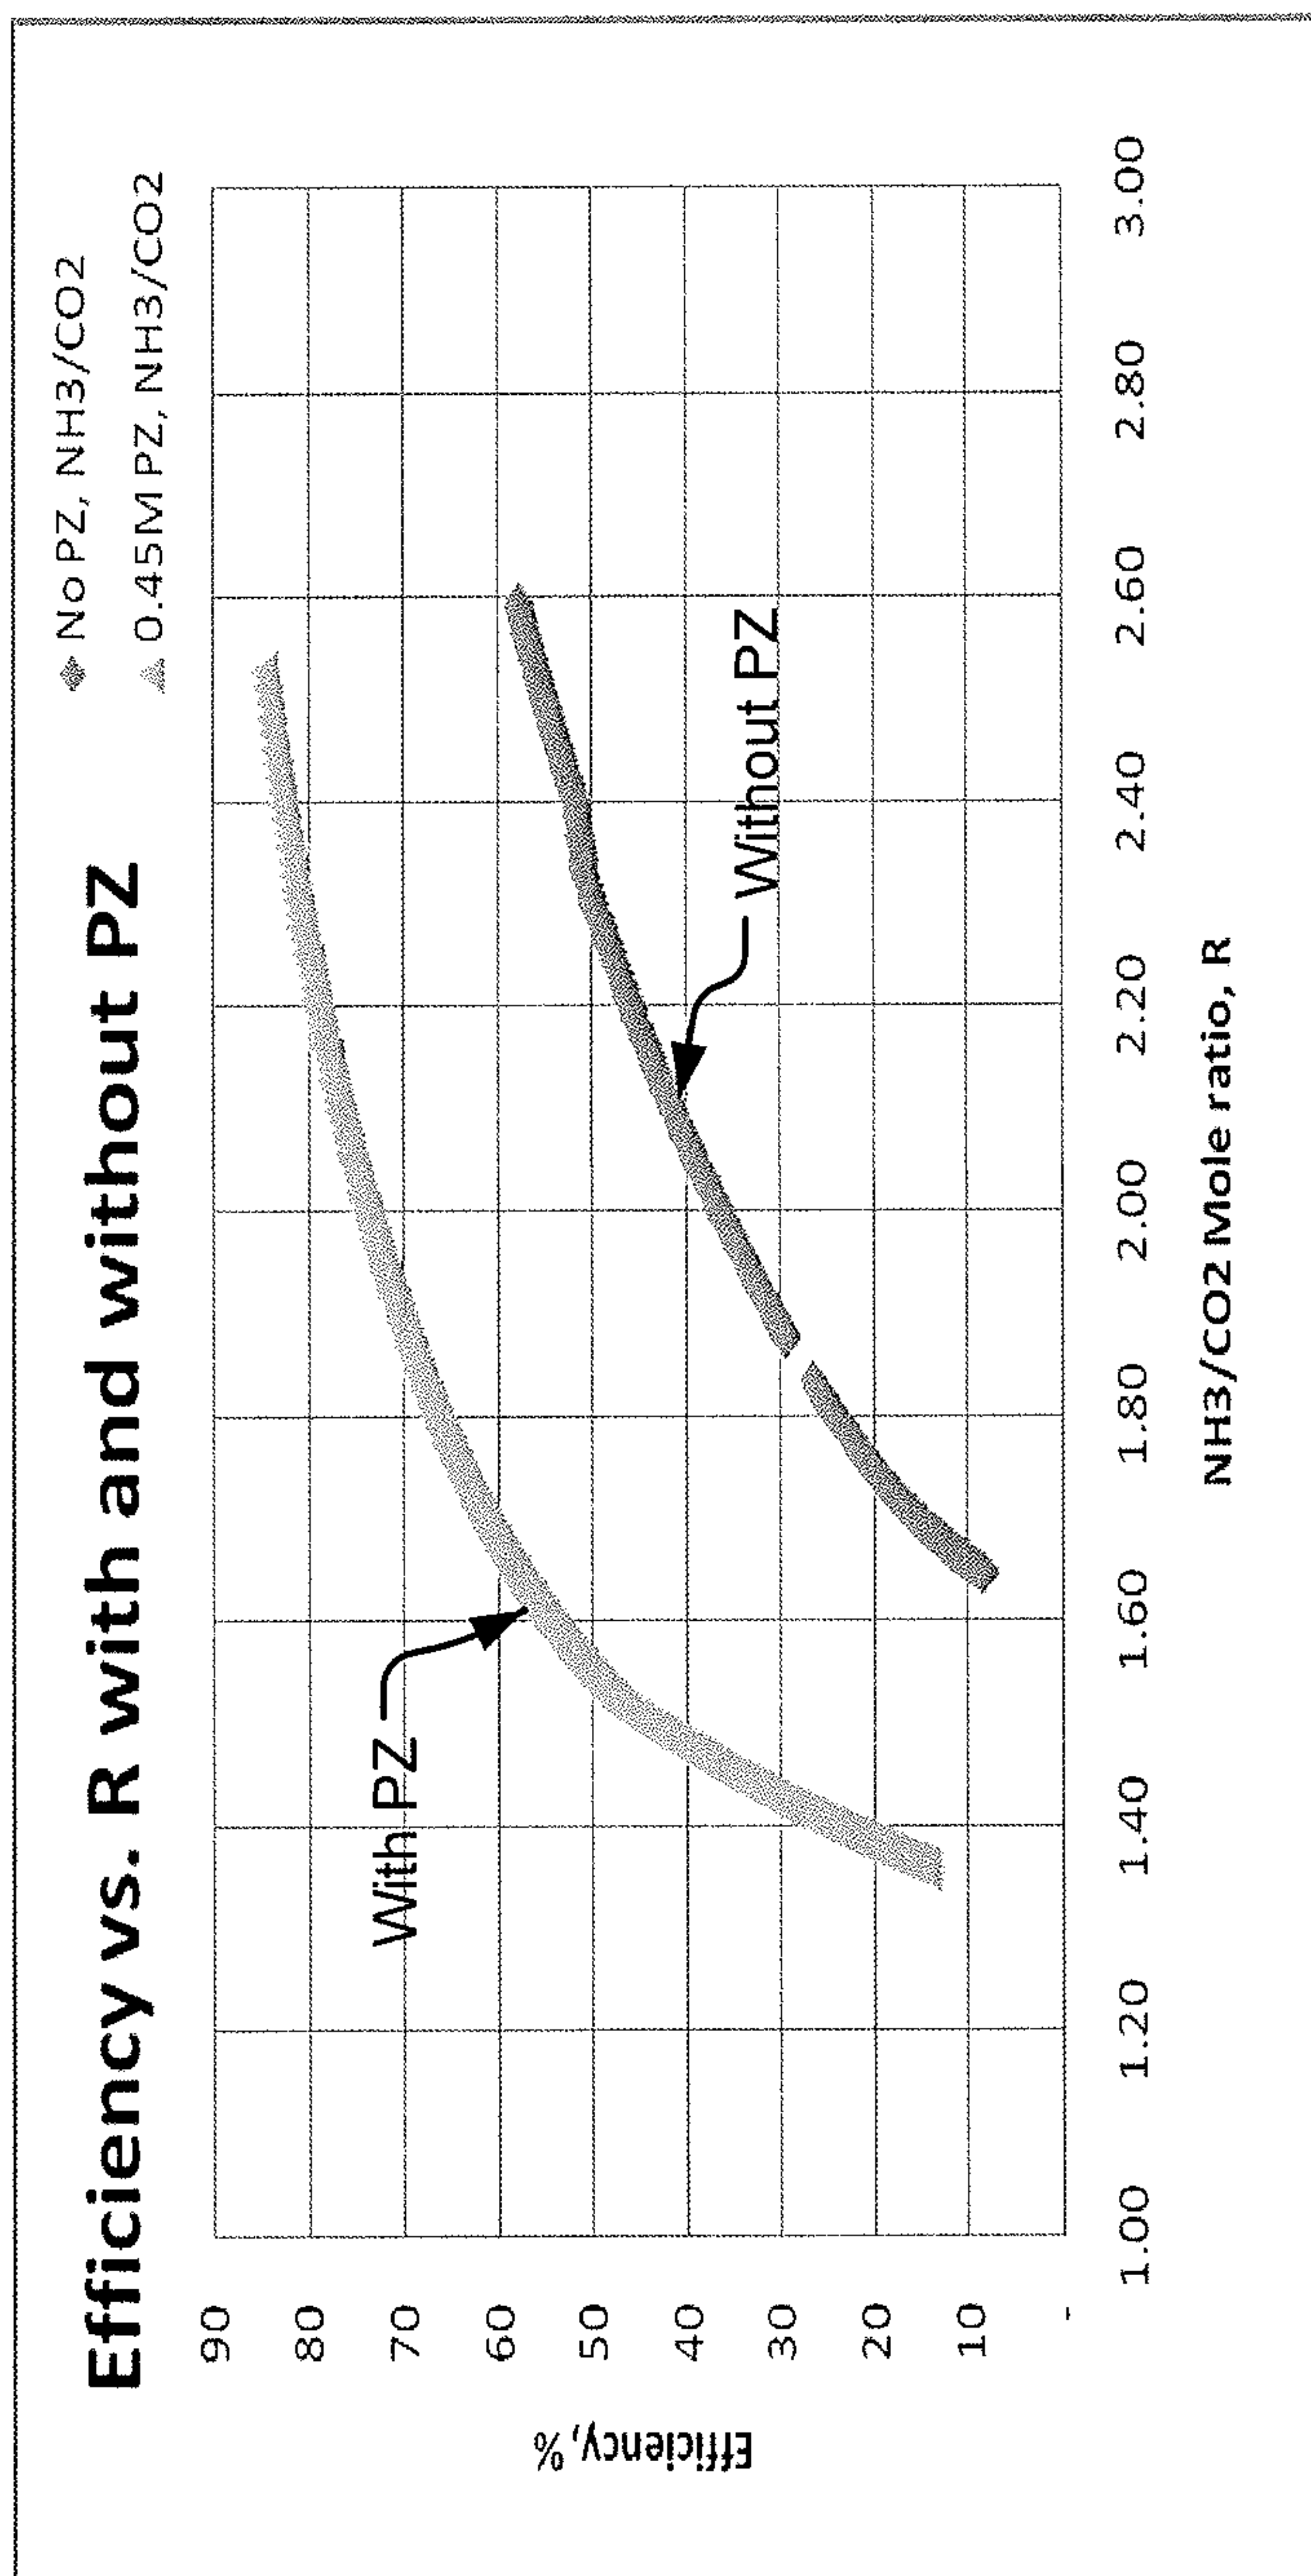


FIG. 2

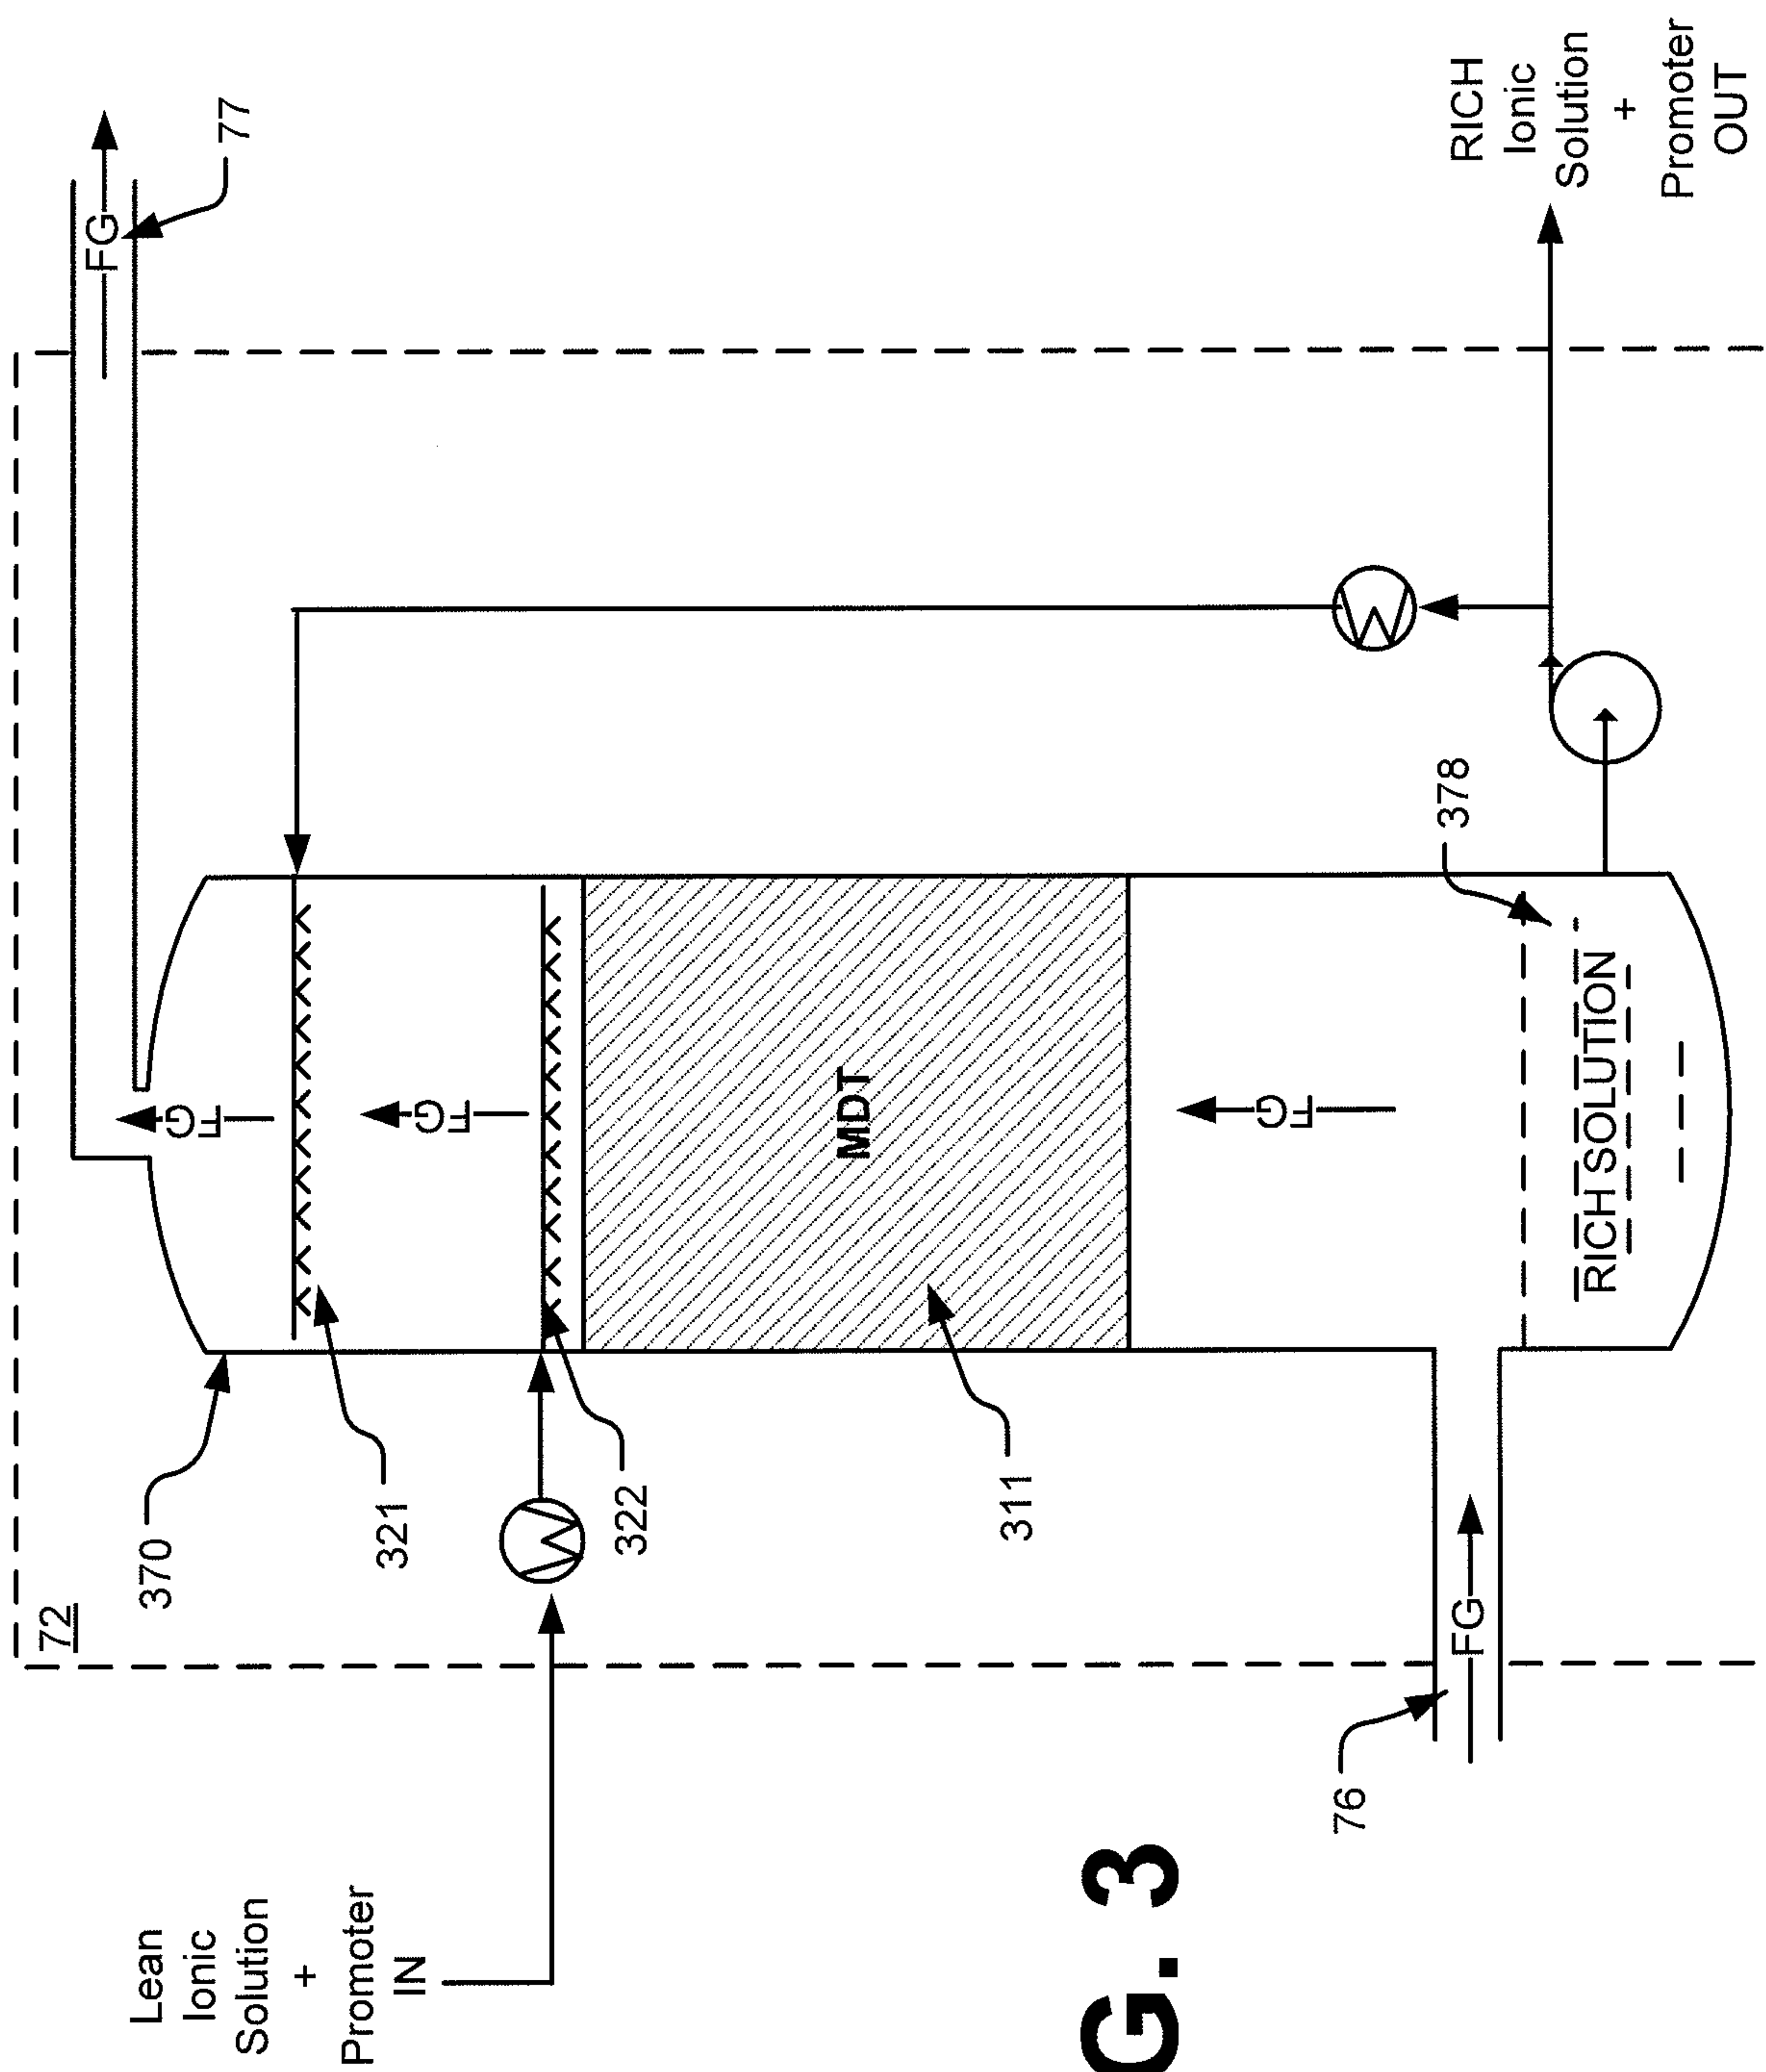


FIG. 3

