

[54] Title: ANTI -SAPSTAIN WOOD TREATMENT

[75] Inventor(s): BRYAN HEGARTY, of Peymenade, France

[73] Assignee(s): ROHM & HAAS COMPANY, of West Philadelphia, Pennsylvania,
U.S.A., a corporation of Delaware, U.S.A.

[22] Filed: January 31, 1990

[21] Application Serial No: 39973

FOREIGN APPLICATION PRIORITY DATA

[31] Number(s) : 89/02449.1

[32] Date(s) : February 3, 1989

[33] Country(ies) : United Kingdom

[52] PH Class 71/67, 71/3

[51] Int. Class A01N 43/80; 50/19, 59/12, 35/12

[58] Field of Search 71/67, 71/3

[56] Reference(s) Cited and/or Considered: None

[57] ABSTRACT see attached sheet

26818

PATENT APPLICATION

OF

BRYAN HEGARTY

FOR

ANTI-SAPSTAIN WOOD TREATMENT

DN89-017

JS/MBF/meb

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention is concerned with the anti-sapstain treatment of wood.

2. Description of the Prior Art

Freshly felled timber contains large quantities of fungal nutrients such as sugars. These, together with a high moisture content in the wood make it extremely susceptible to blue stain and mold attack. In order to prevent the wood from such fungal discoloration, the wood is normally treated, by spraying or dipping with a preservative and it is known to incorporate in such preservatives, as an active ingredient, a fungicidal isothiazolone such as that marketed by Rohm and Haas Company as Kathon 893.

A problem which has been noted when dipping wood into solutions of isothiazolone fungicides is that the wood tends

26818

preferentially to strip the isothiazolone from the treating mixture so that the concentration of the isothiazolone in the mixture rapidly drops. This has the effect that wood dipped into or sprayed with a freshly made treating mixture is excessively treated with isothiazolone, whereas wood which is dipped into or sprayed with a mixture which has already been used substantially may acquire too little isothiazolone from the mixture which is by then depleted in isothiazolone. Clearly it would be advantageous if the take-up of isothiazolone by wood from the mixture were to be substantially the same as the take-up of the other components of the mixture so that the isothiazolone concentration in the mixture, as the mixture is used, would remain substantially the same.

Summary of the Invention

It is known to use polymers to thicken wood treatment solutions to increase the uptake of boron wood preservatives by increasing the adherence of the solution to the wood surface.

We have now surprisingly found that, by the incorporation of a certain additive(s) in anti-sapstain mixtures, the stripping of the isothiazolone from the mixture by the wood can be substantially reduced or virtually eliminated: this being contraindicated by the experience in the earlier wood treatment practice.

Accordingly the invention provides in a first aspect the use in an isothiazolone-containing solution of one or more of

- (a) a polyquaternary compound;
- (b) a thickening agent or dispersing agent;
- (c) a nonionic surfactant having from 3 to 12 alkylene oxide, preferably ethylene oxide, units; and
- (d) a simple quaternary compound in an amount at least equal to the amount of isothiazolone in the solution,

as an agent for combating stripping of the isothiazolone from said solution when it is to be used as an anti-sapstain treatment composition with which wood is to be contract recurrently.

Detailed Description of the Invention and the Preferred Embodiments

As will be apparent to the skilled man, the anti-stripping agent (hereinafter referred to as "additive") should be chosen so as to have no deleterious effect on the wood, on the isothiazolone, or on any of the other optional ingredients which may be found in the mixtures employed in the invention. To exemplify what is meant by a deleterious effect on the wood, if the wood is subsequently intended to be painted, an additive should be chosen which will have no deleterious effect on the paintability of the wood. The choice of

additives whilst taking account of these considerations is within the ordinary skill of those in the art.


Both the polyquaternary and simple quaternary compounds are preferably nitrogen-containing compounds. However, other candidate functional groups for additives useful in the invention are phosphonium functional groups, and other suitable compounds are quanidine and related compounds.

Preferred polyquaternary compounds for incorporation into anti-sapstain mixtures prepared in accordance with the invention are based on (1) polyamines and polyamine ethers, (2) polyvinyl pyrrolidones (3) polyquaternary ammonium polymers, and (4) cationic copolymers based on acrylates, particularly suitable polymers are (1) Gafquat 755N, a quaternary copolymer of vinylpyrrolidone and dimethylaminoethylmethacrylate, (2) Polyquart H81, a condensation resin of polyamine/polyglycol and (3) Rhoplex LE 1126, a cationic ethylacrylate polymer.

Among suitable thickening or dispersing agents are water soluble and water dispersible polymers among the following: homopolymers and copolymers of (meth)acrylic acids and esters, vinyl homopolymers and copolymers, and polymers based on glycol monomers and on ether monomers.

Suitable nonionic surfactants are as follows: (1) polyalkoxylates of alkylphenols, alcohols, amines, and alkanolamides, (2) block polymers of ethylene and propylene oxides.

Preferred simple quaternary compounds are ammonium halide salts having the formula:

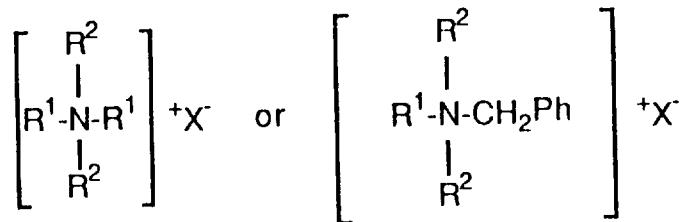


where Ph is C_6H_5 or C_6H_4R , R is H or (C_1-C_3) alkyl, R^1 is (C_8-C_{18}) alkyl, R^2 is (C_1-C_3) alkyl and X is halogen.

In general suitable ratios of isothiazolone to anti-stripping additive are from 1:20 to 1:0.1; preferably 1:10 to 1:0.5, most preferably 1:5 to 1:1. However, for simple quaternary compounds a ratio of isothiazolone to additive of 1:1 or less (i.e. more additive) is essential, and the preferred ratio is from 1:5 to 1:20. Additionally variants of these ratios may be required depending, *inter alia*, on the molecular weight of the additive; for example a minimum isothiazolone to additive ratio of 1:3.5 has been found necessary in some cases so this is a preferred end point to each of the above ratio ranges.

The resulting anti-sapstain compositions for use are generally in the form of a dip or spray mixture and containing 0.005 to 3%, preferably .05 to 1.5%, more preferably 0.075 to 1%, most preferably 0.1 to 0.5% by weight of the isothiazolone. Alternatively the composition may be in the form of a concentrate which may contain from 1 to 80%, more usually from 10 to 40% by weight of the isothiazolone and which can be extended at the treatment site to form treatment mixtures containing the level of isothiazolone indicated above.

Isothiazolone useful in the invention comprise any of the isothiazolones described as suitable or preferable in the following Rohm and Haas specifications, GB 1474983, GB1390443, GB1488891, GB1575226, US4325201, US4322475, EP0095907, US 3870795, US4396413, US3761488, US4067878, US3755224, US3801575, US4067878, US3849430, US3870795, US3887352, US4031055, US4105431, US 4129448, US4062946; preferably those which have low solubility in water.

Such isothiazolones have the general formula

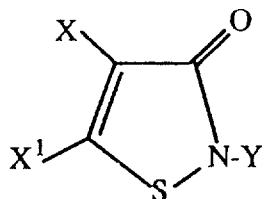

wherein Y may be (C₁-C₁₈)alkyl or (C₃-C₁₂)cycloalkyl each optionally substituted with one or more of hydroxy, halo, cyano, alkylamino,

dialkylamine, arylamino, carboxy, carbalkoxy, alkoxy, alkylthio, arylthio, haloalkoxy, cycloalkylamino, carbamoxy, or isothiazolonyl; an unsubstituted or halo-substituted (C₂-C₈)alkenyl or alkynyl; a (C₇-C₁₀)aralkyl optionally substituted with one or more of halogen, (C₁-C₄)alkyl or (C₁-C₄)alkoxyl; and an aryl optionally substituted with one or more of halogen, nitro, (C₁-C₄)alkyl, (C₁-C₄)alkyl-acylamino, carb(C₁-C₄)alkoxy or sulfamyl; and X and X¹ may each independently be H, halogen or (C₁-C₄)alkyl.

Preferred substituents for Y are substituted or unsubstituted (C₁-C₁₈) alkyl or (C₃-C₁₂) cycloalkyl; X is preferred to be H, Me or Cl; and X¹ is preferred to be H or Cl. Representative of such preferred Y substituents are methyl, ethyl, propyl, isopropyl, butyl, hexyl, octyl, cyclohexyl, benzyl, 3,4-dichlorobenzyl, 4-methoxybenzyl, 3,4-diclorophenyl, 4-methoxyphenyl, hydroxymethyl, chloromethyl, chloropropyl, hydrogen and the like.

As is well known, such isothiazolones are usually stabilized against deterioration by the presence of various stabilizing agent several of which are described in the above mentioned patent specifications. Other convenient stabilizing agents and isothiazolones


are disclosed in the following specifications: EP-A-0166611, EP-A-0194146 and European Application No 88310390.5.

Especially preferred isothiazolones are: 4,5,dichloro-2-n-octyl-3- isothiazolone, 4,5-dichloro-2-cyclohexyl-3-isothiazolone, and, most preferably, 2-n-octyl-3-isothiazolone. 5-Chloro-2-methyl-3- isothiazolone and 2-methyl-3-isothiazolone may also be used.

The isothiazolones employed in the invention can be in any known form, including micro-emulsion such as is described in pending European Application 88307123.5.

In another aspect the invention provides a composition comprising

(i) an isothiazolone of the formula

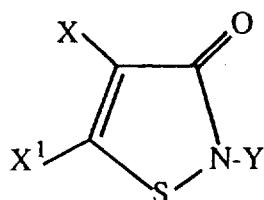

wherein Y is one of (C₄-C₁₂)alkyl optionally substituted with one or more of hydroxy, halo, cyano, alkylamino, dialkylamine, arylamino, carboxy, carbalkoxy, alkoxy, alkylthio, arylthio, haloalkoxy, cycloalkylamino, carbamoxy, or isothiazolonyl; an unsubstituted or halo-substituted (C₂-C₈)alkenyl or alkynyl; and an (C₇-C₁₀)aralkyl

optionally substituted with one or more of halogen, (C₁-C₄)alkyl or (C₁-C₄)alkoxy, and X and X¹ are each independently either H, halogen, or (C₁-C₄)alkyl,

(ii) one or more of

- (a) a polyquaternary compound;
- (b) a thickener or dispersant; or
- (c) a simple quaternary compound in an amount at least equal to that of the isothiazolone.

Preferred ratios of (ii) to (i) are as previously described in respect of the first aspect of the invention, as are the preferred compounds (a), (b) and (c) and the preferred isothiazolones.

Examples

The invention will now be described with reference to the following Examples in which all parts and percentages are by weight unless otherwise specified.

In Examples 1 to 3 a 1000 to 2000 ppm active ingredient aqueous solution of the isothiazolone biocide marketed by Rohm and Haas Company as Kathon 893 containing the active ingredient 2-octyl-3- isothiazolone was emulsified with a mixture of nonionic (300 to 600 ppm) and anionic (600 to 1200) ppm surfactants, together with the

additive to be tested. In Example 4, where surfactants were tested emulsification was unnecessary.

Each solution was tested for isothiazolone content.

2.5% w/w of sawdust was added to each solution and the mixture was allowed to stand for 3 hours at 23°C. The solution was then filtered off from the sawdust and analyzed for isothiazolone content.

Without any additive present to prevent stripping, the loss of isothiazolone is typically from 40 to 60%, the precise value depending on the wood used, analytical error and operator error.

Example 1

The following polyquaternary compounds were employed as anti-stripping additives:

Luviquat HM 552, a modified copolymer of vinyl pyrrolidone and vinyl imidazoliummethochloride;

Gafquat 755N, a quaternary copolymer of vinyl pyrrolidone and dimethylaminoethyl methacrylate;

Polyquart H81, a polyamine-polyglycol condensation resin;

Busan 77, a poly[oxyethylene (dimethylimino)ethylene (dimethylimino)ethylene dichloride]; and

RH-A, a polyquaternary dimethylaminoethylmethacrylate.

Table 1 gives the ratio of isothiazolones (IT) to additive in each case, and the amount of isothiazolone to additive in each case, and the amount of isothiazolone (in parts per million) present before and after the test, together with the percentage loss.

TABLE 1

Additive	Ratio IT:additive	Before	After	Detectable isothiazolone (ppm)	% loss
Luviquat Hm 552	1:2.5	2002	1590	21%	
Gafquat 755N	1:5	1000	870	13%	
Polyquart H81	1:5	1000	900	10%	
Busan 77	1:5	1946	1390	29%	
RH-A	1:2.5	2011	1657	17%	

Example 2

The following simple quaternary salts were tested as in Example 1: RH-B, a solution of N-octyl-3-isothiazolone and dimethyl benzylammonium chloride (12.5%); Empigen BAC, alkyl dimethyl benzylammonium chloride; and Luviquat Mono Cp, cetyl-dimethyl-(2)-hydroxy-ethylammonium dihydrogen phosphate.

The results are shown in Table 2:

Table 2

Additive	Ratio IT:additive	Before	After	Detectable isothiazolone (ppm)	% loss
RH-B	1:5	2000	1995	0.5%	
Empigen BAC	1:1	1857	1282	31%	
	1:2.5	1943	1526	21%	
	1:5	2004	1776	11%	
	1:2.5	1983	1774	10.5%	

The effect of increasing the proportion of additive is clearly seen here.

EXAMPLE 3

The following dispersing agents were tested as in Example 1:

RH-C (Rohm and Haas Company), a self crosslinkable polyacrylate:

RH-D, a sodium salt of polyacrylic acid; and

RH-E, a low-molecular weight polyacrylic acid.

The results are shown in Table 3.

TABLE 3

Additive	Ratio IT: additive	Before	After	Detectable isothiazzone (ppm)	% loss
RH-C	1:2.5	1996	1668	1668	16%
RH-D	1:2.5	1993	1600	1600	20%
RH-E	1:2.5	1995	1433	1433	28%

EXAMPLE 4

The following nonionic surfactants were tested as in Example 1, except that no additional surfactants were required for emulsification:

SA1, nonyl phenoxy polyethoxy ethanol (EO content 9.5);

SA2, octyl phenoxy polyethoxy ethanol (EO content 7-8);

SA3, octyl phenoxy polyethoxy ethanol (EO content 15-16);

SA4, octyl phenoxy polyethoxy ethanol (EO content 30).

The results are shown in Table 4.

TABLE 4

Additive	Ratio IT:additive	Before	After	Detectable isothiazone (ppm)	%loss
SA3	1:0.8	860	570	34%	
SA4	1:0.8	850	560	34%	
SA1 + SA2	1:1:1	1972	1639	17%	

Table 4 shows how the two nonionic surfactants having an EO content outside the scope of the invention have no significant effect on the stripping of isothiazolone, whereas the combination of SA1 and SA2 is very effective.

CLAIMS:


1. A method comprising using a composition comprising a solution comprising an isothiazolone and a material selected from the group consisting of

- (a) a polyquaternary compound;
- (b) a thickening agent or dispersing agent;
- (c) a nonionic surfactant having from 3 to 12 alkylene oxide, preferably ethylene oxide, units; and
- (d) a simple quaternary compound

in an amount at least equal to the amount of isothiazolone in the solution, as an agent for combating stripping of the isothiazolone from said solution when it is to be used as an anti-sapstain treatment composition in recurrent contact with wood.

2. A method according to Claim 1 wherein the thickening or dispersing agent comprises water-soluble and/or water-dispersible polymer comprising either homopolymer or copolymer or (meth) acrylic acid and/or esters, vinyl homopolymer and/or copolymer, and/or polymer based on glycol monomer or ether monomer.

3. A method according to Claim 1 wherein the nonionic surfactant is selected from the group consisting of polyalkoxylate of alkylphenol, alcohol, amine or alkanolamide, and block copolymer of ethylene and propylene oxides.
4. A method according to any of Claim 1 wherein the polyquaternary compound is a nitrogen-containing compound or phosphonium compound.
5. A method according to Claim 1 wherein the simple quaternary compound is a nitrogen-containing compound or phosphonium compound.
6. A method according to Claim 1 wherein the polyquaternary compound comprises either polyamine or polyamine ether, polyvinyl pyrrolidone, polyquaternary ammonium polymer or cationic copolymer based on acrylates.
7. A method according to Claim 1 wherein the simple quaternary compound comprises ammonium halide of the formula:

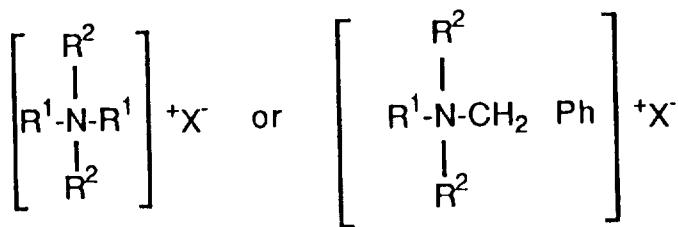


where Ph is C_6H_5 or C_6H_4 , R is (C_1-C_3) alkyl, R^1 is (C_8-C_{18}) alkyl,

R^2 is (C_1-C_3) alkyl, and X is halogen.

8. A method according to Claim 1 in which the ratio of isothiazolone to anti-stripping agent is from 1:20 to 1:01.

9. A method according to Claim 1 wherein the isothiazolone has the formula

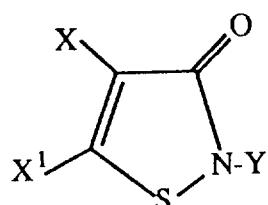


wherein Y is selected from the group consisting of (C_1-C_{18}) alkyl or (C_3-C_{12}) cycloalkyl each optionally substituted with one or more of hydroxy, halo, cyano, alkylamino, dialkylamine, arylamino, carboxy, carbalkoxy, alkoxy, alkylthio, arylthio, haloalkoxy, cycloalkylamino, carbamoxy, or isothiazolonyl; an unsubstituted or halo-substituted (C_2-C_8) alkenyl or alkynyl; a (C_7-C_{10}) aralkyl optionally substituted with one or more of

halogen, (C₁-C₄)alkyl or (C₁-C₄)alkoxy; and an aryl optionally substituted with one or more of halogen, nitro, (C₁-C₄)alkyl, (C₁-C₄)alkyl-acylamino, carb(C₁-C₄)alkoxy or sulfamyl; and X and X¹ are independently H, halogen or (C₁-C₄) alkyl.

10. A method according to Claim 9 wherein the isothiazolone comprises one of more of 4,5-dichloro-2-n-octyl-3-isothiazolone, 4,5-dichloro-2-cyclohexyl-3-isothiazolone and 2-n-octyl-3-isothiazolone.

11. A composition comprising

(i) an isothiazolone of the formula

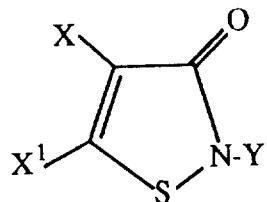

wherein Y is one of (C₄-C₁₂)alkyl optionally substituted with one or more of hydroxy, halo, cyano, alkylamino, dialkylamine, arylamino, carboxy, carbalkoxy, alkoxy, alkylthio, arylthio, haloalkoxy, cycloalkylamino, carbamoxy, or isothiazolonyl; an unsubstituted or halo-substituted (C₂-C₈)alkenyl or alkynyl; and an (C₇-C₁₀)aralkyl optionally substituted with one or more of halogen, (C₁-C₄)alkyl or (C₁-C₄)alkoxy; and an aryl optionally substituted with one or more of halogen, nitro, (C₁-C₄)alkyl, (C₁-C₄)alkyl-acylamino, carb(C₁-C₄)alkoxy or sulfamyl; and X and X¹ are independently H, halogen or (C₁-C₄) alkyl.

C_4 alkoxy, and X^1 and X are each independently either H, halogen or $(C_1\text{-}C_4)$ alkyl,

(ii) one or more of


- (a) a polyquaternary compound;
- (b) a thickener or dispersant; or
- (c) a simple quaternary compound

in an amount at least equal to that of the isothiazolone.

12. A composition according to Claim 11 wherein the thickening or dispersing agent comprises a water-soluble and water-dispersible polymer comprising either homopolymer and/or copolymer of (meth)acrylic acid and/or ester, vinyl homopolymers and/or copolymer, or polymer based on glycol monomer and/or either monomer.

13. A composition according to Claim 11 wherein the polyquaternary compound comprises either polyamine or polyamine ether, polyvinyl pyrrolidone, polyquaternary ammonium polymer or cationic copolymer based on acrylate.

14. A composition according to Claim 11 wherein the simple quaternary compound comprises ammonium halide of the formula:

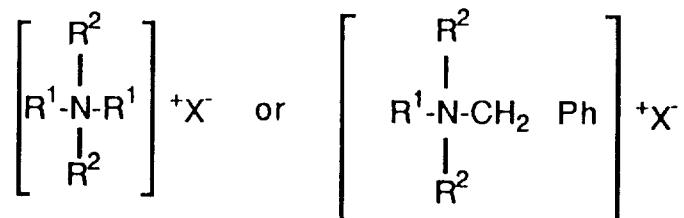

where Ph is C_6H_5 or C_6H_4R , R is (C_1-C_3) alkyl, R^1 is (C_8-C_{18}) alkyl, R^2 is (C_1-C_3) alkyl, and X is halogen.

15. A composition according to Claim 11 wherein the polyquaternary compound is a nitrogen-containing compound or phosphonium compound.

16. A composition according to Claim 11 wherein the simple quaternary compound is a nitrogen-containing compound or phosphonium compound.

17. A composition according to Claim 11 wherein the ratio of isothiazolone to anti-stripping agent is from 1:20 to 1:0.1, preferably from 1:1.0 to 1:0.5 and more preferably 1:5 to 1:1, except that when the anti-stripping agent is a simple quaternary compound, the amount present is at least equal to that of the isothiazolone.

18. A composition according to Claim 11 wherein the isothiazolone comprises one or more of 4,5-dichloro-2-*n*-octyl-3-isothiazolone, and 1-*n*-octyl-3-isothiazolone.

19. A method according to claim 8 in which the ratio is about 1:10 to 1:0.5.

20. A method according to claim 8 in which the ratio is about 1:5 to 1:1.

ABSTRACT

TITLE: ANTI-SAPSTAIN WOOD TREATMENT

The use is disclosed of one or more of

- (a) a polyquaternary compound,
- (b) a thickening agent or dispersing agent,
- (c) a nonionic surfactant having from 3 to 12 alkylene oxide, preferably ethylene oxide, units,
- (d) a simple quaternary compound in an amount at least equal to the amount of isothiazolone in the solution,

to prevent stripping of isothiazolone in an isothiazolone-containing solution used an anti-sapstain agent in wood treatment, where the solution is recurrently contacted with wood.