



HU000034530T2

(19) **HU**(11) Lajstromszám: **E 034 530**(13) **T2****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala**EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 07 848267**(51) Int. Cl.: **B31F 1/07** (2006.01)(22) A bejelentés napja: **2007. 09. 21.**

(86) A nemzetközi (PCT) bejelentési szám:

PCT/FR 07/001538

(96) Az európai bejelentés bejelentési száma:

EP 20070848267

(87) A nemzetközi közzétételi szám:

WO 08037877

(97) Az európai bejelentés közzétételi adatai:

EP 2069135 A2 **2008. 04. 03.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2069135 B1 **2017. 06. 28.**

(30) Elsőbbségi adatok:

0608489 **2006. 09. 27.** **FR**

(73) Jogosult(ak):

SCA TISSUE FRANCE, 93400 Saint-Ouen (FR)

(72) Feltalálók(k):

JEANNOT, Sébastien, F-68320 Holtzwihr (FR)**GRAFF, Pierre, F-68600 Wolfgantzen (FR)****HOEFT, Benoît, F-68320 Bischwihr (FR)****PROBST, Pierre, F-68770 Ammerschwihr (FR)**

(74) Képviselő:

**Danubia Szabadalmi és Jogi Iroda Kft.,
Budapest**(54) **Eljárás és elrendezés szívóképes papírlap gyártására és az így kapott szívóképes papírlap**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.

Process and assembly for manufacturing an absorbent sheet, and absorbent sheet obtained

[0001] The present invention relates to the field of absorbent papers based on cellulose wadding, for sanitary or domestic use such as bathroom tissue, paper towels or other wiping paper, paper napkins, etc.

[0002] To produce such products, cellulose wadding also called tissue paper is usually used. It is an absorbent paper of low basis weight, lying between 10 and 45 g/m², obtained by the wet method from paper fibers. It comprises, where appropriate, chemical additives in small proportions, depending on the use for which it is intended. It may be obtained by pressing the still-wet sheet on a large-diameter, heated cylindrical element, on which it is dried and from which it is subsequently detached by means of a metal blade applied against the latter, across its direction of rotation. The purpose of this operation is to crepe the sheet which then has undulations across its direction of travel. The creping confers a certain elasticity on the sheet at the same time as it increases the thickness thereof and gives it touch properties.

[0003] Another known manufacturing method comprises a first step of drying the sheet, at least partly, by means of a current of hot air passing through it. The latter may or may not then be creped.

[0004] Usually, the sheet thus manufactured is then transformed in another distinct manufacturing phase, called transformation or converting, and combined with other sheets then called plies to form the end product of absorbent paper.

[0005] Specifically, when the requirement is to confer particular properties on a sheet such as thickness, softness, bulk, it is possible to choose to combine several plies together.

[0006] The combining operation may be of a chemical nature by adhesive bonding for example or else of a mechanical nature.

[0007] Concerning adhesive bonding, the known methods consist in depositing a film of adhesive over some or all of the surface of one of the plies, then placing the adhesive-treated surface in contact with the surface of at least one other ply.

[0008] This type of combining operation requires specific additional equipment in the production line which represents a cost and added technical difficulties. In addition, the adhesive is expensive in itself, soils the cylindrical elements of the embossing unit and may cause an added rigidity that is undesirable on the end product whose softness will be further diminished by the presence of the adhesive. These disadvantages have caused certain manufacturers to turn towards mechanical-type combining operations.

[0009] In this case, the plies may be combined by knurling or by compression in a transformation or converting phase.

[00010] Knurling consists in compressing the plies to be combined between a knurling wheel (or engraved wheel provided with elements in relief) and a smooth cylindrical element.

[00011] Each knurled strip therefore corresponds to the width of a knurling wheel. The strips may form decorative strips on the sheet.

[00012] As an illustration, patent US 3,377,224 describes a tissue paper made by such a method. Given that a very limited width of paper is knurled, a notable disadvantage lies in the delamination of the zones that are not knurled.



SZTNH-100066247

[00013] In addition, combining by knurling is limited when it is required to produce patterns over the whole width. Specifically, even if a large number of knurling wheels are placed side by side (thus creating a large number of strips), there may still remain zones that are not knurled.

[00014] Document EP 1 362 953 illustrates a particular example of an installation and a method using knurling. The major difference compared with the basic method described hereinabove lies in that the plies are combined along wide parallel strips (direction of travel of the machine) on the sheet, and in that a film of additive such as oil is applied to at least one of the faces of the sheet.

[00015] Furthermore, knurling generally creates problems of visibility of the embossed pattern if there is one, because the knurling flattens the embossed patterns.

[00016] In addition, in the case where a large number of knurling wheels is used, the adjustment and/or setting of the knurling wheels makes manufacture difficult and complex.

[00017] Embossing is also known that is a deformation in the thickness of the sheet or of the ply, which confers thereon a particular relief or indentation. The thickness of the sheet or of the ply is increased after embossing compared with its initial thickness.

[00018] Although embossing adds a thickness to each ply or sheet, it nevertheless induces a substantial reduction in the sheet's resistance to tearing. Specifically, the mechanical work on the ply (or the sheet) is accompanied by a loosening of the interfibre links of the embossed zones.

[00019] In the case of a multi-ply sheet, the embossing may be carried out individually on each ply and then the already embossed plies may be combined thanks to a marrying cylinder. Application WO 2004/065113 illustrates an example of this type of combining operation.

[00020] However, such a marrying cylinder is complex to produce especially when all its external surface must be covered with a strip of hard material rolled in a helix.

[00021] In one or other method of producing a multi-ply sheet, the two (or even more) plies are embossed and then combined by passing the sheet thus treated and formed between an engraved cylinder and a marrying cylinder.

[00022] Application WO01/38078 describes an analogous process for autogeneously bonding two cellulosic laminae to form a multi-lamina substrate by high pressure lamination. The attachment occurs at selective bond sites wetted with a functional fluid such as water prior to bonding. The process is applicable to multi-lamina substrates formed from laminae treated with chemical softening agents.

[00023] The combining operation may pose problems particularly of wear of the engraved cylinder and/or of the marrying cylinder.

[00024] The wear is accentuated when high pressures and/or speeds are necessary.

[00025] A first known approach consists in covering the external surface of the marrying cylinder for example with a shell.

[00026] Application FR 2 801 833 discloses a marrying cylinder (for example) onto which a sleeve is mounted, a layer called an attachment layer being interposed between the cylinder and the sleeve. The attachment layer may be considered to be an "elastic" sub-layer that absorbs the pressure variations and also the manufacturing differences of each of the cylinders.

[00027] However, in use, it was revealed that the manufacturing differences and the pressure variations absorbed by this type of cylinder are insufficient. Premature and intermittent wear appeared, particularly if the cylinders operate at high speeds, from approximately 300 m/min.

[00028] In addition, the pressure on the sheet at the passage (or nip) between the cylinders accentuates the wear thereof; the external layer is damaged in places.

[00029] Naturally, all these deficiencies have negative consequences on the sheets formed which, for example, are not sufficiently combined (they delaminate); the result therefore is a production of uneven, or even generally bad, quality.

[00030] This is acceptable neither for the manufacturer nor for the user.

[00031] There is therefore a need to combine plies made of tissue paper in a manner that is reliable, simple, without bonding and that obviates the problems specified hereinabove.

[00032] The present invention proposes a solution whose subject is a method of manufacturing an absorbent sheet comprising at least two plies of tissue paper, consisting in combining the said plies under pressure by passing them between two cylindrical steel elements, the first being externally smooth and the second being externally provided with elements in relief and the hardness of the first cylindrical element being less than that of the second cylindrical element.

[00033] According to the invention, the first cylindrical element has a treated, hardened superficial layer and a deformable sub-layer; the second cylindrical element has a hardened outer surface, and the sheet, as it passes between the two cylindrical elements, is compressed at a specific pressure lying between 40 and 250 N/mm².

[00034] The features specified hereinabove advantageously make it possible to work at high pressures and therefore obtain multi-ply products of good quality which also have several, varied and perfectly visible embossing patterns.

[00035] Advantageously, the difference in external hardness between the first and the second cylindrical element lies between 2 and 20 HRC, preferably between 5 and 15 HRC.

[00036] This difference in hardness makes it possible to operate at high speeds and/or pressures while obtaining a perfect combination of plies.

[00037] In addition, this difference in hardness creates wear of the engraved cylindrical element that is less rapid than that of the first cylindrical element, which is an advantage because the engraved cylindrical element is a costly element of the installation, more costly than the first, smooth, cylindrical element.

[00038] Concerning the external hardness of the first cylindrical element, it is possible to choose values lying between approximately 30 and approximately 65 HRC.

[00039] The method according to the invention advantageously makes it possible to combine plies of a width lying between 0.3 and 4 m, without a problem of wear of the cylindrical elements or of variation in the quality of the combining, irrespective of the speeds at which the plies pass through.

[00040] The sheet obtained by such a method is also a subject of the invention.

[00041] An additional subject of the invention is a set of steel cylindrical elements designed for combining multi-ply absorbent sheets, the first cylindrical element being externally smooth and the second cylindrical

element being externally provided with elements in relief, the external hardness of the first cylindrical element being less than that of the second cylindrical element, and the said set making it possible to combine the various plies of the sheet under pressure by passing them into the gap between their generatrices.

[00042] According to the invention, the first cylindrical element has a hardened superficial layer and a deformable sub-layer and the second cylindrical element has a hardened external surface, the first cylindrical element being pressed against the second cylindrical element so as to apply to the absorbent sheet a specific pressure lying between 40 and 250 N/mm².

[00043] In addition to the advantages already cited, the invention allows great flexibility in the choice of marking patterns, in the type of embossing, the placing and/or the quantity of the patterns.

[00044] Furthermore, the first cylindrical element may comprise one cylinder, or else a set of several coaxial cylinders.

[00045] According to a worthwhile feature of the invention, the external (superficial) layer of the first cylindrical element has a thickness lying between 3 and 30 mm, while the thinner, deformable sub-layer may have a thickness lying between 0.5 and 10 mm.

[00046] A hardness gradient of the said external layer of the first cylindrical element may advantageously be provided according to its thickness.

[00047] Without departing from the context of the invention, the said external superficial layer of the first cylindrical element may comprise two layers that are combined with and superposed on one another, the outermost being treated, hardened.

[00048] The external surface (or shell) of the first cylindrical element, mounted on the deformable sub-layer, forms a sort of shield which perfectly resists the mechanical actions while generally retaining a certain flexibility in the cylindrical element.

[00049] Therefore, for large dimension widths, the deflection at the centre of the cylindrical element may be compensated for by the general relative flexibility of the said cylindrical element.

[00050] Similarly, the manufacturing tolerances of each of the cylindrical elements may be compensated for particularly but not exclusively by the said flexibility created by the deformable sub-layer.

[00051] It can also be envisaged, without departing from the context of the invention, that the said deformable sub-layer comprises at least two layers having different mechanical characteristics.

[00052] Other features, details and advantages of the present invention will better emerge on reading the following description, given by way of illustration and in no way limiting, with reference to the appended drawings in which:

- Figure 1 is a simplified section of a "nip" between two cylindrical elements, according to a first embodiment of the invention;
- Figure 2 is a simplified section of a "nip" according to a second embodiment of the invention;
- Figure 3 is a diagram showing the main elements necessary for applying one embodiment of the invention; and
- Figure 4 is a diagram showing the main elements necessary for applying another embodiment of the invention.

[00053] According to one embodiment of the invention, as schematized in Figure 1, the set of two cylindrical elements allowing the combination of the plies comprises a first cylindrical element 1 normally called the marrying cylindrical element which interacts with a second cylindrical element 2 called the embossing cylindrical element.

[00054] As is known, the marrying cylindrical element 1 has a smooth external surface, and the embossing cylindrical element 2 has external protuberances such as lines, protrusions, having only one or else two or even more different depths.

[00055] As is equally known, the first marrying cylindrical element has an external hardness that is less hard than that of the second cylindrical element.

[00056] According to one embodiment as illustrated in Figure 1, the first cylindrical element 1 has an external surface formed of two layers 111, 112 that are combined with and superposed on one another, the outermost 112 being treated, hardened.

[00057] According to another embodiment of the invention, as illustrated in Figure 2, the first marrying cylindrical element has a hardened external surface 11 that rests on a deformable sub-layer 12 that itself may be for example made of a polymer.

[00058] Without departing from the context of the invention, the said sub-layer 12 may comprise at least two layers having different mechanical characteristics, in particular different hardnesses and/or resiliences.

[00059] The external hardness of the first cylindrical element may be produced thanks to a treated steel sleeve; or else thanks to a sleeve externally faced with a hardened treated layer.

[00060] Any conventional treatment known to those skilled in the art may here be used in order to confer the required external hardness on the said cylindrical element 1.

[00061] In all cases, the aim is to obtain an external (surface) hardness greater than approximately 30 HRC, preferably lying between 30 and 55 HRC.

[00062] Furthermore, the external surface of the engraved cylindrical element 2 has a hardness that is 2 to 20 HRC greater than that of the first marrying cylindrical element 1. A difference in hardness lying between 5 and 15 HRC may be preferred.

[00063] The HRC unit is a unit of hardness according to the test developed by the company Rockwell based on the following principle:

A pointed body is inserted into a metal test piece.

[00064] More precisely, the penetrating body used is a slightly rounded diamond point whose angle at the vertex is 120°; this diamond point is sunk progressively into the metal and the remanent penetration (e, in μm) of the point is measured under a given load.

[00065] The hardness value is then given by

$$100 - \frac{e}{2}$$

2

[00066] So, the harder the metal, the closer its hardness expressed in HRC units is to 100.

[00067] These hardness tests known to those skilled in the art are for example disclosed in the work "Technologie professionnelle générale pour les mécaniciens" - Tome II - Classe de 1^{ère} - Editions Foucher, pages 35 to 38.

[00068] In addition, ISO standard 6508 - 1: 1999 has a complete definition of the Rockwell hardness tests.

[00069] The external hardness of the engraved cylindrical element 2 may be achieved by a surface treatment that preferably concerns a thickness 22 greater than the height of the protuberances (or of the highest protuberances) forming the engraving.

[00070] It may also be envisaged that the steel of the engraved cylindrical element 2 intrinsically has the required hardness, in its entirety, as illustrated in Figure 2.

[00071] One or the other solution will be chosen according to the cost and/or the difficulty of producing the cylindrical elements 1, 2, or any other technical constraint.

[00072] According to the invention, at the nip between the cylindrical elements 1 and 2, there is contact along the common generatrix of the cylindrical elements and the absorbent sheet to be combined passes between these cylindrical elements where it sustains a particular specific pressure, lying between 40 and 250 N/mm².

[00073] The specific pressure may be defined as the ratio of the total force applied by the first cylindrical element 1 on the second cylindrical element 2 at the nip, to the sum of the surface areas in contact at this location, at a given moment.

[00074] It is easily understood therefore that this pressure varies according to the geometry of the distal (end) surfaces of the protuberances of the engraved cylindrical element 2, and that it may thus be mastered, controlled.

[00075] The present invention advantageously allows great freedom in the choice of protuberances, that is to say specifically of the embossing patterns of the absorbent sheet to be manufactured.

[00076] It can even be envisaged to produce the embossing thanks to one type of protuberance and the combining operation thanks to another type of protuberance, those that are effectively in contact under pressure with the external surface of the marrying cylindrical element 1.

[00077] Great flexibility in the choice is possible according to the invention.

[00078] Furthermore, the features mentioned hereinabove allow a combining operation on sheets of relatively great width, that is to say lying between 0.3 and 4 m, with no particular problem.

[00079] Concerning the nature of the deformable sub-layer 12, the latter may be made of a compressible polymer such as for example an elastomer.

[00080] This sub-layer may have a thickness lying between 0.5 and 10 mm; tests with thicknesses from 2 to 4 mm have given very worthwhile results.

[00081] The arrangement according to the invention makes it possible to reduce the deflection in the embossing cylindrical element 2 and the vibrations and other associated disadvantages.

[00082] As a produced example, the marrying cylindrical element 1 is faced with a sleeve 11 which has a hardness of 47 HRC and is in contact with the engraved cylindrical element 2 which itself has an external hardness of 57 HRC. The elastic sub-layer 12 has a thickness of 4 mm and is made of a compressible polymer such as an elastomer known per se.

[00083] The sub-layer 12 advantageously makes it possible to absorb the manufacturing defects, the wear and/or the vibrations at high speeds.

[00084] "High speeds" should be understood to be speeds equal to or greater than approximately 300 m/min for manufactures of bathroom tissue; and of 150 to 350 m/min for manufactures of facial tissues.

[00085] It has also been observed that a difference in hardness of approximately 10 HRC between the external surfaces of the two cylindrical elements 1, 2 makes it possible to obviate all the aforementioned disadvantages, and especially to preserve relatively low wear of each of the cylindrical elements with account being taken of their rotation speeds and their respective dimensions.

[00086] For the purposes of illustrating a method of manufacturing a sheet according to the invention, Figures 3 and 4 schematize two examples of envisageable installations.

[00087] Figure 3 shows a first example according to which the elements used comprise, in addition to the marrying cylindrical element 1 and the engraved (embossing) cylindrical element 2, a cylindrical element made of rubber 3 designed to interact with the cylindrical element 2 in order to emboss one of the plies (or groups of plies) P1 forming the sheet F, according to an operating mode known per se and which, as a result, will not be explained further.

[00088] In the example illustrated by Figure 3, a second ply (or group of plies) P2 is brought into the gap (or nip) between the cylindrical elements 1 and 2 where it is combined with the first ply P1, as already described. This second ply is not embossed.

[00089] A sheet F comprising two plies P1, P2 (or group of plies) is thus produced, with a first embossed ply and a second unembossed ply.

[00090] Figure 4 shows the elements used to manufacture an absorbent sheet according to another embodiment of the invention and which comprise, in addition to a marrying cylindrical element 1 and an engraved cylindrical element 2, a second engraved cylindrical element 4 and two rubber cylindrical elements 31, 32 that form counterparts to each of the engraved cylindrical elements 2, 4.

[00091] Thus the first ply (or group of plies) P1 first passes between the first rubber cylindrical element 31 and the engraved cylindrical element 2 where it is embossed. Simultaneously and symmetrically, the second ply P2 passes between the second rubber cylindrical element (counterpart) 32 and the second engraved cylindrical element 4 for the purposes of embossing.

[00092] The two plies (or group of plies) thus embossed separately come together between the first and second engraved cylindrical elements 2, 4 that are set so that the protuberances (or markings) of each of the plies are nested in one another. This particular arrangement, called nested, is well known to those skilled in the art and will not be described further.

[00093] Thus positioned relative to one another, the plies are then combined at the nip 5 between the first engraved cylindrical element 2 and the marrying cylindrical element 1 in conditions mentioned above complying with the invention.

[00094] Without departing from the context of the invention, the first, smooth, cylindrical element 1 may comprise a set of coaxial cylinders supported by one or more shafts. In the latter case, the shafts are offset

angularly about the second engraved cylindrical element 2. In principle two shafts are preferably provided, diametrically opposed.

[00095] Naturally, each of the coaxial cylinders has features according to the invention, namely in particular a treated, hardened superficial layer 11 and a deformable sub-layer 12.

[00096] Without departing from the context of the invention, it is envisageable to combine at least two plies without the latter first being treated and/or embossed.

Eljárás és elrendezés szívóképes papírlap gyártására és az így kapott szívóképes papírlap

Szabadalmi igénypontok

1. Eljárás szívóképes papírlap gyártására, amely cellulózvatta legalább két rétegét tartalmazza, amely eljárás abból áll, hogy a rétegeket két acélból készült hengeres elem közötti áthaladás során nyomás alatt egymással egyesítjük, ahol az első hengeres elem (1) a külső oldalán síma, míg a második elem (2) a külső oldalán kiálló elemekkel van ellátva és ahol az első hengeres elem keménysége kisebb, mint a második hengeres elemé, emellett az első hengeres elem (1) egy kezelt, edzett felületi réteggel (11), valamint egy deformálható alsóbb réteggel (12) rendelkezik, míg a második hengeres elemnek (2) egy edzett külső felülete van, és ahol a papírlapot a két hengeres elem (1, 2) közötti áthaladása során egy 40 és 250 N/mm² közötti fajlagos nyomással nyomjuk össze.
2. Az 1. igénypont szerinti gyártási eljárás, *azzal jellemezve*, hogy az első hengeres elem (1) és a második hengeres elem (2) külső keménysége közötti különbséget 2 és 20 HRC, előnyösen 5 és 15 HRC közé állítjuk be.
3. Az előző igénypontok bármelyike szerinti gyártási eljárás, *azzal jellemezve*, hogy az első hengeres elem (1) külső keménységét kb. 30 és kb. 65 HRC között határozzuk meg.
4. Az előző igénypontok bármelyike szerinti eljárás egy 0,3 és 4 m közötti szalagszélességű papírlap összekötésére.
5. Acélból készült hengeres elemek (1, 2) elrendezése többretegű szívóképes papírlapok összekötésére, ahol az első hengeres elem (1) a külső oldalán síma, míg a második elem (2) a külső oldalán kiálló elemekkel van ellátva és ahol az első hengeres elem keménysége kisebb, mint a második hengeres elemé, és amely elrendezés lehetővé teszi a szívóképes papírlap különböző rétegeinek nyomás alatti egyesítését ezek áthaladása révén a hengeres elemek alkotói közötti térközön keresztül, emellett az első hengeres elem (1) egy kezelt, edzett felületi réteggel (11), valamint egy deformálható alsóbb réteggel (12), ugyanakkor a második hengeres elem (2) egy edzett külső felülettel rendelkezik, és az első hengeres elem úgy van a második hengeres elemhez hozzászorítva, hogy egy 40 és 250 N/mm² közötti fajlagos nyomást gyakoroljon a szívóképes papírlapra.
6. Hengeres elemek elrendezése az 5. igénypont szerint, *azzal jellemezve*, hogy az első hengeres elem egy henger.
7. Hengeres elemek elrendezése az 5. igénypont szerint, *azzal jellemezve*, hogy az első hengeres elem több koaxiális hengert tartalmaz.



SZTNH-100066248

8. Hengeres elemek elrendezése az 5-7. igénypontok bármelyike szerint, *azzal jellemezve*, hogy az első hengeres elem (1) és a második hengeres elem (2) külső keménysége közötti különbség 2 és 20 HRC, előnyösen 5 és 15 HRC között van.
9. Hengeres elemek elrendezése az 5-8. igénypontok bármelyike szerint, *azzal jellemezve*, hogy az első hengeres elem (1) külső keménysége kb. 30 és kb. 65 HRC között van.
10. Hengeres elemek elrendezése az 5-9. igénypontok bármelyike szerint, *azzal jellemezve*, hogy az első hengeres elem (1) külső rétegének (11) vastagsága 3 és 30 mm között van.
11. Hengeres elemek elrendezése az 5-10. igénypontok bármelyike szerint, *azzal jellemezve*, hogy az első hengeres elem deformálható alsóbb rétegének (12) vastagsága 0,5 mm és 10 mm között van.
12. Hengeres elemek elrendezése az 5-11. igénypontok bármelyike szerint, *azzal jellemezve*, hogy az első hengeres elem (1) külső felületi rétegének a vastagsága irányában egy keménységi gradiense van.
13. Hengeres elemek elrendezése az 5-12. igénypontok bármelyike szerint, *azzal jellemezve*, hogy az első hengeres elem külső felületi rétegének (11) két egymással összekötött és egymáson elhelyezkedő rétege (111 és 112) van, ahol a külsőbb réteg (112) edzéssel kezelt.
14. Hengeres elemek elrendezése az 5-13. igénypontok bármelyike szerint, *azzal jellemezve*, hogy a deformálható alsóbb rétegnek (12) legalább két, egymástól különböző mechanikai jellemzőkkel rendelkező rétege van.

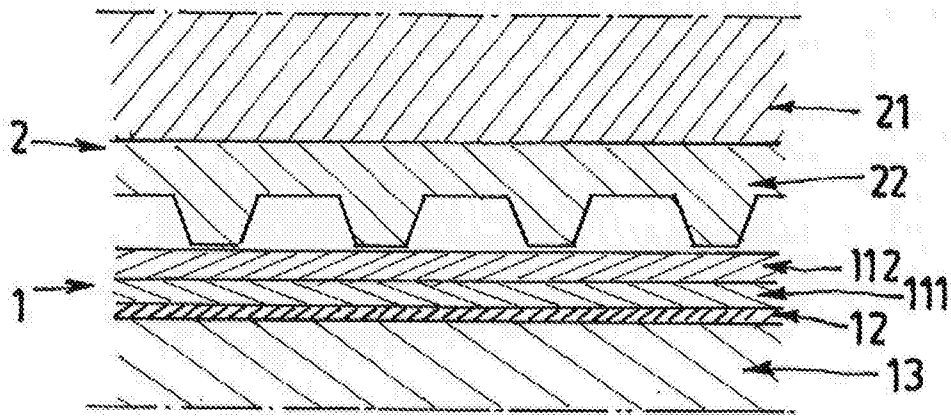


FIG.1


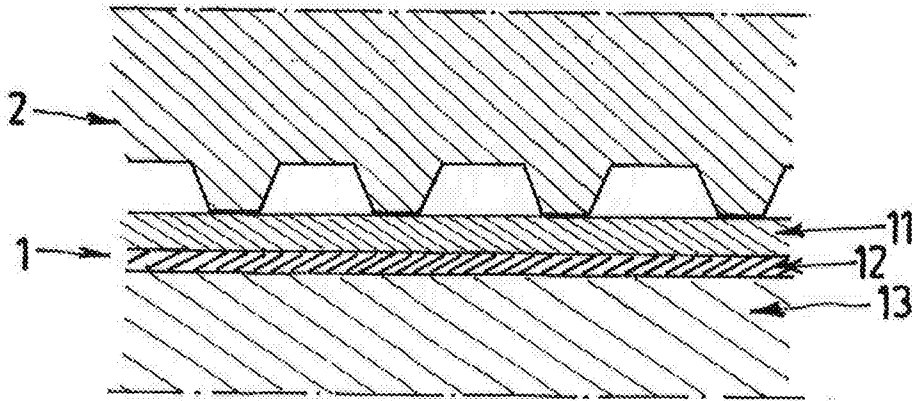


FIG.2



SZTNH-100066249

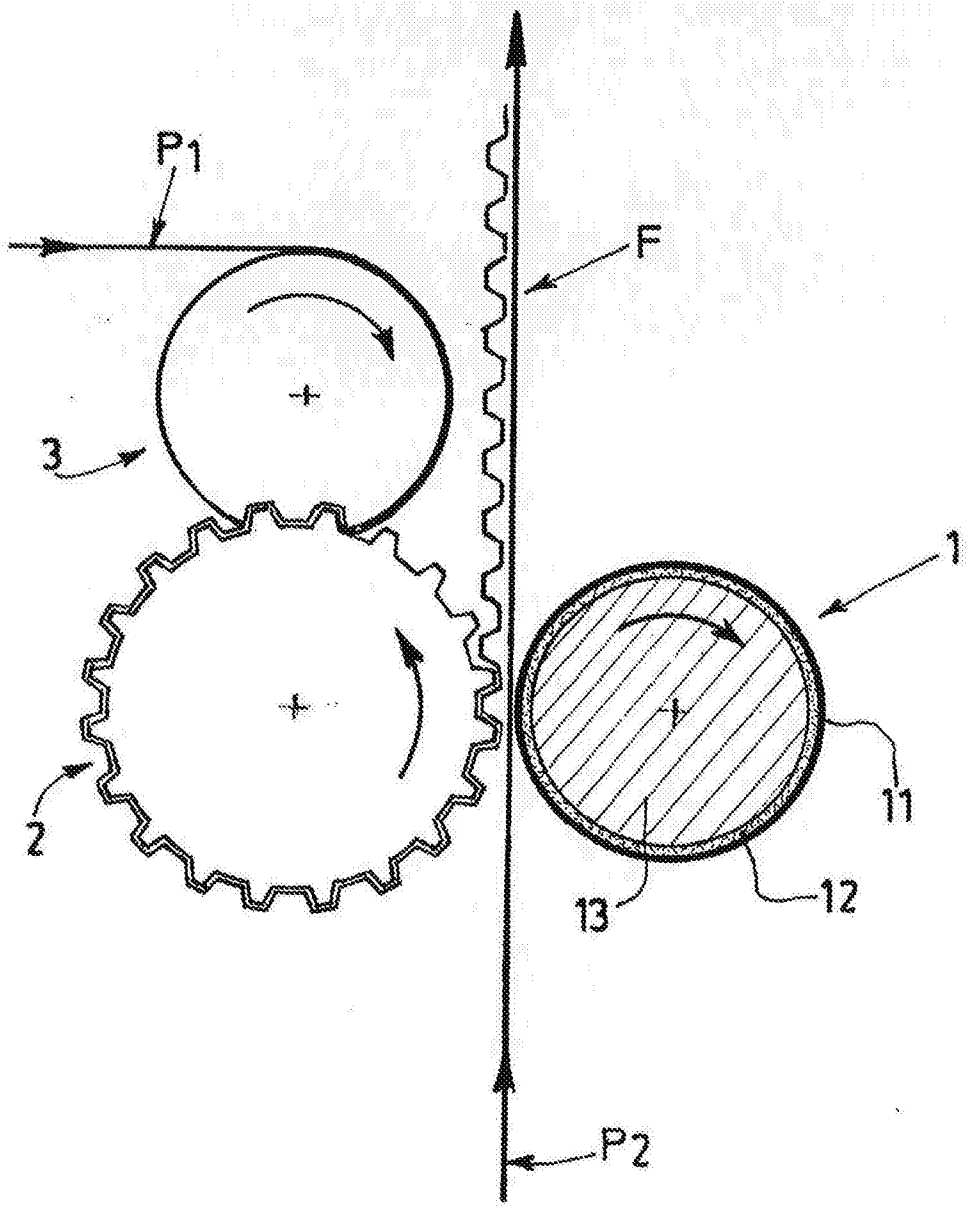


FIG.3

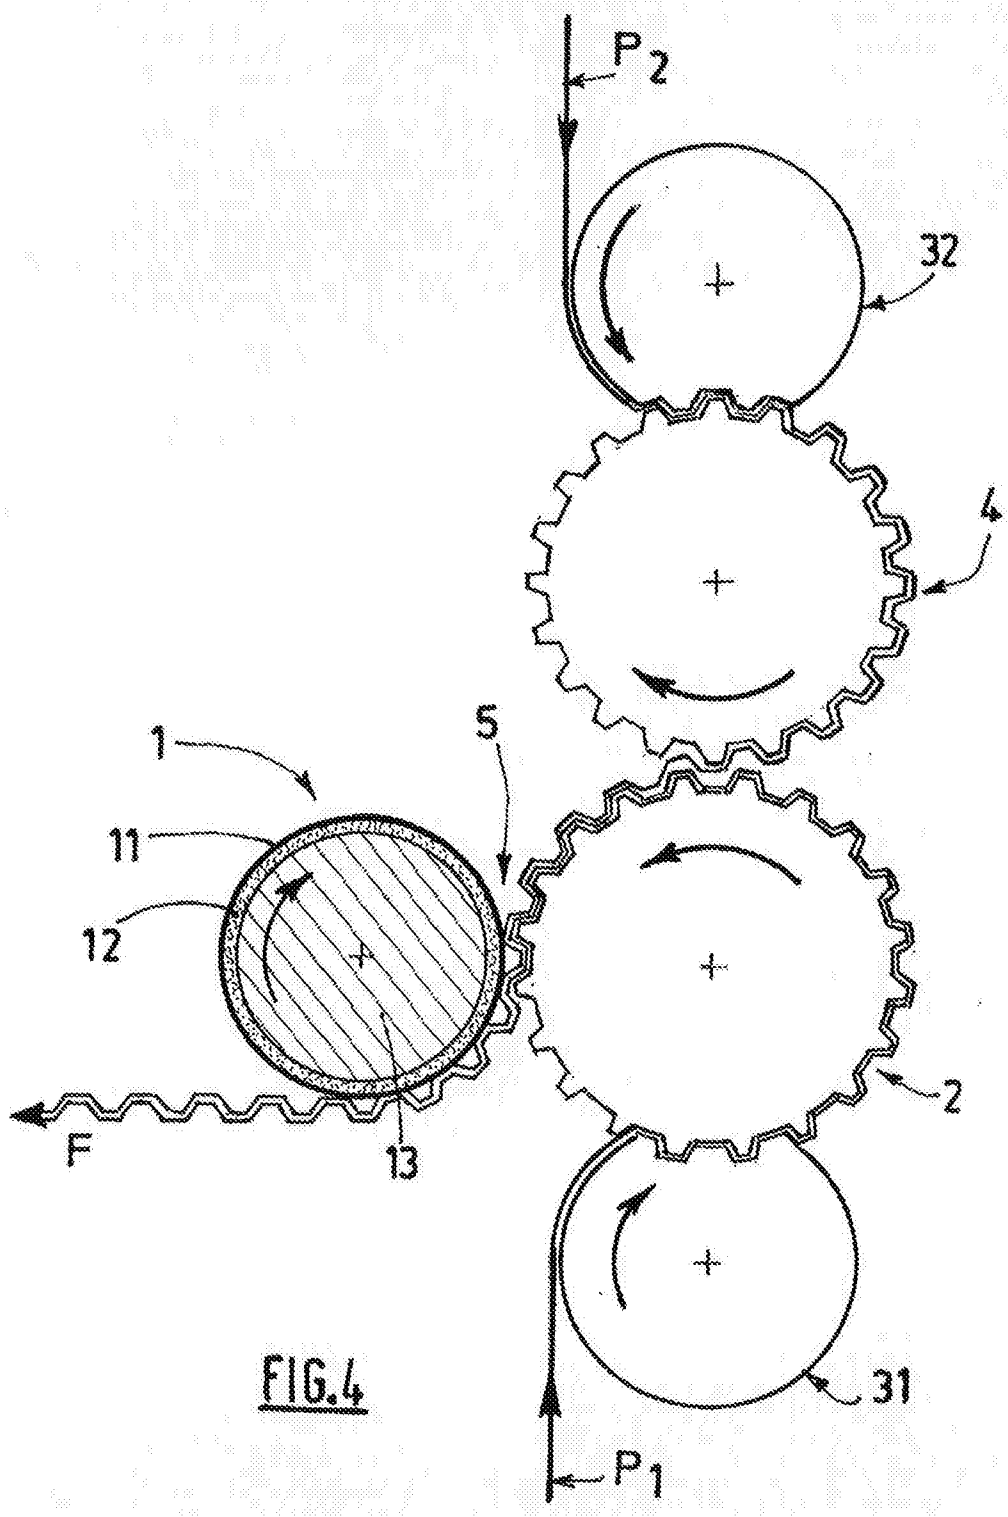


FIG.4