



US 20170175963A1

(19) **United States**(12) **Patent Application Publication**
LENTINE et al.(10) **Pub. No.: US 2017/0175963 A1**(43) **Pub. Date: Jun. 22, 2017**(54) **LANDSCAPE LIGHT**(71) Applicant: **Telebrands Corp.**, Fairfield, NJ (US)(72) Inventors: **Lou LENTINE**, Chattanooga, TN (US);
Ajit KHUBANI, Saddle River, NJ (US)(21) Appl. No.: **15/449,549**(22) Filed: **Mar. 3, 2017****Related U.S. Application Data**

(63) Continuation-in-part of application No. 15/280,315, filed on Sep. 29, 2016, which is a continuation-in-part of application No. 15/142,789, filed on Apr. 29, 2016, which is a continuation of application No. 14/801,458, filed on Jul. 16, 2015, now abandoned.


(60) Provisional application No. 62/025,344, filed on Jul. 16, 2014.

Publication Classification(51) **Int. Cl.****F21S 10/00** (2006.01)**F21V 21/30** (2006.01)**F21V 23/04** (2006.01)**F21V 29/70** (2006.01)**F21V 15/01** (2006.01)**F21S 8/08** (2006.01)**F21V 29/83** (2006.01)**F21V 21/08** (2006.01)**F21V 5/04** (2006.01)(52) **U.S. Cl.**CPC **F21S 10/007** (2013.01); **F21V 21/0824**(2013.01); **F21V 21/30** (2013.01); **F21V****23/0435** (2013.01); **F21V 5/04** (2013.01);**F21V 15/01** (2013.01); **F21S 8/081** (2013.01);**F21V 29/83** (2015.01); **F21V 29/70** (2015.01);**F21Y 2115/30** (2016.08)

(57)

ABSTRACT

A landscape light including a housing including a first compartment and a second compartment, the first compartment being substantially weather-proofed and the second compartment being in fluid communication with an exterior of the housing, a light source producing a light disposed in the first compartment, and a heatsink for dissipating heat generated by the light source disposed in the second compartment.

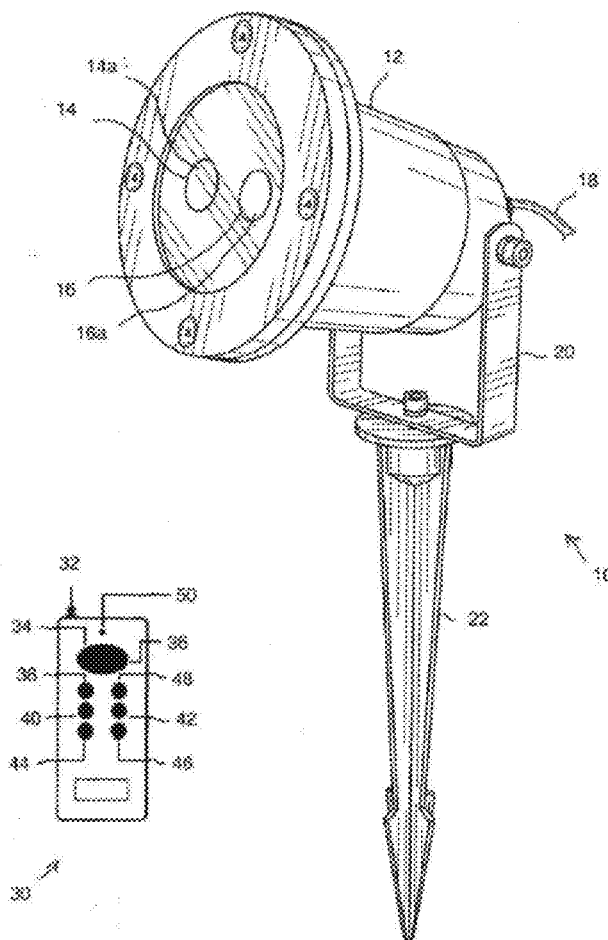

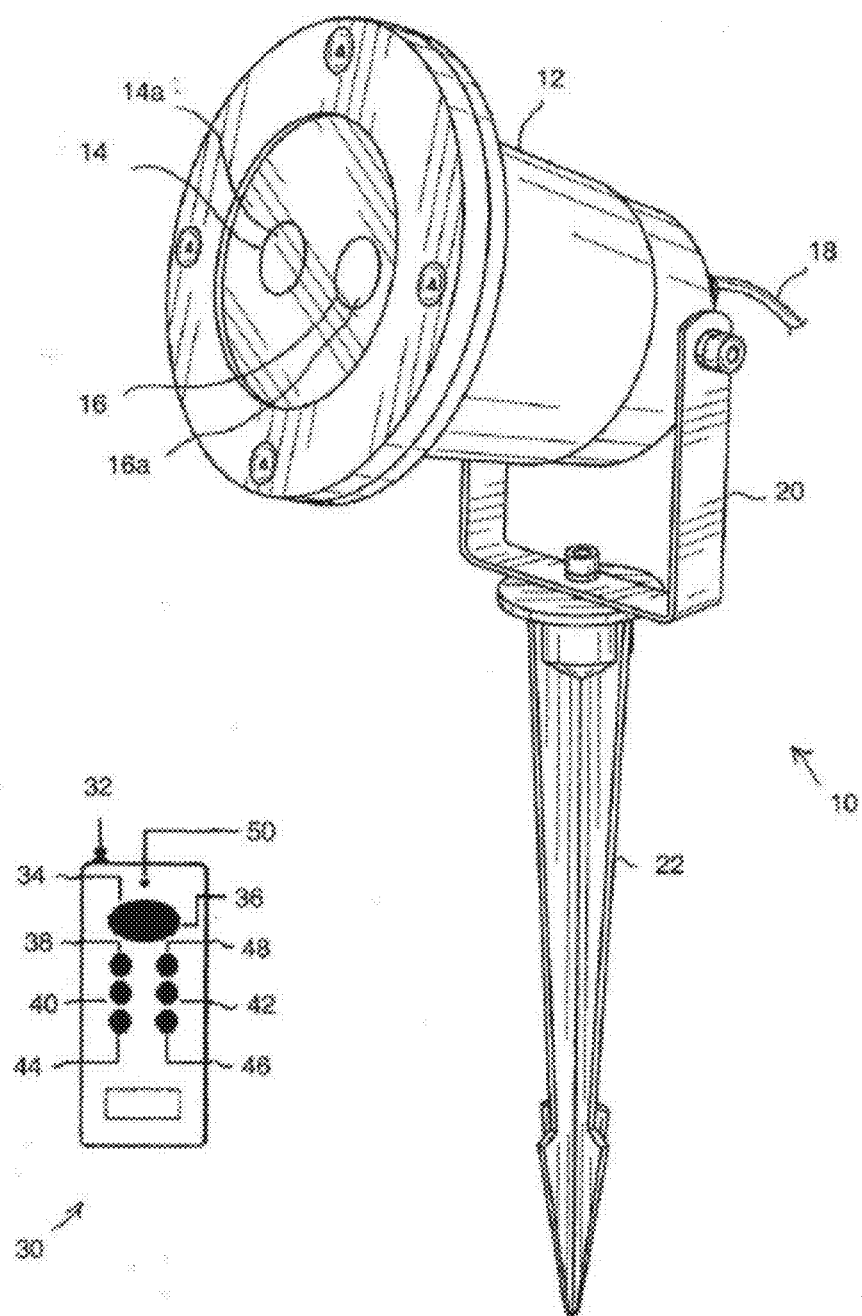


FIG. 1

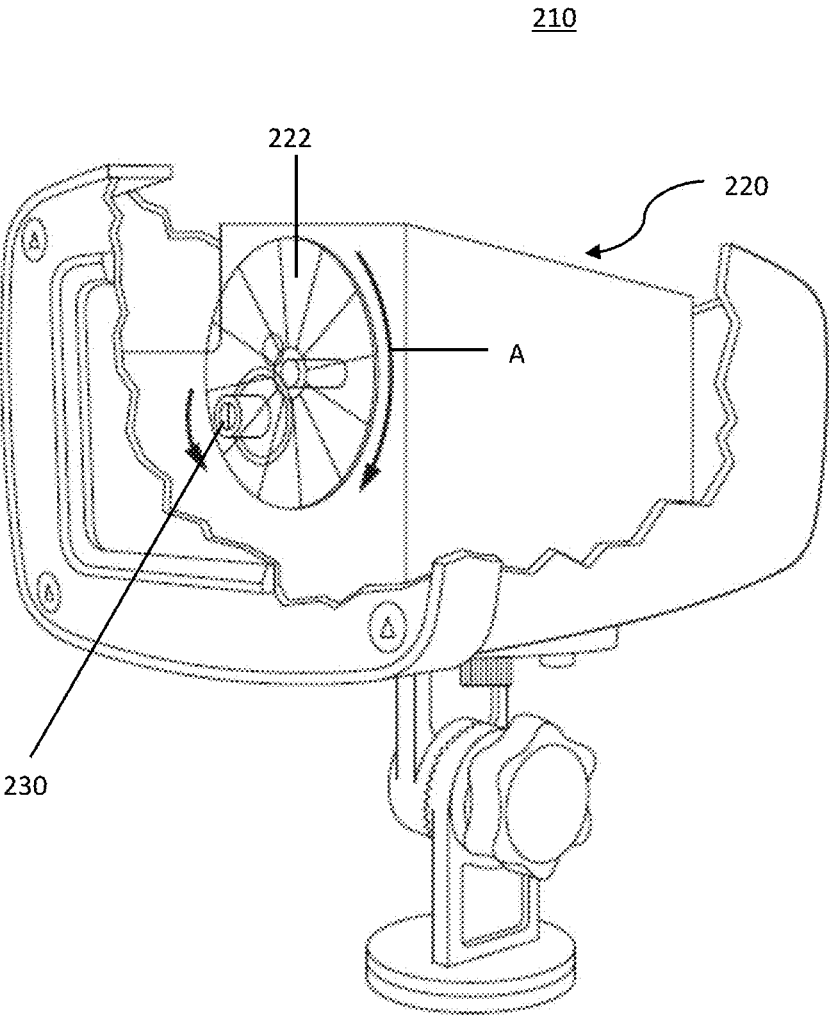


FIG. 2A

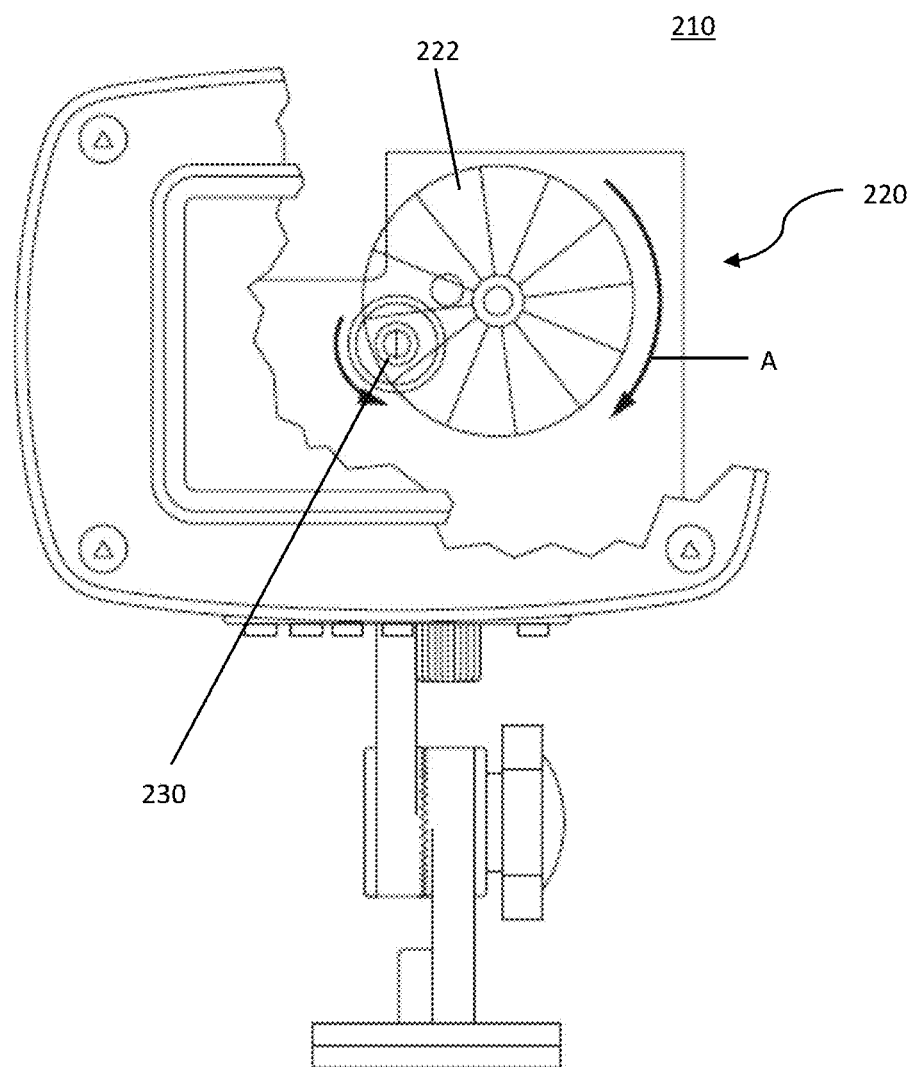


FIG. 2B

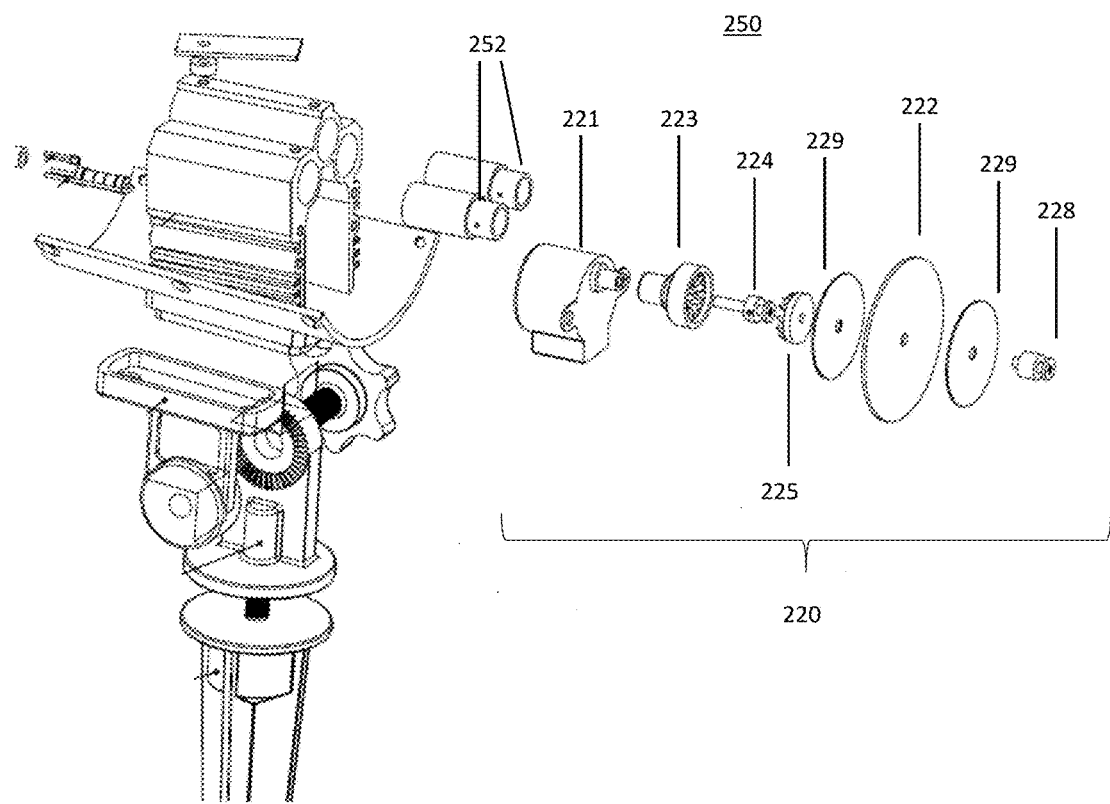


FIG. 2C

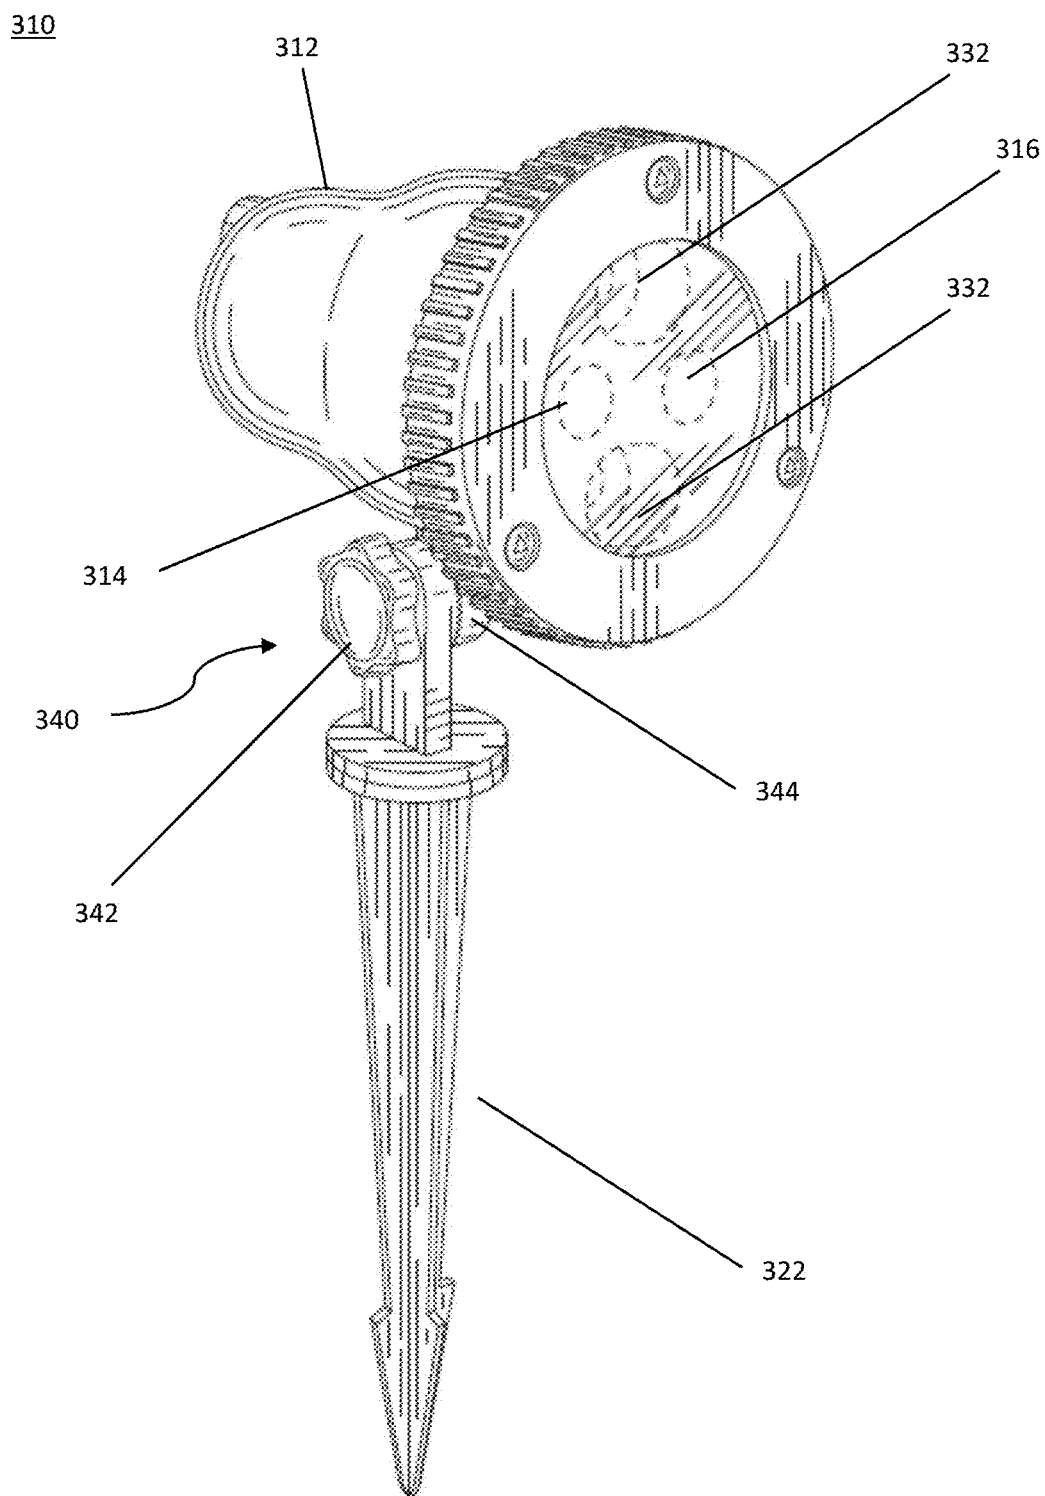


FIG. 3

410

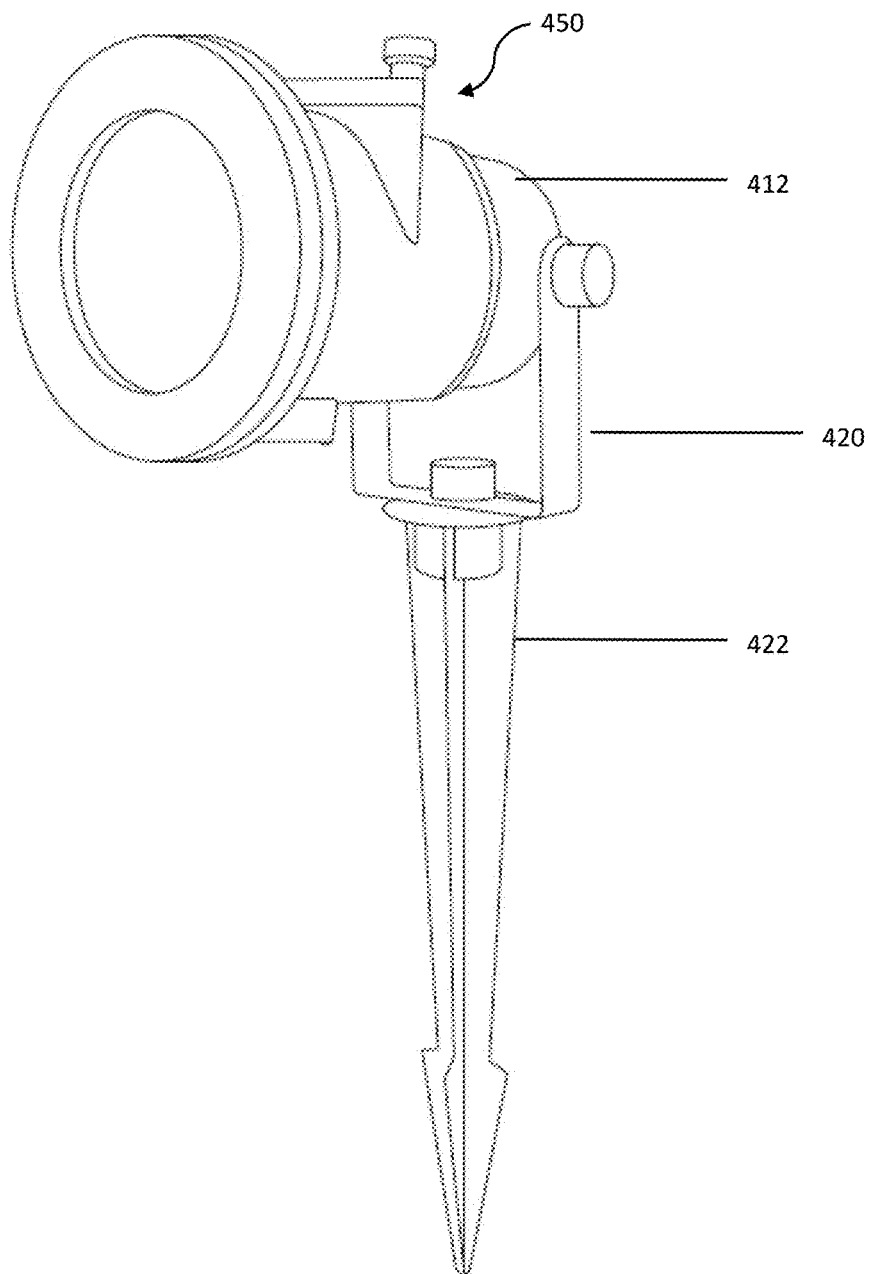


FIG. 4A

410

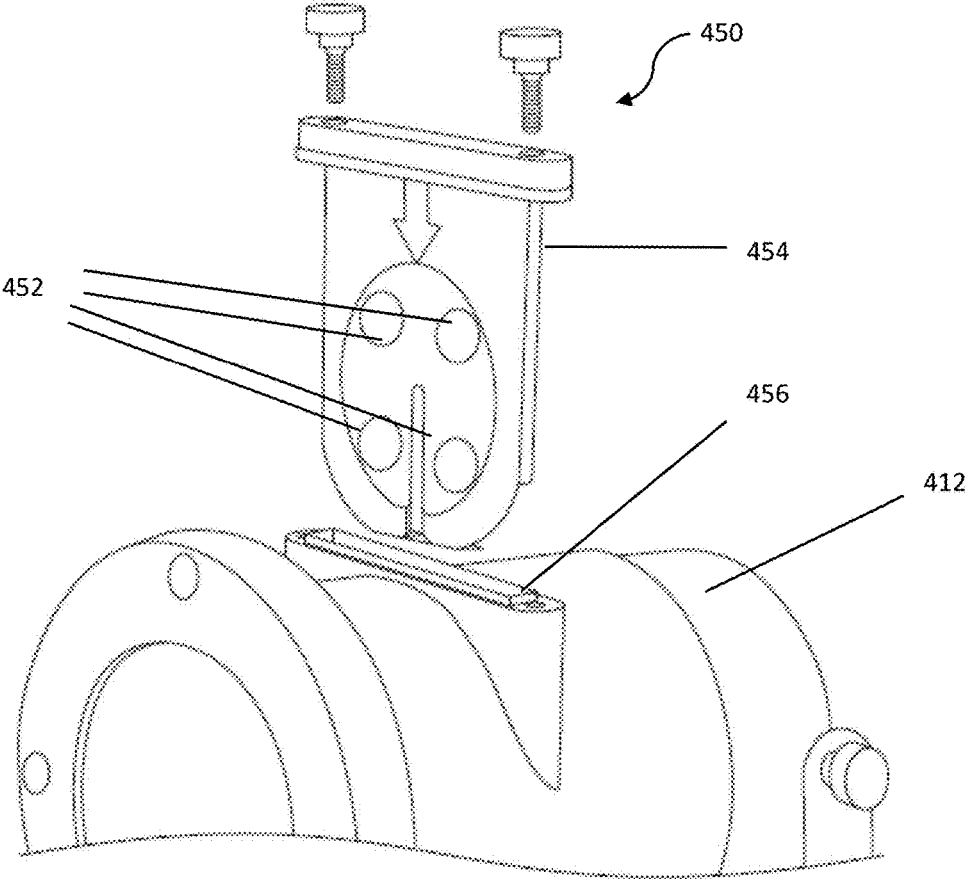


FIG. 4B

410

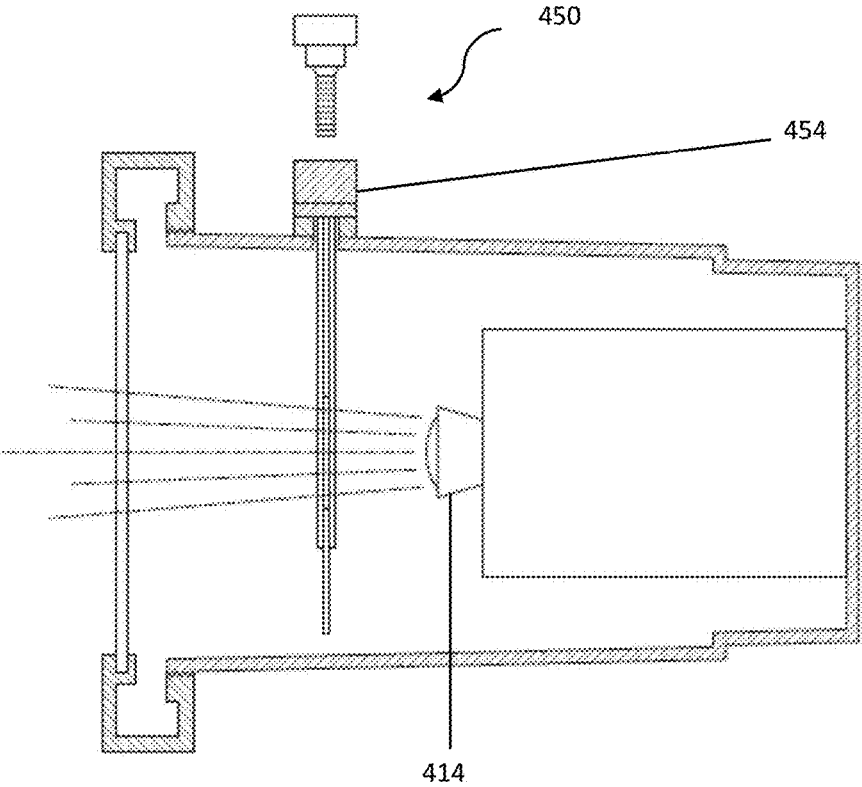


FIG. 4C

410a

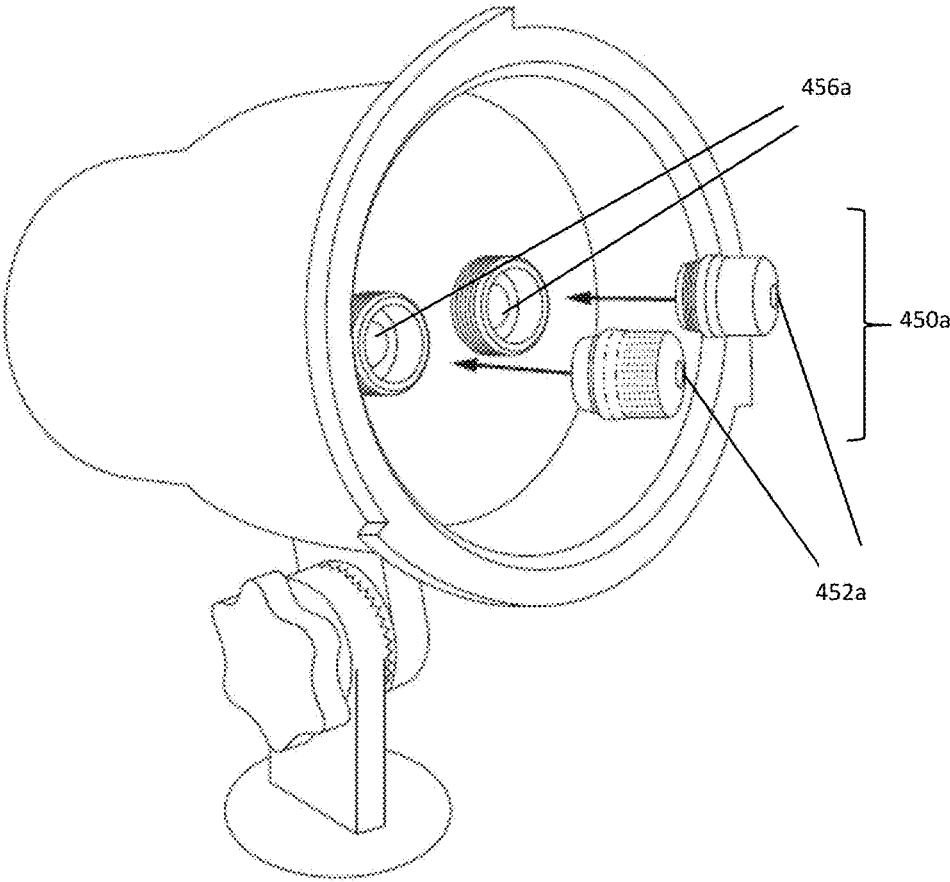


FIG. 4D

500

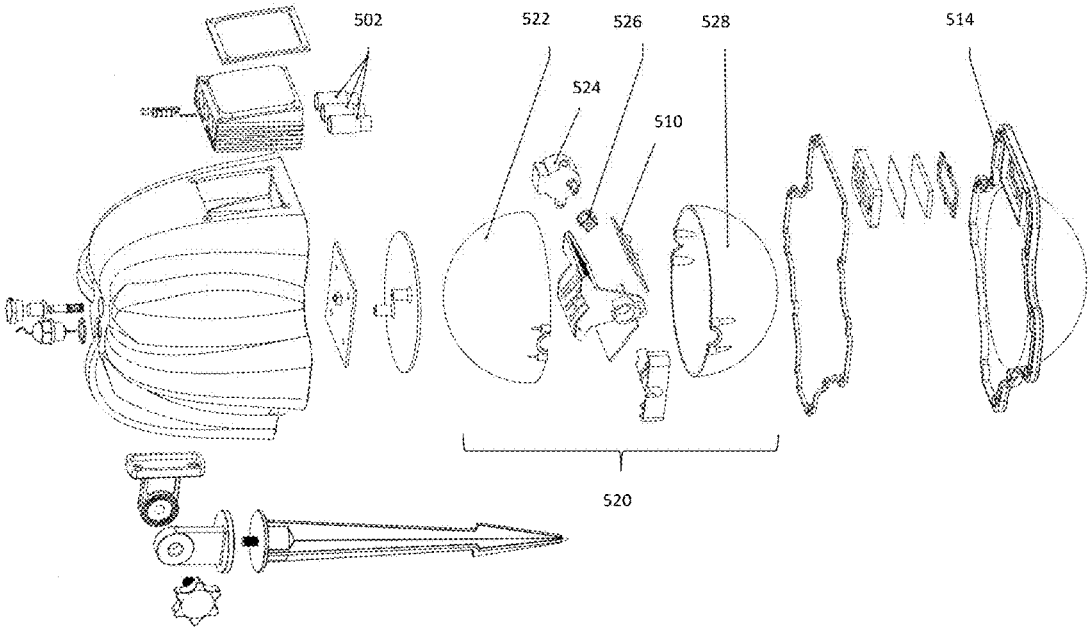


FIG. 5

600

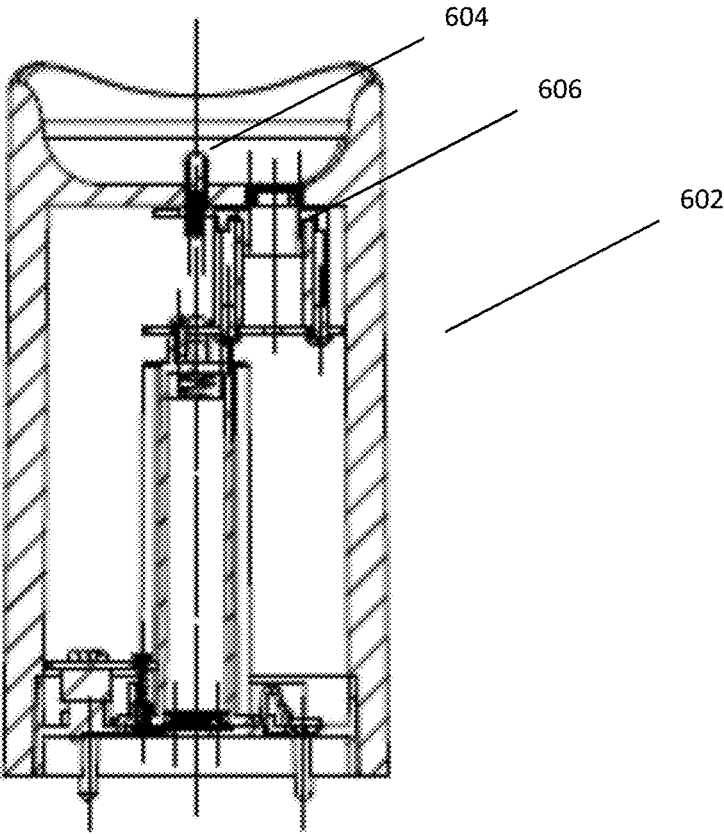


FIG. 6A

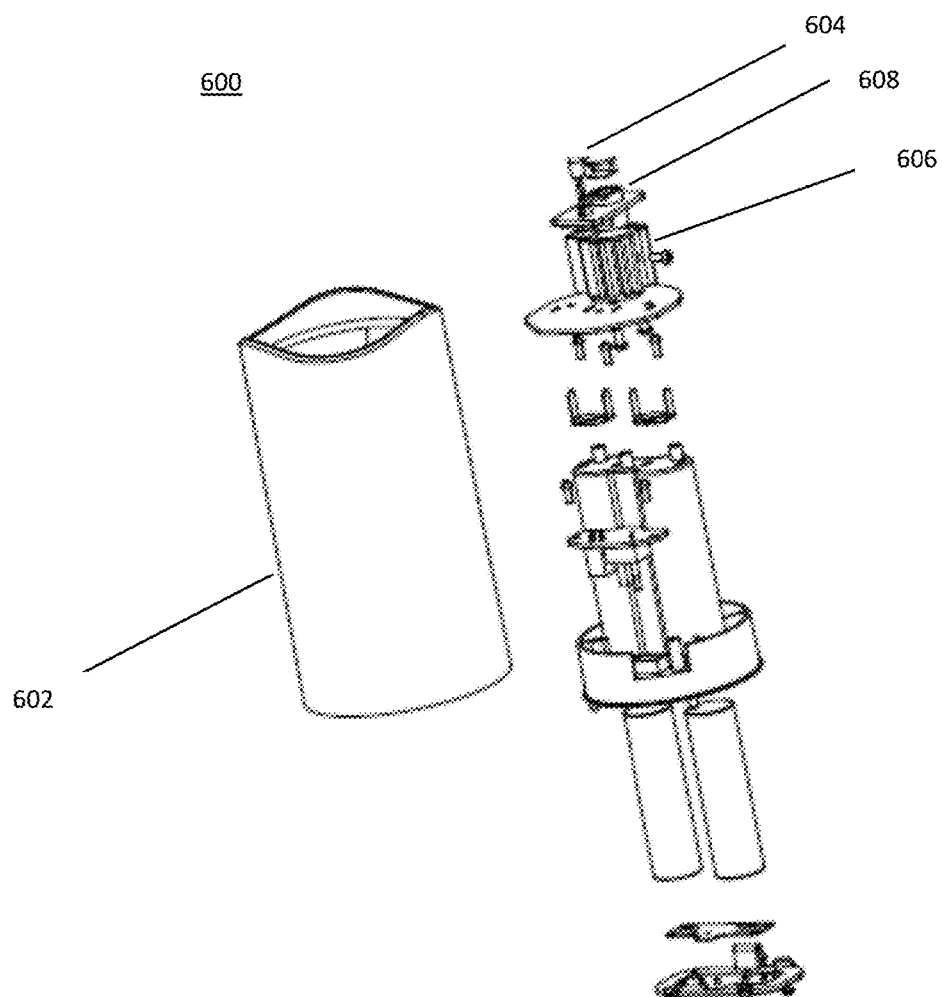


FIG. 6B

710

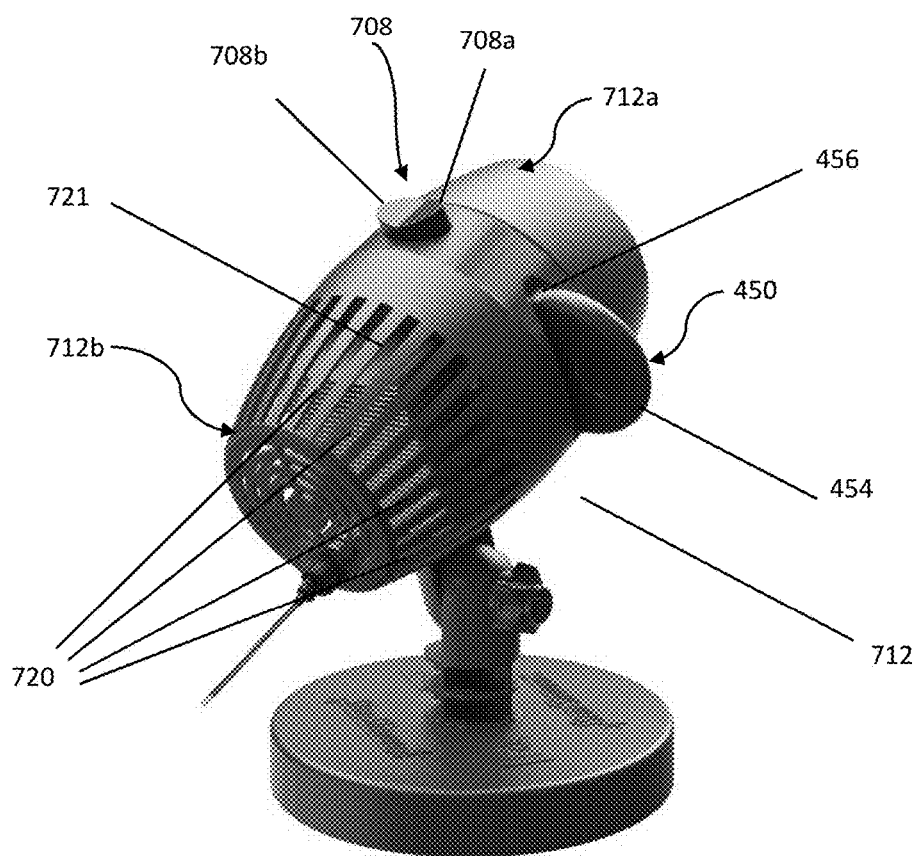


FIG. 7

LANDSCAPE LIGHT

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation-in-part application of U.S. application Ser. No. 15/280,315, filed on Sep. 29, 2016, which is a continuation-in-part application of U.S. application Ser. No. 15/142,789, filed on Apr. 29, 2016, which is a continuation application of U.S. application Ser. No. 14/801,458, filed on Jul. 16, 2015, which claims the benefit of the U.S. Provisional Patent Application Ser. No. 62/025,344, filed on Jul. 16, 2014. These applications are hereby incorporated by reference in their entireties.

FIELD

[0002] The present invention relates generally to lighting devices, and more particularly to an improved landscape lighting apparatus.

BACKGROUND

[0003] U.S. Pat. Nos. 7,641,345 and 8,057,045 to Johnson describes a projection apparatus for generating a moving star field and a cloud-like effect comprising a means for generating a cloud-like effect using at least one non-coherent light source, a means for generating a moving star field using at least one coherent light source and a means for regulating and supplying electric power. The means for generating cloud-like effect using at least one non-coherent light source comprises at least one pair of condenser lenses and an interferential filter wheel rotated by a motor, disposed between at least one pair of condenser lenses. The means for generating the moving star field using a coherent light source comprises a grating wheel rotated by a motor and a diffractive optical element disposed between the at least one coherent light source and the grating wheel.

[0004] U.S. Pat. No. 8,100,537 to Johnson describes a laser landscape lighting apparatus for use in accent lighting applications for landscapes and outdoor venues. In one embodiment, the laser landscape lighting apparatus includes a coherent light source in combination with a diffractive optical element and optionally a diffraction grating wheel. The diffractive optical element may be, for example, a holographic optical element. In some embodiments, the laser landscape lighting apparatus includes a temperature-controlled integral derivative system. In one application, the laser landscape lighting apparatus may project a static or movable star field.

SUMMARY

[0005] Embodiments of the present invention can provide a landscape light. The landscape light can include a housing including a first compartment and a second compartment, the first compartment being substantially weather-proofed and the second compartment being in fluid communication with an exterior of the housing, a light source producing a light disposed in the first compartment; and a heatsink for dissipating heat generated by the light source disposed in the second compartment. According to certain exemplary embodiments, the second compartment can include vents. According to certain exemplary embodiments, the heatsink can be in the thermal communication with the at least one light source.

[0006] According to certain exemplary embodiments, the landscape light can further include a pattern assembly including at least one pattern generator secured in a path of the light such that the light passing through the at least one pattern generator is projected onto a surface in a pattern defined by the at least one pattern generator. The landscape light can also include an articulation assembly configured to articulate the laser light on the surface onto which the laser light is being projected.

[0007] According to embodiments of the present invention, the light source in the landscape light can be a light emitting diode. According to certain embodiments, the light source can include a plurality of light emitting diodes.

[0008] According to certain exemplary embodiments, the landscape light can further include a switch to control an operation of the light source. According to other exemplary embodiments, the landscape light can further include a motor configured to rotate the at least one pattern generator such that the motor imparts movement to the light passing through the at least one pattern generator. According to embodiments of the present invention, the speed of the movement of the pattern assembly is adjustable.

[0009] According to certain exemplary embodiments, the landscape light can include a second light source producing a second light, each of the first light and the second light including a different color, wherein the second light source is a light emitting diode.

[0010] According to certain exemplary embodiments, the landscape light can include a wireless controller. According to yet another exemplary embodiment, the landscape light can include a ground stake and a mounting bracket. According to certain embodiments of the present invention, the mounting bracket can be rotatably coupled to the ground stake.

[0011] According to certain exemplary embodiments, the pattern generation assembly can include a removably mountable slide cartridge. According to certain exemplary embodiments, the slide cartridge can include at least one pattern generator. According to yet another exemplary embodiment, the at least one pattern generator can include a plurality of pattern generators and the landscape light can further comprise a switch configured to select between the plurality of the pattern generators. According to certain exemplary embodiments, the slide cartridge can be removably mountable in the first compartment of the housing.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The features and advantages of the present invention can be more readily understood from the following detailed description with reference to the accompanying drawings, wherein:

[0013] FIG. 1 is a front perspective view of a landscape light apparatus according to an embodiment of the present invention;

[0014] FIG. 2A is a front perspective cutaway view of a landscape light apparatus according to an embodiment of the present invention;

[0015] FIG. 2B is a front cutaway view of a landscape light apparatus according to an embodiment of the present invention;

[0016] FIG. 2C is a partially exploded view of a landscape light apparatus according to an embodiment of the present invention;

[0017] FIG. 3 is a front perspective view of a landscape light apparatus according to an embodiment of the present invention;

[0018] FIG. 4A is a front perspective view of a landscape light apparatus according to an embodiment of the present invention;

[0019] FIG. 4B is a front perspective detailed view of a landscape light apparatus according to an embodiment of the present invention;

[0020] FIG. 4C is a cross-sectional view of a landscape light apparatus according to an embodiment of the present invention;

[0021] FIG. 4D is a front perspective partially opened view of a landscape light apparatus according to an embodiment of the present invention;

[0022] FIG. 5 is a partially exploded view of a landscape light apparatus according to an embodiment of the present invention;

[0023] FIG. 6A is a cross-sectional view of an exemplary electric candle according to an embodiment of the present invention; and

[0024] FIG. 6B is an exploded view of an exemplary electric candle according to an embodiment of the present invention.

[0025] FIG. 7 is a rear perspective view of a landscape light apparatus according to an embodiment of the present invention.

DETAILED DESCRIPTION

[0026] Embodiments of the present invention generally relate to a landscape light. Specifically, certain exemplary embodiments of the present invention provide various new and novel features for a landscape light, such as a landscape light having laser light sources or light-emitting diode (LED) light sources. Landscape lights according to embodiments of the present invention can, for example, be used as interior or exterior festive and/or decorative lighting in connection with holidays such as Christmas, Halloween, etc. Additionally, the landscape lights according to embodiments of the present invention may be used in place of other traditional decorative lighting, such as string lights, etc. Although the embodiments of the present invention are primarily described with respect to a landscape light, it is not limited thereto, and it should be noted that the exemplary apparatus and systems described herein may be used in connection with any lighting apparatus.

[0027] FIG. 1 is an illustration of an exemplary landscape light 10 according to an embodiment of the present invention. As shown in FIG. 1, landscape light 10 can include light sources 14 and 16 and lenses 14a and 16a housed within light projector housing 12. Although landscape light 10 is shown in FIG. 1 having only two light source 14 and 16, landscape light 10 can include any number and type of light sources. For example, landscape light 10 can include one, two, three, or more light sources. Further, each of the light sources can be any type of light source that can produce the type of light desired, such as, for example, light sources 14 and 16 may include lasers, incandescent bulbs, and/or light emitting diodes (LEDs). Optionally, light sources 14 and 16 can produce lights having the same color. Alternatively, light sources 14 and 16 can produce lights having different colors (e.g., red, green, white, blue, etc.). Further, as shown in FIG. 1, landscape light 10 can include lenses 14a and 16a, which can correspond to light sources 14 and 16, respectively.

Lenses 14a and 16a can include any type of optical element that can manipulate and/or condition the light produced by light sources 14 and 16 in a desired manner. For example, lenses 14a and 16a can include diffractive features (e.g., diffractive holographic optics) configured to disperse the light generated by light sources 14 and 16 into a plurality of discrete points of light when projected onto a surface. Lenses 14a and 16a can also scatter the light generated by light sources 14 and 16 so as to lower the power of the light, thereby reducing the potential risk associated with exposure to the light in embodiments where light sources 14 and 16 may include lasers. According to embodiments of the present invention, landscape light 10 can include a single lens for both light sources 14 and 16.

[0028] According to certain embodiments of the present invention, in operation, landscape light 10 can project light produced by light sources 14 and 16 onto a target surface. For example, light produced by light sources 14 and 16 may be manipulated or conditioned by lenses 14a and 16a and be projected onto a target surface, such as a wall or other structure. In an embodiment where lenses 14a and 16a include diffractive elements configured to disperse the light generated by light sources 14 and 16, landscape light may project a plurality of discrete points of light onto the target surface. Landscape light 10 may also include various modes of operation. For example, landscape light 10 may include mode where the lights produced by light sources 14 and 16 can be flashed, strobed, or pulsed at predetermined, or randomized intervals. This may be performed by modulating the power delivered to light sources 14 and 16 in accordance with the desired flashing, pulsing, or strobing pattern. Additionally, landscape light 10 may also include a visual effect assembly, which can produce various visual effects using the lights produced by light sources 14 and 16. For example, visual effect assembly may be configured to produce a shimmering effect of the light, a movement of the light across the target surface, a “raining” effect of the light, etc. Visual effect assembly may also be configured to produce the flashing, pulsing, or strobing pattern of the light in addition to or in place of any power modulation techniques utilized to achieve these effects.

[0029] As shown in FIG. 1, landscape light 10 can also include mounting bracket 20, ground stake 22, and power cord 18. Power cord 18 can be connected to a power supply or transformer (not illustrated). Optionally, landscape light 10 can include a wireless remote control 30, which can enable wireless control of landscape light 10. As shown in FIG. 1, ground stake 22 and light projector housing 12 may be rotatably coupled to mounting bracket 20. This can allow user to aim and adjust the direction of the light produced by landscape light 10. For example, the angle of light projector housing 12 can be adjusted relative to mounting bracket 20, and mounting bracket 20 can be rotatably adjusted relative to ground stake 22. Thus, landscape light 10 can be adjusted in two degrees of freedom to provide nearly a full range of motion of adjustments. This can enable a user, for example, to adjust and aim the light produced by landscape light 10 to be projected on various targets even after it has been staked into the ground.

[0030] Additionally, landscape light 10 can include a wireless remote control 30 that can enable wireless operation of landscape light 10. For example, landscape light 10 can include a wireless transmitter/receiver, which can wirelessly communicate with a remote control 30 to enable

wireless operation of landscape light 10. For example, the wireless transmitter/receiver can employ radio frequency (“RF”), Bluetooth, and/or WiFi technology to facilitate wireless communication between landscape light 10 and remote control 30. According to certain embodiments, landscape light 10 can be wirelessly operated via remote control 30. For example, remote control 30 can control powering landscape light 10 ON and/or OFF, changing the operation of light sources 14 and 16 (e.g., choosing between having one of light source 14 or 16 in an ON condition or having both light sources 14 and 16 in an ON condition), controlling a visual effect setting (e.g., flashing, movement, shimmering, strobing, etc.), controlling an audio effect setting (e.g., music, sounds, etc.), controlling a timer setting, etc. Further remote control 30 can indicate and display the current operating status of landscape light 10 (e.g., whether or not landscape light 10 is ON or OFF and/or the mode of operation). Optionally, remote control 30 can control other features of landscape light 10 described herein, including, for example, created/produced visual effects (e.g., movement, patterns/shapes, flashing etc.), color of the light, operation of the spotlight (e.g., ON/OFF, color, etc.), etc. According to certain embodiments, remote control 30 can be implemented via an app on a mobile device such as a smartphone or tablet, or via a web-based application on a computer.

[0031] FIGS. 2A and 2B show cut-away views of an exemplary landscape light 210 having a visual effect assembly 220 and light source 230 in accordance with an embodiment of the present invention. Landscape light 210 shown in FIGS. 2A and 2B operate similarly to landscape light 10 shown in FIG. 1. Further, visual effect assembly 220 can create and/or produce visual effects using the light generated by light source 230. For example, visual effect assembly 220 can create a flashing, pulsing, or strobing pattern, a shimmering effect, a movement of the light across the target surface, a “raining” effect, etc. According to certain exemplary embodiments, visual effect assembly 220 may include an optical element 222, which may include any optical features (e.g., holographic elements, diffractive elements, patterns, etc.) that can be used to create the desired visual effect. Further, optical element 222 may be coupled to a motor, or other articulating element, that can cause optical element 222 to be articulated in a defined manner, which when combined with the optical feature of optical element 222, can create the desired visual effect. As noted herein, visual effect assembly 220 can create a flashing, pulsing, or strobing pattern, a shimmering effect, a movement of the light across the target surface, a “raining” effect, etc. As shown in FIGS. 2A and 2B, optical element 222 may include a disk having optical features disposed thereon, which can be rotated in front of light source in the direction of arrow A to create various optical effects as the light generated by light source 230 interacts with rotating optical element 222. Although visual effect assembly 220 is shown to include a rotating optical wheel, visual effect assembly 220 can include any structure or programming that can enable creating the desired visual effects of the light.

[0032] FIG. 2C shows a partially exploded view of an exemplary landscape light 250 according to an embodiment of the present invention. As shown in FIG. 2C, landscape light 250 can include light sources 252 (e.g., laser light sources) and visual effect assembly 220. Visual effect assembly 220 can include motor 221, connector 223, linkage 224,

gear 225 and rotating optical element 222. Visual effect assembly may optionally include wheels 229 and coupling element 228. Landscape light 250 may operate similarly to the landscape lights described with respect to FIGS. 2A and 2B. For example, light sources 252 may generate one or more lights that are manipulated by visual effect assembly 220 to create and/or produce certain visual effects. In one instance, rotating optical element 222 can include various optical features that produce a desired optical effect, such as, for example, a flashing, pulsing, or strobing pattern, a shimmering effect, a movement of the light across the target surface, a “raining” effect, etc., when optical element 222 is rotated by motor 221. Motor 221 may be coupled to optical element 222 via linkage 224 and gear 225. Optionally, rotating optical element 222 may include one or more different shapes and/or patterns which allow the light produced by light sources 252 to be projected in the shape and/or pattern (e.g., Christmas ornament, snowflake, candy cane, Santa Claus, reindeer, butterfly, heart, pumpkin, jack-o-lantern, etc.). Accordingly, when rotating optical element 222 is rotated, the shaped light patterns created by the shapes and/or patterns disposed on rotating optical element 222 can cause the light projected in the shape and/or pattern to move across the surface onto which the light is projected.

[0033] According to exemplary embodiments, rotating optical element 222 can be configured to be interchangeable so that a user can interchange rotating optical element 222. For instance, rotating optical element 222 may be designed to include shapes and/or patterns for a specific holiday, and a user may desire to change rotating optical element 222 for the appropriate holiday. According to an exemplary embodiment, a first rotating optical element 222 may include only Christmas shapes and/or patterns (e.g., Santa Claus, snowflake, ornaments, reindeer, candy canes, etc.), a second rotating optical element 222 may include Halloween shapes and/or patterns (e.g., pumpkin, witch, jack-o-lantern, ghost, etc.), a third rotating optical element 222 may include Thanksgiving shapes and/or patterns (e.g., turkey, Pilgrim hat, cornucopia, etc.), etc. Then, a user may be able to select the appropriate or desired rotating optical element 222 for the desired shapes and/or patterns to be projected by landscape light 250.

[0034] The user may be able to change rotating optical element 222 by opening the housing of landscape light 250. This may be enabled by configuring the face of landscape light 250 to be removable from the body to allow the user to access rotating optical element 222. For example, the face of landscape light 250 may be coupled to the body of landscape light 250 via any coupling mechanism, such as threads, clips, screws, fasteners, etc. Further, landscape light 250 may include a safety mechanism to automatically turn light sources 252 OFF if the face of landscape light 250 is removed. This can ensure that a user is not accidentally exposed to the unattenuated light generated by light sources 252 while the face of landscape light 250 is detached. This can be accomplished, for example, by a simple pressure switch, or an electrical connection made with the face of landscape light 250.

[0035] FIG. 3 shows an exemplary landscape light 310 according to an embodiment of the present invention. Similarly to landscape light 10 shown in FIG. 1, landscape light 310 includes housing 312, light sources 314 and 316, and ground stake 322. Additionally, landscape light 310 includes spotlights 332 and an adjustment mechanism 340. Spotlights

332 may include any type of light source having sufficient power to illuminate a desired area. For example, spotlights **332** may include light-emitting diodes (LED), halogen bulbs, high-intensity discharge gas lamps, etc., which may illuminate an area in which the light generated by light sources **314** and **316** are projected. For example, spotlights **332** may illuminate a surface such as a wall, and a plurality of discrete points of light generated by light sources **314** and **316** may be projected on the wall within the area of illumination. In operation, spotlights **332** may be configured to be operable in a continuously ON state, a flashing mode of operation, varying levels of brightness/intensity, etc. Operation of the spotlights **332** can be in addition to and can augment any visual effects that can be produced/created as described herein. Further, certain visual effects (e.g., flashing, movement, etc.) can be implemented on the light generated by light sources **314** and **316** as well as the light generated by spotlights **332**.

[0036] Further, as shown in FIG. 3, landscape light **310** can include adjustment mechanism **340**. Adjustment mechanism **340** may include any element that facilitates adjustment of housing **312** relative to ground stake **322**. As shown in FIG. 3, adjustment mechanism **340** may include a securing element **342** and ratcheted teeth **344**. Securing element **342** may enable housing **312** to be releasably secured in a plurality of positions relative to ground stake **322**. Ratcheted teeth **344** may provide engagement mechanisms that define a plurality of positions in which housing **312** can be secured relative to ground stake **344**.

[0037] FIGS. 4A-4D show landscape lights **410** and **410a** including pattern generation assemblies **450** and **450a**, respectively, according to certain embodiments of the present invention. As shown in FIGS. 4A-4D, landscape lights **410** and **410a** are similar to landscape light **10**, but include pattern generation assemblies **450** and **450a**. Pattern generation assemblies **450** and **450a** can create patterns in the light produced by the light sources of landscape lights **410** and **410a**, thereby enabling landscape lights **410** and **410a** to be project light in specific patterns and shapes. For example, as shown in FIGS. 4A-4C, pattern generation assembly **450** may include pattern generators **452** mounted on a slide cartridge **454**. Slide cartridge **454** may be configured to be received in cartridge receiving mount **456**. Further, each of pattern generators may include a silhouette or outline of a specific pattern. Alternatively, pattern generators **452** can include any shape, pattern, or optical feature that can be used to obtain any desired visual effect. For example, pattern generators **452** can include shapes such as trees, hearts, angels, snowflakes, butterflies, bells, animals, balloons, jack-o-lanterns, etc. When slide cartridge is installed in housing **412** in receiving mount **456**, slide cartridge **454** positions and secures at least one of pattern generators **452** in the path of the light generated by light sources of landscape light **410**. According to certain exemplary embodiments, slide cartridge **454** may facilitate the mounting of a plurality of pattern generators **452** and slide cartridge **454** may allow a user to select between any of the pattern generators **452** mounted thereon. For example, each of pattern generators **452** may include a different pattern, and slide cartridge **454** and/or pattern generation assembly **450** may include a selector to rotate any of pattern generators **452** in position to be the active pattern generator.

[0038] As shown in FIG. 4C, when slide cartridge **454** is installed in housing **412** in receiving mount **456**, light

produced by light source **414** can pass through at least one of the pattern generators **452** mounted on slide cartridge **454**. As light from light source **414** passes through pattern generators **452**, the light may be shaped by the pattern defined by pattern generators **452**. Further, slide cartridge **454** and/or pattern generation assembly **450** may include a selection mechanism so that any of pattern generators **452** can be positioned and secured in the path of the light produced by light source **414**. For example, a switch or other actuatable feature/component, can be included that can be configured to enable selection between the various pattern generators included on a single slide cartridge **454**.

[0039] FIG. 4D shows another exemplary landscape light **410a** having pattern generation assembly **450a**. As shown in FIG. 4D, pattern generation assembly **450a** can include pattern generators **452a**. Pattern generators **452a** can be positioned in mounting locations **456a** to secure pattern generators **452a** in the path of the light generated by landscape light **410**. For example, the mounting of pattern generators **452a** may include a threaded engagement, a tension mount, a clip mount, or any other mounting mechanisms that can secure pattern generators **452a** in the path of the light generated by landscape light **410a**. Similar to landscape light **410**, as the light generated by landscape light **410a** passes through pattern generators **452a**, pattern generators **452a** can create patterns and shapes as defined by the patterns and/or shapes disposed thereon. Pattern generators **452a** may include any shape, pattern, or optical feature that can be used to obtain any desired visual effect. For example, pattern generators **452** can include shapes such as trees, hearts, angels, snowflakes, butterflies, bells, animals, balloons, jack-o-lanterns, etc.

[0040] FIG. 7 is an illustration of an exemplary landscape light **710** according to yet another embodiment of the present invention. Landscape light **710** shown in FIG. 7 can operate substantially similarly to landscape lights **410** and **410a** shown in FIGS. 4A-4D, however, landscape light **710** may include a multi-part housing **712**. For example, housing **712** can include two, three, four, or more separated compartments. As shown in FIG. 7, light projector housing **712** can include compartments **712a** and **712b**. Housing compartment **712a** can house, for example, the internal components of landscape light **710**, such as any number and type of light sources **14** and **16**, lenses **14a** and **16a**, pattern generation assembly, slide cartridge **454**, cartridge receiving mount **456** (not pictured), pattern generators **452** (not pictured), motion generator (not pictured), and switch **708** and housing compartment **712b** can house heat dissipation components such as heat sinks. Further, housing compartment **712a** can include weather-proofing elements to protect internal components of landscape light **710** from the exterior environment while **712b** can be in fluid communication with the environment to facilitate heat dissipation and cooling. For example, housing compartment **712a** can include weather-proofing components to protect the internal components from the exterior environment, such as moisture, dirt, dust, wind, etc., while housing compartment **712b** can include vents and/or openings to provide fluid communication between the interior of housing compartment **712b** and the exterior environment.

[0041] According to embodiments of the present invention, housing compartment **712a** can include one, two, three, or more light sources **14** and **16**. Further, each of the light sources **14** and **16** can be any type of light source that can

produce the type of light desired, such as, for example, light sources **14** and **16** may include lasers, incandescent bulbs, and/or light emitting diodes (LEDs). In one embodiment, landscape light **710** can include multiple LED light sources (e.g., two, three, four, five, six, or more LEDs). According to embodiments of the present invention, the light sources may produce a significant amount of heat, especially, for example, in configurations where many LED light sources are used. Accordingly, housing compartment **712b** can house heat dissipation elements, such as heat sinks **721**, that are in thermal communication with the light sources to facilitate cooling of the light sources. For example, the light sources can be mounted on a thermally conductive component (e.g., a metal plate, etc.) that is in thermal communication with the heat sinks. Further, housing compartment **712b** can be substantially open to the exterior environment to enable improved heat dissipation. For example, housing compartment **712b** may include a plurality of vents, slits, or openings **720** to enable free-flowing circulation of ambient air through the housing compartment **712b**. Further, heatsinks may include a plurality of meal fins, thereby increasing the surface area that interacts with the ambient air.

[0042] As shown in FIG. 7, landscape light **710** can include pattern generation assembly **450**. Pattern generation assembly **450** can include pattern generators **452** mounted on a slide cartridge **454**, and may operate substantially similarly to slide cartridge **454** as discussed herein with respect to FIGS. 4A-4D. For example, slide cartridge **454** may be configured to be received in a cartridge receiving mount **456**. Further, each of pattern generators may include a silhouette or outline of a specific pattern. Alternatively, pattern generators **452** can include any shape, pattern, or optical feature that can be used to obtain any desired visual effect. For example, pattern generators **452** can include shapes such as trees, hearts, angels, snowflakes, butterflies, bells, animals, balloons, jack-o-lanterns, etc. When slide cartridge is installed in housing **712** in receiving mount **456**, slide cartridge **454** positions and secures at least one of pattern generators **452** in the path of the light generated by light sources of landscape light **410**. According to certain exemplary embodiments, slide cartridge **454** may facilitate the mounting of a plurality of pattern generators **452** and slide cartridge **454** may allow a user to select between any of the pattern generators **452** mounted thereon. For example, each of pattern generators **452** may include a different pattern, and slide cartridge **454** and/or pattern generation assembly **450** may include a selector to rotate any of pattern generators **452** in position to be the active pattern generator.

[0043] As shown in FIG. 7, when slide cartridge **454** is installed in housing **412** in receiving mount **456**, light produced by the light source can pass through at least one of the pattern generators **452** mounted on slide cartridge **454**. As light from the light source passes through pattern generators **452**, the light may be shaped by the pattern defined by pattern generators **452**. Further, slide cartridge **454** and/or pattern generation assembly **450** may include a selection mechanism so that any of pattern generators **452** can be positioned and secured in the path of the light produced by the light source. For example, a switch or other actuatable feature/component, can be included that can be configured to enable selection between the various pattern generators included on a single slide cartridge **454**.

[0044] According to one embodiment, the brightness of the light sources may be controlled. For example, landscape

light **710** may include a switch disposed on exterior of housing compartment **712a** which can facilitate a user to control the brightness of the LED light sources **14** and **16** using. The switch (not pictured) can control the brightness of the light sources **14** and **16** by, for example, controlling the number of light sources **14** and **16** being powered on, by controlling the electrical power being supplied to the light sources **14** and **16**, or any other method known in the art.

[0045] As shown in FIG. 7, according to certain embodiments of the present invention, switch **708** may include a rocker switch having three positions and may be articulated between the various positions by pressing on switch portion **708a** or **708b** to articulate the switch. According to certain embodiments of the present invention, switch **708** may be articulated to an OFF position, in which neither portion **708a** nor **708b** is depressed, and light sources **14** and **16** are in an off condition (i.e., not generating light) and landscape light **710** is therefore not emitting or projecting any light. In the OFF position, either switch portion **708a** or **708b** can be pressed to articulate switch **708** into one of two ON positions. In a first ON position, landscape light **710** may be operating in a first operating mode. For example, in an embodiment where light sources **14** and **16** are producing light and the light and/or patterns/shape move at a first speed (e.g., slow, fast, etc.). In a second ON position, landscape light **710** may be operating in a second operating mode where the lights and/or shapes/patterns move at a second speed (e.g., fast, slow, etc.) that is different from the first operating position.

[0046] According to embodiments of the present invention, housing compartment **712a** can optionally include a motion switch **718** (not shown). Motion switch **718** may control any visual and/or optical effect that can be produced by landscape light **710**, such as a motion, modulation, or articulation of the light produced by light sources **14** and **16**. For example, motion switch **718** may rotate any of pattern generators **452** in position to be the active pattern generator. Further, motion switch **718** may control the speed with which pattern generators **452** are rotated. Preferably, pattern generators **452** may be rotated at a variety of speeds. Alternatively, the motion switch can be configured to allow the user to select between a movement of the lights and/or patterns/shapes and a static display of the lights and/or patterns/shapes.

[0047] According to embodiments of the present invention, housing compartment **12a** can include weather-proofing elements to protect switch **708**, motion switch **718**, as well as other internal components of landscape light **710** from the exterior environment, including weather. For example, weather-proofing elements may include rubber, plastic, and/or sealing elements to make it substantially waterproof, water-repellent, dirt-proof, and the like. According to one embodiment, waterproofing switch **708** may include a rubber or plastic cover **709** (not pictured) that can be disposed over switch **708** and/or motion switch **718**. For example, switch **108** can be received within cover **709** to protect switch **708** from water and other environmental elements. Similarly, motion switch **718** can be received within cover **719** to protect switch **718** from water and other environmental elements.

[0048] FIG. 5 shows an exploded view of exemplary landscape light **500** in accordance with yet another embodiment of the present invention. As shown in FIG. 5, landscape light **500** can include laser light sources **502** and LED light

sources **510** operatively coupled to/within rotating assembly **520**. Further, rotating assembly **520** can include motor **524**, connector **526**, optical elements **522** and **528**. Rotating assembly **520** can also include various mounts and connectors which can define the rotating movement of rotating assembly **520**. Optical elements **522** and **528** can include various optical features to disperse, reflect, focus, and/or create shapes/patterns in the light produced by LED light source **510**. In operation, laser light sources **502** can project a plurality of discrete points of laser light onto a surface, as described herein, and LED light sources **510**, in cooperation with rotating assembly **520**, can create a backdrop of moving light. For example, laser light sources **502** can include green, red, and/or blue lasers, and LED light sources **510** can include white LEDs to create a backdrop of falling snow over the colored lights generated by laser light sources **502**. Optionally, landscape light **500** can include visual effects assemblies as described herein that can create and/or produce visual effects in the light generated by the laser light sources **502** and/or LED light sources **510**. Further, the rate or rotation of rotating assembly **520** can be adjustable.

[0049] FIGS. 6A and 6B illustrate cross-sectional and exploded views of exemplary electric candle **600**. As shown in FIGS. 6A and 6B, candle **600** can include body **602**, first light source **604**, and second light source **606**. Body **602** can be shaped and formed so that electric candle **604** has the appearance of a traditional candle. For example, body **602** can be made from a waxy material and body **602** can be substantially cylindrical, or rectangular, or formed in other desired shapes (e.g., designs, sculptures, characters, logos, etc.). First light source **604** can be configured to replicate and/or imitate a flame of a candle and second light source **606** can include an optical element so that the second light source **606** produces a plurality of discrete points of lights, similar to the light sources of the landscape lights described herein. For example, first light source **604** can include a light source such as an LED to produce a soft light to imitate a flame of the candle, and second light source **606** can include a laser light source. Second light source **606** can also include optical element **608**, which can include a lens, attenuator, diffractive element, or other optical element, that can scatter the light generated by second light source **606**. Accordingly, first light source **604** can be configured to replicate and imitate a flame of the candle and light source **606** can be configured to generate and project a plurality of discrete points of light on the ceiling of the room in which electric candle **600** is positioned. Optionally, first light source **604** can be configured to include a flicker to more closely resemble a candle flame. Alternatively, first light source **604** can be configured to create patterns and/or shapes, as described herein. Further, second light source **606** can also include a visual effects assembly, as described herein, such that the various visual effects can be created in the light produced by second light source **606** (e.g., moving lights, flashing, shapes and/or patterns, etc.) as described herein.

[0050] According to embodiments of the present invention, landscape light **10** can include various other features. For example, landscape light **10** can include a motion sensor to control operation of the light when motion is detected. Additionally, landscape light **10** can include a memory, which can facilitate programming various operating modes of landscape light **10**. This programming can be performed via remote control **30**. Landscape light **10** can further include a speaker, and music and audio can be stored on the

memory, which can be played via the speaker. For example, landscape light can include holiday music, scary Halloween sounds, Christmas carols, etc. Further, the lights of landscape light **10** can be choreographed to the audio being played. Additionally, landscape light **10** can include a solar power module, enabling landscape light **10** to be powered by solar energy. Further, landscape light **10** can also include a temperature sensor/thermostat with a heating element. The temperature sensor/thermostat can measure the ambient temperature and activate the heating element when the ambient temperature falls below a predetermined threshold. This can allow the landscape light to operate in cold weather conditions that could otherwise damage the landscape light. Further yet, landscape light **10** can also include a fan that can prevent moisture from collecting within the body of the landscape light. This can prevent, for example, moisture from building up on the face, lens, etc. of the landscape light.

[0051] The embodiments and examples shown above are illustrative, and many variations can be introduced to them without departing from the spirit of the disclosure or from the scope of the appended claims. For example, elements and/or features of different illustrative and exemplary embodiments herein may be combined with each other and/or substituted with each other within the scope of the disclosure. For a better understanding of the disclosure, reference should be had to the accompanying drawings and descriptive matter in which there is illustrated exemplary embodiments of the present invention.

What is claimed as invention is:

1. A landscape light comprising:

- a housing including a first compartment and a second compartment, the first compartment being substantially weather-proofed and the second compartment being in fluid communication with an exterior of the housing;
- a light source producing a light disposed in the first compartment; and
- a heatsink for dissipating heat generated by the light source disposed in the second compartment.

2. The landscape light of claim 1, further comprising a pattern generation assembly including at least one pattern generator secured in a path of the light such that the light passing through the at least one pattern generator is projected onto a surface in a pattern defined by the at least one pattern generator.

3. The landscape light of claim 2, further comprising an articulation assembly configured to articulate the laser light on the surface onto which the laser light is being projected.

4. The landscape light of claim 1, wherein the light source is a light emitting diode.

5. The landscape light of claim 4, wherein the light source includes a plurality of light emitting diodes.

6. The landscape light of claim 1, further comprising a switch to control an operation of the light source.

7. The landscape light of claim 1, further comprising a motor configured to rotate the at least one pattern generator such that the motor imparts movement to the light passing through the at least one pattern generator.

8. The landscape light of claim 7, wherein a speed of the movement of the pattern assembly is adjustable.

9. The landscape light of claim 4, further comprising a second light source producing a second light, each of the first light and the second light including a different color, wherein the second light source is a light emitting diode.

10. The landscape light of claim 1, further comprising a wireless controller.

11. The landscape light of claim 1, further comprising a ground stake and a mounting bracket.

12. The landscape light of claim 11, wherein the mounting bracket is rotatably coupled to the ground stake.

13. The landscape light of claim 1, wherein the second compartment includes vents.

14. The landscape light of claim 3, wherein the pattern generation assembly includes a removably mountable slide cartridge.

15. The landscape light of claim 14, wherein the slide cartridge includes the at least one pattern generator.

16. The landscape light of claim 15, wherein the at least one pattern generator includes a plurality of pattern generators and the landscape light further comprises a switch configured to select between the plurality of the pattern generators.

17. The landscape light of claim 14, wherein the slide cartridge is removably mountable in the first compartment of the housing.

18. The landscape light of claim 1, wherein the heatsink is in thermal communication with the at least one light source.

* * * * *