



(51) International Patent Classification:
C08G 73/02 (2006.01)

(21) International Application Number:
PCT/CN2011/073235

(22) International Filing Date:
25 April 2011 (25.04.2011)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **TONGJI UNIVERSITY** [CN/CN]; No 1239, Siping Road, Shanghai 200092 (CN).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HUANG, Meirong** [CN/CN]; Room 8, 578 Tongji Xincun, Zhangwu Road, Shanghai 200092 (CN). **FENG, Hao** [CN/CN]; No. 1239, Siping Road, Shanghai 200092 (CN). **LI, Xingui** [CN/CN]; Room 8, 578 Tongji Xincun, Zhangwu Road, Shanghai 200092 (CN).

(74) Agent: **UNITALEN ATTORNEYS AT LAW**; 7th Floor, Scitech Place, No.22, Jian Guo Men Wai Ave., Chao Yang District, Beijing 100004 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ANILINE COPOLYMERS AND METHODS FOR THEIR PREPARATION AND USE

(57) Abstract: Aniline copolymers and methods of making these copolymers are disclosed herein. The copolymers can, for example, be used for removing metal ions from a sample.



WO 2012/145885 A1

ANILINE COPOLYMERS AND METHODS FOR THEIR PREPARATION AND USE

BACKGROUND

Field

[0001] The present application relates to compositions and methods for removal of metal ions from a sample.


Description of the Related Art

[0002] The treatment of heavy metal pollution is challenge for environmental protection. Heavy metals, for example some toxic metal ions such as Hg(II), Pb(II), Cd(II), Cr(III, VI), can cause serious damages to living organisms. Traditional methods for heavy metal wastewater treatment, such as chemical precipitation, electrolytic process, extraction separation, and membrane separation, are limited in their applications because of the inability to detect metal ions at low concentrations. There is a need for potent adsorbents that remove metal ions from a sample.

SUMMARY

[0003] Some embodiments disclosed herein include a copolymer having at least one optionally substituted 2-hydroxy-5-sulfonic aniline as a first monomer unit and at least one aniline as a second monomer unit.

[0004] In some embodiments, the first monomer unit is represented by Formula I:

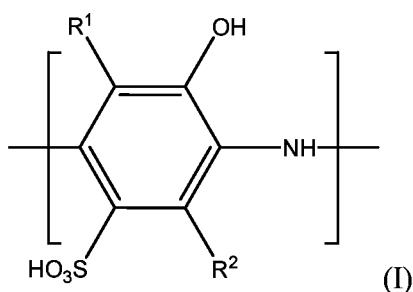


[0005] In some embodiments, R^1 is hydrogen or an electron-donating group, and R^2 is hydrogen or an electron-donating group. In some embodiments, R^1 is hydrogen and R^2 is hydrogen. In some embodiments, the electron-donating group is C_{1-6} alkyl.

[0006] In some embodiments, the copolymer comprises at least about 5% of the first monomer unit by mole. In some embodiments, the copolymer comprises at least about

10% of the first monomer unit by mole. In some embodiments, the copolymer comprises about 20% of the first monomer unit by mole. In some embodiments, the copolymer has a molar ratio of the first monomer unit to the second monomer unit is about 1:99 to about 50:50. In some embodiments, the molar ratio of the first monomer unit to the second monomer unit is about 20:80.

[0007] Some embodiments disclosed herein include a composition comprising submicroparticles, wherein the submicroparticles comprise any one or more copolymer disclosed in the present application. In some embodiments, the submicroparticles have an average size of about 50 nm to about 5 μ m. In some embodiments, the submicroparticles have an average bulk electrical conductivity of about 10^{-7} S/cm to about 100 S/cm. In some embodiments, the submicroparticles have an average surface size of about 1 m²/g to about 500 m²/g. In some embodiments, the submicroparticles have an average pore diameter of about 1 nm to about 500 nm.

[0008] Some embodiments disclosed herein include a method of making a copolymer, the method include forming a composition comprising at least one oxidizing agent, at least one optionally substituted 2-hydroxy-5-sulfonic aniline monomer, and at least one aniline monomer; and maintaining the composition under conditions effective to polymerize the 2-hydroxy-5-sulfonic aniline monomer and the aniline monomer to form the copolymer. In some embodiments, the first monomer unit is represented by Formula I:

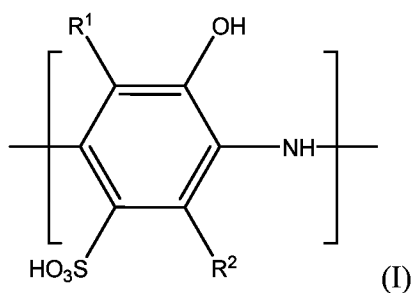


[0009] In some embodiments, R¹ is hydrogen or an electron-donating group, and R² is hydrogen or an electron-donating group. In some embodiments, the oxidizing agent is selected from the group consisting of ammonium persulfate, sodium persulfate, potassium persulfate, FeCl₃, potassium iodate, Na₃VO₄, benzoyl peroxide (BPO), and any combination thereof. In some embodiments, the oxidizing agent is ammonium persulfate. In some embodiments, the molar ratio of the optionally substituted 2-hydroxy-5-sulfonic aniline

monomer to the aniline monomer is about 1:99 to about 50:50. In some embodiments, the molar ratio of the optionally substituted 2-hydroxy-5-sulfonic aniline monomer to the aniline monomer is about 20:80. In some embodiments, the molar ratio of the oxidizing agent to a total amount of monomer components in the composition is about 0.5:1 to about 5:1. In some embodiments, the molar ratio of the oxidizing agent to a total amount of monomer components in the composition is about 1:1. In some embodiments, the composition is maintained at a temperature of about 0 °C to about 100 °C. In some embodiments, the composition is maintained at a temperature of about 30 °C.

[0010] In some embodiments, forming the composition comprises combining a first solution comprising a first solvent and the oxidizing agent; and a second solution comprising a second solvent, the optionally substituted 2-hydroxy-5-sulfonic aniline monomer, and the aniline monomer, wherein the optionally substituted 2-hydroxy-5-sulfonic aniline monomer and the aniline monomer are soluble in the first and second solvents. In some embodiments, the second solvent is an acidic aqueous medium. In some embodiments, the acidic aqueous medium comprises an acid selected from the group consisting of HCl, HNO₃, H₂SO₄, HClO₄, H₃PO₄, H₅IO₆, CH₃COOH, and any combination thereof. In some embodiments, the maintaining step is performed for about 2 hours to about 48 hours.

[0011] Some embodiments disclosed herein include a method for removing a metal ion from a sample, the method include providing (a) an untreated sample suspected of containing the metal ion; and (b) contacting the untreated sample and a composition to form a treated sample, wherein the composition comprises a copolymer comprising at least one optionally substituted 2-hydroxy-5-sulfonic aniline as a first monomer unit and at least one aniline as a second monomer unit. In some embodiments, the first monomer unit is represented by Formula I:

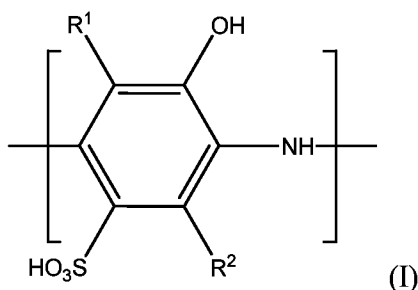

[0012] In some embodiments, R^1 is hydrogen or an electron-donating group, and R^2 is hydrogen or an electron-donating group.

[0013] In some embodiments, the metal ion is a heavy metal ion. In some embodiments, the metal ion is Pb(II) or Hg(II). In some embodiments, the metal ion is a noble metal ion. In some embodiments, the metal ion is Ag(I). In some embodiments, the metal ion is selected from the group consisting of Cd(II), Cu(II), Zn(II), Pb(II), Hg(II), and Fe(III). In some embodiments, the untreated sample is wastewater. In some embodiments, the concentration of the metal ion in the untreated sample is no more than about 200 g/L. In some embodiments, the concentration of the metal ion in the untreated sample is from about 1 ng/L to about 200 mg/L. In some embodiments, the concentration of the metal ion in the untreated sample is higher than the concentration of the metal ion in the treated sample. In some embodiments, the concentration of the metal ion in the untreated sample is at least about 5 times higher than the concentration of the metal ion in the treated sample. In some embodiments, the concentration of the metal ion in the untreated sample is at least about 10 times higher than the concentration of the metal ion in the treated sample. In some embodiments, the concentration of the metal ion in the untreated sample is at least about 20 times higher than the concentration of the metal ion in the treated sample. In some embodiments, the concentration of the metal ion in the treated sample is less than about 30% of the concentration of the metal ion in the untreated sample. In some embodiments, the concentration of the metal ion in the treated sample is less than about 15% of the concentration of the metal ion in the untreated sample. In some embodiments, the concentration of the metal ion in the treated sample is less than about 1% of the concentration of the metal ion in the untreated sample.

[0014] In some embodiments, the method further comprises separating the copolymer from the treated sample. In some embodiments, the method further comprises contacting the separated copolymer with a chelating agent to form a regenerated copolymer, where the amount of metal ions in the regenerated copolymer is less than the amount of metal ions in the separated copolymer. In some embodiments, the method further comprises contacting a second untreated sample suspected of containing metal ions with the regenerated copolymer. In some embodiments, the chelating agent is a polyamino carboxylic acid. In

some embodiments, the chelating agent is selected from ethylenediaminetetraacetic acid (EDTA), diethylenetriaminepentaacetic acid (DTPA), N-(2-hydroxyethyl)ethylenediamine-N,N',N'-triacetic acid (HEDTA), glycol-bis-(2-aminoethylether)-N,N,N',N'-tetraacetic acid (EGTA), ethylenediamine-N,N'-bis((2-hydroxyphenyl)acetic acid) (EDDHA), and mixtures thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The foregoing and other features of the present disclosure will become more fully apparent from the following description and appended claims, taken in conjunction with the accompanying drawings. Understanding that these drawings depict only several embodiments in accordance with the disclosure and are not to be considered limiting of its scope, the disclosure will be described with additional specificity and detail through use of the accompanying drawings.

[0016] **Figure 1** shows the polymerization yield and bulk electrical conductivity of the HCl-doped aniline/2-hydroxy-5-sulfonic aniline (AN/HSA) copolymers as a function of HSA feed content.

[0017] **Figure 2** shows the SEM images of the AN/HSA copolymer submicroparticles. In **Figure 2a-c**, the AN/HSA copolymers were synthesized using the AN/HSA molar ratio of 95:5; in **Figure 2d-f**, the AN/HSA copolymers were synthesized using the AN/HSA molar ratio of 80:20.

[0018] **Figure 3** shows the variation of the number-average diameter and size polydispersity index of the AN/HSA copolymer particles synthesized using various molar ratios of AN/HSA in 1.0 M HCl at 30 °C for 24 hours.

[0019] **Figure 4** shows the nitrogen adsorption-desorption isotherm plots of dry particles of the AN/HSA copolymers synthesized using the AN/HSA molar ratio of 80:20. The pore distribution curves are shown in the inset.

[0020] **Figure 5** shows the FT-IR spectra of the AN/HSA copolymers synthesized using various AN/HSA molar ratios.

[0021] **Figure 6** shows the UV-Vis spectra of the AN/HSA copolymer synthesized with various molar ratio of AN/HSA in DMSO.

[0022] **Figure 7** shows the sorption capacity and adsorptivity of Pb(II) by 50 mg AN/HSA copolymer synthesized using the AN/HSA molar ratio of 80:20 in 25 mL Pb(NO₃)₂ solution at initial Pb(II) concentration of 200 mg/L.

[0023] **Figure 8** shows the kinetics of removal percentage of Pb(II) by the AN/HSA copolymer at initial Pb(II) concentration of 1 mg/L (equals 1 ppm).

[0024] **Figure 9** shows the removal percentage of Pb(II) by the AN/HSA copolymer at ppb/ppm level.

[0025] **Figure 10** shows the adsorption ability of various metal ions by the AN/HSA copolymer in separate or mixed solutions with initial metal ion concentration of 200 mg/L.

[0026] **Figure 11** shows the competitive adsorption of various co-existing metal ions by 50 mg AN/HSA copolymer particles in 25 mL of mixed solution with initial concentration of 20 mg/L for each metal ion.


[0027] **Figure 12** shows the competitive adsorption of various co-existing metal ions by 5 mg AN/HSA copolymer particles in 25 mL of mixed solution with initial concentration of 20 mg/L for each metal ion.

[0028] **Figure 13** shows the Pb(II) adsorption and desorption by the AN/HSA copolymer.

DETAILED DESCRIPTION

[0029] In the following detailed description, reference is made to the accompanying drawings, which form a part hereof. In the drawings, similar symbols typically identify similar components, unless context dictates otherwise. The illustrative embodiments described in the detailed description, drawings, and claims are not meant to be limiting. Other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the subject matter presented here. It will be readily understood that the aspects of the present disclosure, as generally described herein, and illustrated in the Figures, can be arranged, substituted, combined, and designed in a wide variety of different configurations, all of which are explicitly contemplated and make part of this disclosure.

[0030] Disclosed herein are copolymers having at least one optionally substituted 2-hydroxy-5-sulfonic aniline as a first monomer unit and at least one aniline as a second monomer unit. In some embodiments, the first monomer unit is represented by Formula I:

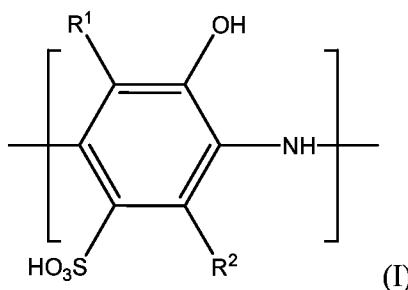

[0031] Also disclosed herein are compositions having one or more of the copolymers disclosed in the present application. The copolymer can be used, for example, removing metal ions from a sample. Also disclosed herein are methods of making the copolymer. The methods can, in some embodiments, include standard polymerization procedures that may be easily scaled for manufacturing purposes. The present application also includes methods of using the copolymer.

Definitions


[0032] As used herein, the term “electron donating” refers to the ability of a substituent to donate electrons relative to that of hydrogen if the hydrogen atom occupied the same position in the molecule. This term is well understood by one skilled in the art and discussed in *Advanced Organic Chemistry* by M. Smith and J. March, John Wiley and Sons, New York N.Y. (2007). Non-limiting examples of electron donating group include $-\text{CH}_3$, $-\text{CH}_2\text{CH}_3$, $-\text{OH}$, $-\text{OCH}_3$, $-\text{OCH}_2\text{CH}_3$, $-\text{N}(\text{CH}_3)_2$, $-\text{N}(\text{CH}_2\text{CH}_3)_2$, and $-\text{SH}$.

[0033] As used herein, “alkyl” refers to a straight or branched hydrocarbon chain that comprises a fully saturated (no double or triple bonds) hydrocarbon group. The alkyl group of the compounds may be designated as “ C_1 - C_4 alkyl” or similar designations. By way of example only, “ C_1 - C_4 alkyl” indicates that there are one to four carbon atoms in the alkyl chain, *i.e.*, the alkyl chain is selected from methyl, ethyl, propyl, iso-propyl, n-butyl, iso-butyl, sec-butyl, and tert-butyl. Typical alkyl groups include, but are in no way limited to, methyl, ethyl, propyl, isopropyl, butyl, isobutyl, tertiary butyl, pentyl, hexyl, and the like. The alkyl group may be substituted or unsubstituted.


[0034] As used herein, “BET specific surface area” refers to the specific surface area of a material that is measured by nitrogen multilayer adsorption measured as a function of relative pressure using a method based on the Brunauer-Emmett-Teller theory (Brunauer *et al.* “Adsorption of Gases in Multimolecular Layers”, J. Am. Chem. Soc., 1938, 60(2):309-319). Analyzers and testing services are commercially available from various sources including CERAM (Staffordshire, UK).

Aniline Copolymer Materials

[0035] Some embodiments disclosed herein include a copolymer having at least one optionally substituted 2-hydroxy-5-sulfonic aniline as a first monomer unit and at least one aniline as a second monomer unit. In some embodiments, the first monomer unit is represented by Formula I:

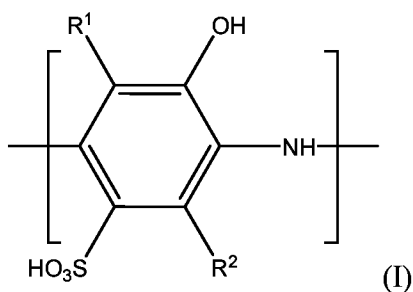

[0036] In some embodiments, R^1 is hydrogen or an electron-donating group, and R^2 is hydrogen or an electron-donating group. In some embodiments, R^1 is hydrogen and R^2 is hydrogen. In some embodiments, the electron-donating group is C_{1-6} alkyl. In some embodiments, the first monomer unit is 2-hydroxy-5-sulfonic aniline represented by Formula II:

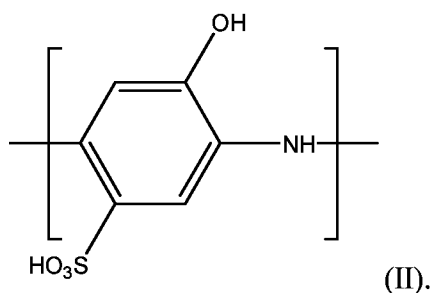

[0037] In some embodiments, the electron-donating group is $-CH_3$, $-CH_2CH_3$, $-OH$, $-OCH_3$, $-OCH_2CH_3$, $-N(CH_3)_2$, $-N(CH_2CH_3)_2$, or $-SH$.

[0038] In some embodiments, the copolymer comprises at least about 5%, at least 10%, at least 20%, at least 30%, at least 40%, or at least 50% of the first monomer unit by mole. In some embodiments, the copolymer comprises at least about 10% of the first monomer unit by mole. In some embodiments, the copolymer comprises about 20% of the first monomer unit by mole. In some embodiments, the molar ratio of the first monomer unit to the second monomer unit in the copolymer is about 1:99, about 5:95, about 10:90, about 20:80, about 30:70, about 40:60, about 50:50, or ranges between any two of these values. In some embodiments, the molar ratio of the first monomer unit to the second monomer unit is about 20:80.

Compositions Including Aniline Copolymers

[0039] Some embodiments disclosed herein include a composition having submicroparticles, wherein the submicroparticle include any one or more copolymers described in the present application. In some embodiments, the copolymer has at least one optionally substituted 2-hydroxy-5-sulfonic aniline as a first monomer unit and at least one aniline as a second monomer unit.

[0040] The total amount of the copolymer in the composition is not particularly limited and can vary depending upon the desired use. For example, a relatively small amount of the copolymer can be used for certain applications to remove metal ions that are discussed further below. The total amount of the copolymer in the composition can, for example, be at least about 1% by weight; at least about 2% by weight; at least about 5% by weight; at least about 10% by weight; at least about 15% by weight; at least about 20% by weight. The total amount of the copolymer in the composition may, for example, be less than or equal to about 100% by weight, less than or equal to about 99% by weight; less than or equal to about 90% by weight; less than or equal to about 70% by weight; less than or equal to about 50% by weight; less than or equal to about 30% by weight; less than or equal to about 10% by weight; less than or equal to about 5% by weight, or less than or equal to about 1% by weight.

[0041] The composition can, in some embodiments, be in the form of a liquid that includes one or more of the copolymers described in the present application. For example, the copolymer can be dispersed or dissolved in a solvent. The solvent can be an organic

solvent or water. The organic solvent may, for example, be a non-polar solvent, a polar aprotic solvent, a polar protic solvent, or combinations thereof. In some embodiments, the composition includes a polar aprotic solvent. Non-limiting examples of polar aprotic solvents include n-methyl-2-pyrrolidone (NMP), dimethylformamide (DMF), dimethyl sulfoxide (DMSO), and tetrahydrofuran (THF).

[0042] The composition can, in some embodiments, be in the form of a solid that includes one or more of the copolymers described in the present application. In some embodiments, a solid form of the copolymer can be obtained by precipitating or drying the copolymer from solution (e.g., solvent casting). The solid composition can include amorphous or semi-crystalline forms of the copolymer. In some embodiments, the copolymer can be blended with one or more polymers. Generally, any inert polymer can be blended with the copolymer; such inert polymers can be, for example, acrylics, polyolefins, polyamides, polyesters, polysulfones, fluoropolymers, vinyl polymers, and the like. The amount of the copolymer in the composition is not particularly limited and can be, for example, at least about 10% by weight; at least about 30% by weight; at least about 50% by weight; at least about 60% by weight; at least about 70% by weight; at least about 80% by weight; at least about 90% by weight; at least about 95% by weight; at least about 97% by weight; or at least about 99% by weight.

[0043] The copolymer particles can have various sizes. For example, the copolymer particles can have a size of about 50 nm to about 5 μm , a size of about 100 nm to about 2 μm , a size of about 150 nm to about 1 μm , a size of about 200 nm to about 800 nm, a size of about 250 nm to about 600 nm, or a size of about 300 nm to about 500 nm. In some embodiments, the copolymer particles have a size of about 150 nm to about 2.5 μm . In some embodiments, the copolymer particles have a size of about 300 nm to about 2 μm . In some embodiments, the copolymer particles have a size of about 500 nm to about 1 μm .

[0044] The composition can, in some embodiments, exhibit electrical conductivity. For example, the composition can exhibit a conductivity of about 1×10^{-7} S/cm to about 100 S/cm. In some embodiments, the composition can exhibit a conductivity of about 1×10^{-3} S/cm⁻¹ to about 1×10^{-2} S/cm⁻¹. The composition can, in some embodiments, exhibit electrical conductivity when doped with an effective amount of dopant. For example,

the composition can exhibit a conductivity of about $0.8 \times 10^{-3} \text{ S/cm}^{-1}$ when doped with HCl. Non-limiting examples of dopants include halogenated compounds, such as iodine, bromine, chlorine, iodine trichloride; protonic acids such as sulfuric acid, hydrochloric acid, nitric acid, perchloric acid; Lewis acids, such as aluminum trichloride, ferric trichloride, molybdenum chloride; and organic acids, such as acetic acid, trifluoroacetic acid, and benzenesulfonic acid. In some embodiments, the dopant is HCl.

[0045] The copolymer particles can have various average BET specific areas. For example, the copolymer particles can have an average BET specific area of about $1 \text{ m}^2/\text{g}$ to about $500 \text{ m}^2/\text{g}$, about $2 \text{ m}^2/\text{g}$ to about $200 \text{ m}^2/\text{g}$, about $5 \text{ m}^2/\text{g}$ to about $100 \text{ m}^2/\text{g}$, about $10 \text{ m}^2/\text{g}$ to about $50 \text{ m}^2/\text{g}$, about $15 \text{ m}^2/\text{g}$ to about $40 \text{ m}^2/\text{g}$, or about $20 \text{ m}^2/\text{g}$ to about $30 \text{ m}^2/\text{g}$. In some embodiments, the copolymer particles have an average BET specific area of about $22 \text{ m}^2/\text{g}$ to about $25 \text{ m}^2/\text{g}$. In some embodiments, the copolymer particles have an average BET specific area of about $22 \text{ m}^2/\text{g}$.


[0046] The copolymer particles can have various average pore diameters. For example, the copolymer particles can have an average pore diameter of about 1 nm to about 500 nm , about 10 nm to about 450 nm , about 20 nm to about 400 nm , about 30 nm to about 350 nm , about 40 nm to about 300 nm , about 50 nm to about 250 nm , or about 75 nm to about 200 nm . In some embodiments, the copolymer particles have an average pore diameter of about 75 nm to about 200 nm .

[0047] In some embodiments, the average molecular weight of the copolymer is from about 500 g/mol to about 2000 g/mol . In some embodiments, the average molecular weight of the one or more polyanthrylenes is from about 800 g/mol to about 1500 g/mol .


Method of Making Copolymers

[0048] Some embodiments disclosed herein include a method of making a copolymer. Any one or more of the copolymers described in the present application can be prepared using this process. The method can include, for example, forming a composition comprising at least one oxidizing agent, at least one optionally substituted 2-hydroxy-5-sulfonic aniline monomer and at least one aniline monomer; maintaining the composition under the conditions effective to polymerize the optionally substituted 2-hydroxy-5-sulfonic

aniline monomer and the aniline monomer to form the copolymer. In some embodiments, the optionally substituted 2-hydroxy-5-sulfonic aniline monomer is represented by Formula I:

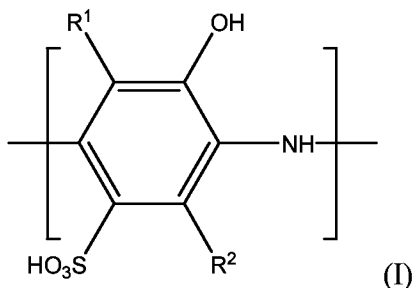

wherein R^1 and R^2 are as previously defined in the present application. In some embodiments, the first monomer unit is 2-hydroxy-5-sulfonic aniline represented by Formula II:

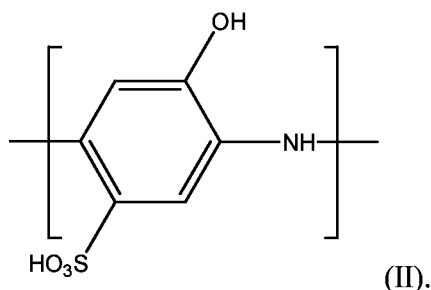

[0049] The steps and/or conditions for forming the copolymer are not particularly limited. Any suitable method of combining the ingredients is within the scope of the present application. For example, the oxidizing agent can be combined (e.g., mixed or dissolved) in a first solvent, and the optionally substituted 2-hydroxy-5-sulfonic aniline monomer and the aniline monomer can be combined (e.g., mixed or dissolved) in a second solvent. The solution can then be combined by dropwise or continuous addition of one of the mixtures to the other. The first and second solvents can be the same or different. In some embodiments, the first solvent is at least partially immiscible in the second solvent. In some embodiments, the oxidizing agent is soluble in the first solvent. In some embodiments, the first solvent is distilled water. In some embodiments, both the optionally substituted 2-hydroxy-5-sulfonic aniline monomer and the aniline monomer are soluble in the second solvent. Without being bound to any specific theory, but it is believed that the solvent used for polymerization owns the ability to offer H^+ , which allows the monomer components (for example, the aniline monomer and the 2-hydroxy-5-sulfonic aniline monomer) to be protonated to copolymerize. In some embodiments, the second solvent is an acid aqueous medium, for example an

aqueous medium containing organic and/or inorganic acids. Examples of acid include, but are not limited to, HCl, HNO₃, H₂SO₄, HClO₄, H₃PO₄, H₅IO₆, CH₃COOH, and any combination thereof. The pH of the aqueous medium can be, for example, less than or equal to about 6; less than or equal to about 5; less than or equal to about 4; or less than or equal to about 3. As one example, the polymerization solvent can include a protonic acid, such as 1M HCl. And various pH modifying agents can be used to adjust and/or maintain the pH of the composition to a desired pH.

[0050] Various oxidative agents can be used. Examples of the oxidizing agent include, but are not limited to, ammonium salts (such as ammonium persulfate), sodium persulfate, potassium persulfate, FeCl₃, potassium iodate, Na₃VO₄, benzoyl peroxide (BPO), or combinations thereof. In some embodiments, the oxidizing agent is ammonium persulfate.

[0051] The molar ratio of the oxidizing agent to the monomer components in the composition can be modified, for example, to adjust the properties of the copolymer. The relative molar ratio of the oxidizing agent to the monomer components in the composition can be, for example, at least about 0.1:1, at least about 0.5:1, at least about 1:1, at least about 1.5:1, at least about 2:1, at least about 2.5:1, at least about 3:1, at least about 3.5:1, at least about 4:1, at least about 4.5:1, or at least about 5:1. The relative molar ratio of the monomer components to the oxidizing agent in the composition can be, for example, less than or equal to about 5:1, less than equal to about 4.5:1, less than or equal to about 4:1, less than equal to about 3:1, less than equal to about 2:1, or less than equal to about 1:1. In some embodiments, the relative molar ratio of the oxidizing agent to the monomer components is about 1:1.

[0052] After forming the composition having the optionally substituted 2-hydroxy-5-sulfonic aniline monomer, the aniline monomer and oxidizing agent, the composition can be maintained at conditions effective to polymerize the monomer components to form the copolymer. For example, the composition can be maintained at about atmospheric pressure and a temperature of about 0 °C to about 100 °C, about 5 °C to about 80°C, about 10 °C to about 60 °C, about 15 °C to about 50 °C, about 20 °C to about 40 °C, or about 25 °C to about 35 °C. In some embodiments, the temperature can be about 15 °C to about 25 °C. In some embodiments, the temperature can be about 30 °C. Non-limiting examples of polymerization temperature include about 15 °C, about 20 °C, about 25 °C,

about 30 °C, about 35 °C, about 40 °C, about 45 °C, about 50 °C, and ranges between any two of these values.

[0053] The composition having the optionally substituted 2-hydroxy-5-sulfonic aniline monomer, the aniline monomer and oxidizing agent can be maintained at the conditions for a period of time sufficient to obtain the copolymer. The composition, for example, can be maintained at the conditions for about 2 hours to about 48 hours. In some embodiments, the composition is maintained at the conditions for at least about 1 hour, at least about 2 hours, at least about 6 hours, at least about 12 hours, at least about 18 hours, at least about 24 hours, at least about 30 hours, at least about 36 hours, at least about 42 hours, at least about 48 hours, at least about 60 hours, and ranges between any two of these values. In some embodiments, the composition is maintained at the conditions for about 2 hours to about 48 hours. In some embodiments, the composition is maintained at the conditions for about 24 hours.

[0054] The method can also optionally include isolating the copolymer from the composition. For example, the copolymer can be isolated by centrifuging the composition to obtain one or more copolymers within the precipitate. The copolymer can be subject to various other optional treatments, such as washing, doping, dedoping, and the like.

[0055] The yield of the copolymer using the method will vary depending upon various factors, such as the temperature and the like. In some embodiments, the method yields at least about 50% by weight of copolymer relative to a total amount of the monomer components in the composition. In some embodiments, the method yields at least about 60% by weight of copolymer relative to a total amount of the monomer components in the composition. In some embodiments, the method yields at least about 70% by weight of the copolymer relative to a total amount of the monomer components in the composition. In some embodiments, the method yields at least about 80% by weight of the copolymer relative to a total amount of the monomer components in the composition. In some embodiments, the method yields at least about 90% by weight of the copolymer relative to a total amount of the monomer components in the composition.

Methods for Removing Metal Ions from a Sample

[0056] Some embodiments of the present application include methods for removing metal ions from a sample. In some embodiments, a method for removing metal ions from a sample includes: (a) providing an untreated sample suspected of containing one or more metal ions; and (b) contacting the sample and a composition to form a treated sample, wherein the composition comprises a copolymer comprising at least one optionally substituted 2-hydroxy-5-sulfonic aniline as a first monomer unit and at least one aniline as a second monomer unit.

[0057] Non-limiting examples of metal ions that can be removed using the methods disclosed in the present application include heavy metal ions, noble metal ions, nutritious metal ions, and ions of rare earth metal. Examples of heavy metal ion include As(III), As(V), Cd(II), Cr(VI), Pb(II), Hg(II), Sb(III), Sb(V), Ni(II), Ag(I) and Tl(III). Examples of nutritious metal ion include K(I), Na(I), Ca(II), Mg(II), Fe(II), Fe(III), Zn(II), Cu(II), and Co(II). Examples of noble metal ions are Ag(I), Au(I), Au(III), Pt(II), Pt(IV), Ir(III), Ir(IV), Ir(VI), Pd(II), and Pd(IV). Examples of ions of rare earth metal are La(III), Pr(III), Nd(III), Sm(III), Gd(III), Dy(III), Y(III), and Er(III). In some embodiments, the metal ion is Pb(II). In some embodiments, the metal ion is Hg(II). In some embodiments, the metal ion is Cu(II) or Au(I). In some embodiments, the metal ion is Fe(III) or Zn(II). In some embodiments, the metal ion is Au(I).

[0058] Various types of samples can be treated by the copolymer as described in the present application for removing metal ions. In some embodiments, the sample is an aqueous sample. In some embodiments, the untreated sample is wastewater. In some embodiments, the untreated sample is sewage, plant discharge, groundwater, polluted river water, industrial waste, battery waste, electroplating wastewater, liquid waste in chemical analysis, or laboratory waste. In some embodiments, the wastewater is generated from industrial factories such as printery, non-ferrous metal manufacturing, mining, smelting, electrolysis, electroplating, chemicals, medicine, paint and pigment. In some embodiments, the untreated sample is automotive exhaust. The concentration of the metal ion in the untreated sample can be from about 1 ng/L to about 200 g/L, from about 10 ng/L to about 100 g/L, from about 100 ng/L to about 50 g/L, from about 1 µg/L to about 10 g/L, from about 10 µg/L to about 5 g/L, from about 100 µg/L to about 1 g/L, from 1 mg/L to about 0.5 g/L,

from about 5 mg/L to about 0.1 g/L, or from about 10 mg/L to about 0.05 g/L. In some embodiments, the concentration of the metal ion in the untreated sample is no more than about 200 g/L, no more than 100 g/L, no more than 50 g/L, no more than 5 g/L, no more than 1 g/L, no more than 0.5 g/L, no more than 0.1 g/L, no more than 0.05 g/L, no more than 0.01 g/L, no more than 0.005 g/L, no more than 1 mg/L or less. In some embodiments, the concentration of the metal ion is from about 0.01 mg/L to about 500 mg/L. In some embodiments, the concentration of the metal ion is from about 0.1 mg/L to about 200 mg/L. In some embodiments, the concentration of the metal ion is from about 1 ng/L to about 200 mg/L. In some embodiments, the concentration of the metal ion in the untreated sample is about 200 mg/L. In some embodiments, the concentration of the metal ion in the untreated sample is about 20 mg/L. In some embodiments, the concentration of the metal ion in the untreated sample is about 0.1 mg/L. In some embodiments, the concentration of the metal ion in the untreated sample is about 1 ng/L.

[0059] The copolymer described in the present application can be potent adsorbents for metal ions. For example, the removal percentage of a metal ion in a sample can be at least about 20% by weight, at least about 30% by weight, at least about 40% by weight, at least about 50% by weight, at least about 60% by weight, at least about 70% by weight, at least about 80% by weight, at least about 90% by weight, at least about 95% by weight, or at least about 99% by weight. In some embodiments, the removal percentage of the metal ion is at least about 85%. In some embodiments, the removal percentage of the metal ion is at least about 90% by weight. In some embodiments, the removal percentage of the metal ion is at least about 95% by weight. In some embodiments, the removal percentage of the metal ion is at least about 99% by weight. In some embodiments, the removal percentage of the metal ion is at least about 99.5% by weight. In an idealized embodiment, the removal percentage of the metal ion is 100% by weight.

[0060] Various amount of the copolymer can be used to remove a metal ion from a sample. The copolymer can be added to the untreated sample at a concentration of, for example, at least about 0.001 mg/mL; at least about 0.01 mg/mL; at least about 0.1 mg/mL; at least about 1 mg/mL; at least about 5 mg/mL; at least about 10 mg/mL; at least about 50 mg/mL; at least about 100 mg/mL; at least about 500 mg/mL; at least about 1 g/mL; or at

least about 5 g/mL. The copolymer can be added to the untreated sample at a concentration of, for example, less than or equal to about 500 mg/mL; less than or equal to about 100 mg/mL; less than or equal to about 50 mg/mL; less than or equal to about 10 mg/mL; less than or equal to about 5 mg/mL; less than or equal to about 1 mg/mL; less than or equal to about 0.1 mg/mL; less than or equal to about 0.01 mg/mL; or less than or equal to about 0.001 mg/mL.

[0061] In some embodiments, the untreated sample has a higher concentration of the metal ion than the treated sample. For example, the concentration of the metal ion in the untreated sample can be, for example, at least about 5 times higher, at least about 10 times higher, at least about 15 times higher, at least about 20 times higher, at least about 25 times higher, at least about 30 times higher, at least about 35 times higher, at least about 40 times higher, at least about 45 times higher, at least about 50 times higher, at least about 60 times higher, or at least about 100 times higher, than the concentration of the metal ion in the treated sample. The concentration of the metal ion in the treated sample can be less than, for example, about 30%, about 25%, about 20%, about 15%, about 10%, about 5%, about 4%, about 3%, about 2%, about 1%, about 0.5%, about 0.2%, about 0.1%, about 0.05%, or about 0.01% of the concentration of the metal ion in the untreated sample.

[0062] The sample can be, in some embodiments, in contact with the composition containing the copolymer for various period of time. For example, the sample can be in contact with the composition for from about 0.01 hour to about 100 hours; from about 0.1 hour to about 50 hours; from about 1 hour to about 40 hours; from about 5 hours to about 24 hours; or from about 10 hour to about 12 hours. In some embodiments, the sample is in contact with the composition for about 5 minutes, about 10 minutes, about 15 minutes, about 20 minutes, about 30 minutes, about 40 minutes, about 50 minutes, about 60 minutes, about 75 minutes, or longer. In some embodiments, the sample is in contact with the composition for about 24 hours. In some embodiments, the sample is in contact with the composition for about 1 hour. In some embodiments, the adsorption time at equilibrium is about 1 hour. In some embodiments, the adsorption time at equilibrium is about 40 minutes. In some embodiments, the adsorption time at equilibrium is at most about 30 minutes, at most about 1 hour, at most about 2 hours, or at most about 5 hours.

[0063] The temperature of the sample while contacting the composition containing the copolymer can be varied. The temperature can be, for example, in the range of about 0 °C to about 60 °C. In some embodiments, the temperature is about 30 °C. In some embodiments, the sample may be heated above room temperature. In some embodiments, the sample can be maintained at a selected temperature while the composition containing the copolymer contacts the untreated sample.

[0064] The method can also optionally include separating the copolymer from the treated sample. Various methods of separating the copolymer can be used, such as filtering or centrifuging. As one example, after the copolymer has contacted the untreated sample for sufficient time to adsorb metal ions, the sample can be filtered to remove the copolymer. The filter can, for example, be configured to remove particles containing the copolymer.

[0065] In some embodiments, the metal ion that has been adsorbed by the copolymer can be removed from the copolymer. The method can also optionally include contacting the separated copolymer with a chelating agent to form a regenerated copolymer, wherein the amount of metal ions in the regenerated copolymer is less than the amount of metal ions in the separated copolymer. Various chelating agents can be used to release the metal ions from the separate copolymer and regenerate the copolymer. Non-limiting examples of chelating agent include a polyamino carboxylic acid, a protonic acid (such as nitric acid), diethylenetriaminepentaacetic acid (DTPA), N-(2-hydroxyethyl)ethylenediamine-N,N',N'-triacetic acid (HEDTA); glycol-bis-(2-aminoethylether)-N,N,N',N'-tetraacetic acid (EGTA); ethylenediamine-N,N'-bis((2-hydroxyphenyl)acetic acid) (EDDHA).

[0066] The copolymer can be repeatedly regenerated for removing metal ions. In some embodiments, the copolymer can maintain an adsorptivity of about 50%, 60%, 70%, 80%, 90%, or 95% to the metal ions after being recycled for about 3 times, about 5 times, about 8 times, about 10 times, about 15 times, about 20 times, about 25 times, or about 30 times. In some embodiments, the copolymer can maintain an adsorptivity of at least about 85% after being recycled for about 3 times, about 5 times, about 8 times, about 10 times, about 15 times, or about 20 times. In an idealized embodiment, the adsorptivity of the copolymer is 100% to the metal ions after being recycled for about 3 times, about 5 times,

about 8 times, about 10 times, about 15 times, about 20 times, about 25 times, or about 30 times.

[0067] In at least some of the previously described embodiments, one or more elements used in an embodiment can interchangeably be used in another embodiment unless such a replacement is not technically feasible. It will be appreciated by those skilled in the art that various other omissions, additions and modifications may be made to the methods and structures described above without departing from the scope of the claimed subject matter. All such modifications and changes are intended to fall within the scope of the subject matter, as defined by the appended claims.

[0068] With respect to the use of substantially any plural and/or singular terms herein, those having skill in the art can translate from the plural to the singular and/or from the singular to the plural as is appropriate to the context and/or application. The various singular/plural permutations may be expressly set forth herein for sake of clarity.

[0069] It will be understood by those within the art that, in general, terms used herein, and especially in the appended claims (*e.g.*, bodies of the appended claims) are generally intended as “open” terms (*e.g.*, the term “including” should be interpreted as “including but not limited to,” the term “having” should be interpreted as “having at least,” the term “includes” should be interpreted as “includes but is not limited to,” etc.). It will be further understood by those within the art that if a specific number of an introduced claim recitation is intended, such an intent will be explicitly recited in the claim, and in the absence of such recitation no such intent is present. For example, as an aid to understanding, the following appended claims may contain usage of the introductory phrases “at least one” and “one or more” to introduce claim recitations. However, the use of such phrases should not be construed to imply that the introduction of a claim recitation by the indefinite articles “a” or “an” limits any particular claim containing such introduced claim recitation to embodiments containing only one such recitation, even when the same claim includes the introductory phrases “one or more” or “at least one” and indefinite articles such as “a” or “an” (*e.g.*, “a” and/or “an” should be interpreted to mean “at least one” or “one or more”); the same holds true for the use of definite articles used to introduce claim recitations. In addition, even if a specific number of an introduced claim recitation is explicitly recited, those skilled in the art

will recognize that such recitation should be interpreted to mean at least the recited number (*e.g.*, the bare recitation of "two recitations," without other modifiers, means at least two recitations, or two or more recitations). Furthermore, in those instances where a convention analogous to "at least one of A, B, and C, etc." is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (*e.g.*, "a system having at least one of A, B, and C" would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). In those instances where a convention analogous to "at least one of A, B, or C, etc." is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (*e.g.*, "a system having at least one of A, B, or C" would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). It will be further understood by those within the art that virtually any disjunctive word and/or phrase presenting two or more alternative terms, whether in the description, claims, or drawings, should be understood to contemplate the possibilities of including one of the terms, either of the terms, or both terms. For example, the phrase "A or B" will be understood to include the possibilities of "A" or "B" or "A and B."

[0070] In addition, where features or aspects of the disclosure are described in terms of Markush groups, those skilled in the art will recognize that the disclosure is also thereby described in terms of any individual member or subgroup of members of the Markush group.

[0071] As will be understood by one skilled in the art, for any and all purposes, such as in terms of providing a written description, all ranges disclosed herein also encompass any and all possible sub-ranges and combinations of sub-ranges thereof. Any listed range can be easily recognized as sufficiently describing and enabling the same range being broken down into at least equal halves, thirds, quarters, fifths, tenths, etc. As a non-limiting example, each range discussed herein can be readily broken down into a lower third, middle third and upper third, etc. As will also be understood by one skilled in the art all language such as "up to," "at least," "greater than," "less than," and the like include the number recited and refer to ranges which can be subsequently broken down into sub-ranges

as discussed above. Finally, as will be understood by one skilled in the art, a range includes each individual member. Thus, for example, a group having 1-3 articles refers to groups having 1, 2, or 3 articles. Similarly, a group having 1-5 articles refers to groups having 1, 2, 3, 4, or 5 articles, and so forth.

[0072] While various aspects and embodiments have been disclosed herein, other aspects and embodiments will be apparent to those skilled in the art. The various aspects and embodiments disclosed herein are for purposes of illustration and are not intended to be limiting, with the true scope and spirit being indicated by the following claims.

[0073] One skilled in the art will appreciate that, for this and other processes and methods disclosed herein, the functions performed in the processes and methods can be implemented in differing order. Furthermore, the outlined steps and operations are only provided as examples, and some of the steps and operations can be optional, combined into fewer steps and operations, or expanded into additional steps and operations without detracting from the essence of the disclosed embodiments.

EXAMPLES

[0074] Additional embodiments are disclosed in further detail in the following examples, which are not in any way intended to limit the scope of the claims.


Example 1

Polymerization of Aniline (AN) and 2-hydroxy-5-sulfonic aniline (HSA)

[0075] The chemical oxidative polymerization of Aniline (AN) and 2-hydroxy-5-sulfonic aniline (HSA) for the synthesis of An/HSA copolymers was carried out in a typical synthesis procedure described below.

[0076] A typical synthesis procedure of AN/HSA copolymers included adding 0.729 mL AN and 0.378 g HSA so that the molar ratio of the AN monomer to the HSA monomer (AN/HSA molar ratio) was about 20:80, and mixing AN and HSA in a 200-mL glass flask which contained 100 mL HCl solution with concentration of 1M. Next, 2.28 g oxidant ammonium persulfate was dissolved separately in 50 mL of distilled water to prepare as an oxidant solution. The oxidant solution was gradually dropped into the mixed monomer solution at a rate of one drop of every 3 seconds at 25 °C with a final monomer

components/oxidant molar ratio of 1:1. The reaction mixture was vigorously magnetically stirred for 24 hour at 30 °C. When the synthetic procedure is completed, resulting AN/HSA copolymer precipitates were filtered and washed thoroughly with water and ethanol to remove residual oxidant, water-soluble oligomers, and byproducts. Then, the solid copolymer submicroparticles in a virgin salt (acid doped state) were left to dry in an oven at 40 °C for 3 days till constant weight. Yield was calculated based on the weight of the copolymer. The oxidative copolymerization reaction is shown in **Scheme I**.

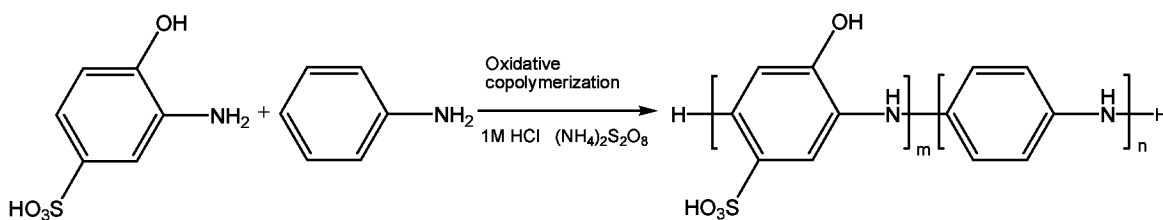

Scheme I

Example 2

Modifying Polymerization Conditions

[0077] Additional AN/HSA copolymers were prepared using the typical procedures described in Example 1. However, in one set of experiments, AN/HSA molar ratio varied from 100:0 to 70:30 (i.e., HSA feed content was increased from 0% to 30%). The synthetic yields of those AN/HSA copolymers were determined based on the weight of the copolymer. The bulk electrical conductivity of the pressed copolymer pellet sheets with the thicknesses of 0.20 mm and a constant efficient area of 0.785 cm² was examined by a two-disk method at room temperature with a UT 70A multimeter. The results are shown in **Figure 1**.

[0078] **Figure 1** shows that an increase in the HSA feed content leads to a reduction in the synthetic yield and the electrical conductivity of the AN/HSA copolymer. Also, as compared to polyaniline homopolymer, the bulk electrical conductivity of the AN/HSA copolymer does not change significantly when the molar ratio of the HSA monomer to the AN monomer is changed from 5:95 to 20:80.

Example 3

Solubility Property of AN/HSA Copolymers

[0079] Additional AN/HSA copolymer particles were prepared using generally the same procedures described in Example 1. However, AN/HSA molar ratio was 95:5, 90/10, 80/20, and 70:30, respectively. Chemoresistance of the copolymer particles was evaluated using a typical procedure including: adding 5 mg copolymer powders into 1 mL solvent and dispersing the mixture thoroughly; and characterizing the solubility of the copolymer after swaying the mixture continuously for 24 hours at room temperature. The solubility of the AN/HSA copolymer particles in various solvents was examined, and the results are summarized in Table 1.

[0080] As shown in Table 1, the AN/HSA copolymer particles maintain good resistance to most of organic solvents, and are tolerant to acid solution. In addition, the solubility of the copolymer particles changed significantly when HSA/AN molar ratio is more than 20:80. For example, those copolymer particles are slightly soluble in water.

Table 1: Chemoresistance and solution color of the AN/HSA copolymers in various solvents

HSA/AN molar ratio	Chemoresistance in solvents, Solution color				
	DMSO	DMF	THF	NMP	Acetone
5/95	Soluble, Cyan	Partially soluble, Blackish green	Partially soluble, Sage green	Partially soluble, Blue green	Insoluble
10/90	Soluble, Cyan	Soluble, Green	Partially soluble, Sage green	Soluble, Blue green	Insoluble
20/80	Soluble, Dark green	Soluble, Green	Partially soluble, Blackish green	Soluble, Dark green	Slightly soluble, Sage green
30/70	Soluble, Dark green	Soluble, Green	Partially soluble, Blackish green	Soluble, Dark green	Slightly soluble, Sage green
HSA/AN molar ratio	Chemoresistance in solvents, Solution color				
	Toluene	Ethanol	<i>m</i> -Cresol	Acetonitrile	distilled water
5/95	Insoluble	Insoluble	Slightly soluble, Tawny	Insoluble	Insoluble
10/90	Insoluble	Slightly soluble, Yellow green	Slightly soluble, Tawny	Slightly soluble, Turquoise	Insoluble
20/80	Insoluble	Slightly soluble, Yellow green	Slightly soluble, Tawny	Slightly soluble, Turquoise	Insoluble
30/70	Insoluble	Slightly soluble, Yellow green	Partially soluble, Tawny	Partially soluble, Turquoise	Slightly soluble, light slate gray

	Chemoresistance in solvents, Solution color			
HSA/AN molar ratio	HCl		NH ₄ OH	
	1M	0.1M	1M	0.1M
5/95	Insoluble	Insoluble	Slightly soluble, light gray	Insoluble
10/90	Slightly soluble, light blue	Insoluble	Partially soluble, dim gray	Slightly soluble, dim gray
20/80	Slightly soluble, pale goldenrod	Insoluble	Partially soluble, dark khaki	Slightly soluble, dark khaki
30/70	Partially soluble, rose brown	Slightly soluble, rose brown	Soluble, sienna	Partial soluble, sienna

Example 4

Morphological Features of the AN/HSA Copolymers

[0081] Additional AN/HSA copolymers were prepared using generally the same procedures described in Example 1. However, the AN/HSA molar ratio was 95:5 and 80:20, respectively. The size and morphology of those AN/HSA copolymer particles were observed using a Field Emission Scanning Electron Microscopy (FE-SEM) with an observation resolution of < 2 nm. The SEM images are shown in **Figure 2a-f**.

[0082] Morphological variations for the AN/HSA copolymers were observed with a change in the HSA feed content (**Figure 2a-f**). As shown in **Figure 2a-f**, short fibers morphology gradually changes to sphere and ellipsoid morphology with an increase of the HSA feed content. **Figure 2a-c** show that that the copolymers were a component of partial short fibers and partial spheres when the AN/HSA molar ratio was 95:5, and that the spheres were not uniformed in such a condition. However, when the AN/HSA molar ratio was 80:20, the AN/HSA copolymer particles became more regular and uniform (**Figure 2d-f**), and most of the particles are in sphere and ellipsoid.

Example 5

Size of the AN/HSA Copolymer Particles

[0083] Additional AN/HSA copolymers were prepared using generally the same procedures described in Example 1. However, the AN/HSA molar ratio varied from 100:0 to 70:30 (i.e., HSA feed content was increased from 0% to 30%). The size of those AN/HSA

copolymer particles in water was analyzed with an LS230 laser particle-size analyzer. The results are shown in **Figure 3**.

[0084] As shown in **Figure 3**, compared to polyaniline, the number-average diameter of the AN/HSA copolymer particles that produced using the HSA/AN molar ratio of 20:80 dwindles from 2.09 μm to 308 nm, and the size polydispersity index changes from 1.24 to 1.03. This example shows that smaller amount of HSA monomer is needed for the formation of near nano-size copolymer particles with aniline as compared to other monomers (such as sulfodiphenylamine and sulfoanisidine), demonstrating that HSA is a robust modified monomer for polyaniline.

Example 6

Surface Area of the AN/HSA Copolymers

[0085] Additional AN/HSA copolymers were prepared using generally the same procedures described in Example 1. The surface areas of those AN/HSA copolymer particles were calculated by the Barrett-Emmett-Teller (BET) method. The pore volumes and pore-size distributions of those copolymer particles were derived from the adsorption branches of the isotherms using the Barrett-Joyner-Haladan (BJH) method. The results are shown in **Figure 4**.

[0086] The BET specific area of those AN/HSA copolymer particles is 22.3 m^2/g , which is about 4.5 times as much as that of polydiaminonaphthalene and copolydiaminonaphthalene microparticles. Those AN/HSA submicroparticles are porous with average pore-diameter to be nearly 30 nm, and their total pore volume is nearly 0.141 cm^3/g . Without being bound to any particular theory, it is believed that the hydroxyl and sulfonic side-groups of HSA play an important role not only in the formation of the nanosphere, but also in pore morphology. Comparing with other oxidative polymer from aromatic amines, those AN/HSA particles have larger surface area and smaller diameters.

Example 7

IR Spectra

[0087] Additional AN/HSA copolymers were prepared using generally the same procedures described in Example 1. However, the AN/HSA molar ratio was 100:0, 95:5, 90:10, 80:20, and 70:30, respectively. The IR spectra for those AN/HSA copolymers were measured on Bruker Equinoxss/Hyperion2000 FT-IR spectrometer by the Attenuated Total Reflectance (ATR) method. The results are shown in **Figure 5**.

[0088] As shown in **Figure 5**, various peaks (e.g., peaks around 1250, 1087 and 1024 cm^{-1} which correspond to the stretching vibration of C-O bond, asymmetric and symmetric stretching vibration of the S=O bond) are not found in pure polyaniline IR spectrum. These results demonstrate the existence of HSA moiety on the AN/HSA copolymer chains. In addition, the peaks between 600~750 cm^{-1} that are attributed to the substituted aromatic rings of HSA units provide further evidence of successful copolymerization.

Example 8

UV-Vis Spectra

[0089] Additional AN/HSA copolymers were prepared using generally the same procedures described in Example 1. However, the AN/HSA molar ratio was 95:5, 90:10, 80:20, and 70:30, respectively. The UV-vis adsorption spectra for those AN/HSA copolymers in DMSO were measured on Perkin-Elmer Instruments Lambda 35 at a scanning rate of 480 nm/min. The results are shown in **Figure 6**.

[0090] As shown in **Figure 6**, the UV-vis spectra varies with a change in the AN/HSA molar ratio. In **Figure 6**, the peaks appearing at 326 nm correspond to π - π^* transition of the aromatic ring in copolymer chains, and the peaks around 610 nm correspond to the bipolarons n - π^* transition of large π conjugated structure. The peaks emerge in these two areas stand for the typical aromatic polymer, which is also in UV-vis spectrum of polyaniline. Further, the intensity of the peaks around 610 nm gradually degrade with the rising of the HSA content, which demonstrates that large side-groups in the HSA damage

overlap effect of conjugative structure in the skeleton chains, and cause the decline of bulk electrical conductivity.

Example 9

Adsorption of Lead Ions

[0091] Additional AN/HSA copolymers were prepared using generally the same procedures described in Example 1. However, the AN/HSA molar ratio was 100:0, 95:5, 90:10, 80:20, and 70:30, respectively. The adsorptivity of lead ions for each of those AN/HSA copolymers was measured in a typical procedure including: adding AN/HSA copolymer particles in a 25 mL aqueous solution at 30 °C; filtering the copolymer particles from the solution; measuring the concentration for lead ions in the filtrate by inductively coupled plasma (ICP) or atomic adsorption spectrometry (AAS). In this example, 50 mg AN/HSA copolymer particles were added to the aqueous solution for 2 hours, and the initial concentration of lead ions in the aqueous solution was 200 mg/L. The results are shown in **Table 2**.

Table 2: Adsorption of lead ions onto AN/HSA copolymers

AN/HSA molar ratio	Amount of AN/HSA copolymers (mg)	Initial Pb ²⁺ concentration (mg/L)	Final Pb ²⁺ concentration (mg/L)	Adsorptivity (%)
100/0	50	200	78.0	61.0
95/5	50	200	59.2	70.4
90/10	50	200	39.6	80.2
80/20	50	200	5.60	97.2
70/30	50	200	16.0	92.0

Example 10

Removal Kinetics of Lead Ions by the AN/HSA copolymers

[0092] AN/HSA copolymers were prepared using generally the same procedures described in Example 1. The adsorption capacity and adsorptivity of lead ions onto each of those AN/HSA copolymers was measured according to the general procedure described in Example 9.

[0093] In one set of experiments, 50 mg AN/HSA copolymer particles were added to 25 mL $\text{Pb}(\text{NO}_3)_2$ solution for various period of time, and the initial concentration of lead ions was 200 mg/L. The results are shown in **Figure 7**.

[0094] In another set of experiments, 50 mg AN/HSA copolymer particles were also added to 25 mL $\text{Pb}(\text{NO}_3)_2$ solution for various periods of time, but the initial concentration of lead ions was 1 mg L^{-1} . The results are shown in **Table 3** and **Figure 8**.

Table 3: Kinetics of removal percentage of lead ions

Adsorption time (minute)	Amount of AN/HSA copolymers (mg)	Initial Pb^{2+} concentration (mg/L)	Final Pb^{2+} concentration (mg/L)	Adsorptivity (%)
5	5	1	0.479	52.1
10	5	1	0.277	72.3
15	5	1	0.155	84.5
20	5	1	0.087	91.3
30	5	1	0.024	97.6
40	5	1	0.003	99.7
50	5	1	0.003	99.7
60	5	1	0.003	99.7
75	5	1	0.003	99.7

[0095] **Figure 7** shows that when the lead ions were at the concentration of 200 mg L^{-1} , the adsorption rate of the lead ions onto the AN/HSA copolymers is high, and it takes only 15 minutes to reach the adsorption equilibrium with the removal percentage of 98.7%. **Table 3** and **Figure 8** show that at lower concentration (the lead ions were at 1 mg L^{-1}), the removal percentage of lead ions by the AN/HSA copolymers can reach up to over 99.5% after 40 minutes, further demonstrating that the AN/HSA copolymers are fast and efficient adsorbent for metal ions.

Example 11

Adsorption of Lead Ions at ppm and ppb Level

[0096] Additional AN/HSA copolymers were prepared using generally the same procedures described in Example 1. Removal percentage of lead ions at the initial concentration at ppm and ppb level by the AN/HSA copolymers synthesized using the molar

ratio of the HSA monomer to the AN monomer of 20:80 were studied. The results are shown in **Figure 9** and **Table 4**.

Table 4: The removal percentage of lead ions

Adsorption time (hour)	Amount of AN/HSA copolymers (mg)	Initial Pb ²⁺ concentration (mg/L)	Final Pb ²⁺ concentration (mg/L)	Adsorptivity (%)
1	5	0.1	0.0051	94.9
1	5	0.5	0.0195	96.1
1	5	1.0	0.008	99.2
1	5	2.0	0.052	97.4
1	5	3.0	0.189	93.7

[0097] As shown in **Figure 9** and **Table 4**, the removal percentage of lead ions at ppm~ppb level by the AN/HSA copolymers can reach up to 100%, demonstrating that the AN/HSA copolymers are highly efficient adsorbents for metal ions.

Example 12

Competitive Adsorption of Metal Ions

[0098] Additional AN/HSA copolymers were prepared using generally the same procedures described in Example 1. The adsorptivity of those AN/HSA copolymers for various metal ions at 30 °C for 1 hour was measured according to the general procedure described in Example 9. In one set of experiment, the adsorptivity of the copolymer for one metal ion was determined using solutions containing only the corresponding metal ion at 200 mg/L. In another set of experiment, the adsorptivity of the copolymer for one metal ion was determined using a mixed solution containing all seven metal ions, where the concentration of each of the metal ions is 200 mg/L. The results are shown in **Table 5** and **Figure 10**.

Table 5: Adsorption ability of AN/HSA copolymer for various heavy metal ions in separate and mixed solutions

Metal ion solution	Amount of AN/HSA copolymers (mg)	Adsorption Time (hour)	Initial Metal ion concentration (mg/L)	Final metal ion concentration (mg/L)		percentage reduction (%)	
				individual	Co-existed	individual	Co-existed
Hg(NO ₃) ₂	50	6	200	0.26	13.58	99.9	93.2
Pb(NO ₃) ₂	50	6	200	5.58	19.7	97.2	90.2
AgNO ₃	50	6	200	9.4	--	95.3	-

Zn(NO ₃) ₂	50	6	200	10.9	32.46	94.6	83.8
Cu(NO ₃) ₂	50	6	200	17.06	27.16	91.5	86.4
Cd(NO ₃) ₂	50	6	200	27.42	41.26	86.3	79.4
FeCl ₃	50	6	200	85.36	113.42	57.3	43.3

[0099] As shown in **Table 5** and **Figure 10**, the removal percentage of the copolymer for many metal ions is over 90% when no other metal ions are present. The removal percentage still maintains to be over 80% for many metal ions when other types of metal ions are present. This Example shows the AN/HSA copolymers are efficient and anti-interfering adsorbents for various metal ions.

Example 13

Competitive Adsorption of Metal Ions

[0100] Additional AN/HSA copolymers were prepared using generally the same procedures described in Example 1. The adsorptivity of various metal ions in a mixed solution for those AN/HSA copolymers at 30 °C for 1 hour was measured according to the general procedure described in Example 8. In the mixed solution, the concentration of each of the eight metal ions: Na(I), Ca(II), Cd(II), Cu(II), Zn(II), Pb(II), Hg(II), and Fe(III), was 20 mg/L (i.e., 20 ppm).

[0101] In one set of experiments, 50 mg AN/HSA copolymer particles were added into 25 mL of the mixed solution to determine adsorptivity. The results are shown in **Table 6** and **Figure 11**.

Table 6: Competitive adsorption of co-existing metal ions using 50 mg AN/HSA copolymer particles

Metal ion solution	Amount of AN/HSA copolymers(mg)	Initial Metal ion concentration (mg/L)	Final metal ion concentration (mg/L)	percentage reduction (%)
NaNO ₃	50	20	13.0	35.1
Ca(NO ₃) ₂	50	20	10.3	48.6
Cd(NO ₃) ₂	50	20	0.248	98.8
Cu(NO ₃) ₂	50	20	0.376	98.1
Zn(NO ₃) ₂	50	20	0.33	98.4
Pb(NO ₃) ₂	50	20	0.108	99.5
Hg(NO ₃) ₂	50	20	0.046	99.8
FeCl ₃	50	20	3.27	83.6

[0102] In another set of experiments, 5 mg AN/HSA copolymer particles were added into 25 mL of the mixed solution to determine adsorptivity. The results are shown in Table 7 and Figure 12.

Table 7: Competitive adsorption of co-existing metal ions using 5 mg AN/HSA copolymer particles

Metal ion solution	Amount of AN/HSA copolymers(mg)	Initial Metal ion concentration (mg/L)	Final metal ion concentration (mg/L)	percentage reduction) (%)
NaNO ₃	5	20	18.9	5.71
Ca(NO ₃) ₂	5	20	18.3	8.64
Cd(NO ₃) ₂	5	20	14.9	25.4
Cu(NO ₃) ₂	5	20	14.3	28.5
Zn(NO ₃) ₂	5	20	13.3	33.5
Pb(NO ₃) ₂	5	20	3.73	81.3
Hg(NO ₃) ₂	5	20	1.36	93.2
FeCl ₃	5	20	17.9	10.4

[0103] This Example further demonstrates that the AN/HSA copolymers are efficient adsorbents for various metal ions with high anti-interfering capability.

Example 14

Purification of Wastewater

[0104] AN/HSA copolymers were prepared according to the procedures described in Example 1 and used to removing metal ions from wastewater from a non-ferrous metal factory. In this example, every 25 mL wastewater was treated with 50 mg AN/HSA copolymers.

[0105] In one set of experiments, after pretreatment by centrifugation to remove solids, the wastewater was treated by the copolymers alone. In another set of experiments, after pretreatment by centrifugation to remove solids, the wastewater was pre-treated by 0.5M NaOH before using the copolymers to adsorb metal ions. In those experiments, 3 mL of 0.5M NaOH was added to 50 mL of wastewater, and the wastewater was stirred for 2 to 10 minutes before being filtered for further adsorption treatment by the AN/HSA copolymers. The concentration of various metal ions in the wastewater before and after purification by the AN/HSA copolymers was determined by inductively coupled plasma (ICP) or atomic adsorption spectrometry (AAS). The adsorption results are summarized in Tables 8 and 9.

Table 8: Summary of Metal Ion Removal Efficiency in Wastewater using the AN/HSA Copolymer Alone

Metal Ions	Concentration in untreated wastewater (mg L ⁻¹)	Concentration after adsorption treatment (mg L ⁻¹)	Removal percentage (%)
Mg(II)	152.5	42.23	72.3
Cr(III, VI)	1.417	0.543	61.7
Mn(II)	32.03	2.627	91.8
Fe(III)	100.2	43.05	57.0
Ni(II)	5.495	0.78	85.8
Cu(II)	123.4	5.19	85.8
Zn(II)	102.5	5.623	94.5
Cd(II)	0.754	0.096	87.3
Hg(II)	1.073	0.021	98.0
Pb(II)	13.26	0.232	98.3

Table 9: Summary of Metal Ion Removal Efficiency by the AN/HSA Copolymer in Wastewater Pretreated by NaOH

Metal Ions	Concentration in untreated wastewater (mg L ⁻¹)	Concentration after NaOH treatment (mg L ⁻¹)	Concentration after NaOH and adsorption treatment (mg L ⁻¹)	Removal percentage by the copolymer (%)	Total Removal percentage (%)
Mg(II)	152.5	2.64	1.19	54.9	99.1
Ca(II)	5.03	4.28	2.99	30.1	34.6
Cr(III, VI)	1.417	0.012	0.009	25.0	99.3
Mn(II)	32.03	2.54	0.44	82.7	98.5
Fe(III)	100.2	0.011	0.003	72.7	99.9
Ni(II)	5.495	0.378	0.18	52.4	96.4
Cu(II)	123.4	0.258	0.15	41.9	99.9
Zn(II)	102.5	0.133	0.075	43.6	99.9
Cd(II)	0.754	0.717	0.21	70.7	69.4
Hg(II)	1.073	0.479	0.013	97.3	98.7
Pb(II)	13.26	2.02	0.051	97.5	99.6

[0106] As shown in **Tables 8 and 9**, the pretreatment of NaOH is not sufficient to reduce the concentration of various toxic metal ions, such as Hg(II), Pb(II), Cd(II), Cr (III, VI) and Ni (II), to a safe level. AN/HSA copolymer particles significantly reduce the concentration of various metal ions in the wastewater sample after the NaOH pretreatment. This example demonstrates that the AN/HSA copolymers can be used to remove various metal ions from and thus purify polluted environmental and industrial wastewaters.

Example 15

Regeneration of AN/HSA Copolymers for Adsorption of Metal Ions

[0107] AN/HSA copolymers were prepared according to the procedures described in Example 1. The adsorptivity of lead ions for those AN/HSA copolymers was measured in a typical procedure described in Example 9. In this example, the copolymers were added to the sample with Pb^{2+} at 200 mg/L for 6 hours. After adsorption, the AN/HSA copolymers containing adsorbed lead ions were separated from the solution and treated with 0.05M EDTA desorption eluant for 1 hour to remove lead ions from the copolymers. Following desorption, the regenerated AN/HSA copolymers were tested again for adsorptivity of lead ions according to the procedure described in Example 8 and the adsorption time was 6 hours. The cycle of adsorption-desorption was repeated 5 times to determine the reversibility of the copolymer in removing metal ions. The measured adsorptivity of lead ions by the AN/HSA copolymers in each cycle is shown in **Table 10** and **Figure 13**.


Table 10: Adsorptivity of the AN/HSA copolymers During 5 Cycles of Regeneration

No. of cycle	Initial Pb^{2+} concentration (mg/L)	Amount of AN/HSA copolymers (mg)	Adsorptivity (%)	Concentration of EDTA(M)	Volume of EDTA (mL)	Desorptivity (%)
1	200	50	97.2	0.05	25	93.0
2	200	50	92.5	0.05	25	87.2
3	200	50	90.2	0.05	25	83.0
4	200	50	88.1	0.05	25	80.2
5	200	50	85.0	0.05	25	77.5

[0108] As shown in **Table 10** and **Figure 13**, even after 4 cycles of adsorption-desorption, the AN/HSA copolymers still maintain an adsorptivity close to 90% compared to the fresh copolymers, which is significantly better than many of the adsorbents that have been reported to be out of work after 3 cycles. This example demonstrates that chelating agents such as EDTA can effectively regenerate the AN/HSA copolymer adsorbents, and the AN/HSA copolymers can be regenerated and reusable as high-efficient adsorbent for metal ions.

WHAT IS CLAIMED IS:

1. A copolymer comprising at least one optionally substituted 2-hydroxy-5-sulfonic aniline as a first monomer unit and at least one aniline as a second monomer unit.
2. The copolymer of Claim 2, wherein the first monomer unit is represented by Formula I:

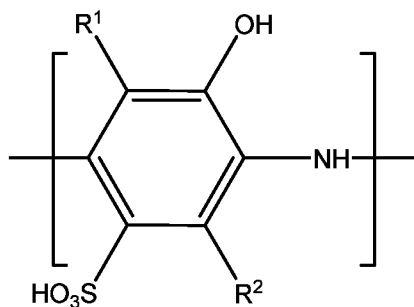

(I)

- wherein R^1 is hydrogen or an electron-donating group, and R^2 is hydrogen or an electron-donating group.
3. The copolymer of Claim 2, wherein R^1 is hydrogen and R^2 is hydrogen.
 4. The copolymer of Claim 2, wherein the electron-donating group is C_{1-6} alkyl.
 5. The copolymer of any one of Claims 1-4, wherein the copolymer comprises at least about 5% of the first monomer unit by mole.
 6. The copolymer of Claim 5, wherein the copolymer comprises at least about 10% of the first monomer unit by mole.
 7. The copolymer of Claim 6, wherein the copolymer comprises about 20% of the first monomer unit by mole.
 8. The copolymer of any one of Claims 1-4, wherein the copolymer has a molar ratio of the first monomer unit to the second monomer unit from about 1:99 to about 50:50.
 9. The copolymer of Claim 8, wherein the molar ratio of the first monomer unit to the second monomer unit is about 20:80.
 10. A composition comprising submicroparticles, wherein the submicroparticles comprise a copolymer of any one of Claims 1-9.
 11. The composition of Claim 10, wherein the submicroparticles have an average size of about 50 nm to about 5 μ m.

12. The composition of Claim 10, wherein the submicroparticles have an average bulk electrical conductivity of about 10^{-7} S/cm to about 100 S/cm.

13. The composition of Claim 10, wherein the submicroparticles have an average surface size of about $1 \text{ m}^2/\text{g}$ to about $500 \text{ m}^2/\text{g}$.


14. The composition of Claim 10, wherein the submicroparticles have an average pore diameter of about 1 nm to about 500 nm.

15. A method of making a copolymer, the method comprising:

forming a composition comprising at least one oxidizing agent, at least one optionally substituted 2-hydroxy-5-sulfonic aniline monomer, and at least one aniline monomer; and

maintaining the composition under conditions effective to polymerize the 2-hydroxy-5-sulfonic aniline monomer and the aniline monomer to form the copolymer.

16. The method of Claim 15, wherein the optionally substituted 2-hydroxy-5-sulfonic aniline monomer is represented by Formula I:

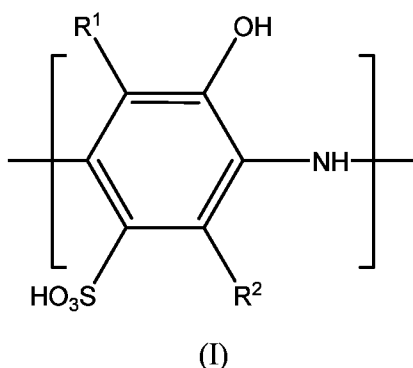

wherein R^1 is hydrogen or an electron-donating group, and R^2 is hydrogen or an electron-donating group.

17. The method of any one of Claims 15-16, wherein the oxidizing agent is selected from the group consisting of ammonium persulfate, sodium persulfate, potassium persulfate, FeCl_3 , potassium iodate, Na_3VO_4 , benzoyl peroxide (BPO), and any combination thereof.

18. The method of Claim 17, wherein the oxidizing agent is ammonium persulfate.

19. The method of any one of Claims 15-17, wherein the molar ratio of the optionally substituted 2-hydroxy-5-sulfonic aniline monomer to the aniline monomer is about 1:99 to about 50:50.

20. The method of Claim 18, wherein the molar ratio of the optionally substituted 2-hydroxy-5-sulfonic aniline monomer to the aniline monomer is about 20:80.

21. The method of any one of Claims 15-20, wherein the molar ratio of the oxidizing agent to a total amount of monomer components in the composition is about 0.5:1 to about 5:1.

22. The method of Claim 21, wherein the molar ratio of the oxidizing agent to a total amount of monomer components in the composition is about 1:1.

23. The method of any one of Claims 15-22, wherein the composition is maintained at a temperature of about 0 °C to about 100 °C.

24. The method of Claim 23, wherein the composition is maintained at a temperature of about 30 °C.

25. The method of Claims 15-24, wherein forming the composition comprises combining a first solution comprising a first solvent and the oxidizing agent; and a second solution comprising a second solvent, the optionally substituted 2-hydroxy-5-sulfonic aniline monomer, and the aniline monomer, wherein the optionally substituted 2-hydroxy-5-sulfonic aniline monomer and the aniline monomer are soluble in the first and second solvents.

26. The method of Claim 25, wherein the second solvent is an acidic aqueous medium.


27. The method of Claim 26, wherein the acidic aqueous medium comprises an acid selected from the group consisting of HCl, HNO₃, H₂SO₄, HClO₄, H₃PO₄, H₅IO₆, CH₃COOH, and any combination thereof.

28. The method of any one of Claims 15-27, wherein the maintaining step is performed for about 2 hours to about 48 hours.

29. A method for removing a metal ion from a sample, the method comprising:
(a) providing an untreated sample suspected of containing the metal ion; and
(b) contacting the untreated sample and a composition to form a treated sample, wherein the composition comprises a copolymer comprising at least one

optionally substituted 2-hydroxy-5-sulfonic aniline as a first monomer unit and at least one aniline as a second monomer unit.

30. The method of Claim 29, wherein, the first monomer unit is represented by Formula I:

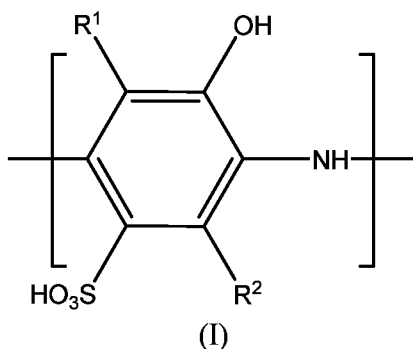

wherein R^1 is hydrogen or an electron-donating group, and R^2 is hydrogen or an electron-donating group.

31. The method of any one of Claims 29-30, wherein the metal ion is a heavy metal ion.

32. The method of any one of Claims 29-30, wherein the metal ion is Pb(II) or Hg(II).

33. The method of any one of Claims 29-30, wherein the metal ion is a noble metal ion.

34. The method of any one of Claims 29-30, wherein the metal ion is Ag(I).

35. The method of any one of Claims 29-30, wherein the metal ion is selected from the group consisting of Cd(II), Cu(II), Zn(II), Pb(II), Hg(II), and Fe(III).

36. The method of any one of Claims 29-35, wherein the untreated sample is wastewater.

37. The method of any one of Claims 29-36, wherein the concentration of the metal ion in the untreated sample is no more than about 200 g/L.

38. The method of Claim 37, wherein the concentration of the metal ion in the untreated sample is from about 1 ng/L to about 200 mg/L.

39. The method of any one of Claims 29-38, wherein the concentration of the metal ion in the untreated sample is higher than the concentration of the metal ion in the treated sample.

40. The method of Claim 39, wherein the concentration of the metal ion in the untreated sample is at least about 5 times higher than the concentration of the metal ion in the treated sample.

41. The method of Claim 40, wherein the concentration of the metal ion in the untreated sample is at least about 10 times higher than the concentration of the metal ion in the treated sample.

42. The method of Claim 41, wherein the concentration of the metal ion in the untreated sample is at least about 20 times higher than the concentration of the metal ion in the treated sample.

43. The method of any one of Claims 29-38, wherein the concentration of the metal ion in the treated sample is less than about 30% of the concentration of the metal ion in the untreated sample.

44. The method of Claim 43, wherein the concentration of the metal ion in the treated sample is less than about 15% of the concentration of the metal ion in the untreated sample.

45. The method of Claim 44, wherein the concentration of the metal ion in the treated sample is less than about 1% of the concentration of the metal ion in the untreated sample.

46. The method of any one of Claims 29-45, further comprising separating the copolymer from the treated sample.

47. The method of Claim 46, further comprising contacting the separated copolymer with a chelating agent to form a regenerated copolymer, wherein the amount of metal ions in the regenerated copolymer is less than the amount of metal ions in the separated copolymer.

48. The method of Claim 47, further comprising contacting a second untreated sample suspected of containing metal ions with the regenerated copolymer.

49. The method of any one of Claims 47-48, wherein the chelating agent is a polyamino carboxylic acid.

50. The method of any one of Claims 47-49, wherein the chelating agent is selected from ethylenediaminetetraacetic acid (EDTA), diethylenetriaminepentaacetic acid

(DTPA), N-(2-hydroxyethyl)ethylenediamine-N,N',N'-triacetic acid (HEDTA), glycol-bis-(2-aminoethylether)-N,N,N',N'-tetraacetic acid (EGTA), ethylenediamine-N,N'-bis((2-hydroxyphenyl)acetic acid) (EDDHA), and mixtures thereof.

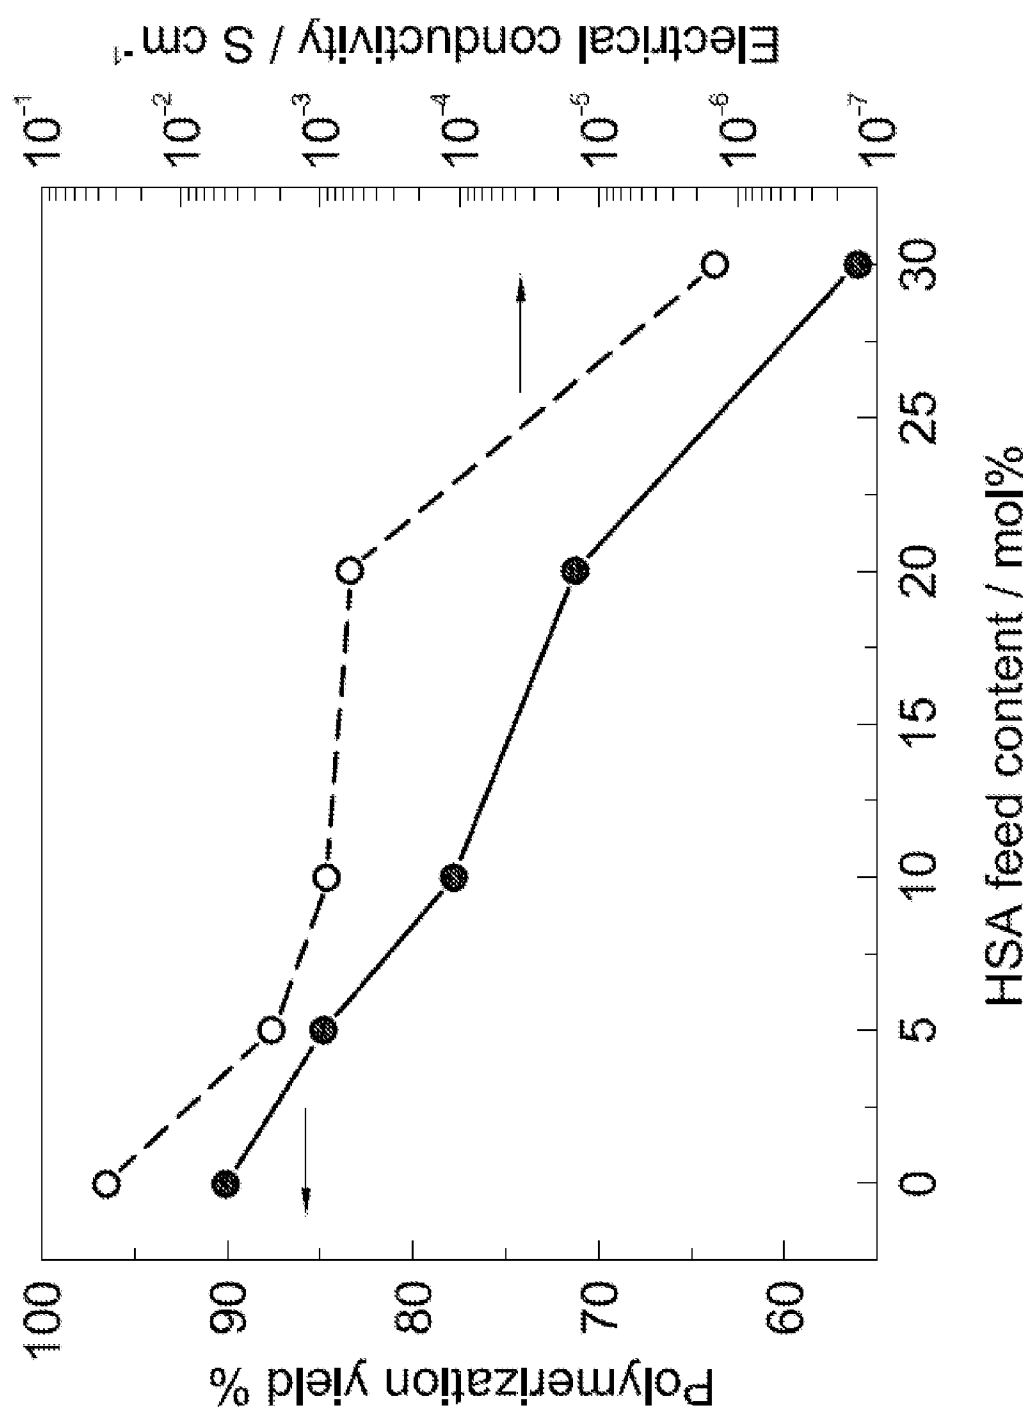


FIG. 1

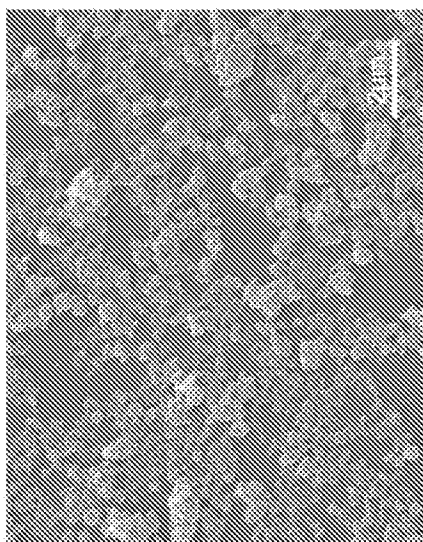


FIG. 2A

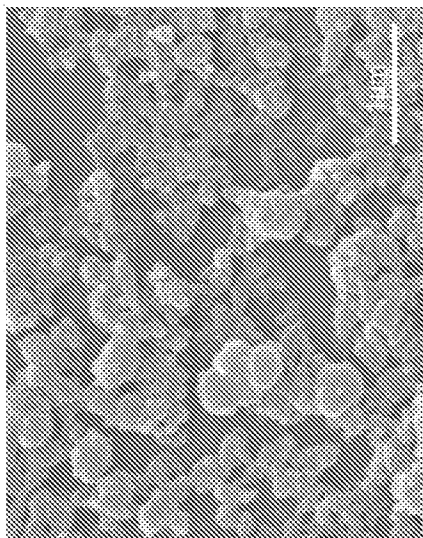


FIG. 2B

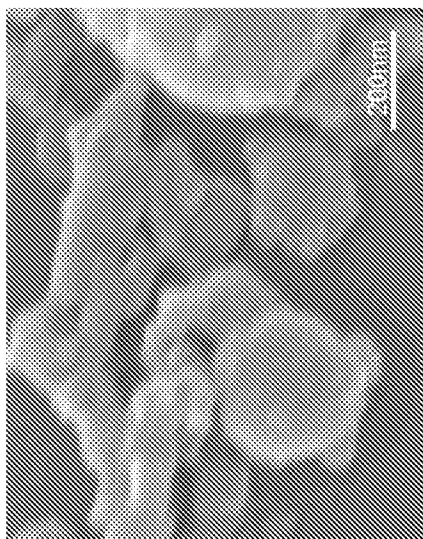


FIG. 2C

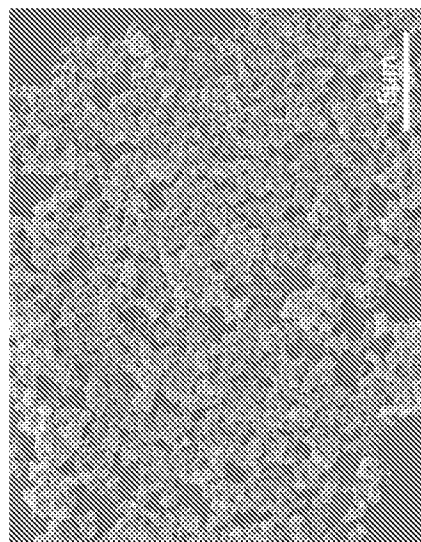


FIG. 2D

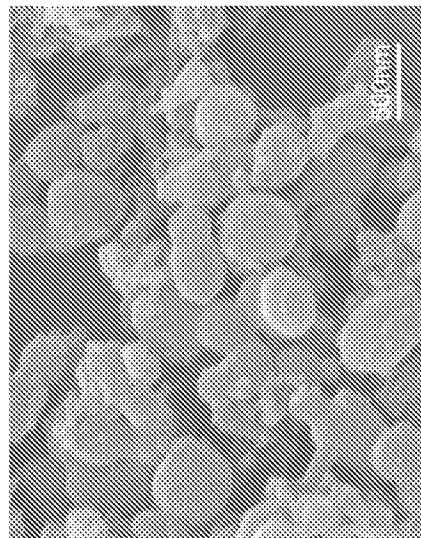


FIG. 2E

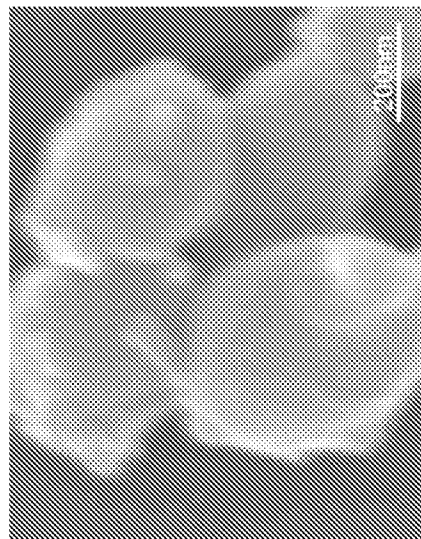


FIG. 2F

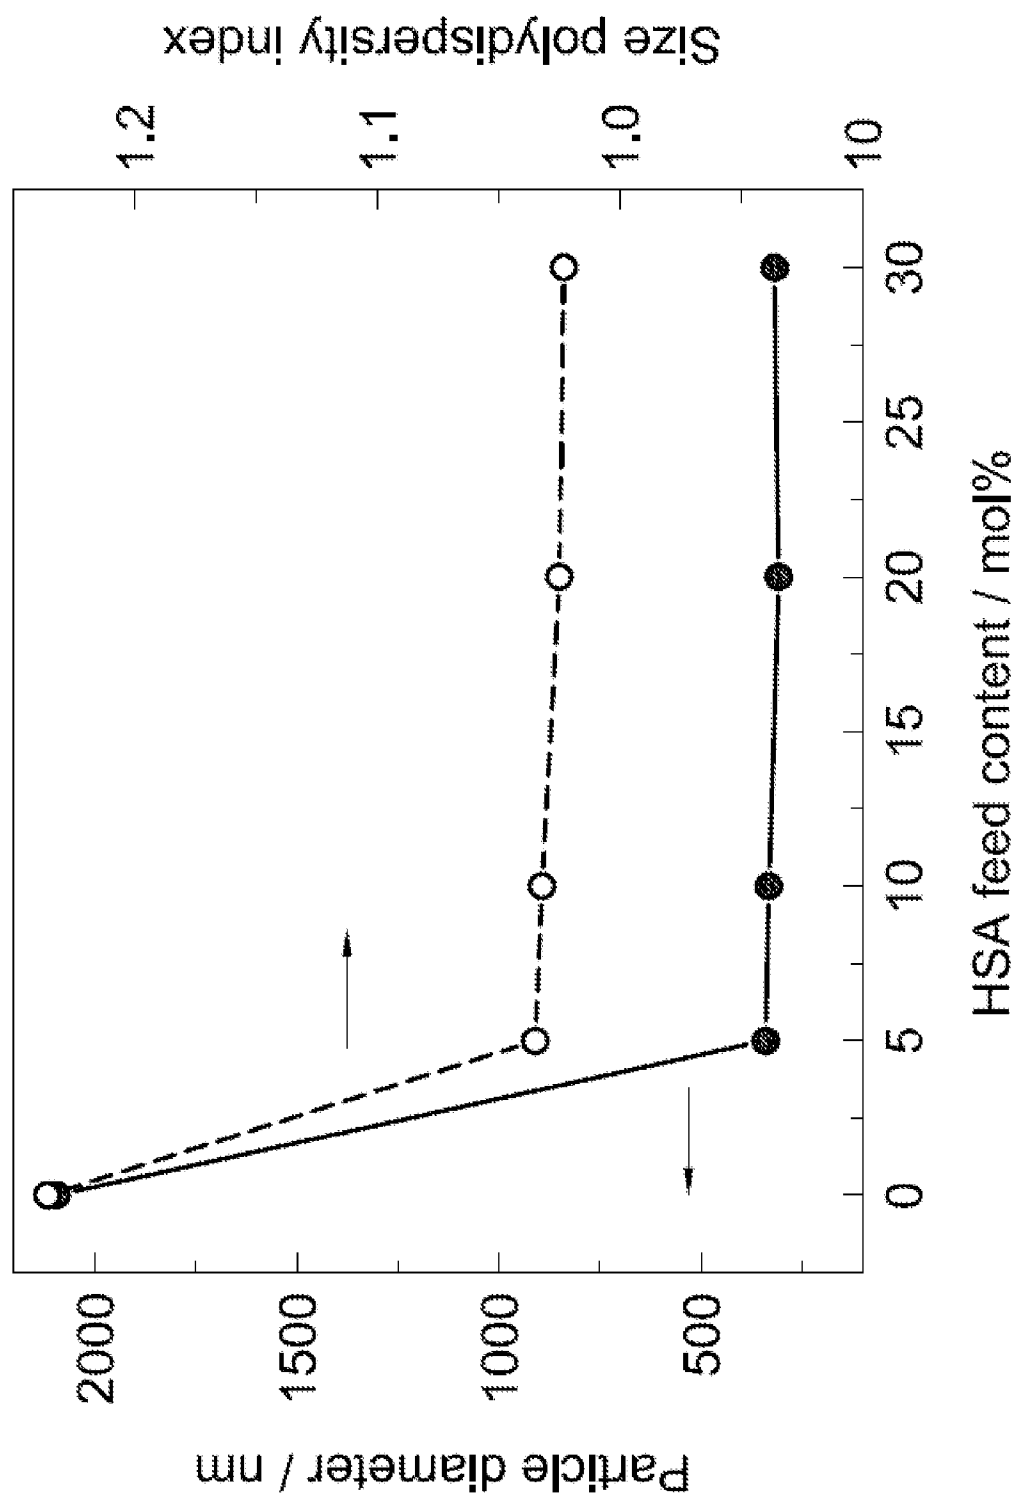


FIG. 3

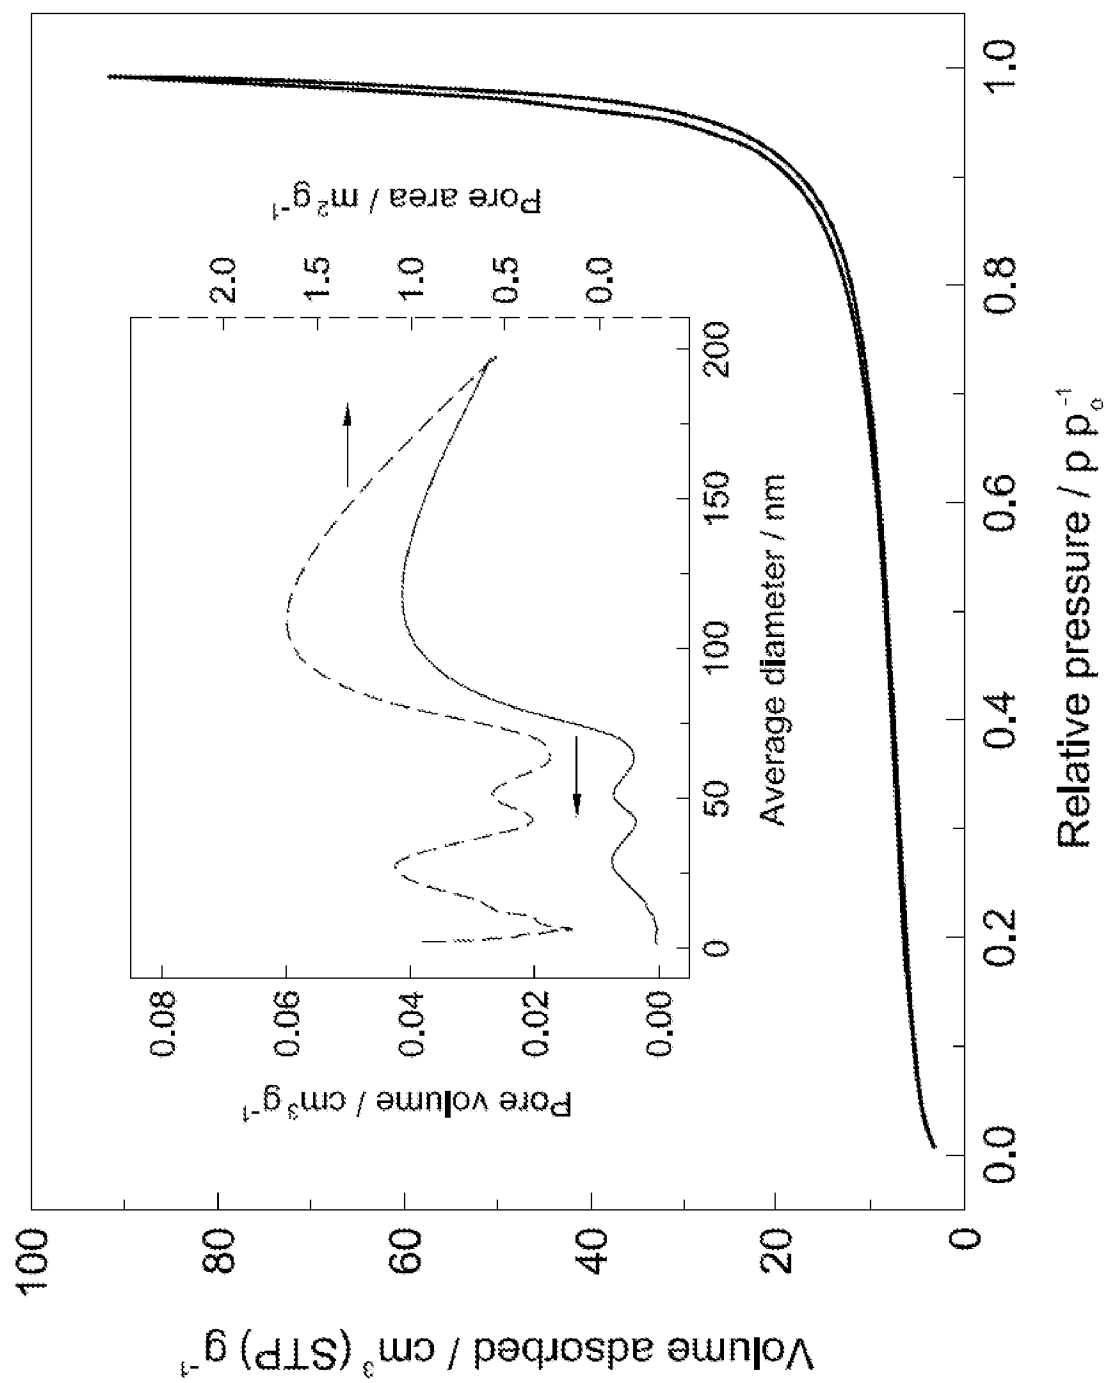


FIG. 4

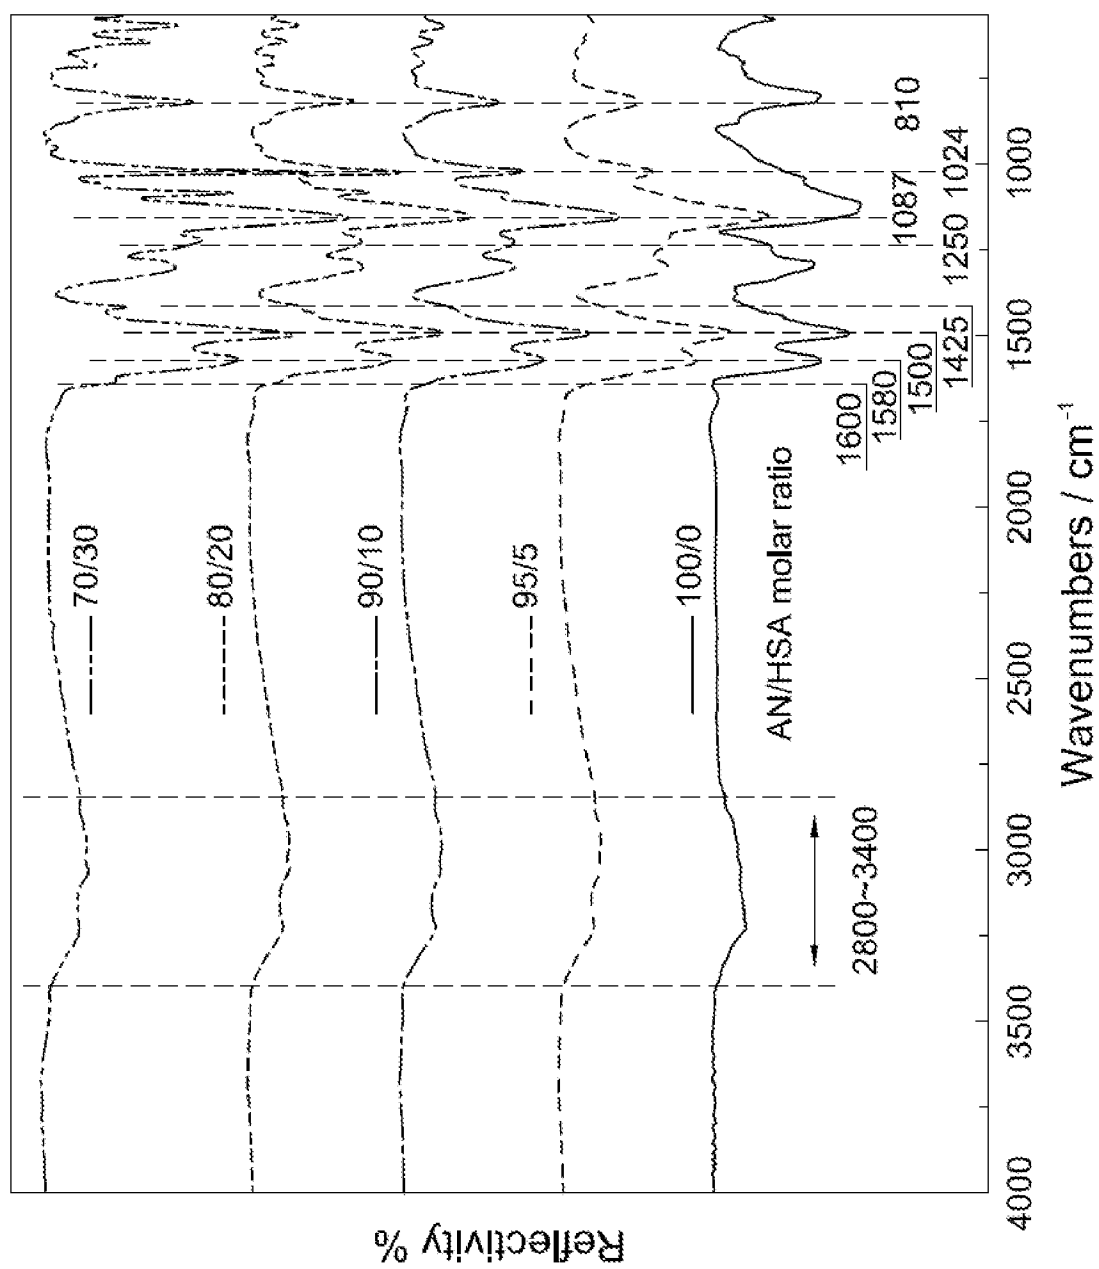
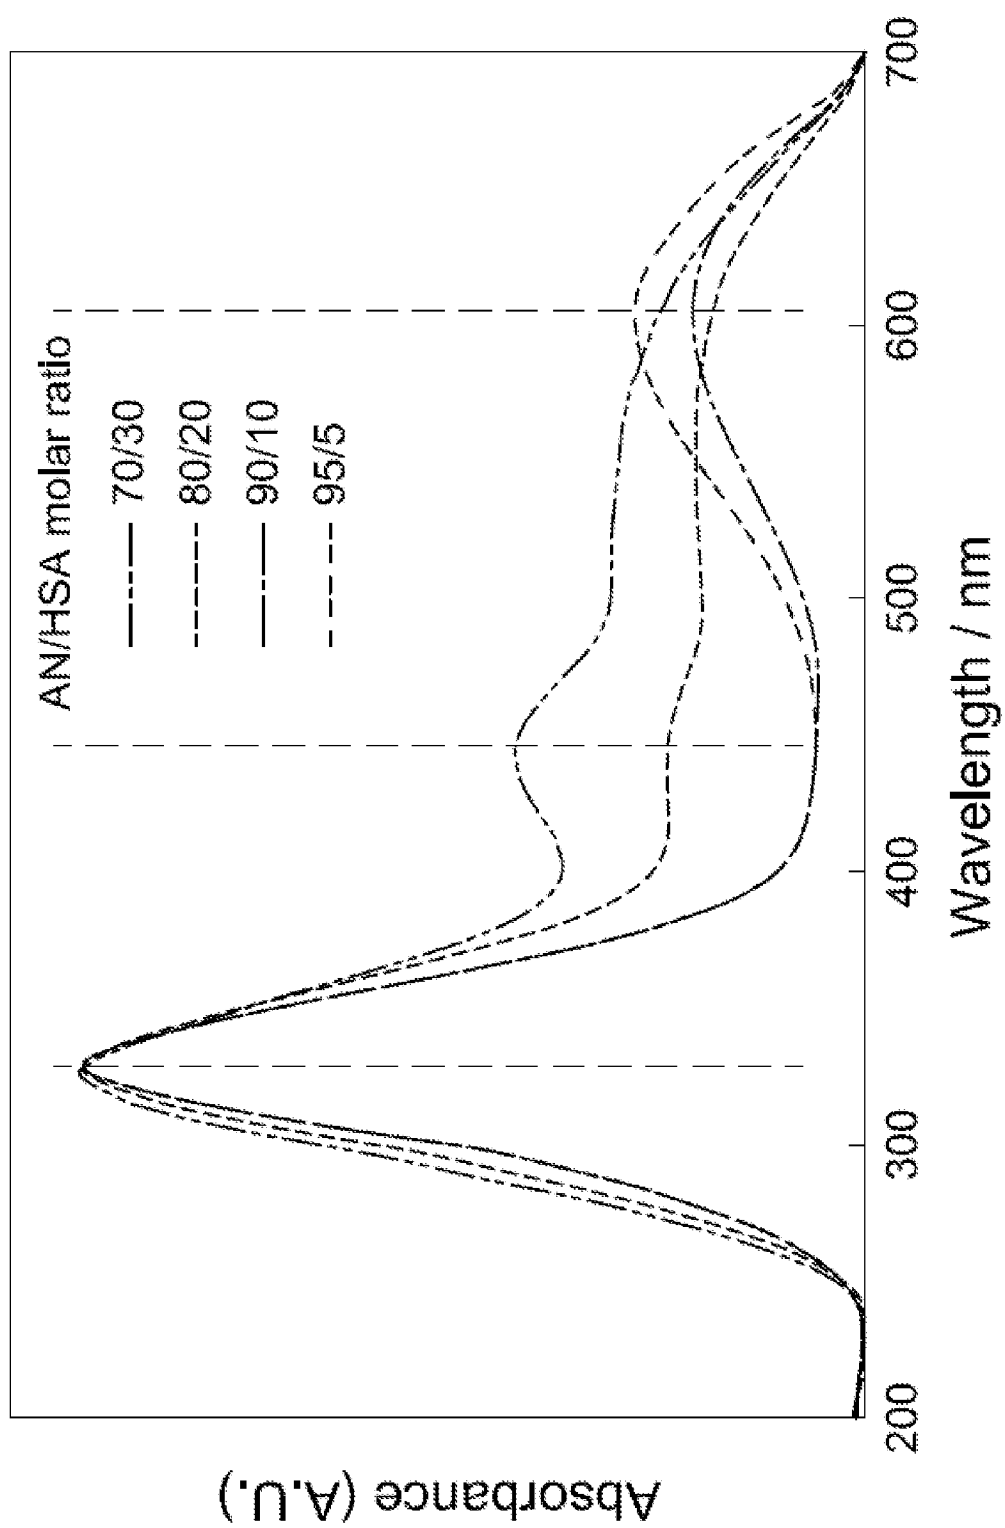
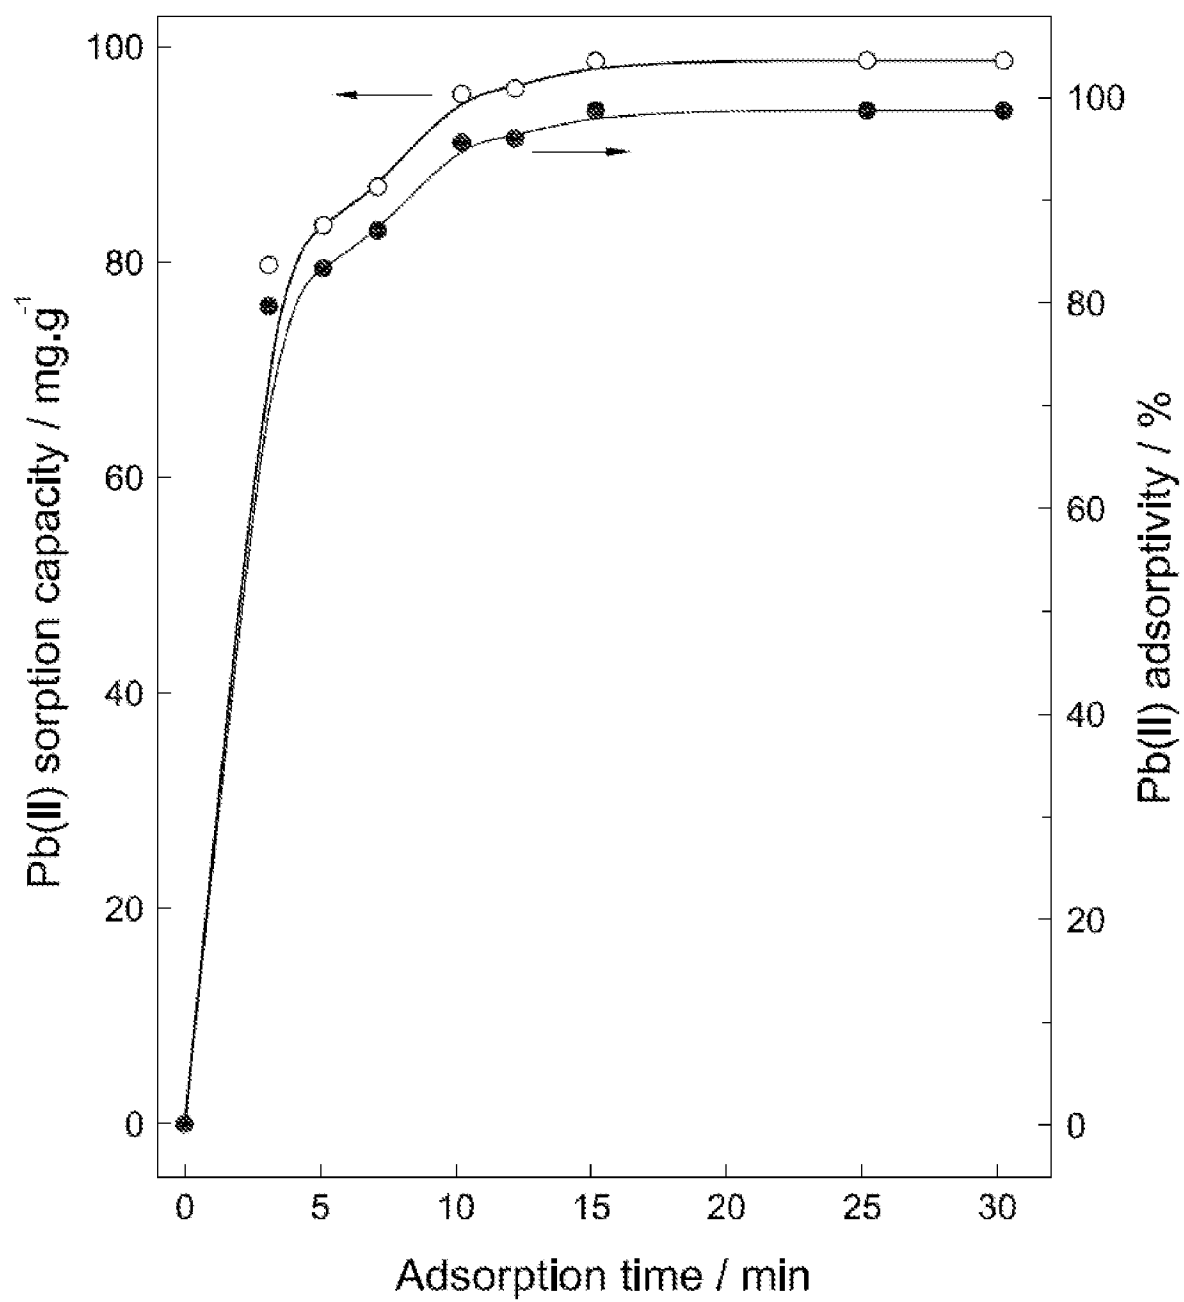
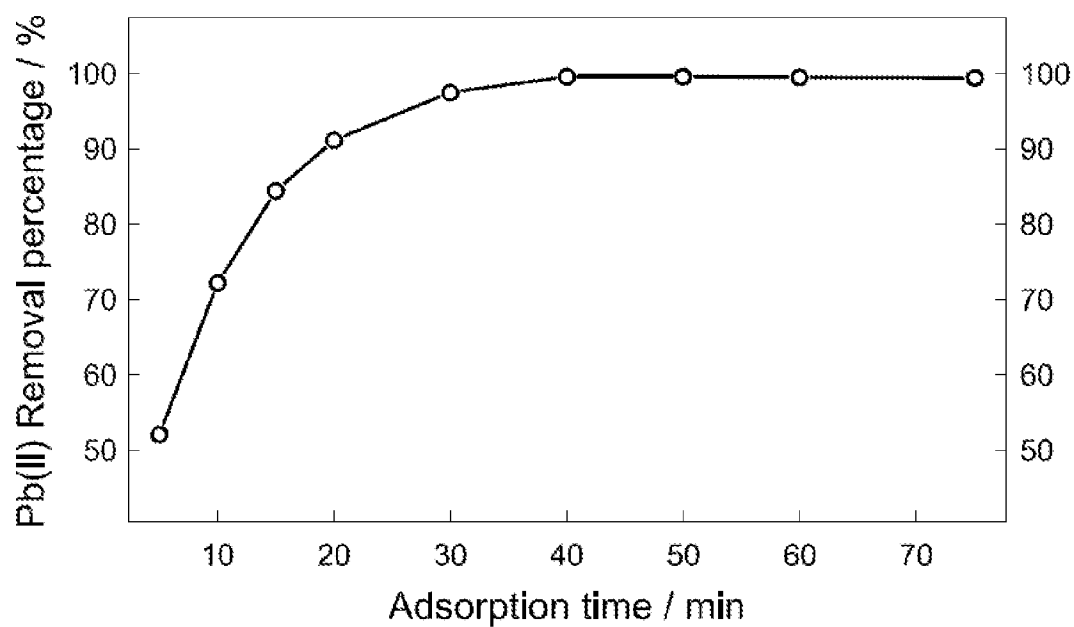
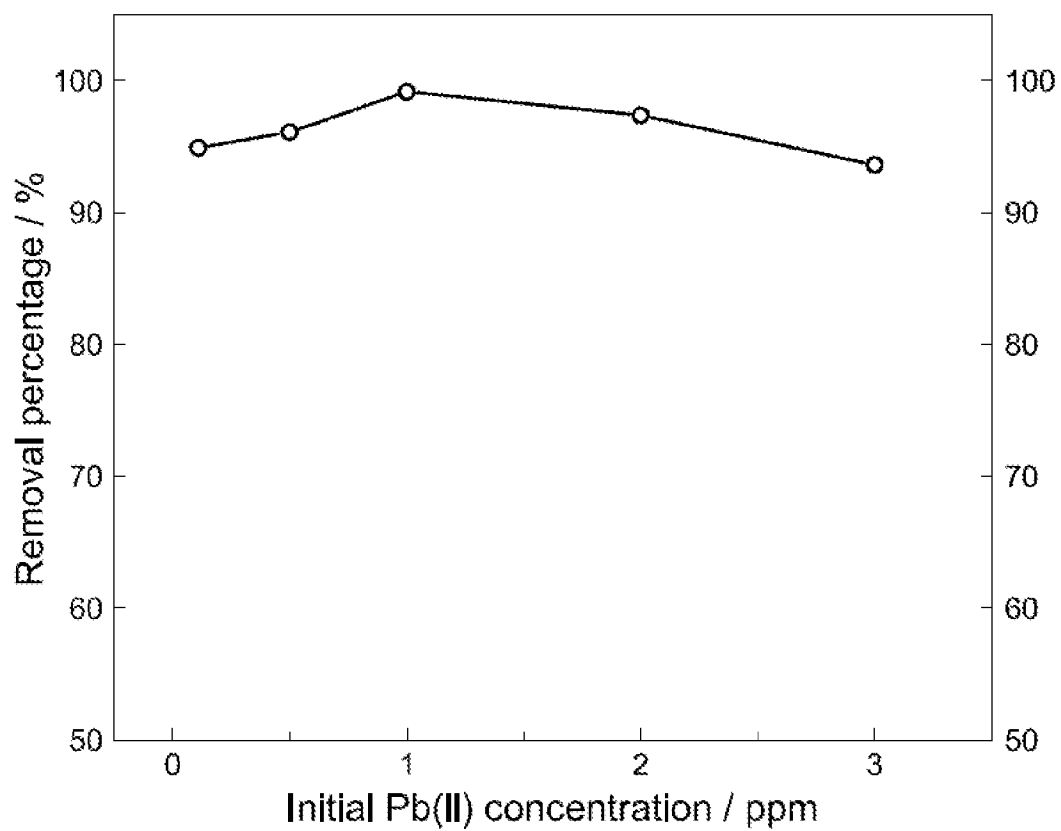


FIG. 5

*FIG. 6*

*FIG. 7*

*FIG. 8**FIG. 9*

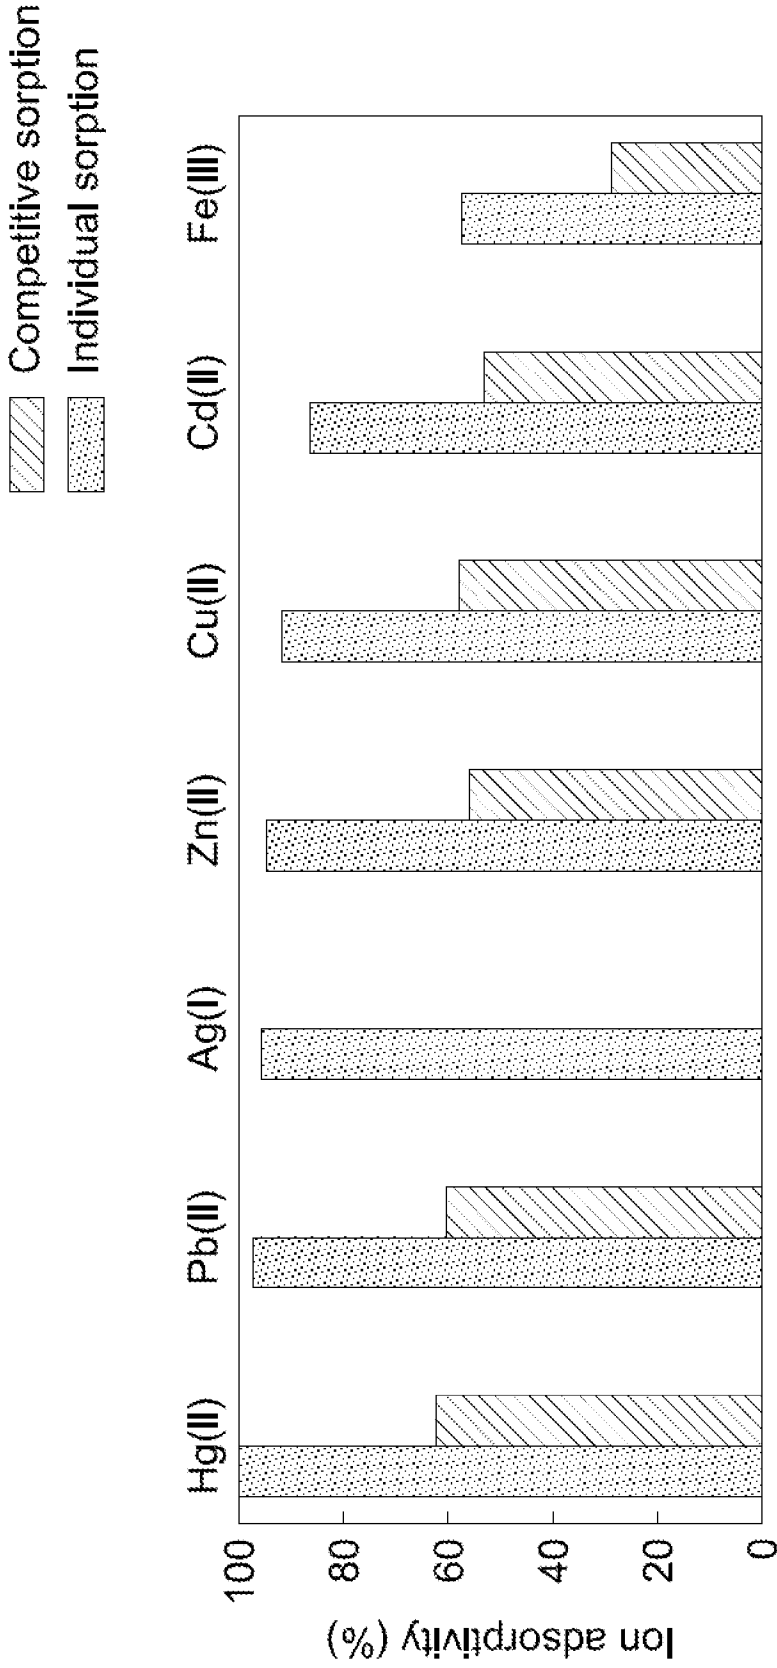


FIG. 10

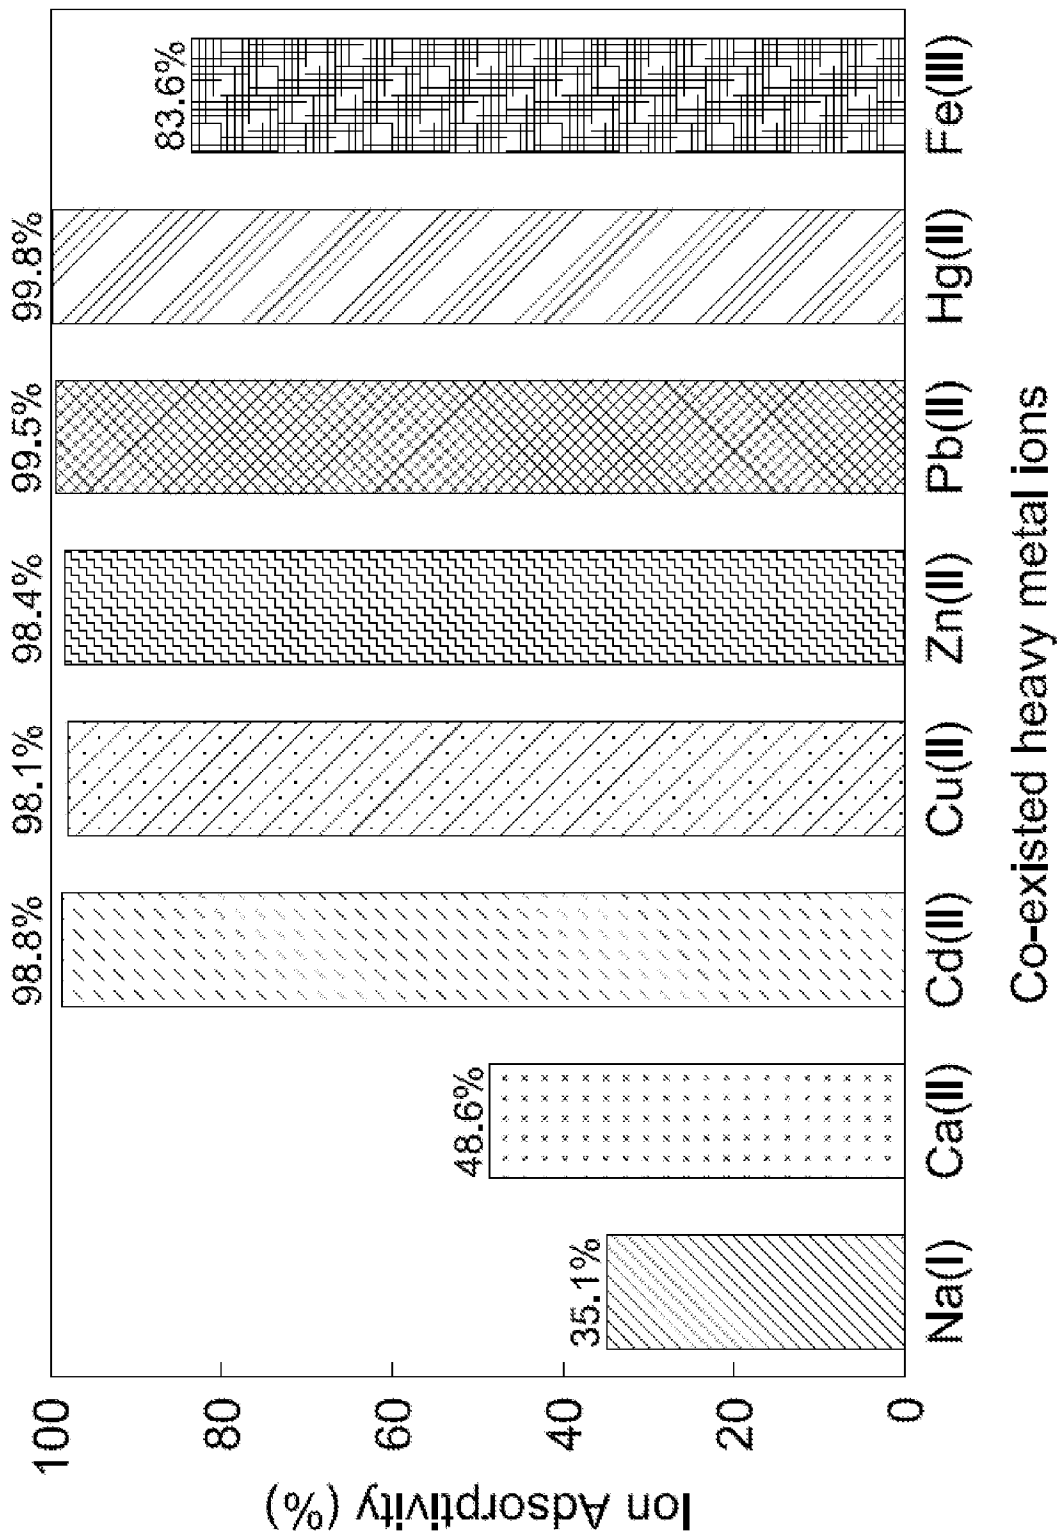


FIG. 11

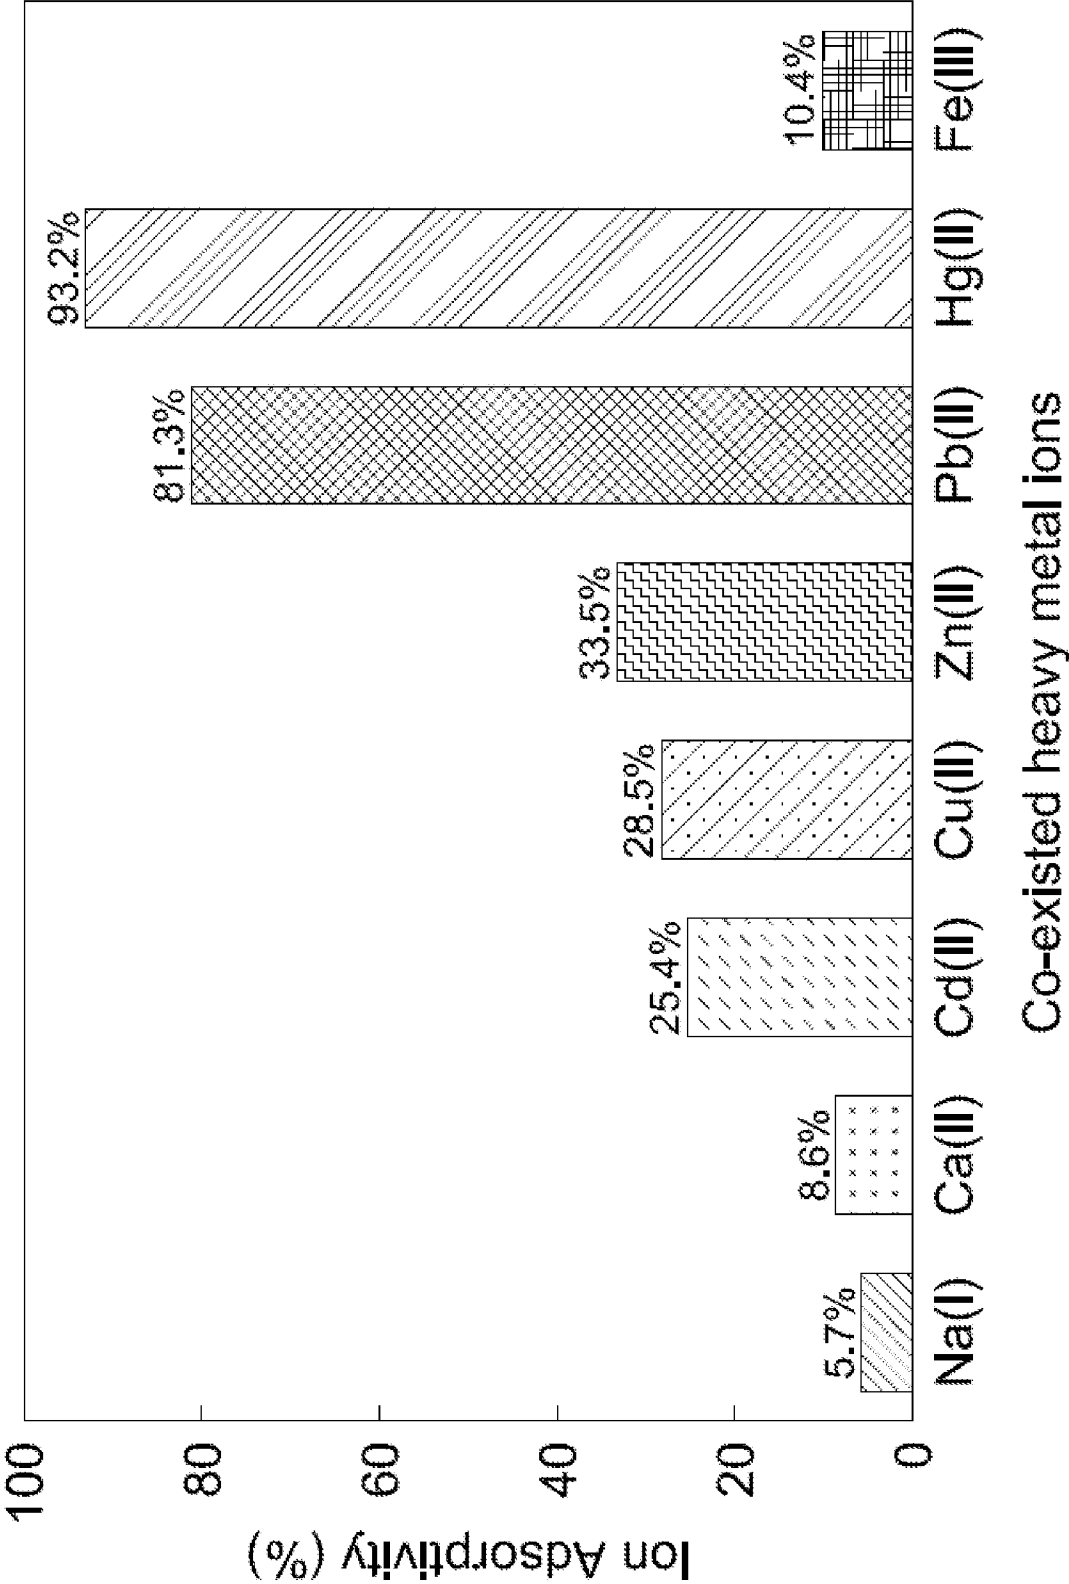
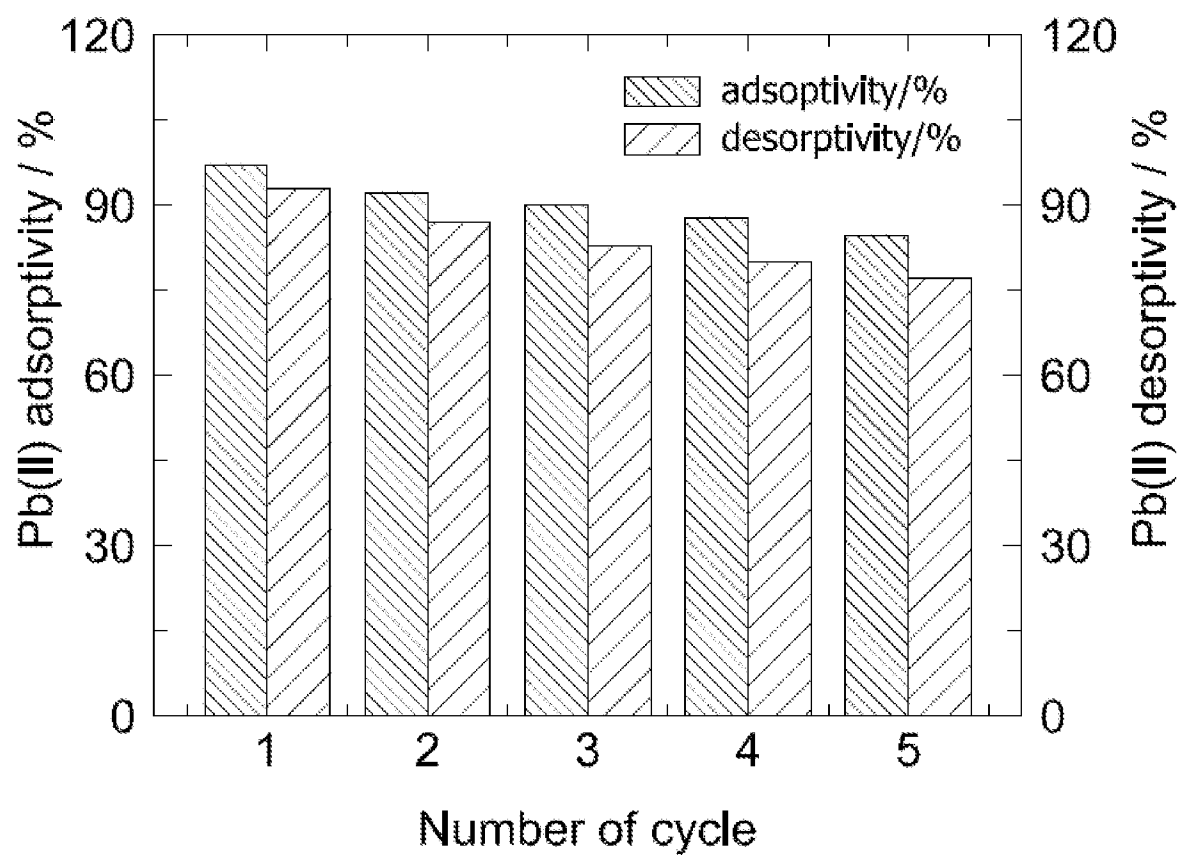


FIG. 12

*FIG. 13*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2011/073235

A. CLASSIFICATION OF SUBJECT MATTER

C08G 73/02 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: C08G 73/-

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, CPRS, CNKI, CA on WEB: sulf???? 1d ???aniline?, oxid????, sulf????aniline?, hydroxybenzenesulfonic, C6H7NO4S, C6H7N, CAS No. 5857-93-2, CAS No. 62-53-3

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	YANG, Yifei et al., Synthesis and high electrochemical activity of poly(aniline-co-2-amino-4-hydroxybenzenesulfonic acid), Electrochimica Acta 54 (2008) 506-512	1-9, 15-28
A		10-14, 29-50
X	MU, Shaolin, Synthesis and electronic properties of poly(aniline-co-2-amino-4-hydroxybenzenesulfonic acid), J. Phys. Chem. B 2008, 112, 6344-6349	1-9
A		10-50

☒ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“A” document defining the general state of the art which is not considered to be of particular relevance	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“E” earlier application or patent but published on or after the international filing date	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)	“&” document member of the same patent family
“O” document referring to an oral disclosure, use, exhibition or other means	
“P” document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 21 December 2011 (21.12.2011)	Date of mailing of the international search report 09 Feb. 2012 (09.02.2012)
Name and mailing address of the ISA/CN The State Intellectual Property Office, the P.R.China 6 Xitucheng Rd., Jimen Bridge, Haidian District, Beijing, China 100088 Facsimile No. 86-10-62019451	Authorized officer LIANG, Shuang Telephone No. (86-10)62084228

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2011/073235

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	MU, Shaolin et al., Electrocatalysis of NADH oxidation by nanostructured poly(aniline-co-2-amino-4-hydroxybenzenesulfonic acid) and experimental evidence for the catalytic mechanism, electrochemistry communications 11 (2009) 1960-1963	1-14
A		15-50