




(12) **DEMANDE DE BREVET CANADIEN  
CANADIAN PATENT APPLICATION**

(13) **A1**

(22) Date de dépôt/Filing Date: 2023/09/01  
(41) Mise à la disp. pub./Open to Public Insp.: 2024/03/08  
(30) Priorité/Priority: 2022/09/08 (US17/930,534)

(51) Cl.Int./Int.Cl. *E04F 11/18* (2006.01),  
*E04B 1/28* (2006.01), *E04H 12/22* (2006.01)  
(71) Demandeur/Applicant:  
VINYLAST, INC., US  
(72) Inventeur/Inventor:  
LEARY, STEVEN J., US  
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : SUPPORT DE POTEAU DE BOIS  
(54) Title: WOOD POST BRACKET

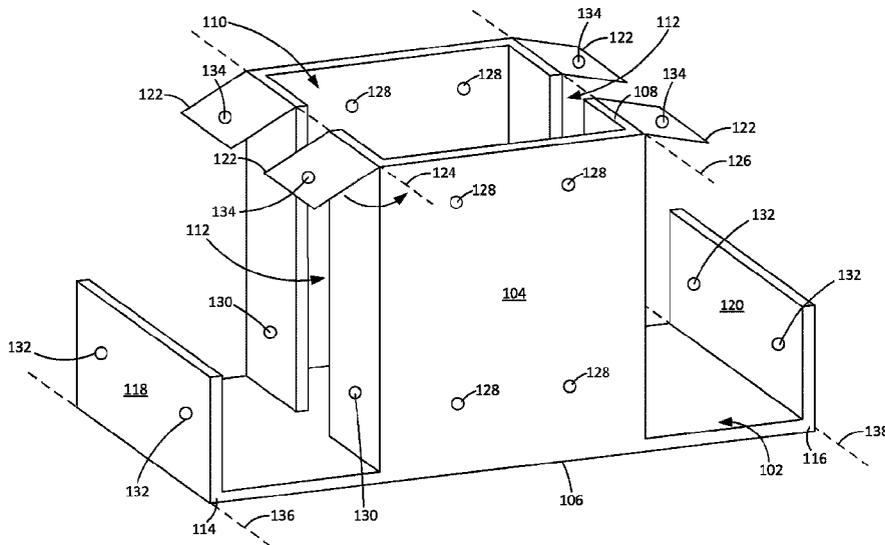

(57) Abrégé/Abstract:

A wood post bracket used for securing a post mount to a rim joist and a mounting blocks of a substructure of a deck's wood framing system includes a hollow sleeve defining an open rectangular passage, the open rectangular passage having four walls, a planar base forming a first wall of the four walls and a mounting plate forming a second wall of the four walls that is positioned opposite the first wall, such that the hollow sleeve is positioned between the planar base and the mounting plate and the planar base and the mounting plate are oriented parallel to each other.

## ABSTRACT

A wood post bracket used for securing a post mount to a rim joist and a mounting blocks of a substructure of a deck's wood framing system includes a hollow sleeve defining an open rectangular passage, the open rectangular passage having four walls, a planar base forming a first wall of the four walls and a mounting plate forming a second wall of the four walls that is positioned opposite the first wall, such that the hollow sleeve is positioned between the planar base and the mounting plate and the planar base and the mounting plate are oriented parallel to each other.

## **WOOD POST BRACKET**

### FIELD OF THE INVENTION

[0001] The present invention relates generally to railing systems and relates more specifically to support hardware for use in railing systems.

### BACKGROUND OF THE DISCLOSURE

[0002] One common style of decking system comprises vertically oriented posts that are supported by a wood substructure or framing system that includes joists. The posts, in turn, support a railing which may be oriented in a manner parallel to the joists or in a manner that is angled relative to the joists (e.g., as may be the case on a railing that is adjacent to stairs). The posts are typically coupled to the joists by fasteners (e.g., lag bolts or lag screws) which are lagged through the posts and joists (e.g., drilled directly through, without any pre-drilled holes being formed in either the posts or the joists).

### SUMMARY OF THE INVENTION

[0003] In one example, a wood post bracket used for securing a post mount to a rim joist and a mounting blocks of a substructure of a deck's wood framing system includes a hollow sleeve defining an open rectangular passage, the open rectangular passage having four walls, a planar base forming a first wall of the four walls and a mounting plate forming a second wall of the four walls that is positioned opposite the first wall, such that the hollow sleeve is positioned between the planar base and the mounting plate and the planar base and the mounting plate are oriented parallel to each other.

[0004] In another example, a wood post bracket used for securing a post mount to a rim joist and a mounting blocks of a substructure of a deck's wood framing system includes a hollow sleeve defining an open rectangular passage, the open rectangular passage having four walls; a planar base forming a first wall of the four walls, wherein the planar base comprises, a first flange that extends away from the planar base in an orientation parallel to the hollow sleeve, such that the planar base has an L-shaped cross section, and a first plurality of apertures formed in the first

flange; and a mounting plate forming a second wall of the four walls that is positioned opposite the first wall, such that the hollow sleeve is positioned between the planar base and the mounting plate, wherein the mounting plate comprises a second flange that extends away from the mounting plate in a direction toward the first flange and in an orientation parallel to the hollow sleeve, such that the mounting plate has an L-shaped cross section, a second plurality of apertures formed in the second flange, a third plurality of apertures formed in a surface of the mounting plate that is oriented parallel to the planar base, and a lip positioned on an opposite end of the mounting plate from the second flange and extending past the hollow sleeve, such that the mounting plate is longer than the planar base.

[0005] In another example, a deck substructure includes a rim joist coupled between a first deck joist and a second deck joist; a wood post bracket coupled to the rim joist, the wood post bracket comprising a hollow sleeve defining an open rectangular passage, the open rectangular passage having four walls, a planar base forming a first wall of the four walls, a mounting plate forming a second wall of the four walls that is positioned opposite the first wall, such that the hollow sleeve is positioned between the planar base and the mounting plate and the planar base and the mounting plate are oriented parallel to each other; and a post mount coupled to the wood post bracket, the post mount comprising a base plate secured to the mounting plate of the wood post bracket, and a support pipe extending upward from the base plate.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The teachings of the present disclosure can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

[0007] FIG. 1 illustrates an isometric view of one example of a bracket according to the present disclosure;

[0008] FIGs. 2A-2E are isometric views illustrating the installation of a post using the bracket of FIG. 1;

[0009] FIGs. 3A-3E are cross sectional views of certain steps of the installation illustrated in FIGs. 2A-2E, taken along line A-A' of FIG. 2B;

[0010] FIG. 4 illustrates several example installation locations of the bracket of FIG. 1;

[0011] FIG. 5 illustrates a cross sectional view of an alternate example of the bracket;

[0012] FIG. 6 illustrates an isometric view of another example of a bracket according to the present disclosure;

[0013] FIGs. 7A-7D are side views illustrating the installation of a post mount using the bracket of FIG. 6; and

[0014] FIG. 8 illustrates a top view of the fully installed post mount of FIGs. 7A-7D, using the wood post bracket of FIG. 6 to reinforce.

[0015] To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.

#### DETAILED DESCRIPTION

[0016] The present disclosure describes a novel bracket and a method for securing wood posts in a decking system. In one example, a wood post bracket secures a wood post directly to the rim joist, to the reinforcing block, and to the substructure of the deck's wood framing system. The bracket thus allows the rim joist, reinforcing block, and deck framing to work together to reinforce the vertical wood post quickly and easily with a code compliant installation.

[0017] In another example, a wood post bracket can be used to secure the base plate of a post mount to the deck's wood framing system, while also reinforcing the substructure and rim joist of the wood framing system.

[0018] As discussed above, one common style of decking system comprises vertically oriented posts that are supported by a wood substructure or framing system that includes joists. The posts are typically secured to the joists by fasteners (e.g., lag bolts or lag screws) which are drilled directly through the posts and joists, without any pre-drilled holes being formed in either the posts or the joists.

[0019] Current building codes require that outward movement of a post (i.e., movement in a direction away from the joist to which the post is secured) is not greater than a threshold. Conventionally, the outward movement of the post may

be limited by securing a reinforcing block to the post, on the opposite side of the post from the joist. For instance, the fastener may be lagged through the joist, post, and reinforcing block, so that the post is held between the joist and the reinforcing block. However, building codes that are scheduled for implementation in the coming years not only further limit the permitted outward movement of the post, but also limit the permitted inward movement (i.e., movement in a direction toward the joist to which the post is secured) and lateral movement (i.e., sideways movement of the post along the joist to which the post is secured). Although a reinforcing block as described above may provide adequate protection against outward movement of a post, and may also provide some protection against inward movement, the reinforcing block does little to limit the lateral movement of the post. Thus, conventional methods of securing posts to joists are unlikely to ensure compliance with the expected changes in the building codes.

[0020] Examples of the present disclosure provide a bracket that may be installed on and under the rim joist of a decking system and a reinforcing block. The bracket includes a sleeve or pocket into which the post may be inserted, and includes apertures so that fasteners may be driven through the rim joist, sleeve, post, and reinforcing block. The bracket acts as a counter pivot to loads exerted on the post in all directions, so that outward, inward, and lateral movement of the post is minimized. The bracket allows the full width and height of the rim joist and the reinforcing block to work together as a counter balance, pushing and pulling in opposite directions to transfer and distribute pressures and loads directly to the deck substructure, as opposed to using just the width of the rim joist for structural reinforcement of the post.

[0021] FIG. 1 illustrates an isometric view of one example of a bracket 100 according to the present disclosure. It should be noted that FIG. 1 is not necessarily to scale (e.g., some dimensions may be exaggerated to better show the features of the bracket 100). In one example, the bracket 100 is formed as a single, unitary piece fabricated from stamped metal. In other words, no fasteners are required to hold the different components or sections of the bracket 100 together.

[0022] As illustrated, the bracket 100 generally takes the form of an upside down “T.” Specifically, the bracket 100 comprises a planar base 102 having a generally rectangular shape.

[0023] At the center of the base 102 is a hollow sleeve 104 that extends from the base 102 at approximately a ninety degree angle (i.e., perpendicular relative to the base 102). The sleeve 104 may be sized and shaped to accommodate a wooden post, i.e., such that a wooden post can be inserted into the sleeve 104. Thus, in one example, the sleeve 104 may comprise four sides arranged to form a rectangular tube (i.e., a tube having a rectangular cross section) whose dimensions are sized such that a 4 inch by 4 inch post can be held snugly within the hollow interior of the tube.

[0024] In one example, two of the four sides of the sleeve 104 (i.e., two non-adjacent sides) each include a gap 112, such that there are breaks in the perimeter of the sleeve’s cross section. In this case, the sleeve 104 may appear to be formed in two halves that are spaced apart from each other, as illustrated in FIG. 1. Forming the gaps 112 in the two sides of the sleeve 104 may reduce the amount of material required to fabricate the bracket 100. Alternatively or in addition, one or more of the sides of the sleeve 104 may include cutouts or windows cut into the planar surface of the side to further reduce material usage. However, in other examples, the sleeve 104 may be formed to have a continuous perimeter (e.g., without gaps or cutouts in any of the sides). In this case, the sleeve 104 may appear to be formed as a single, solid piece.

[0025] A first end 106 of the sleeve 104 is coupled directly to the base 102, such that the first end 106 of the sleeve 104 is closed. However, a second end 108 of the sleeve 104 defines an opening 110 into which the post may be inserted, as described in further detail below.

[0026] Referring back to the base 102, the base 102 may further include a first end 114 and a second end 116. The first end 114 and the second end 116 of the base 102 may be spaced equidistant from the sleeve 104 (e.g., such that the sleeve 104 is positioned midway between the first end 114 and the second end 116). In one example, the first end 114 comprises a first flange 118 that extends from the base 102 at approximately a ninety degree angle (i.e., perpendicular relative to the

base 102, or parallel relative to the sleeve 104). Similarly, the second end 116 may comprise a second flange 120 that extends from the base 102 at approximately a ninety degree angle (i.e., perpendicular relative to the base 102, or parallel relative to the sleeve 104 and first flange 118). The first flange 118 and the second flange 120 may extend from the base 102 in the same direction as the sleeve 104. In one example, at least one of the first flange 118 and the second flange 120 may be hinged, e.g., such that the first flange 118 and the second flange 120 can rotate or bend to some degree around a respective bending axis 136 and 138, where the bending axes 136 and 138 run substantially parallel to the first flange 118 and the second flange 120.

[0027] In one example, the bracket 100 may further comprise a plurality of tabs 122 coupled to the perimeter of the second end 108 of the sleeve 104. In one example, a tab 122 may extend from each corner of the second end 108 of the sleeve 104, and the tabs 122 may be coupled to non-adjacent sides of the sleeve 104. For instance, in one example, a first tab 122 and a second tab 122 may extend outward from the sleeve 104, in a direction toward the first end 114 of the base 102. Similarly, a third tab 122 and a fourth tab 122 may extend outward from the sleeve 104, in a direction toward the second end 116 of the base 102. Each tab 122 may have a planar shape. The tabs 122 may be hinged, e.g., such that the tabs 122 can rotate or bend to some degree around respective bending axes 124 and 126, where the bending axes 124 and 126 run substantially parallel to the first flange 118 and the second flange 120.

[0028] In one example, the bracket 100 further comprises a plurality of apertures. The plurality of apertures may include a first plurality of apertures 128 that is formed in the sides of the sleeve 104. More specifically, the first plurality of apertures 128 may be formed in the sides of the sleeve 104 that do not have the tabs 122 coupled thereto (e.g., non-adjacent sides). In one example, some apertures 128 of the first plurality of apertures 128 are formed near the first end 106 of the sleeve, while some apertures 128 of the first plurality of apertures are formed near the second end 108 of the sleeve 104. In the example illustrated in FIG. 1, each side of the sleeve 104 that includes the first plurality of apertures 128 includes

four apertures 128: two apertures 128 formed near the first end 106 of the sleeve 104 and two apertures 128 formed near the second end 108 of the sleeve 104.

[0029] The plurality of apertures may further include a second plurality of apertures 130 that is formed in the sleeve 104. More specifically, the second plurality of apertures 130 may be formed in the sides of the sleeve 104 that have the tabs 122 coupled thereto (e.g., non-adjacent sides). In one example, the second plurality of apertures 130 is formed near the first end 106 of the sleeve 104. In the example illustrated in FIG. 1, each side of the sleeve 104 that includes the second plurality of apertures 130 includes two apertures 130 formed near the first end 106 of the sleeve 104. The second plurality of apertures 130 may be situated closer to the base 102 than the lower apertures of the first plurality of apertures 128 that are formed near the first end 106 of the sleeve 104.

[0030] The plurality of apertures may further include a third plurality of apertures 132 that is formed in the flanges 118 and 120. In the example illustrated in FIG. 1, each of the first flange 118 and the second flange 120 includes two apertures 132. Each aperture of the third plurality of apertures 132 may be collinear with at least one aperture of the second plurality of apertures 130, e.g., such that a single fastener may pass through both an aperture of the second plurality of apertures and an aperture of the third plurality of apertures 132.

[0031] The plurality of apertures may further include a fourth plurality of apertures 134 that is formed in the tabs 122. In the example illustrated in FIG. 1, each tab 122 includes one aperture 134.

[0032] FIGs. 2A-2E are isometric views illustrating the installation of a post using the bracket 100 of FIG. 1. As such, FIGs. 2A-2E also serve as a flow diagram for a method of installing a post using the bracket 100 of FIG. 1. Similar reference numerals are used in FIGs. 2A-2E to refer to elements of the bracket 100 that is illustrated in FIG. 1. FIGs. 3A-3E are cross sectional views of certain steps of the installation illustrated in FIGs. 2A-2E, taken along line A-A' of FIG. 2B.

[0033] As illustrated in FIG. 2A, a wood frame 200 comprising a plurality of joists may be provided. It should be noted that FIG. 2A may illustrate a portion of the frame 200; the full frame 200 may be larger than what is illustrated in FIG. 2A. The frame 200 may be provided as part of the substructure or support system for a deck, where

each joist is one of a plurality of horizontal members that is arranged to support the deck. In one example, the plurality of joists may include rim joists 202, which form part of the perimeter of the frame 200 (e.g., the outside frame of the deck). For instance, FIG. 2A illustrates four rim joists 202 that are spaced apart from each other in a parallel manner. In addition, the plurality of joists may also include a plurality of deck joists 204 positioned inside the perimeter defined by the rim joists.

[0034] As illustrated in FIG. 2B, which shows a close-up view of a portion of location 206 of the frame 200 of FIG. 2A, a bracket 100 may be installed on and under one of the rim joists 202. FIG. 3A illustrates a cross sectional view of this step. The bracket 100 may be configured in a manner similar to the bracket 100 of FIG. 1. In one example, the first end 116 of the base 102 of the bracket 100 may be slid beneath the rim joist 202, such that the rim joist 202 sits between the sleeve 104 and the first flange 118. In one example, where a double rim joist is used (e.g., such that two rim joists 202 are positioned flush against each other, the first flange 118 may be folded down (e.g. so that the first flange 118 is substantially coplanar with the base 102). In this case, the first flange 118 will rest along the bottoms of both rim joists. Two of the tabs 122 at the second end 108 of the sleeve 104 may be folded over the top of the rim joist 202.

[0035] As illustrated in FIG. 2C and FIG. 3B, fasteners may next be lagged through at least some of the apertures in the bracket 100, in a direction toward (or perpendicular relative to) the base 102. For instance, fasteners 208 may be lagged through the apertures 134 in the tabs 122 that are folded over the top of the rim joist 202. This partially secures the bracket 100 to the rim joist 202.

[0036] FIG. 3E illustrates an alternate example of the step shown in FIG. 2C and 3B, where the rim joist 202 may be larger than shown in FIG. 2C and 3B. For instance, if the rim joist 202 illustrated in FIG. 2C and 3B is a 2 inch by 8 inch rim joist, then the rim joist 202 illustrated in FIG. 3E may be larger than an 8 inch rim joist. In the case of FIG. 3E, the tabs 122 at the second end 108 of the sleeve 104 may not be folded over the top of the rim joist 202, but may instead rest flush against the side of the rim joist 202 as shown. Fasteners 208 may be lagged through the apertures 134 in the tabs 122 in a direction toward the first flange 118 (or parallel relative to the base 102).

[0037] As illustrated in FIG. 2D and FIG. 3C, a reinforcing block 214 may next be installed in the frame 200. In one example, the reinforcing block 214 is installed so that the reinforcing block 214 sits between the sleeve 104 and the second flange 120. Although not shown in FIG. 2D and FIG. 3C, the reinforcing block 214 may be secured with fasteners to the frame 200 (e.g., the ends of the reinforcing block 214 may be secured to two respective deck joists, or a first end of the reinforcing block 214 may be secured to one deck joist while a second end of the reinforcing block 214 is secured to one rim joist, depending upon the location of installation). Two of the tabs 122 at the second end 108 of the sleeve 104 may be folded over the top of the reinforcing block 214. Fasteners 216 may be lagged through the apertures 134 in the tabs 122 that are folded over the top of the reinforcing block 214. This partially secures the bracket 100 to the reinforcing block 214. Moreover, the reinforcing block 214 ties the bracket 100 directly to the frame 200, as the bracket 100 is now secured on both ends to the rim joist 202 for counterbalance reinforcement and energy dispersal throughout the frame 200.

[0038] As illustrated in FIG. 2E and FIG. 3D, a post (e.g., a 4 inch by 4 inch pressure treated post) may be inserted into the sleeve 104. Fasteners 222 may secure the post 220 to the rim joist 202. In this case, the fasteners 222 may be lagged through the apertures 132 in the first flange 118, through the rim joist 202, through the apertures 130 in the sleeve 104, and into the post 220, as shown. In addition, fasteners 218 may also be lagged through the apertures 132 in the second flange 220, through the support block 214, through the apertures 130 in the sleeve 104, and into the post 220, as shown. In some examples, one or more bolts 232 may additionally be lagged all the way through the rim joist 202, through the gap 112 in one side of the sleeve 104, through the post 220, through the gap 112 on the opposite side of the sleeve 104, and through the reinforcing block 214.

[0039] Optionally, fasteners 224 may secure the post 220 to the deck joist 204 (as shown in FIG. 3D), e.g., if the bracket 100 is installed in a corner of the frame 200 where the rim joist 202 meets a deck joist 204. In this case, the fasteners 224 may be lagged through the deck joist 204, through the apertures 128 in the sleeve 104, and into the post 220. In an example where the bracket 100 is installed mid-

span on the rim joist 202 (e.g., not in a corner where the rim joist 202 meets a deck joist 204), this step may be skipped.

[0040] Thus, as shown in FIG. 3D, the bracket 100 allows the full length of the rim joist 202 and the reinforcing block 214 to work together to counter balance the top pull load on the post 220 in any direction. Specifically, the rim joist 202 and the reinforcing block 214 push and pull in opposite directions to transfer and distribute pressures and loads directly to the deck sub structure, as opposed to using just the width of the rim joist 202 for structural reinforcement of the post. For instance, when a pull force is applied to the post 220 as shown in FIG. 3D, the bracket 100 pulls the rim joist and reinforcing block in opposite directions both up and down (as shown by force arrows  $F_1$  and  $F_2$ ), as well as in and out.

[0041] As discussed above, FIGs. 2A-2D illustrate only one example installation of the bracket 100. Specifically, FIGs. 2A-2D illustrate an example in which the bracket 100 is installed in a corner of the frame 200 (e.g., where two joists meet). However, the bracket 100 may also be installed to secure a post mid-span on a joist, i.e., in the middle of the joist as opposed to where the joist meets another joist.

[0042] FIG. 4 illustrates several example installation locations of the bracket 100 of FIG. 1. For instance, the location 206 illustrates the installation shown in FIG. 2A, where the bracket 100 is installed in a corner of the frame 200 (i.e., where two rim joists 202 meet). In this case, the reinforcing block 214 is installed parallel to one rim joist 202 and perpendicular to the other rim joist 202 (e.g., so that the reinforcing block is secured between one rim joist 202 and an adjacent deck joist 204).

[0043] The location 228, however, illustrates an example in which the bracket 100 is installed mid-span on a rim joist 202, between two deck joists 204. In this case, the reinforcing block 214 is installed parallel to the rim joist 202 (or perpendicular to the deck joists 204 to which the bracket 100 is secured).

[0044] FIG. 5 illustrates a cross sectional view of an alternate example of the bracket 100. Similar reference numerals to those used in the previous figures are used for similar components in FIG. 5. In the example illustrated in FIG. 5, the planar base 102 is shortened, such that the base 102 extends to a single side of the sleeve 104.

[0045] More particularly, the first flange 118 and the portion of the base 102 connecting the first flange 118 to the sleeve 104 have been removed in FIG. 5. In this case, the bracket 100 is secured to the rim joist 202 by fasteners 208 that are driven through the tabs 122 (e.g., through apertures of the fourth plurality of apertures 134). The bracket 100 may be further secured to the rim joist 202 by fasteners 234 that are driven through apertures (e.g., of the second plurality of apertures 130) in the side of the sleeve 104 that is positioned flush against the rim joist 202. Thus, the bracket 100 of FIG. 5 does not wrap around the bottom of the rim joist 202.

[0046] The bracket 100 is secured to the reinforcing block 214 as described above.

[0047] The location 230 illustrates another example in which the bracket is installed mid-span on a rim joist 202. However, in this case, the bracket 100 is situated between two joists 226 that are secured between the rim joist 202 and an adjacent deck joist 204. In this case, the reinforcing block 214 is installed parallel to the rim joist 202 (or perpendicular to the joists 226 to which the bracket 100 is secured).

[0048] In another example, a wood post bracket can be used to secure the base plate of a post mount to the deck's wood framing system, while also reinforcing the substructure and rim joist of the wood framing system. In some examples, rather than placing a wood post within the hollow sleeve of the wood post bracket and securing the wood post directly to the substructure of the deck's wood framing system, a post mount may instead be secured to the top of the deck's wood framing system. The post mount may comprise a support pipe (e.g., a metal post or tube) over which a decorative sleeve may be placed, and may include a planar base plate for attachment to the top of the deck's wood framing system. Conventionally, a plurality of (e.g., three) wood mounting blocks help couple the post mount to the rim joist. However, according to one example of the present disclosure, a wood post bracket such as that described above (or slightly modified) may be used to reinforce the substructure and rim joist of the wood framing system while also providing a means of securing the post mount to the wood framing system.

[0049] FIG. 6 illustrates an isometric view of another example of a bracket 600 according to the present disclosure. It should be noted that FIG. 6 is not necessarily to scale (e.g., some dimensions may be exaggerated to better show the features of the bracket 600). In one example, the bracket 600 is formed as a single, unitary piece fabricated from stamped or extruded metal (e.g., aluminum). In other words, no fasteners are required to hold the different components or sections of the bracket 600 together.

[0050] As illustrated, the bracket 600 generally takes the form of “J.” Specifically, the bracket 600 comprises a planar base 602 having a generally rectangular shape.

[0051] At one end of the base 602 is a hollow sleeve 604 that extends from the base 602 at approximately a ninety degree angle (i.e., perpendicular relative to the base 602). The sleeve 604 may be sized and shaped to accommodate a wood mounting block for use in securing a post mount (e.g., a 2” x 6” board), i.e., such that a wood mounting block can be inserted through the sleeve 604 (e.g., in the direction of the arrow 630). Thus, in one example, the sleeve 604 may comprise four walls arranged to form an open rectangular passage (i.e., an open passage having a rectangular cross section) whose dimensions are sized such that a 2” x 6” board can be held snugly within the hollow interior of the passage.

[0052] A first end 606 of the sleeve 604 is coupled directly to the base 602, while a second end 608 of the sleeve 604 is coupled to a mounting plate 610. Thus, the sleeve 604 is positioned between the base 602 and the mounting plate 610. Moreover, the base 602 and the mounting plate 610 are oriented substantially parallel to each other. Thus, one wall of the open rectangular passage formed by the sleeve 404 may be bounded by the base 602, while an opposite wall of the open rectangular passage may be bounded by the mounting plate 610.

[0053] Referring back to the base 602, the base 602 may include a first flange 614 that extends away from the base 602 in an orientation that is parallel to the sleeve 604, such that the base 602 as a whole has an “L” shaped cross section. The first flange 614 may include a first plurality of (e.g., two) apertures 616 formed therein.

[0054] The mounting plate 610 may have a generally rectangular shape and may include a second flange 618 that extends away from the mounting plate 610 and toward the first flange 614 in an orientation that is parallel to the sleeve 604, such that the mounting plate 610 as a whole, like the base 602, has an “L” shaped cross section. Thus, collectively, the base 602 (i.e., including the first flange 214) and the mounting plate 610 (i.e., including the second flange 618) may form a rectangular channel 624 with an outer surface of the sleeve 604. The rectangular channel 624 may extend in a parallel manner relative to the sleeve 604 and may be of similar dimensions to the sleeve 604 (e.g., equal width, length, and depth). Thus, the rectangular channel 624 may be sized such that a 2” x 6” board can be held snugly within the hollow interior of the rectangular channel 624.

[0055] Referring back to the mounting plate 610, the second flange 618 may include a second plurality of (e.g., two) apertures 620 formed therein. Additionally, a third plurality of (e.g., four) apertures 622 may be formed in the surface of the mounting plate 610 that is parallel to the base 602. The spacing between the apertures 622 of the third plurality of apertures 622 may be arranged to mirror the spacing of apertures in the base plate of a post mount, as described in further detail below. Thus, in one example, the apertures 622 of the third plurality of apertures 622 may be arranged such that each aperture 622 is positioned at a different corner of a common rectangle or square. However, other spacings and arrangements of the apertures 622 are also possible based on the configuration of the post mount’s base plate.

[0056] The mounting plate 610 may be longer than the base 602. That is, while the end of the base 602 opposite the flange 612 may end flush with the sleeve 604, the end of the mounting plate 610 opposite the flange 618 may extend past the sleeve 604 to form a lip 626.

[0057] FIGs. 7A-7D are side views illustrating the installation of a post mount using the bracket 600 of FIG. 6. As such, FIGs. 7A-7D also serve as a flow diagram for a method of installing a post mount using the bracket 600 of FIG. 6. Similar reference numerals are used in FIGs. 7A-7D to refer to elements of the bracket 600 that is illustrated in FIG. 6.

[0058] As illustrated in FIG. 7A, a first wood mounting block 700, such as a 2" x 6" board, may be inserted into the rectangular channel 624 of a wood post bracket 600 (e.g., following the direction of the arrow 630 of FIG. 6). As discussed above, the rectangular channel 624 may be defined by the base 602, the mounting plate 610, and the outer surface of the sleeve 604 of the wood post bracket 600. The first wood mounting block 700 may be secured to the wood post bracket 600 by inserting a first plurality of fasteners 702 (e.g., lag screws) through the first plurality of apertures 616 of the wood post bracket 600 and into the first wood mounting block 700 and inserting a second plurality of fasteners (e.g., lag screws) 704 through the second plurality of apertures 720 of the wood post bracket 600 and into the first wood mounting block 700. For instance, a lag screw may be inserted through each aperture of the first plurality of apertures 616 and the second plurality of apertures 620 and lagged into the wood of the first wood mounting block 700.

[0059] Optionally, a second wood mounting block 706 may also be inserted into the sleeve 604 of the wood post bracket 600 (e.g., following the direction of the arrow 630 of FIG. 6). However, in some examples, the sleeve 604 may be left empty (i.e., no wood mounting block may be inserted in the sleeve 604). The second wood mounting block 706 may have the same dimensions as the first wood mounting block 700 (e.g., may comprise a 2" x 6" board).

[0060] As illustrated in FIG. 7B, the wood post bracket 600 may next be positioned such that the lip 626 of the mounting plate 610 rests along the top of a third wood mounting block 708. The third wood mounting 708 block may, in turn, be secured to a rim joist 710 of a wood deck framing system (e.g., similar to the wood frame 200 of FIGs. 2A-2E).

[0061] As illustrated in 7C, a post mount 712 may next be placed over the mounting plate 610 of the wood post bracket 600. As discussed above, the post mount 712 may include a base plate 714 and a support pipe 716 extending upward from the base plate 714. The base plate 714 may include a plurality of (e.g., four) apertures (not shown). The base plate 714 may be positioned such that each aperture in the base plate 714 is aligned with an aperture 622 of the third plurality of apertures 622 in the mounting plate 610.

[0062] The post mount 712 may be secured to the wood post bracket 600 (and, thus, secured to the wood deck framing system) by inserting a third plurality of fasteners (e.g., lag screws) 718 through the apertures in the base plate 714, through the third plurality of apertures 622 of the mounting plate 610, and into the first or third wood mounting block 700 or 708 (depending upon the locations of the apertures). For instance, a lag screw may be inserted through each aperture of the base plate 714 and the third plurality of apertures 622 and lagged into the wood of the first or third wood mounting block 700 or 708. In one example, a decking surface material (i.e., the visible surface material of the deck structure, as opposed to the invisible, supporting substructure of framing) may be positioned between the mounting plate 610 of the wood post bracket 600 and the base plate 714 of the post mount 712.

[0063] FIG. 7D illustrates the post mount 712 fully installed using the wood post bracket 600 to reinforce. FIG. 8 illustrates a top view of the fully installed post mount 712 of FIGs. 7A-7D, using the wood post bracket 600 of FIG. 6 to reinforce. In other words, FIG. 8 represents a top view of FIG. 7D. FIG. 8 additionally shows how the rim joist 710, first wood mounting block 700, second wood mounting block 706, and third wood mounting block 708 are arranged relative to other portions of a deck's wood framing system, namely, deck joists 720.

[0064] Thus, the wood post bracket 600 allows the full length of the rim joist 710 and the wood mounting blocks 700, 706, and 708 to work together to counter balance the top pull load on the post mount 712 in any direction. Specifically, the rim joist 710 and the wood mounting blocks 700, 706, and 708 push and pull in opposite directions to transfer and distribute pressures and loads directly to the deck sub structure, as opposed to using just the width of the rim joist 710 for structural reinforcement of the post mount 712. Thus, the wood post bracket 400 provides a stable installation platform for the post mount 712 while also reinforcing the deck substructure.

[0065] Although various embodiments which incorporate the teachings of the present disclosure have been shown and described in detail herein, those skilled in the art can readily devise many other varied embodiments that still incorporate these teachings. In addition, while various embodiments have been described

above, it should be understood that they have been presented by way of example only, and not limitation. Thus, the breadth and scope of a claimed embodiment should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

## CLAIMS

1. An apparatus, comprising:
  - a hollow sleeve defining an open rectangular passage, the open rectangular passage having four walls;
  - a planar base forming a first wall of the four walls; and
  - a mounting plate forming a second wall of the four walls that is positioned opposite the first wall, such that the hollow sleeve is positioned between the planar base and the mounting plate and the planar base and the mounting plate are oriented parallel to each other.
2. The apparatus of claim 1, wherein the rectangular passage is sized to accommodate a two inch by six inch board.
3. The apparatus of claim 1, wherein the planar base and the mounting plate both have rectangular shapes.
4. The apparatus of claim 3, wherein the planar base includes a first flange that extends away from the planar base in an orientation parallel to the hollow sleeve, such that the planar base has an L-shaped cross section.
5. The apparatus of claim 4, wherein the first flange includes a plurality of apertures.
6. The apparatus of claim 4, wherein the mounting plate includes a second flange that extends away from the mounting plate in a direction toward the first flange and in an orientation parallel to the hollow sleeve, such that the mounting plate has an L-shaped cross section.
7. The apparatus of claim 6, wherein a rectangular channel is defined by the first flange, the second flange, and an outer surface of the hollow sleeve.

8. The apparatus of claim 7, wherein the rectangular channel is sized to accommodate a two inch by six inch board.
9. The apparatus of claim 6, wherein the second flange includes a plurality of apertures.
10. The apparatus of claim 6, wherein the mounting plate includes a lip that extends past the hollow sleeve, such that the mounting plate is longer than the planar base.
11. The apparatus of claim 10, wherein the lip is positioned on an opposite end of the mounting plate from the second flange.
12. The apparatus of claim 1, wherein the mounting plate includes a plurality of apertures formed in a surface of the mounting plate that is oriented parallel to the planar base.
13. The apparatus of claim 12, wherein the plurality of apertures are arranged such that each aperture of the plurality of apertures is positioned at a different corner of a common rectangle.
14. The apparatus of claim 1, wherein the apparatus is formed from a single piece of extruded aluminum.
15. An apparatus, comprising:
  - a hollow sleeve defining an open rectangular passage, the open rectangular passage having four walls;
  - a planar base forming a first wall of the four walls, wherein the planar base comprises:
    - a first flange that extends away from the planar base in an orientation parallel to the hollow sleeve, such that the planar base has an L-shaped cross section; and

a first plurality of apertures formed in the first flange; and  
a mounting plate forming a second wall of the four walls that is positioned opposite the first wall, such that the hollow sleeve is positioned between the planar base and the mounting plate, wherein the mounting plate comprises:

a second flange that extends away from the mounting plate in a direction toward the first flange and in an orientation parallel to the hollow sleeve, such that the mounting plate has an L-shaped cross section;

a second plurality of apertures formed in the second flange;

a third plurality of apertures formed in a surface of the mounting plate that is oriented parallel to the planar base; and

a lip positioned on an opposite end of the mounting plate from the second flange and extending past the hollow sleeve, such that the mounting plate is longer than the planar base.

16. The apparatus of claim 15, wherein the hollow sleeve, the planar base, and the mounting plate form a J shape.

17. The apparatus of claim 15, wherein the apparatus is formed from a single piece of extruded aluminum.

18. The apparatus of claim 15, wherein a rectangular channel is defined by the first flange, the second flange, and an outer surface of the hollow sleeve.

19. The apparatus of claim 18, wherein each of the rectangular passage and the rectangular channel is sized to accommodate a two inch by six inch board.

20. A deck substructure, comprising  
a rim joist coupled between a first deck joist and a second deck joist;  
a wood post bracket coupled to the rim joist, the wood post bracket comprising:

a hollow sleeve defining an open rectangular passage, the open rectangular passage having four walls;

a planar base forming a first wall of the four walls;

a mounting plate forming a second wall of the four walls that is positioned opposite the first wall, such that the hollow sleeve is positioned between the planar base and the mounting plate and the planar base and the mounting plate are oriented parallel to each other; and

a post mount coupled to the wood post bracket, the post mount comprising:

- a base plate secured to the mounting plate of the wood post bracket;

and

- a support pipe extending upward from the base plate.





200

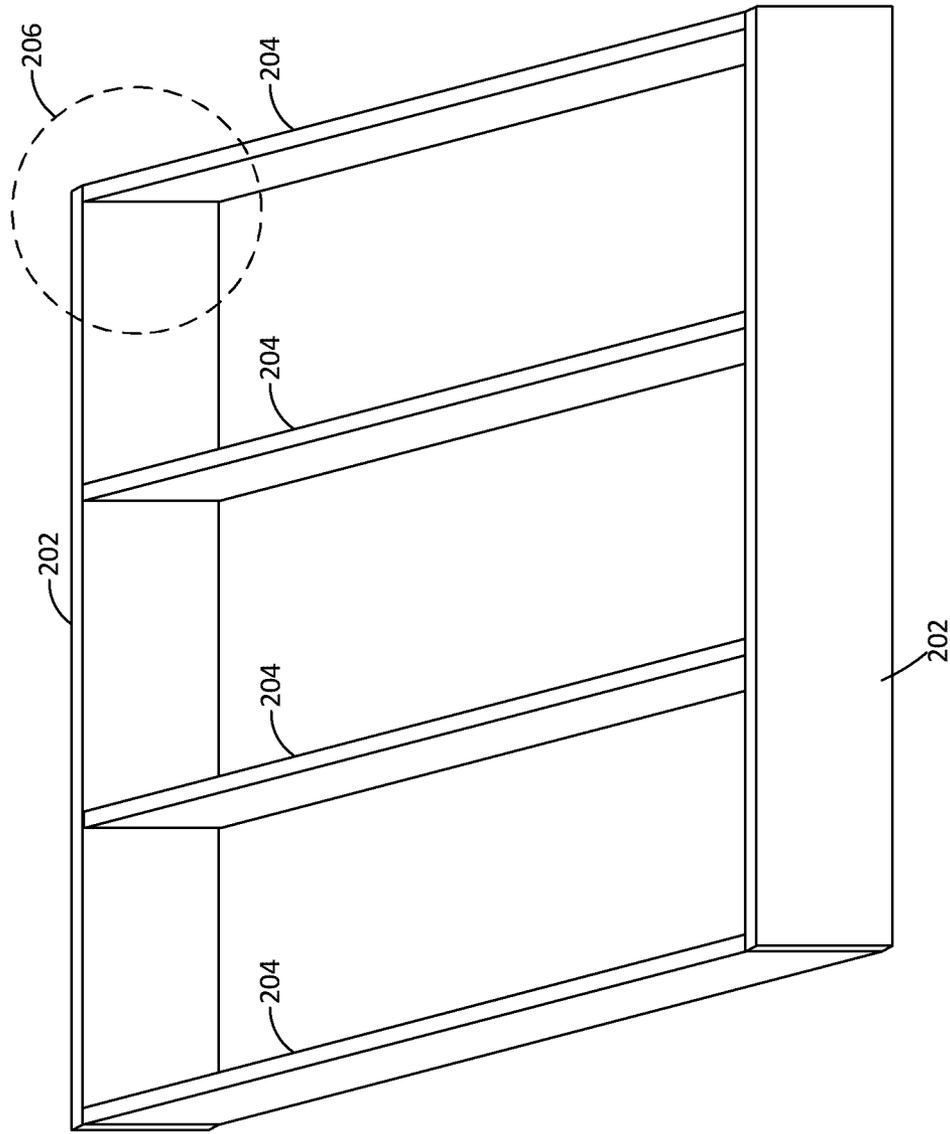


FIG. 2A



206

3/19

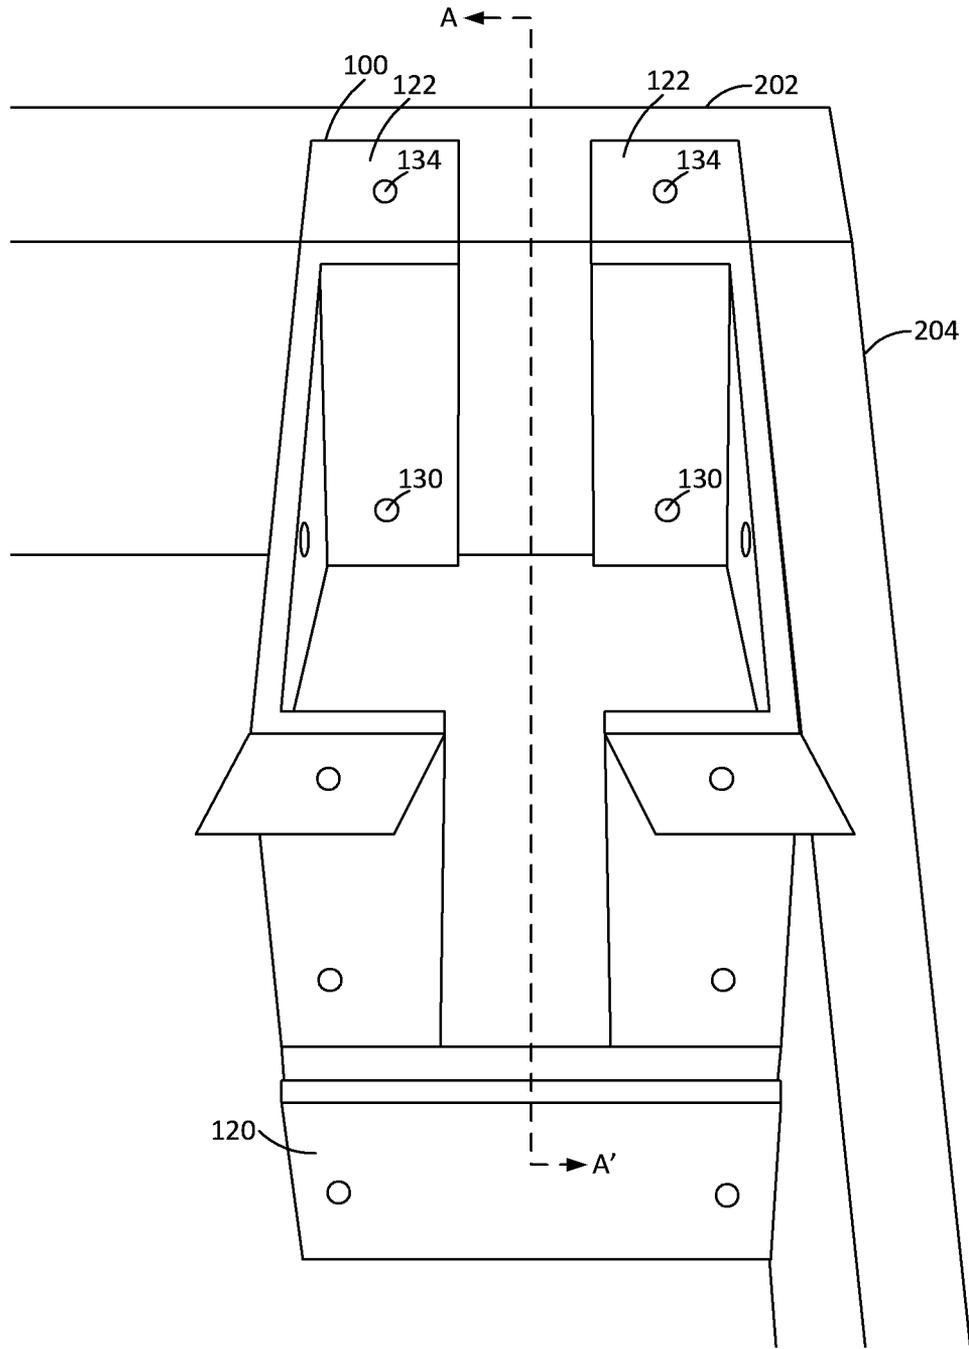


FIG. 2B

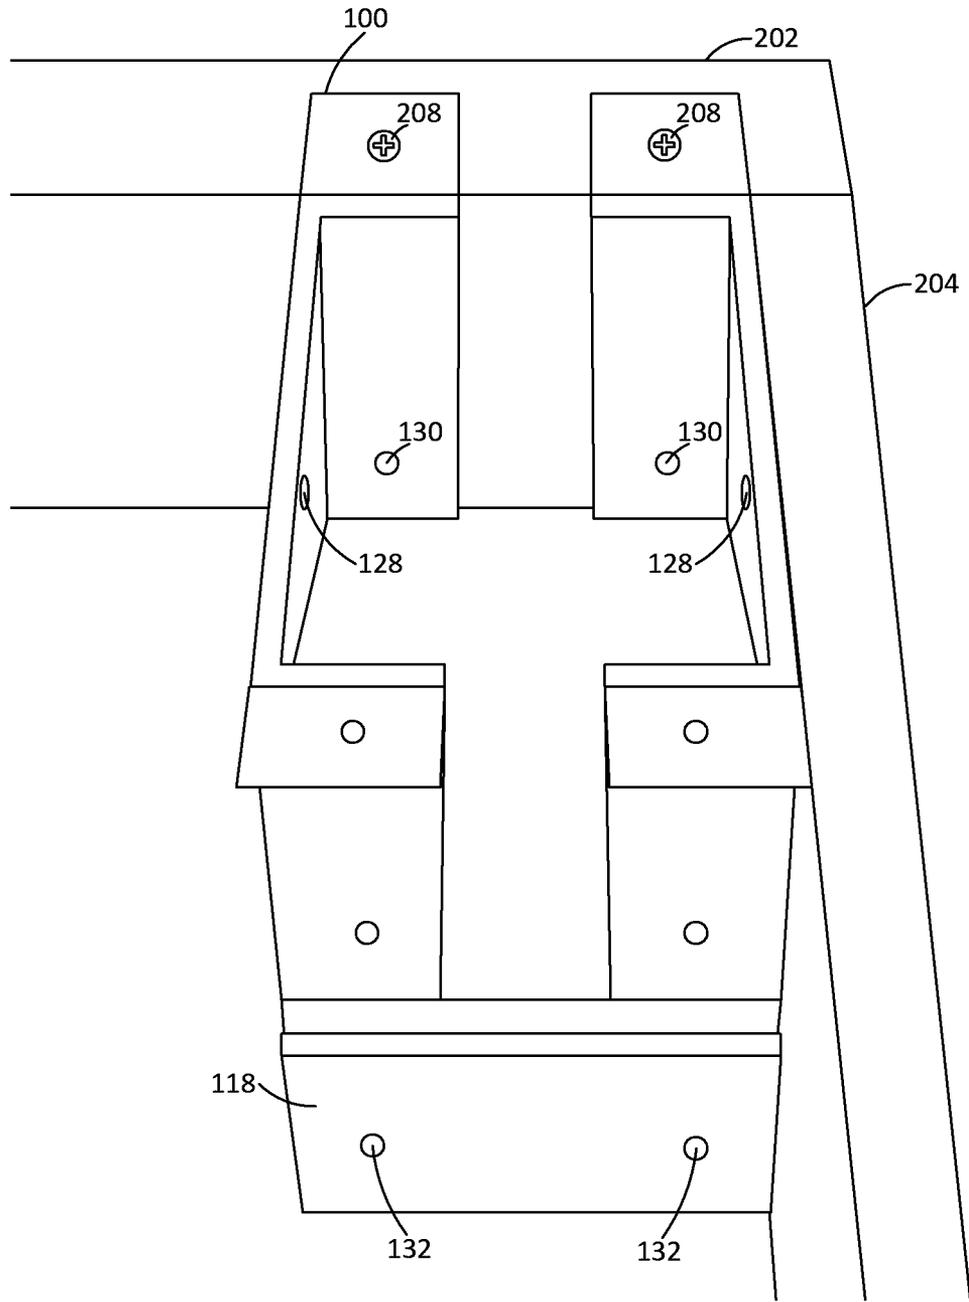


FIG. 2C

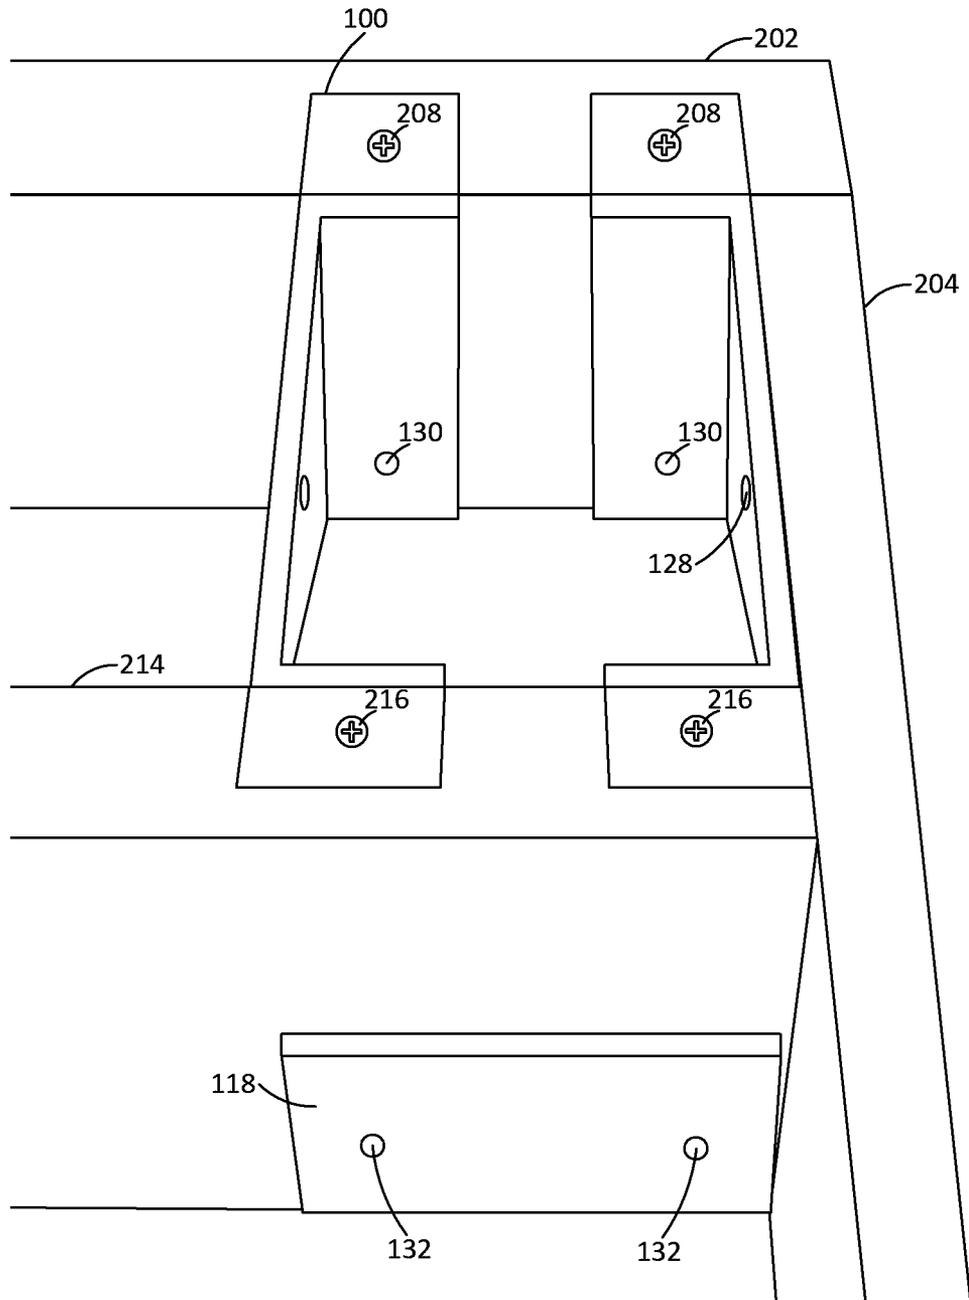


FIG. 2D

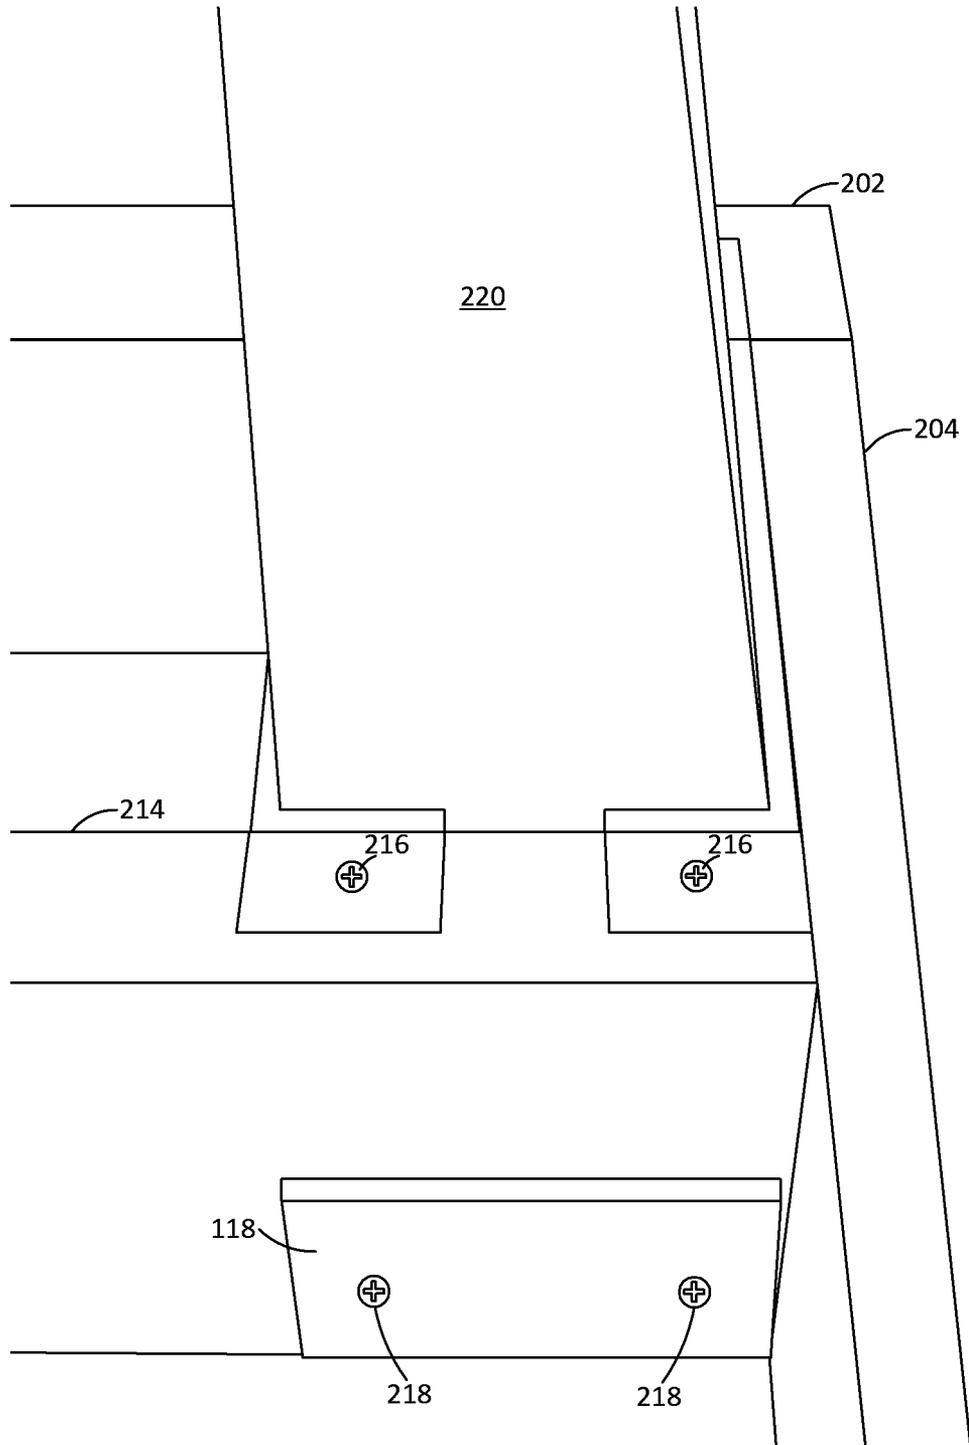


FIG. 2E

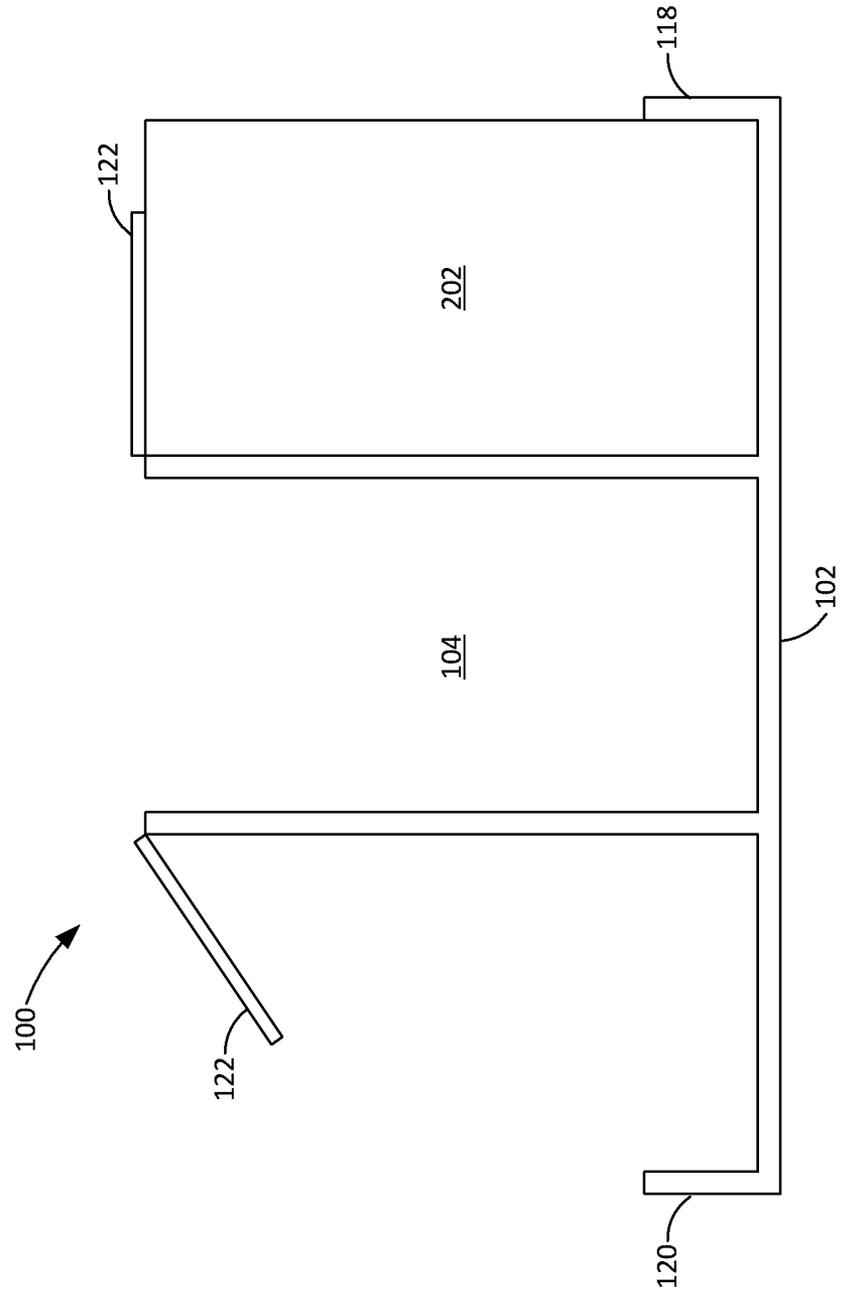


FIG. 3A

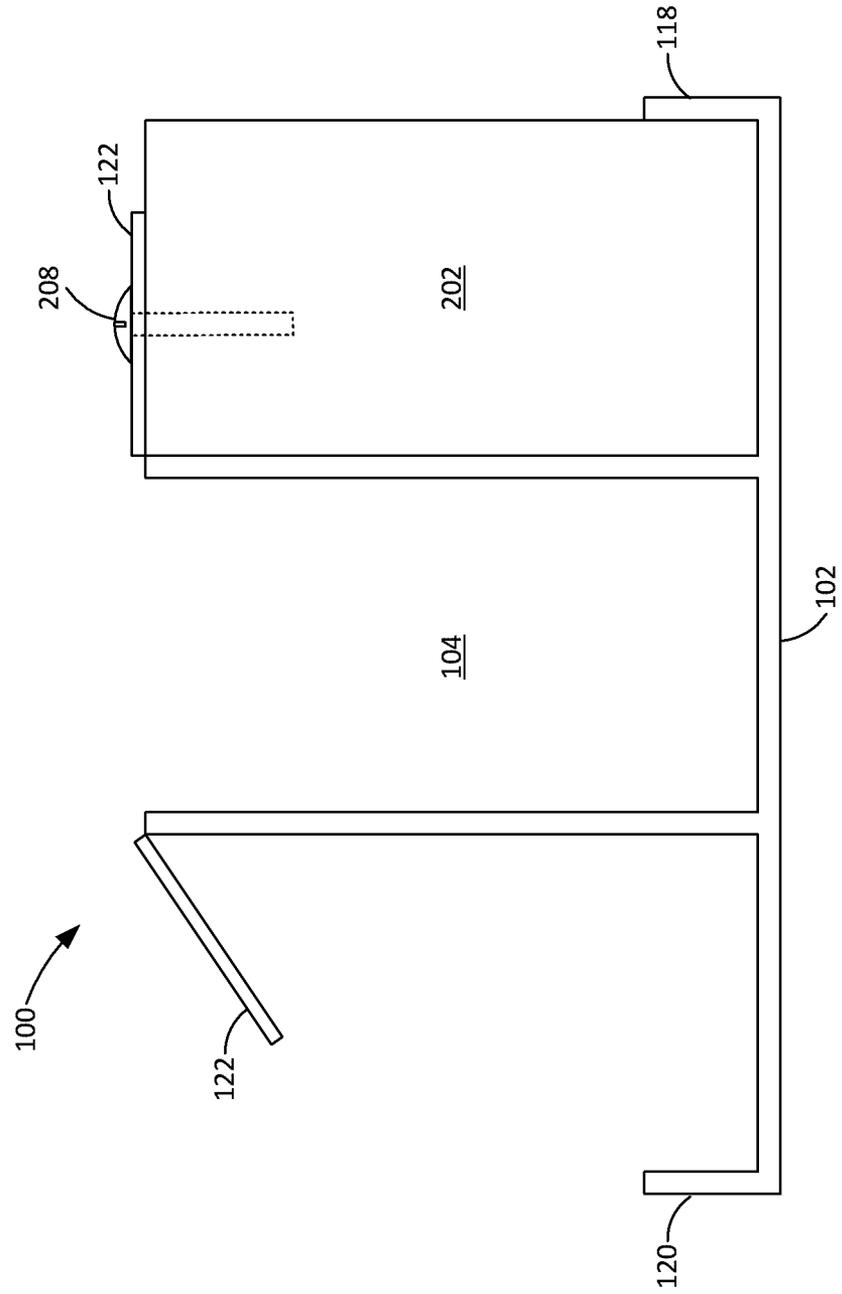


FIG. 3B

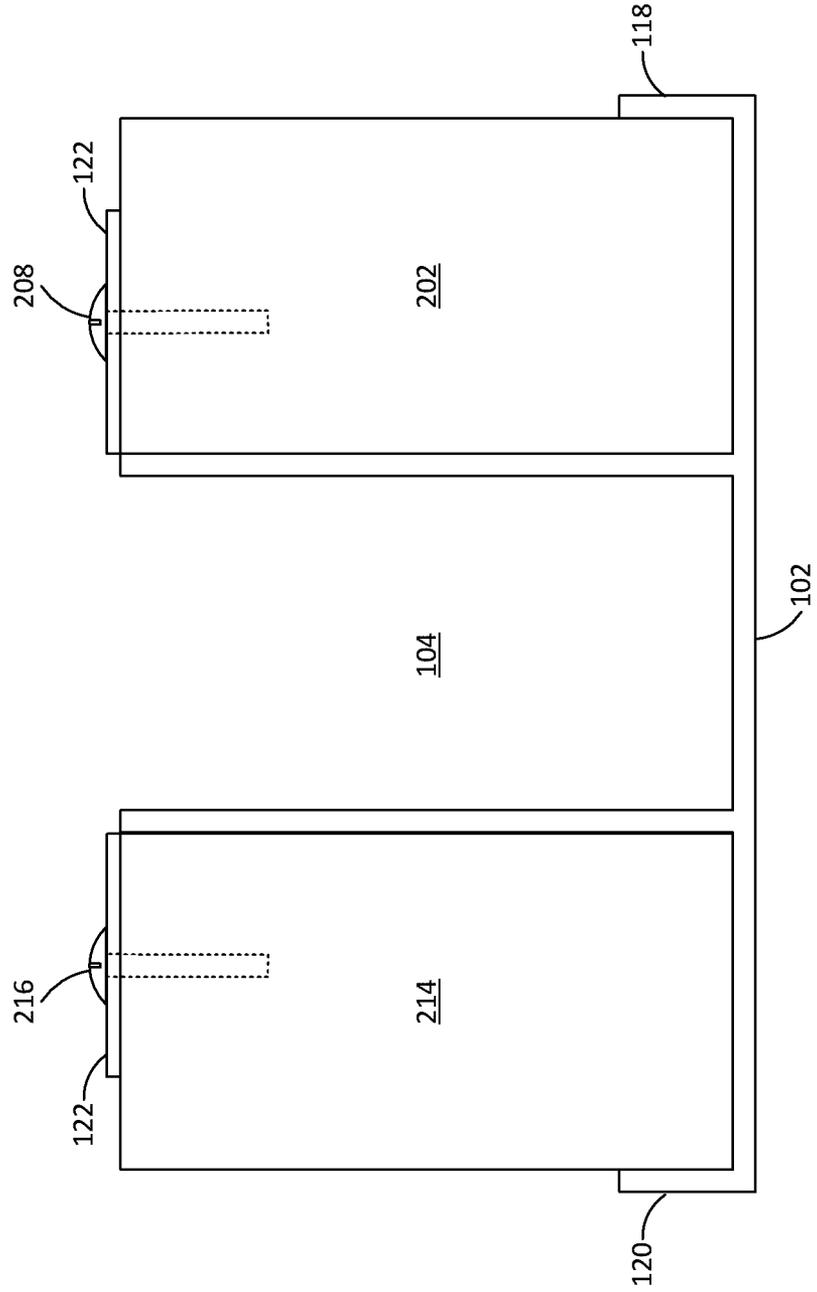


FIG. 3C



10/19

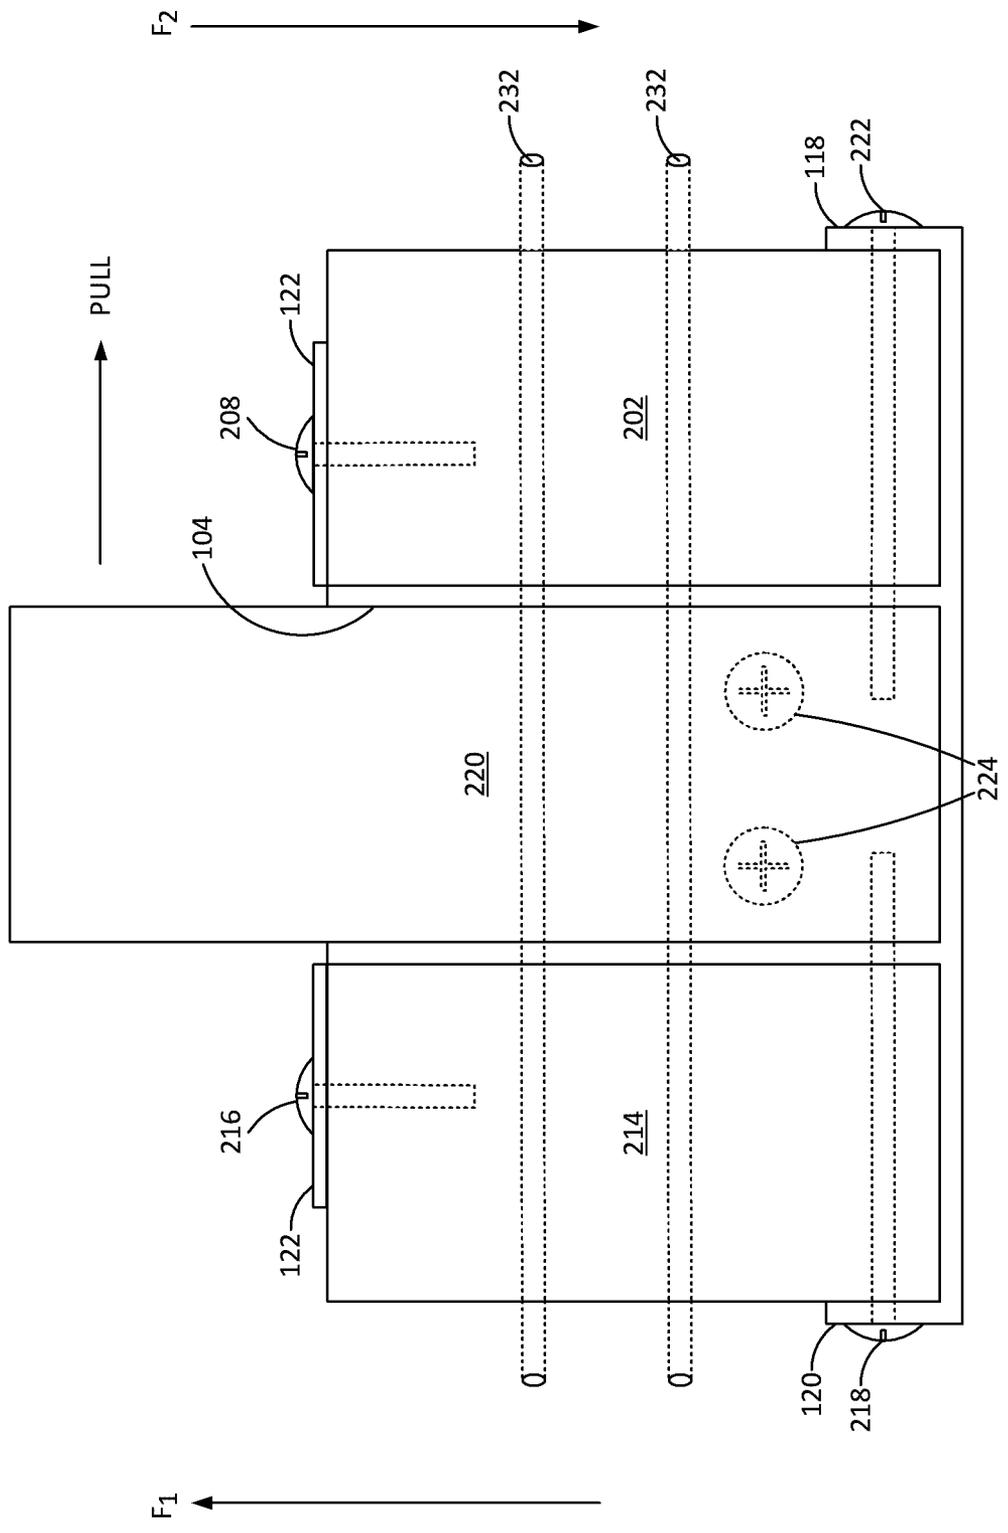


FIG. 3D



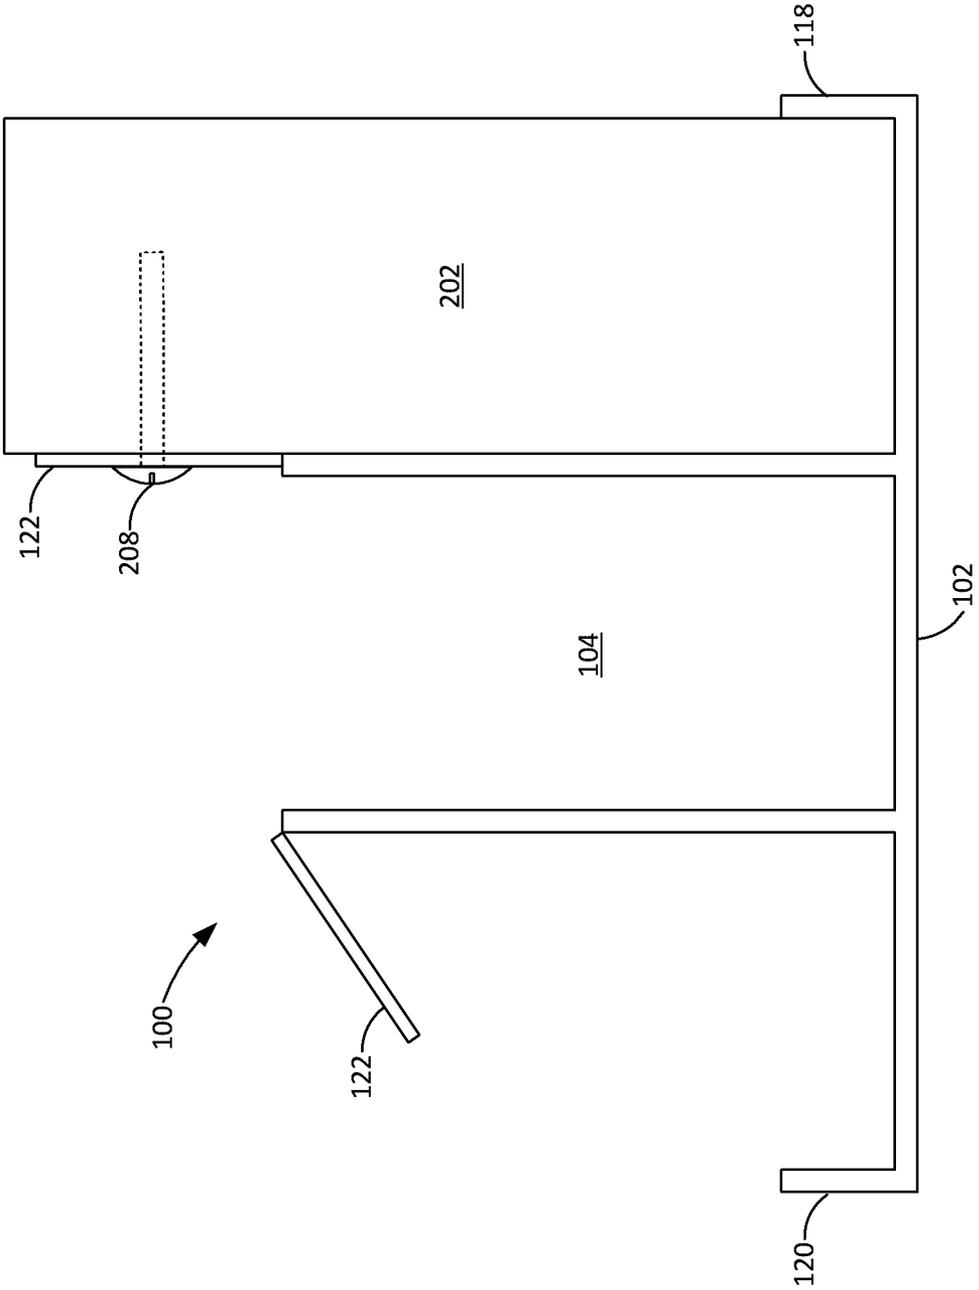


FIG. 3E



200

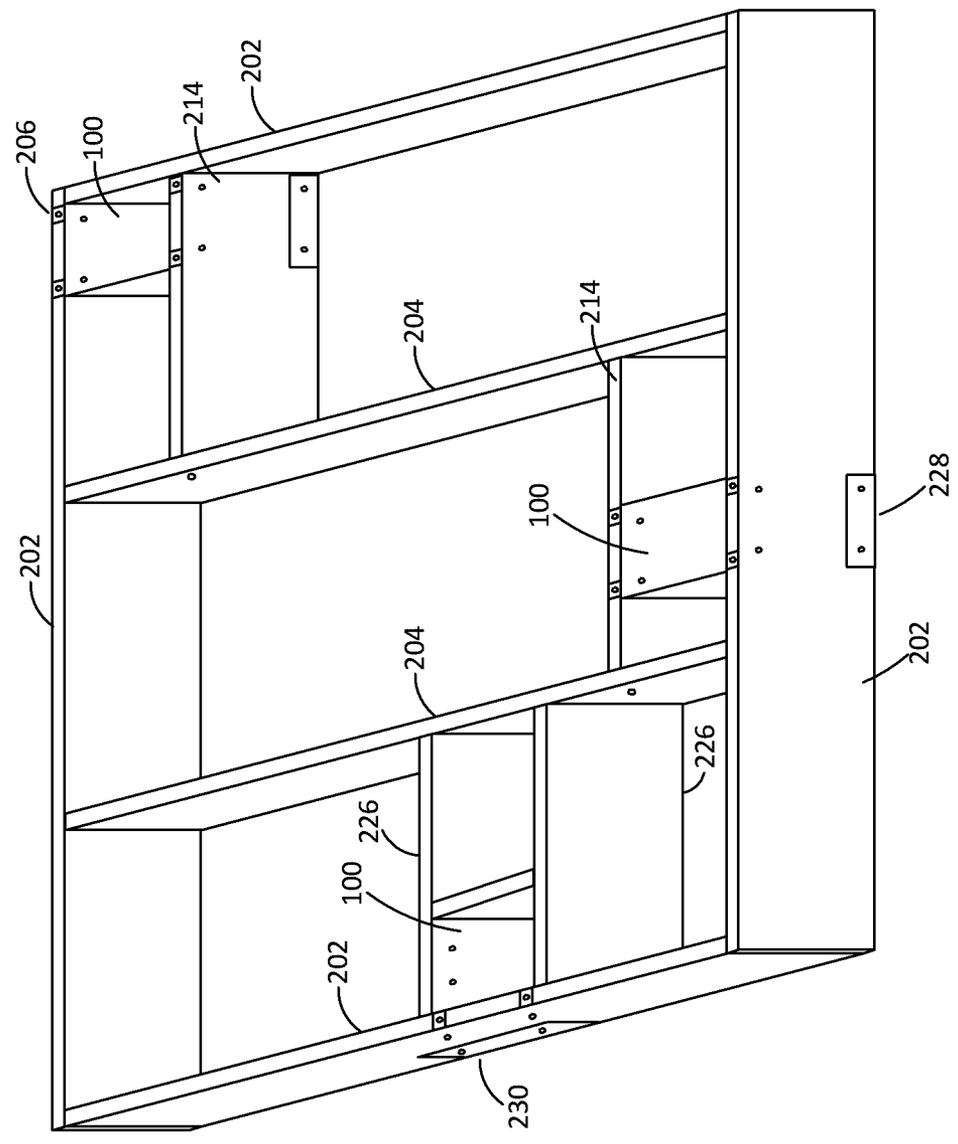


FIG. 4



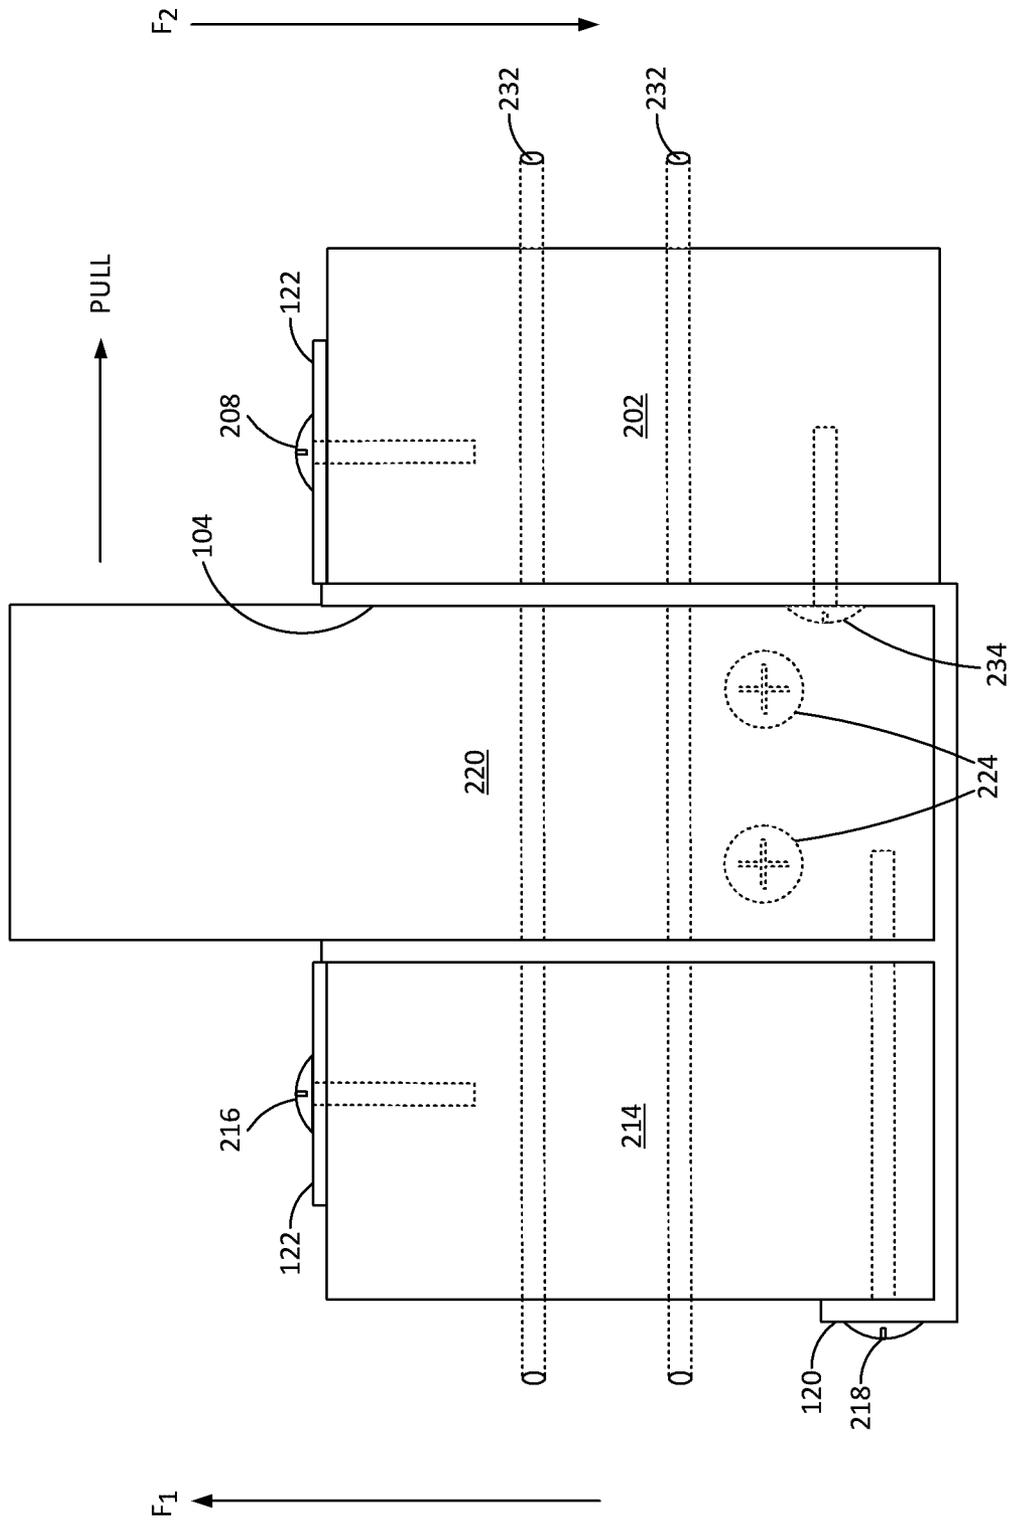


FIG. 5

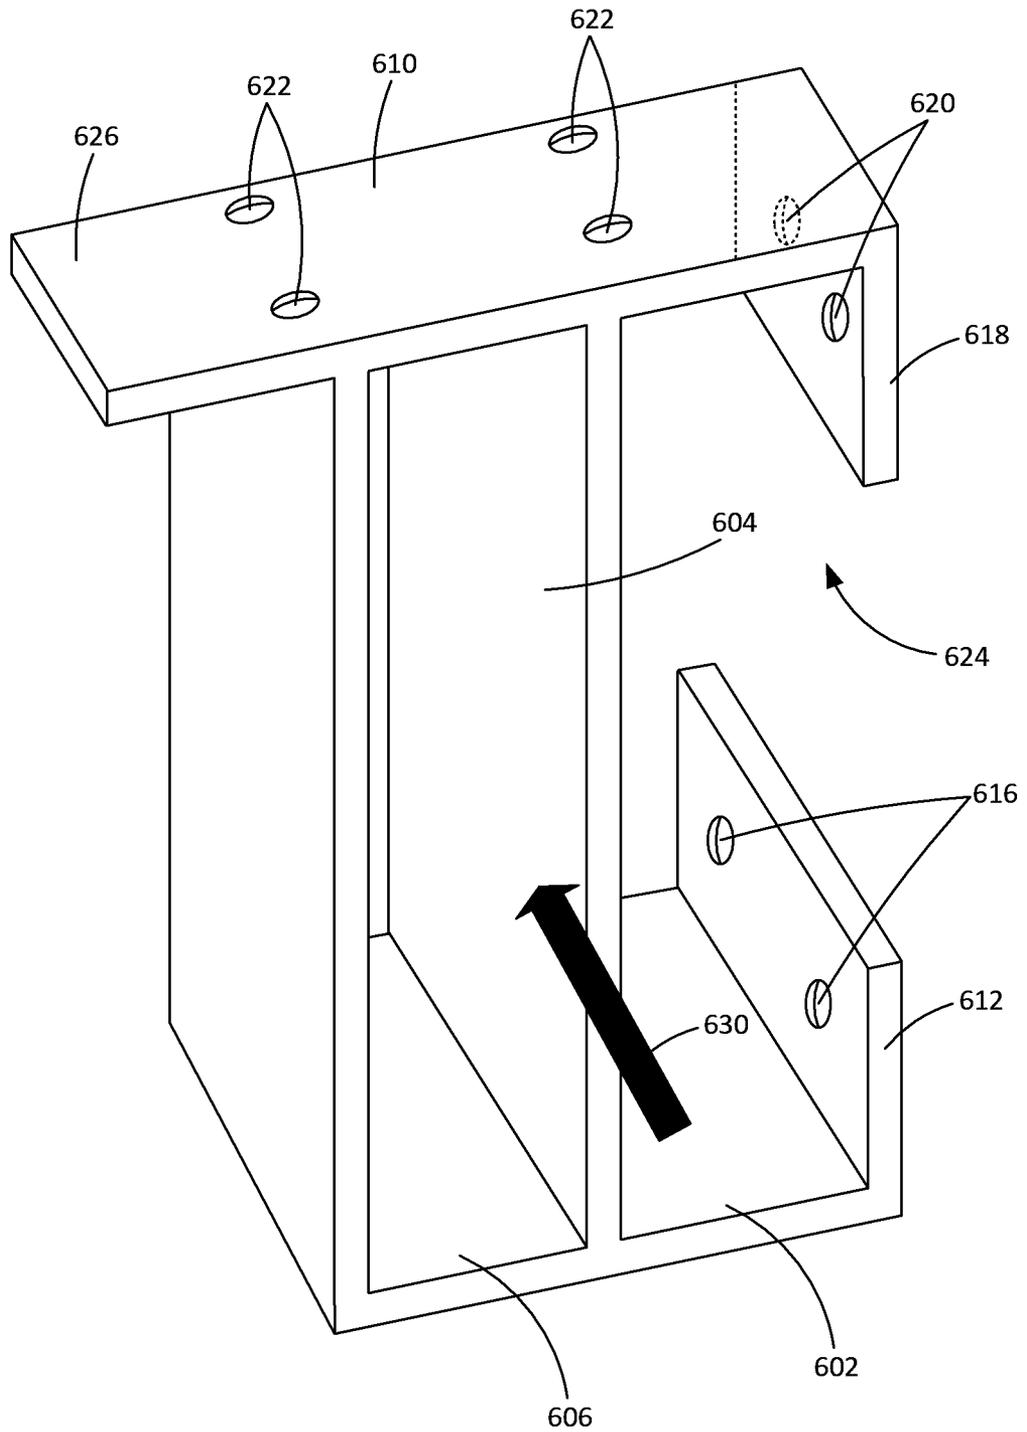


FIG. 6

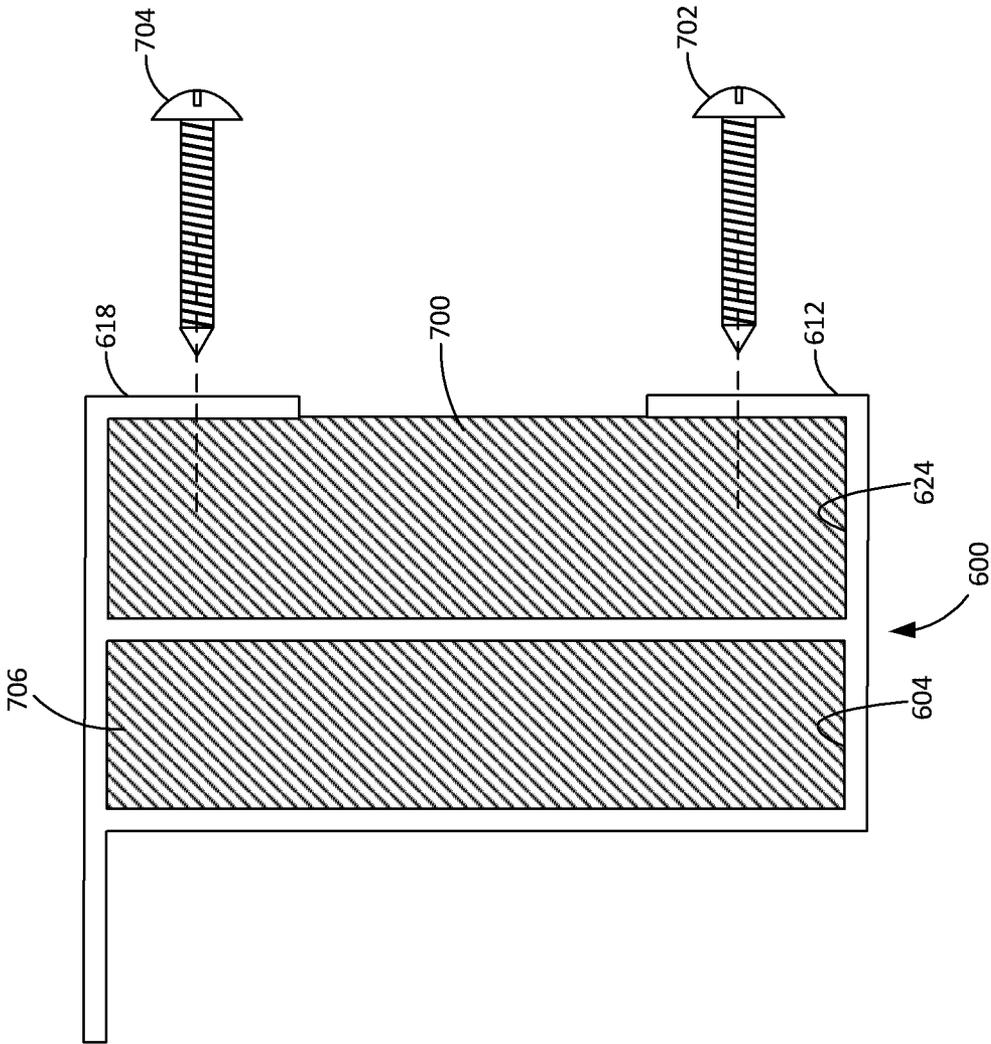


FIG. 7A

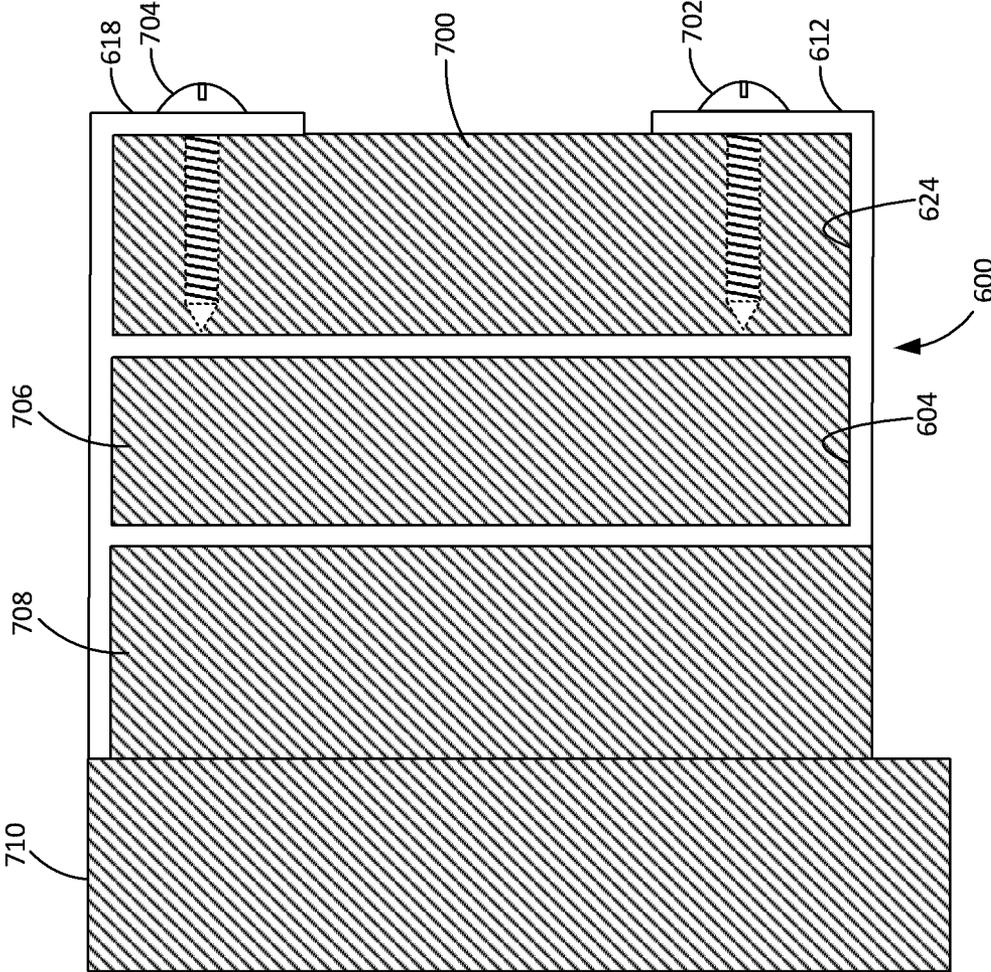


FIG. 7B

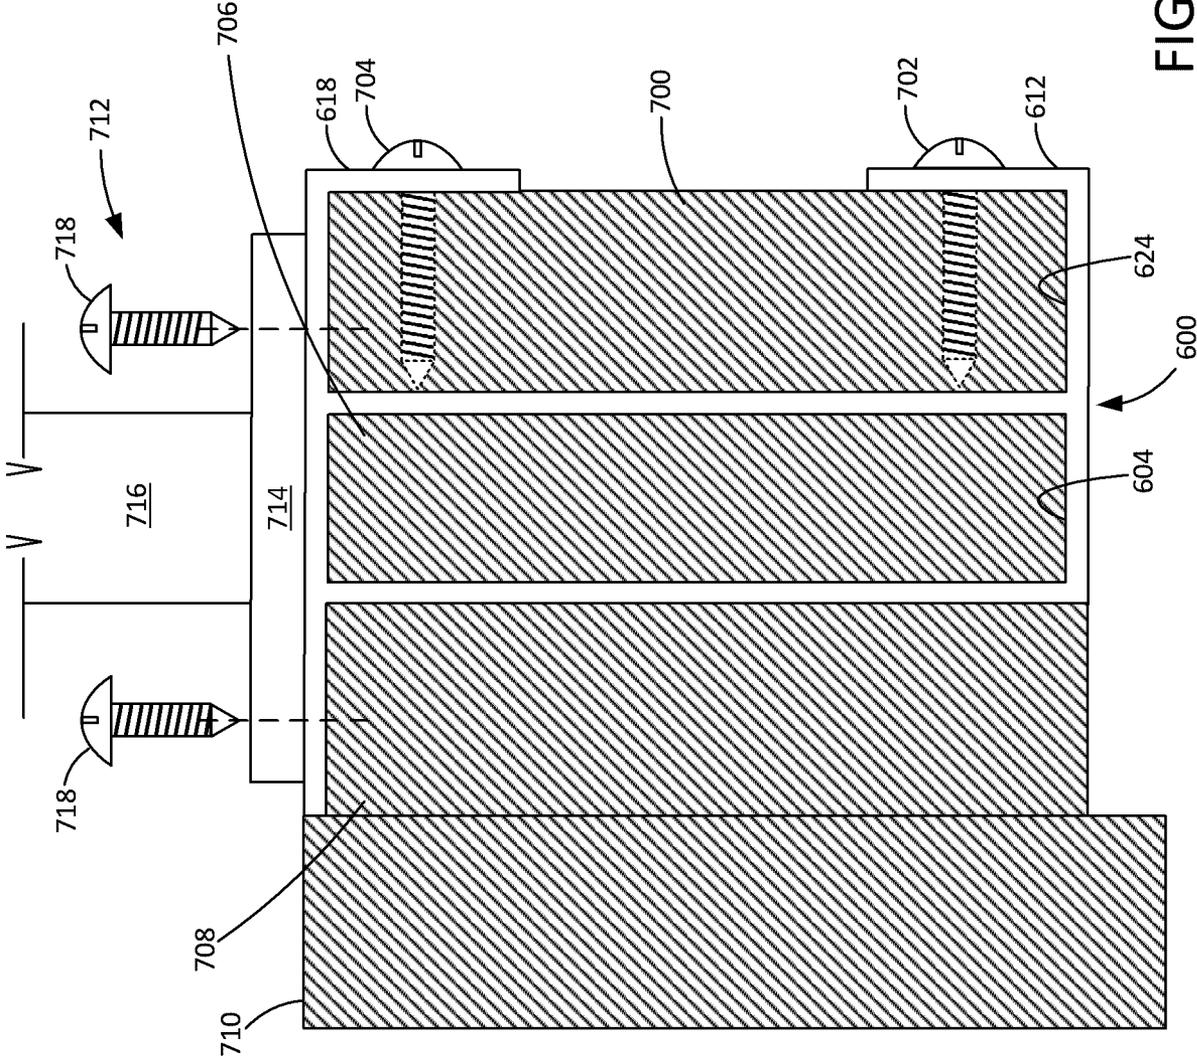


FIG. 7C

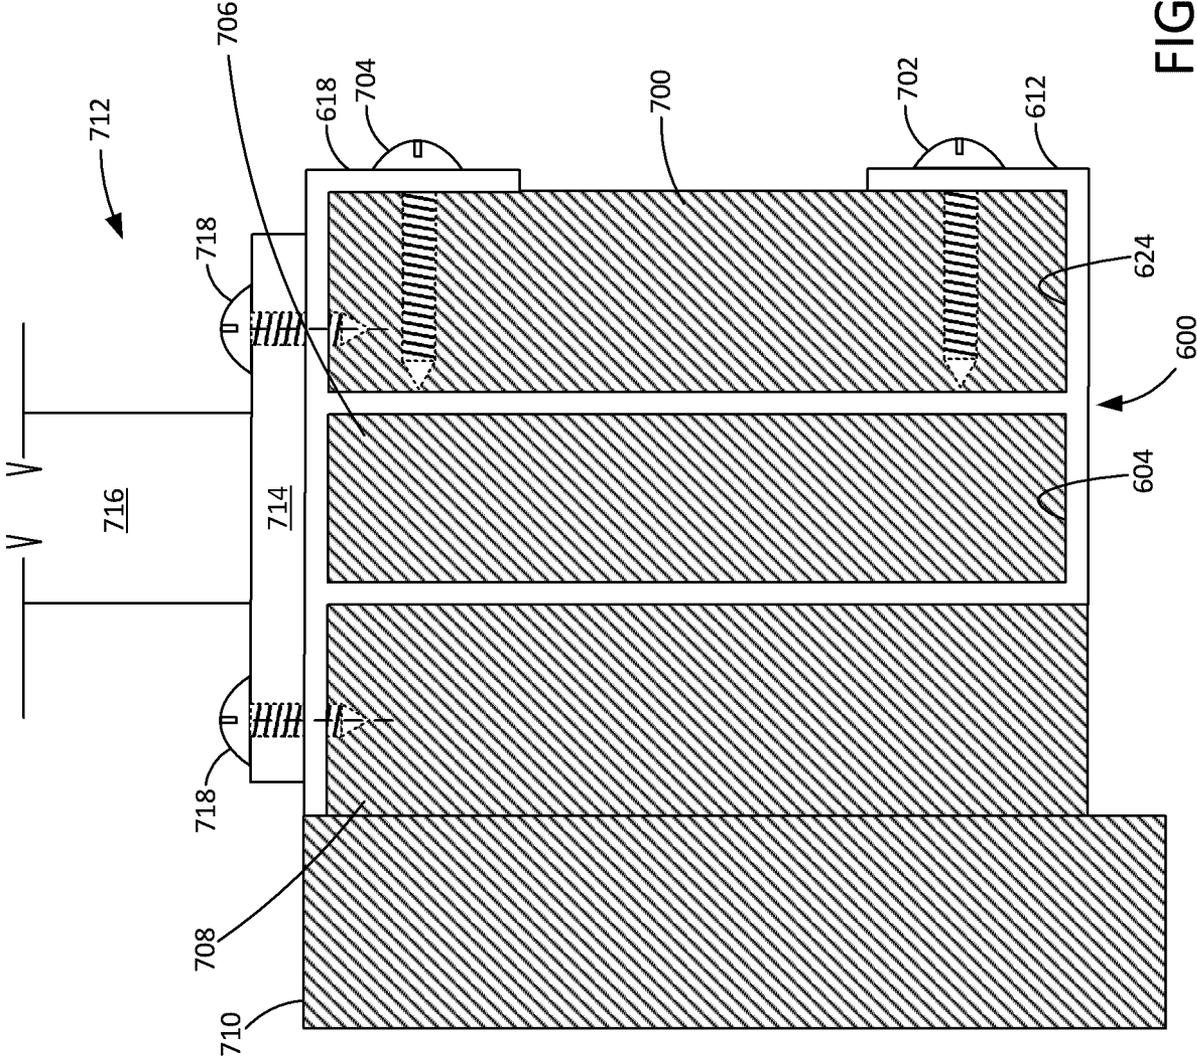


FIG. 7D

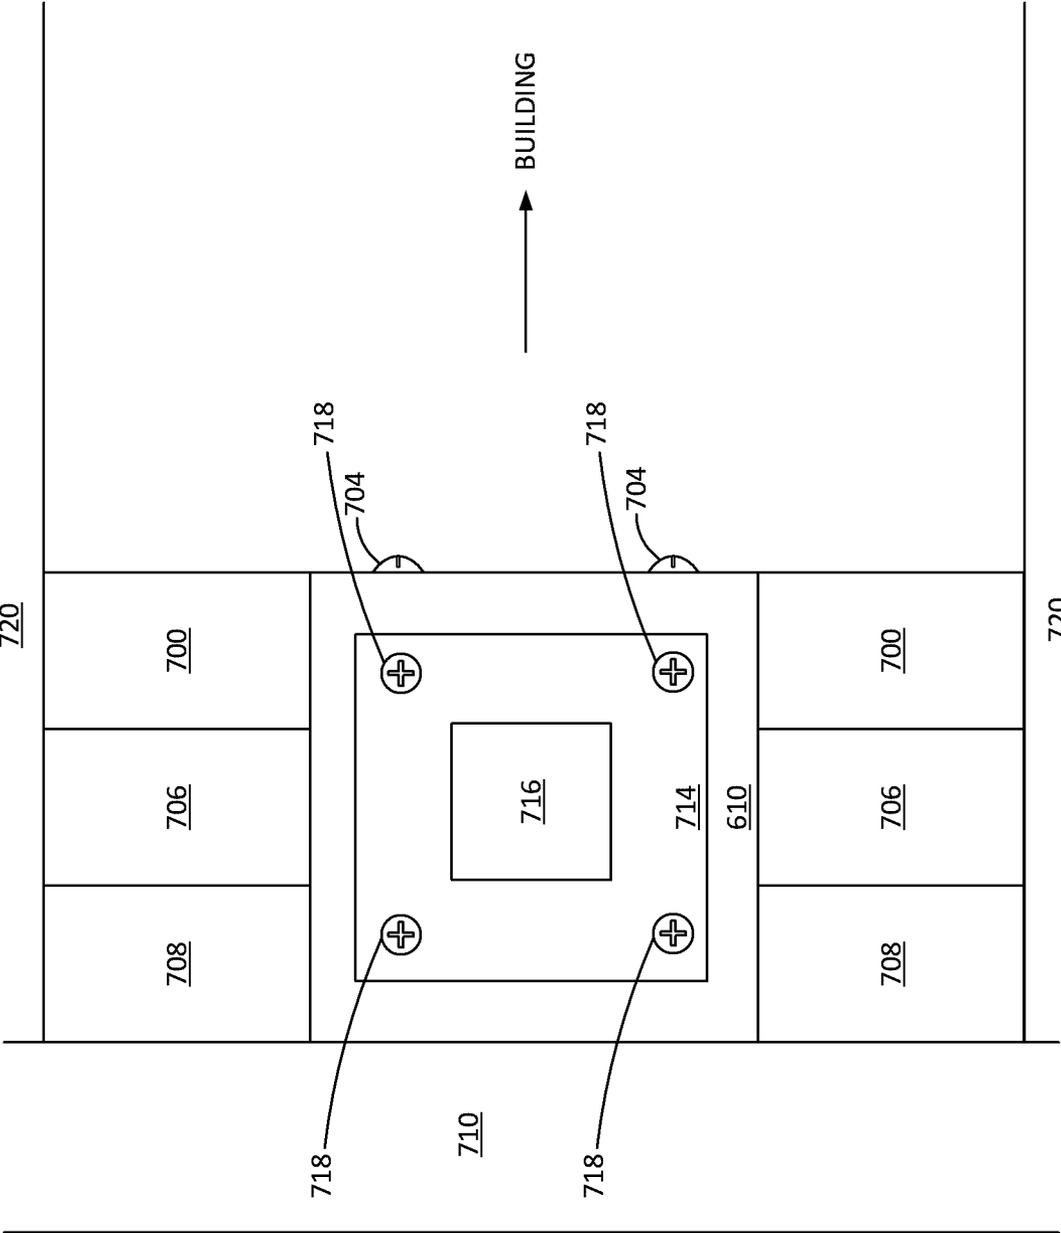


FIG. 8

