

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(10) International Publication Number

WO 2017/040385 A1

(43) International Publication Date
9 March 2017 (09.03.2017)

(51) International Patent Classification:

B01J 23/20 (2006.01) *B01J 27/18* (2006.01)
B01J 37/04 (2006.01) *B01J 35/02* (2006.01)
B01J 37/08 (2006.01) *B01J 37/00* (2006.01)
B01J 27/055 (2006.01) *C07C 51/00* (2006.01)

(21) International Application Number:

PCT/US2016/049224

(22) International Filing Date:

29 August 2016 (29.08.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/211,012 28 August 2015 (28.08.2015) US

(71) Applicant: THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).

(72) Inventors: VELASQUEZ, Juan, Esteban; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). COLLIAS, Dimitris, Ioannis; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). GODLEWSKI, Jane, Ellen; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).

(74) Agent: KREBS, Jay, A.; c/o the Procter & Gamble Company, Global Patent Services, One Procter & Gamble Plaza, C8-229, Cincinnati, OH 45202 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CATALYSTS FOR THE DEHYDRATION OF HYDROXYPROPIONIC ACID AND ITS DERIVATIVES

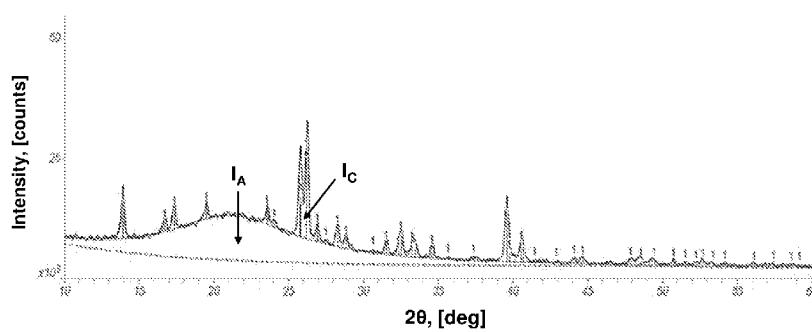


Fig. 1

(57) Abstract: Hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof are dehydrated using a catalyst and a method to produce bio-acrylic acid, acrylic acid derivatives, or mixtures thereof. A method to produce the dehydration catalyst is also provided.

WO 2017/040385 A1

CATALYSTS FOR THE DEHYDRATION OF HYDROXYPROPIONIC ACID AND ITS DERIVATIVES

FIELD OF THE INVENTION

5 The present invention generally relates to dehydration catalysts useful for the conversion of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof to acrylic acid, acrylic acid derivatives, or mixtures thereof. The invention also relates to methods of making such dehydration catalysts.

10 BACKGROUND OF THE INVENTION

Acrylic acid, acrylic acid derivatives, or mixtures thereof have a variety of industrial uses, typically consumed in the form of polymers. In turn, these polymers are commonly used in the manufacture of, among other things, adhesives, binders, coatings, paints, polishes, detergents, flocculants, dispersants, thixotropic agents, sequestrants, and superabsorbent polymers (SAP), 15 which are used in disposable absorbent articles, comprising diapers and hygienic products, for example. Acrylic acid is commonly made from petroleum sources. For example, acrylic acid has long been prepared by catalytic oxidation of propylene. These and other methods of making acrylic acid from petroleum sources are described in the Kirk-Othmer Encyclopedia of Chemical Technology, Vol. 1, pgs. 342 - 369 (5th Ed., John Wiley & Sons, Inc., 2004). As petrochemical 20 resources become increasingly scarce, more expensive, and subject to regulations for CO₂ emissions, there exists a growing need for bio-based acrylic acid, acrylic acid derivatives, or mixtures thereof that can serve as an alternative to petroleum-based acrylic acid, acrylic acid derivatives, or mixtures thereof.

Many attempts have been made over the last 80 years to make bio-based acrylic acid, 25 acrylic acid derivatives, or mixtures thereof from non-petroleum sources, such as lactic acid (also known as 2-hydroxypropionic acid), lactic acid derivatives (e.g. alkyl 2-acetoxy-propionate and 2-acetoxy propionic acid), 3-hydroxypropionic acid, glycerin, carbon monoxide and ethylene oxide, carbon dioxide and ethylene, and crotonic acid. From these non-petroleum sources, only lactic acid is produced today in high yield from sugar ($\geq 90\%$ of theoretical yield, or 30 equivalently, ≥ 0.9 g of lactic acid per g of sugar). Furthermore, commercial lactic acid purity and economics could favor producing acrylic acid at a cost competitive to petroleum-based acrylic acid. As such, lactic acid or lactate presents a real opportunity of serving as a feedstock for bio-based acrylic acid, acrylic acid derivatives, or mixtures thereof. Also, 3-hydroxypropionic acid is expected to be produced at commercial scale in a few years, and as such, 3-

hydropropionic acid will present another real opportunity of serving as feedstock for bio-based acrylic acid, acrylic acid derivatives, or mixtures thereof. Sulfate salts, phosphate salts, mixtures of sulfate and phosphate salts, bases, zeolites or modified zeolites, metal oxides or modified metal oxides, and supercritical water are the main catalysts which have been used to dehydrate 5 lactic acid or lactate to acrylic acid, acrylic acid derivatives, or mixtures thereof in the past with varying success.

For example, U.S. Patent No. 4,786,756 (issued in 1988), describes the vapor phase dehydration of lactic acid or ammonium lactate to acrylic acid using aluminum phosphate (AlPO₄) treated with an aqueous inorganic base as a catalyst. As an example, the '756 patent 10 discloses a maximum yield of acrylic acid of 43.3% when lactic acid was fed into the reactor at approximately atmospheric pressure, and a respective yield of 61.1% when ammonium lactate was fed into the reactor. In both examples, acetaldehyde was produced at yields of 34.7% and 11.9%, respectively, and other side products were also present in large quantities, such as propionic acid, CO, and CO₂. Omission of the base treatment caused increased amounts of the 15 side products. Another example is Hong *et al.*, *Appl. Catal. A: General* 396:194-200 (2011), who developed and tested composite catalysts made with Ca₃(PO₄)₂ and Ca₂(P₂O₇) salts with a slurry-mixing method. The catalyst with the highest yield of acrylic acid from methyl lactate was the 20 50%-50% (by weight) catalyst. It yielded 68% acrylic acid, about 5% methyl acrylate, and about 14% acetaldehyde at 390°C. The same catalyst achieved 54% yield of acrylic acid, 14% yield of acetaldehyde, and 14% yield of propionic acid from lactic acid.

Prof. D. Miller's group at Michigan State University (MSU) published many papers on the dehydration of lactic acid or lactic acid esters to acrylic acid and 2,3-pentanedione, such as Gunter *et al.*, *J. Catalysis* 148:252-260 (1994); and Tam *et al.*, *Ind. Eng. Chem. Res.* 38:3873-3877 (1999). The best acrylic acid yields reported by the group were about 33% when lactic acid 25 was dehydrated at 350 °C over low surface area and pore volume silica impregnated with NaOH. In the same experiment, the acetaldehyde yield was 14.7% and the propionic acid yield was 4.1%. Examples of other catalysts tested by the group were Na₂SO₄, NaCl, Na₃PO₄, NaNO₃, Na₂SiO₃, Na₄P₂O₇, NaH₂PO₄, Na₂HPO₄, Na₂HAsO₄, NaC₃H₅O₃, NaOH, CsCl, Cs₂SO₄, KOH, CsOH, and LiOH. In all cases, the above referenced catalysts were tested in gas phase reactions 30 with low partial pressures of water, as commonly suggested in the art for dehydration reactions. Finally, the group suggested that the acrylic acid yield is increased (and the by-product yields are decreased) when the surface area of the silica support is low, the reaction temperature is high, the reaction pressure is low, and the residence time of the reactants in the catalyst bed is short.

Finally, the Chinese patent application 200910054519.7 discloses the use of ZSM-5 molecular sieves modified with aqueous alkali (such as NH₃, NaOH, and Na₂CO₃) or a phosphoric acid salt (such as NaH₂PO₄, Na₂HPO₄, LiH₂PO₄, LaPO₄, etc.). The best yield of acrylic acid achieved in the dehydration of lactic acid was 83.9%, however that yield came at 5 very long residence times.

Therefore, the manufacture of acrylic acid, acrylic acid derivatives, or mixtures thereof from lactic acid or lactate by processes, such as those described in the literature noted above, has demonstrated: 1) yields of acrylic acid, acrylic acid derivatives, or mixtures thereof not exceeding 70% at short residence times; 2) low selectivities of acrylic acid, acrylic acid 10 derivatives, or mixtures thereof, i.e., significant amounts of undesired side products, such as acetaldehyde, 2,3-pentanedione, propionic acid, CO, and CO₂; 3) long residence times in the catalyst beds; and 4) catalyst deactivation in short time on stream (TOS). The side products can deposit onto the catalyst resulting in fouling, and premature and rapid deactivation of the catalyst. Further, once deposited, these side products can catalyze other undesired reactions. Aside from 15 depositing on the catalysts, these side products, even when present in only small amounts, impose additional costs in processing acrylic acid (when present in the reaction product effluent) towards the manufacture of SAP, for example. These deficiencies of the prior art processes and catalysts render them commercially non-viable.


Accordingly, there is a need for catalysts, methods of making the catalysts, and processes 20 for the dehydration of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof to acrylic acid, acrylic acid derivatives, or mixtures thereof, with high yield and selectivity toward acrylic acid, in an efficient manner (i.e. short residence times), and with suitable catalyst longevity.

25

SUMMARY OF THE INVENTION


In one embodiment of the present invention, a dehydration catalyst is provided. The dehydration catalyst comprises:

(a) one or more amorphous phosphate salts consisting essentially of: i) one or more monovalent cations, and ii) one or more phosphate anions selected from the group represented 30 by empirical formula (I):





wherein x is any real number equal to or greater than 0 and equal to or less than 1; wherein said one or more amorphous phosphate salts are neutrally charged;

5 (b) one or more crystalline phosphate salts consisting essentially of: i) one or more polyvalent cations, and ii) one or more phosphate anions selected from the group represented by molecular formula (II):



wherein f is a positive integer; wherein g is a positive integer or zero; wherein h is an integer; wherein (f-2g-h) is equal to or greater than zero; wherein (4f-g) is greater than zero; wherein (2f+h) is greater than zero; wherein (4h/f) is equal to or greater than -2 and equal to or less than 1; wherein said one or more crystalline phosphate salts are neutrally charged; and

10 (c) one or more non-phosphate salts consisting essentially of: i) one or more polyvalent cations, and ii) one or more non-phosphate anions selected from the group represented by molecular formulae (III) and (IV):




wherein a and b are positive integers or zero; wherein c, d, and e are positive integers; wherein (a-2b) is equal to or greater than zero; wherein (2c-a) is greater than zero; wherein said one or more non-phosphate salts are neutrally charged;

20 and wherein said one or more crystalline phosphate salts and said one or more non-phosphate salts are substantially chemically inert to said one or more amorphous phosphate salts.

In another embodiment of the present invention, a method of preparing a dehydration catalyst is provided. The method comprises contacting:


(a) a dehydration catalyst precursor mixture comprising: one or more amorphous phosphate salt precursors, one or more crystalline phosphate salts, and one or more non-phosphate salts; 25 wherein said one or more crystalline phosphate salts and said one or more non-phosphate salts are substantially chemically inert to said one or more amorphous phosphate salt precursors;

(b) wherein said one or more amorphous phosphate salt precursors consist essentially of: i) one or more monovalent cations, and ii) one or more phosphate anions selected from the group represented by molecular formulae (V) and (VI):

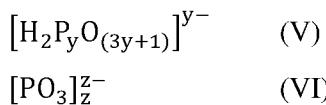


wherein y is any integer number equal to or greater than 1 and z is any integer number equal to or greater than 3; wherein said one or more amorphous phosphate salt precursors are neutrally charged;

wherein said one or more crystalline phosphate salts consists essentially of: i) one or more polyvalent cations, and ii) one or more phosphate anions selected from the group represented by molecular formula (II):



wherein f is a positive integer; wherein g is a positive integer or zero; wherein h is an integer; wherein (f-2g-h) is equal to or greater than zero; wherein (4f-g) is greater than zero; wherein (2f+h) is greater than zero; wherein (4h/f) is equal to or greater than -2 and equal to or less than 1; wherein said one or more crystalline phosphate salts are neutrally charged; and wherein said one or more non-phosphate salts consist essentially of: i) one or more polyvalent cations, and ii) one or more non-phosphate anions selected from the group represented by molecular formulae (III) and (IV):

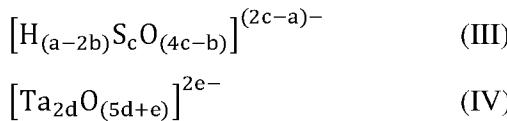

wherein a and b are positive integers or zero; wherein c, d, and e are positive integers; wherein (a-2b) is equal to or greater than zero; wherein (2c-a) is greater than zero; wherein said one or more non-phosphate salts are neutrally charged; with


b) a gas mixture comprising water vapor;

wherein the water partial pressure in said gas mixture is equal to or greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salt precursors; wherein said contacting step between said dehydration catalyst precursor mixture and said gas mixture is performed at a temperature equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salt precursors; and wherein one or more amorphous phosphate salts are produced as a result of said one or more amorphous phosphate salt precursors being contacted with said water vapor.

In another embodiment of the present invention, a method of preparing a dehydration catalyst is provided. The method comprises contacting:


(a) a dehydration catalyst precursor mixture comprising: one or more amorphous phosphate salt precursors, one or more crystalline phosphate salts, and one or more non-phosphate salts;

wherein said one or more crystalline phosphate salts and said one or more non-phosphate salts are substantially chemically inert to said one or more amorphous phosphate salt precursors; wherein said one or more amorphous phosphate salt precursors consist essentially of: i) one or more monovalent cations; and ii) one or more phosphate anions selected from the group 5 represented by molecular formulae (V) and (VI):




wherein y is any integer number equal to or greater than 1 and z is any integer number equal to or greater than 3; wherein said one or more amorphous phosphate salt precursors are neutrally 10 charged;

wherein said one or more crystalline phosphate salts consists essentially of: i) one or more polyvalent cations, and ii) one or more phosphate anions selected from the group represented by molecular formula (II):



15 wherein f is a positive integer; wherein g is a positive integer or zero; wherein h is an integer; wherein (f-2g-h) is equal to or greater than zero; wherein (4f-g) is greater than zero; wherein (2f+h) is greater than zero; wherein (4h/f) is equal to or greater than -2 and equal to or less than 1; wherein said one or more crystalline phosphate salts are neutrally charged; and wherein said one or more non-phosphate salts consist essentially of: i) one or more polyvalent 20 cations, and ii) one or more non-phosphate anions selected from the group represented by molecular formulae (III) and (IV):



wherein a and b are positive integers or zero; wherein c, d, and e are positive integers; wherein (a-2b) is equal to or greater than zero; wherein (2c-a) is greater than zero; wherein said one or more non-phosphate salts are neutrally charged; with

(b) a gas mixture comprising water;

5 wherein the water partial pressure in said gas mixture is equal to or greater than about 4.0 bar; wherein said contacting step between said dehydration catalyst precursor mixture and said gas mixture is performed at a temperature equal to or greater than about 250 °C; and wherein one or more amorphous phosphate salts are produced as a result of said one or more amorphous phosphate salt precursors being contacted with said water vapor.

10 In yet another embodiment of the present invention, a method of preparing a dehydration catalyst is provided. The method comprises contacting:

(a) a dehydration catalyst precursor mixture comprising: i) KH_2PO_4 or $(\text{KPO}_3)_n$, ii) $\text{Ba}_2\text{P}_2\text{O}_7$, and iii) BaSO_4 ; with

(b) a gas mixture comprising water vapor;

15 wherein the water partial pressure in said gas mixture is equal to or greater than the water partial pressure at the triple point of KH_2PO_4 or $(\text{KPO}_3)_n$; wherein said contacting step between said dehydration catalyst precursor mixture and said gas mixture is performed at a temperature equal to or greater than the temperature at the triple point of KH_2PO_4 or $(\text{KPO}_3)_n$; and wherein one or more amorphous phosphate salts are produced as a result of said KH_2PO_4 or $(\text{KPO}_3)_n$ being 20 contacted with said water vapor.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the disclosure, reference should be made to the 25 following detailed description and drawing Figures.

FIG. 1 illustrates the calculation of amorphous content in the dehydration catalyst using an XRD technique. The separate amorphous (I_A) and crystalline (I_C) contributions to the scattering pattern are determined using a profile-fitting technique, after appropriate background subtraction.

30 FIG. 2 illustrates a typical water partial pressure versus temperature phase equilibrium diagram of a dehydration catalyst (amorphous phosphate salt) and its precursor phosphate salts (crystalline phosphate salts). The triple point is located in the interception of the three phase boundary curves. M^I is a monovalent cation. The reported values of water partial pressure are

only an illustration and do not represent the real values for every specific dehydration catalyst described in the current invention.

While the disclosed catalysts and methods are susceptible of embodiments in various forms, there are illustrated in the figures (and will hereafter be described) specific embodiments 5 of the invention, with the understanding that the disclosure is intended to be illustrative, and is not intended to limit the invention to the specific embodiments described and illustrated herein.

DETAILED DESCRIPTION OF THE INVENTION

I. Definitions

10 As used herein, the term “catalyst” refers to either a pre-reaction catalyst (also called a catalyst precursor mixture) or an *in-situ* catalyst. The pre-reaction catalyst is the catalyst loaded into the chemical reactor, and the *in-situ* catalyst is the catalyst present in the reactor during the reaction. In general, a catalyst increases the reaction rate without being consumed in the reaction. Finally, a pre-reaction catalyst can remain unchanged during the reaction or undergo *in-situ* 15 physical or chemical transformations during the reaction that can change its physical and chemical properties and become an *in-situ* catalyst.

As used herein, the term “monophosphate” or “orthophosphate” refers to any salt whose anionic entity, $[\text{PO}_4]^{3-}$, is composed of four oxygen atoms arranged in an almost regular tetrahedral array about a central phosphorus atom.

20 As used herein, the term “condensed phosphate” refers to any salts containing one or several P-O-P bonds generated by corner sharing of PO_4 tetrahedra.

As used herein, the term “polyphosphate” refers to any condensed phosphates with a linear structure; i.e. containing linear P-O-P linkages by corner sharing of PO_4 tetrahedra leading to the formation of finite chains.

25 As used herein, the term “cyclophosphate” refers to any condensed phosphate with a cyclic structure.

As used herein, the term “hydrated” refers to a hydrated crystalline salt or hydrated crystalline compound that contains a specific number of water molecules per formula unit of the salt or compound.

30 As used herein, the term “monovalent cation” refers to any cation with a positive charge of +1.

As used herein, the term “polyvalent cation” refers to any cation with a positive charge equal or greater than +2.

As used herein, the term “anion” refers to any atom or group of covalently-bonded atoms having a negative charge.

5 As used herein, the term “heteropolyanion” refers to any anion with covalently bonded XO_p and YO_r polyhedra, and thus comprises X-O-Y and possibly X-O-X and Y-O-Y bonds, wherein X and Y represent any atoms, and wherein p and r are any positive integers.

As used herein, the term “heteropolyphosphate” refers to any heteropolyanion, wherein X represents phosphorus (P) and Y represents any other atom.

10 As used herein, the term “phosphate adduct” refers to any compound with one or more phosphate anions and one or more non-phosphate anions that are not covalently linked.

As used herein, the term “amorphous” refers to the state of any condensed phase material that lacks the long-range order characteristic of a crystalline material. An amorphous material can be either an amorphous solid or a liquid. In the context of the present invention, materials with 15 more than 50 wt% of amorphous content are considered amorphous materials.

As used herein, the term “crystalline” refers to the state of any condensed phase material whose constituents are arranged in a highly ordered microscopic structure, forming a crystal lattice with long-range order. In the context of the present invention, materials with less than 50 wt% of amorphous content are considered crystalline materials.

20 As used herein, the term “chemically inert” materials refers to materials which remain in the same chemical form, under equilibrium conditions, when contacted with another material or materials. In the context of the present invention, more than about 90 wt% of the material should remain in the same chemical form to be considered a “substantially chemically inert” material and more than about 98 wt% of the material should remain in the same chemical form to be 25 considered an “essentially chemically inert” material.

As used herein, the term “antioxidant” refers to a molecule capable of terminating radical chain processes by either donating a hydrogen atom or the reaction of an olefinic bond to form a stabilized organic radical and thus terminate radical chain processes. Non limiting examples of antioxidants comprise thiols, polyphenols, butylated hydroxy toluene (BHA), and butylated 30 hydroxy anisole (BHA).

As used herein, the terms “LA” refers to lactic acid, “AA” refers to acrylic acid, “AcH” refers to acetaldehyde, and “PA” refers to propionic acid.

As used herein, the term “conversion” in % is defined as [hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof flow rate in (mol/min) –

hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof flow rate out (mol/min) / [hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof flow rate in (mol/min)] x 100. For the purposes of this invention, the term “conversion” means molar conversion, unless otherwise noted.

5 As used herein, the term “yield” in % is defined as [product flow rate out (mol/min) / hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof flow rate in (mol/min)] x 100. For the purposes of this invention, the term “yield” means molar yield, unless otherwise noted.

10 As used herein, the term “selectivity” in % is defined as [Yield / Conversion] x 100. For the purposes of this invention, the term “selectivity” means molar selectivity, unless otherwise noted.

15 As used herein, the term “total carbon balance” is defined as: [((mol carbon monoxide out + mol carbon dioxide out + mol methane out) + (2 x (mol acetic acid out + mol acetaldehyde out + mol ethane out + mol ethylene out)) + (3 x (mol acrylic acid out + mol propionic acid out + mol hydroxypropionic acid out + mol hydroxyacetone out) + (5 x mol 2,3 pentanedione out) + (6 x mol acrylic acid dimer out)) / (3 x mol hydroxypropionic acid in)] x 100. If hydroxypropionic acid derivative is used instead of hydroxypropionic acid, the above formula needs to be adjusted according to the number of carbon atoms in the hydroxypropionic acid derivative.

20 As used herein, the term “Gas Hourly Space Velocity” or “GHSV” in h^{-1} is defined as 60 x [Total gas flow rate (mL/min) / catalyst empty bed volume (mL)]. The total gas flow rate is calculated under Standard Temperature and Pressure conditions (STP; 0°C and 1 atm).

As used herein, the term “Weight Hourly Space Velocity” or “WHSV” in h^{-1} is defined as 60 x [Total LA flow rate (g/min) / catalyst weight (g)].

25 As used herein, the term “Liquid Hourly Space Velocity” or “LHSV” in h^{-1} is defined as 60 x [Total liquid flow rate (mL/min) / catalyst bed volume (mL)].

As used herein, the term “bio-based” material refers to a renewable material.

As used herein, the term “renewable material” refers to a material that is produced from a renewable resource.

30 As used herein, the term “renewable resource” refers to a resource that is produced via a natural process at a rate comparable to its rate of consumption (e.g., within a 100 year time frame). The resource can be replenished naturally, or via agricultural techniques. Non-limiting examples of renewable resources include plants (e.g., sugar cane, beets, corn, potatoes, citrus fruit, woody plants, lignocellulose, hemicellulose, and cellulosic waste), animals, fish, bacteria, fungi, and forestry products. These resources can be naturally occurring, hybrids, or genetically engineered

organisms. Natural resources, such as crude oil, coal, natural gas, and peat, which take longer than 100 years to form, are not considered renewable resources. Because at least part of the material of the invention is derived from a renewable resource, which can sequester carbon dioxide, use of the material can reduce global warming potential and fossil fuel consumption.

5 As used herein, the term “petroleum-based” material refers to a material that is produced from fossil material, such as petroleum, natural gas, coal, etc.


II. Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives

10

Unexpectedly, it has been found that catalysts comprising a mixture of: 1) partially dehydrated dihydrogen monophosphates of monovalent cations in the amorphous state, 2) crystalline polyphosphates of polyvalent cations, and 3) non-phosphate salts of polyvalent cations (e.g. sulfates, tantalates) can dehydrate hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof to acrylic acid, acrylic acid derivatives, or mixtures thereof with high: 1) yield and selectivity for acrylic acid, acrylic acid derivatives, or mixtures thereof, i.e., low amount and few side products; 2) efficiency, i.e., performance in short residence time; and 3) longevity. As a non limiting example, the amorphous state of said mixture of partially dehydrated dihydrogen monophosphates can be formed reversibly when crystalline phosphate salts (e.g. monophosphates, polyphosphates, or cyclophosphates) of monovalent cations with molar ratio of phosphorus to cations of about 1 are contacted with water at elevated water partial pressure and temperature. The applicants also found unexpectedly, that in order to dehydrate hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof to acrylic acid, acrylic acid derivatives, or mixtures thereof, the dehydration catalyst of the present invention needs to be in the presence of sufficient water vapor, contrary to common belief in the art of performing dehydration reactions under dry conditions. Although not wishing to be bound by any theory, applicants hypothesize that the water vapor is required to avoid full dehydration of the dihydrogen monophosphate salts to condensed phosphates under operation conditions, maintaining the Brønsted acid sites that are required for the selective acid-catalyzed dehydration of hydroxypropionic acid and its derivatives to acrylic acid and its derivatives.

In one embodiment of the present invention, the dehydration catalyst comprises:

(a) one or more amorphous phosphate salts consisting essentially of: i) one or more cations, and ii) one or more phosphate anions selected from the group represented by empirical formula (I):




wherein x is any real number equal to or greater than 0 and equal to or less than 1; wherein said one or more amorphous phosphate salts are neutrally charged;

(b) one or more crystalline phosphate salts consisting essentially of: i) one or more cations, and

ii) one or more phosphate anions selected from the group represented by molecular formula


5 (II):



wherein f is a positive integer; wherein g is a positive integer or zero; wherein h is an integer; wherein (f-2g-h) is equal to or greater than zero; wherein (4f-g) is greater than zero; wherein (2f+h) is greater than zero; wherein (4h/f) is equal to or greater than -2 and equal to or less than

10 1; wherein said one or more crystalline phosphate salts are neutrally charged; and

(c) one or more non-phosphate salts consisting essentially of: i) one or more cations, and ii) one or more non-phosphate anions selected from the group represented by molecular formulae (III) and (IV):



wherein a and b are positive integers or zero; wherein c, d, and e are positive integers; wherein (a-2b) is equal to or greater than zero; wherein (2c-a) is greater than zero; wherein said one or more non-phosphate salts are neutrally charged; and wherein said one or more crystalline

20 phosphate salts and said one or more non-phosphate salts are substantially chemically inert to said one or more amorphous phosphate salts. In another embodiment of the present invention, said one or more cations of said one or more amorphous phosphate salts are selected from the group consisting of monovalent cations, polyvalent cations, and mixtures thereof. In another embodiment of the present invention, said one or more cations of said one or more amorphous


25 phosphate salts are selected from the group consisting of monovalent cations. In another embodiment of the present invention, said one or more cations of said one or more crystalline phosphate salts are selected from the group consisting of monovalent cations, polyvalent cations, and mixtures thereof. In another embodiment of the present invention, said one or more cations of said one or more crystalline phosphate salts are selected from the group consisting of

30 polyvalent cations. In another embodiment of the present invention, said one or more cations of said one or more non-phosphate salts are selected from the group consisting of monovalent cations, polyvalent cations, and mixtures thereof. In another embodiment of the present

invention, said one or more cations of said one or more non-phosphate salts are selected from the group consisting of polyvalent cations.


In one embodiment of the present invention, the dehydration catalyst comprises:

(a) one or more amorphous phosphate salts consisting essentially of: i) one or more monovalent cations, and ii) one or more phosphate anions selected from the group represented by empirical formula (I):




wherein x is any real number equal to or greater than 0 and equal to or less than 1; wherein said one or more amorphous phosphate salts are neutrally charged;

(b) one or more crystalline phosphate salts consisting essentially of: i) one or more polyvalent cations, and ii) one or more phosphate anions selected from the group represented by molecular formula (II):



wherein f is a positive integer; wherein g is a positive integer or zero; wherein h is an integer; wherein (f-2g-h) is equal to or greater than zero; wherein (4f-g) is greater than zero; wherein (2f+h) is greater than zero; wherein (4h/f) is equal to or greater than -2 and equal to or less than 1; wherein said one or more crystalline phosphate salts are neutrally charged; and

(c) one or more non-phosphate salts consisting essentially of: i) one or more polyvalent cations, and ii) one or more non-phosphate anions selected from the group represented by molecular formulae (III) and (IV):




wherein a and b are positive integers or zero; wherein c, d, and e are positive integers; wherein (a-2b) is equal to or greater than zero; wherein (2c-a) is greater than zero; wherein said one or more non-phosphate salts are neutrally charged; and wherein said one or more crystalline phosphate salts and said one or more non-phosphate salts are substantially chemically inert to said one or more amorphous phosphate salts. In another embodiment of the present invention, said one or more crystalline phosphate salts and said one or more non-phosphate salts are essentially chemically inert to said one or more amorphous phosphate salts. In another embodiment of the present invention, said one or more crystalline phosphate salts and said one or more non-phosphate salts are chemically inert to said one or more amorphous phosphate salts. In

yet another embodiment of the present invention, the weight fraction of said one or more amorphous phosphate salts in said dehydration catalyst is between about 0.1 and about 0.8.

The amorphous phosphate salts that comprise one or more phosphate anions represented by empirical formula (I) can be a mixture of amorphous monophosphates and polyphosphates of different length (e.g. $M^I H_2 PO_4$, $M^I_2 H_2 P_2 O_7$, $M^I_3 H_2 P_3 O_{10}$, $M^I_4 H_2 P_4 O_{13}$, ..., $M^I_n H_2 P_n O_{(3n+1)}$; wherein M^I is a monovalent cation). As a non limiting example, this mixture can be produced by partial dehydration of dihydrogen monophosphates or by partial hydrolysis of condensed phosphates with molar ratio of phosphorus to cations of about 1. The amorphous phosphate salts can also comprise any hydrated form of said monophosphates and polyphosphates. In the context of the present invention, the variable x in empirical formula (I) refers either to the composition of single species within said mixture of monophosphates and polyphosphates or to the average composition of said mixture.


In the context of the present invention, a phosphate salt or a mixture of phosphate salts with more than 50 wt% of amorphous content (or less than 50 wt% of crystalline content) are considered amorphous phosphate salts. The amorphous content can be determined by any method known to those skilled in the art, such as, by way of example and not limitation, x-ray diffraction (XRD), infrared spectroscopy (IR), Raman spectroscopy, differential scanning calorimetry (DSC), or solid-state nuclear magnetic resonance (NMR) spectroscopy. As an illustration, in a method based on an XRD technique (see Figure 1), the separate crystalline (I_C) and amorphous (I_A) contributions on the X-ray scattering pattern are determined using a profile-fitting technique. This deconvolution of the scattering pattern into the separate contributions can be performed using Gaussian, Lorentzian, Voigt, or related functions known to those skilled in the art. Then, the amorphous content, X_A , is determined by calculating the ratio between the area of scattered intensity for the amorphous contribution (I_A) and the area of the total scattered intensity (crystalline plus amorphous contributions, $I_T = I_C + I_A$) for a defined Bragg angle range (e.g. 20 = 5° to 50°, Cu-radiation $\lambda = 1.54059 \text{ \AA}$, in the context of the current invention), i.e. $X_A = \frac{I_A}{I_C + I_A} \times 100 \text{ wt\%}$.

In another embodiment of the present invention, at least one of said one or more amorphous phosphate salts of said dehydration catalyst is replaced by one or more crystalline phosphate salts of monovalent cations consisting essentially of: i) one or more monovalent cations, and ii) one or more phosphate anions selected from the group represented by empirical formula (I):




wherein x is any real number equal to or greater than 0 and equal to or less than 1; wherein said one or more crystalline phosphate salts of monovalent cations are neutrally charged.

In one embodiment of the present invention, said one or more amorphous phosphate salts of said dehydration catalyst are selected from the group represented by empirical formula (Ia):



wherein M^1 is a monovalent cation; wherein x is any real number equal to or greater than 0 and equal to or less than 1. In another embodiment of the present invention, at least one of said one or more amorphous phosphate salts of said dehydration catalyst is replaced by one or more crystalline phosphate salts represented by empirical formula (Ia); wherein M^1 is a monovalent cation; wherein x is any real number equal to or greater than 0 and equal to or less than 1.

In one embodiment of the present invention, said one or more amorphous phosphate salts of said dehydration catalyst are selected from the group represented by empirical formula (Ib):



wherein M^1 and N^1 are two different monovalent cations; wherein x is any real number equal to or greater than 0 and equal to or less than 1; wherein w is any real number greater than 0 and less than 1. In another embodiment of the present invention, at least one of said one or more amorphous phosphate salts of said dehydration catalyst is replaced by one or more crystalline phosphate salts represented by empirical formula (Ib); wherein M^1 and N^1 are two different monovalent cations; wherein x is any real number equal to or greater than 0 and equal to or less than 1; wherein w is any real number greater than 0 and less than 1.

In another embodiment of the present invention, at least one of said one or more amorphous phosphate salts of said dehydration catalyst is a hydrated salt. In another embodiment of the present invention, at least one of said one or more crystalline phosphate salts is a hydrated salt. In another embodiment of the present invention, at least one of said one or more non-phosphate salts is a hydrated salt. A hydrated salt contains a specific number of water molecules per formula unit of the salt. Non limiting examples of hydrated salts are hemihydrated, monohydrated, sesquihydrated, dehydrated, trihydrated, tetrahydrated, pentahydrated, hexahydrated, heptahydrated, octahydrated, nonahydrated, nonahydrated, and decahydrated salts.

In the context of the present invention, “one or more cations” refers to different types of cations and “one or more anions” refers to different types of anions. Non limiting examples of cations are metallic cations, organo-metallic cations, ammonium, substituted ammonium, oxycations, and other cations known by those skilled in the art. Non limiting examples of substituted ammonium and other cations are isopropylammonium, ethylenediammonium,

sarcosinium, L-histidinium, glycinium, and 4-aminopyridinium. Non limiting examples of oxycations are pervanadyl and vanadyl ions.

Non limiting examples of monovalent cations of said one or more amorphous phosphate salts are cations of alkali metals, organo-metallic cations, ammonium, substituted ammonium, 5 oxycations, and other cations known by those skilled in the art. In one embodiment of the present invention, said one or more monovalent cations of said one or more amorphous phosphate salts are selected from the group consisting of Li^+ , Na^+ , K^+ , Rb^+ , Cs^+ , Ag^+ , Tl^+ , and mixtures thereof. In another embodiment of the present invention, said one or more monovalent cations of said one or more amorphous phosphate salts are selected from the group consisting of K^+ , Rb^+ , Cs^+ , and 10 mixtures thereof. In yet another embodiment of the present invention, said one or more monovalent cations of said one or more amorphous phosphate salts is K^+ .

In another embodiment of the present invention, at least one of said one or more amorphous phosphate salts consists of two or more different monovalent cations selected from the group consisting of Li^+ , Na^+ , K^+ , Rb^+ , Cs^+ , Ag^+ , and Tl^+ . In another embodiment of the 15 present invention, at least one of said one or more amorphous phosphate salts consists of two or more different monovalent cations selected from the group consisting of K^+ , Rb^+ , and Cs^+ .

In one embodiment of the present invention, said one or more amorphous phosphate salts are selected from the group consisting of $\text{KH}_{2(1-x)}\text{PO}_{(4-x)}$, $\text{RbH}_{2(1-x)}\text{PO}_{(4-x)}$, $\text{CsH}_{2(1-x)}\text{PO}_{(4-x)}$, any of their hydrated forms, and mixtures thereof; wherein x is any real 20 number equal to or greater than 0 and equal to or less than 1. In another embodiment of the present invention, the amorphous phosphate salt is $\text{KH}_{2(1-x)}\text{PO}_{(4-x)}$; wherein x is any real number equal to or greater than 0 and equal to or less than 1.

In one embodiment of the present invention, the amorphous phosphate salts are selected from the group consisting of $\text{K}_w\text{Rb}_{(1-w)}\text{H}_{2(1-x)}\text{PO}_{(4-x)}$, $\text{K}_w\text{Cs}_{(1-w)}\text{H}_{2(1-x)}\text{PO}_{(4-x)}$, 25 $\text{Rb}_w\text{Cs}_{(1-w)}\text{H}_{2(1-x)}\text{PO}_{(4-x)}$, any of their hydrated forms, and mixtures thereof; wherein x is any real number equal to or greater than 0 and equal to or less than 1; and wherein w is any real number greater than 0 and less than 1.


Non limiting examples of said one or more polyvalent cations of said one or more crystalline phosphate salts and of said one or more non-phosphate salts are cations of alkaline 30 earth metals, transition metals, post-transition or poor metals, and metalloids; organo-metallic cations, substituted ammonium cations, oxycations (e.g. vanadyl), and other cations known by those skilled in the art. In one embodiment of the present invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the

metals Be, Mg, Ca, Sr, Ba, Sc, Y, Ti, Zr, Hf, V, Nb, Ta, Cr, Mo, W, Mn, Re, Al, Ga, In, Tl, Si, Ge, Sn, Pb, Sb, Bi, La, Ce, Pr, Nd, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu, and mixtures thereof. In another embodiment of the present invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals 5 Mg, Ca, Sr, Ba, Y, Mn, Al, Er, and mixtures thereof. In another embodiment of the present invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of divalent cations, trivalent cations, tetravalent cations, pentavalent cations, 10 and mixtures thereof. In another embodiment of the present invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of Be^{2+} , Mg^{2+} , Ca^{2+} , Sr^{2+} , Ba^{2+} , Sc^{3+} , Y^{3+} , Ti^{3+} , Ti^{4+} , Zr^{2+} , Zr^{4+} , Hf^{4+} , V^{3+} , V^{4+} , Nb^{3+} , Cr^{2+} , Cr^{3+} , Mo^{3+} , Mo^{4+} , Mn^{2+} , Mn^{3+} , Re^{4+} , Al^{3+} , Ga^{3+} , In^{3+} , Si^{4+} , Ge^{4+} , Sn^{4+} , Pb^{4+} , Sb^{3+} , Sb^{5+} , Bi^{3+} , La^{3+} , 15 Ce^{3+} , Ce^{4+} , Pr^{3+} , Nd^{3+} , Sm^{3+} , Eu^{3+} , Gd^{3+} , Tb^{3+} , Dy^{3+} , Ho^{3+} , Er^{3+} , Tm^{3+} , Yb^{3+} , Lu^{3+} , and mixtures thereof. In another embodiment of the present invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of Mg^{2+} , Ca^{2+} , Sr^{2+} , Ba^{2+} , Y^{3+} , Mn^{2+} , Mn^{3+} , Al^{3+} , Er^{3+} , and mixtures thereof. In yet another embodiment of the present 20 invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are Ba^{2+} .

In one embodiment of the present invention, said one or more crystalline phosphate salts further consist of one or more monovalent cations. In another embodiment of the present invention, said one or more non-phosphate salts further consist of one or more monovalent 25 cations. Non limiting examples of said one or more monovalent cations of said one or more crystalline phosphate salts and of said one or more non-phosphate salts are cations of alkali metals. In one embodiment of the present invention, said one or more monovalent cations of said one or more crystalline phosphate salts and said one or more monovalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals Li, Na , K , Rb , Cs , Ag , Tl , and mixtures thereof; and said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals Be, Mg, 30 Ca, Sr, Ba, Sc, Y, Ti, Zr, Hf, V, Nb, Ta, Cr, Mo, W, Mn, Re, Al, Ga, In, Tl, Si, Ge, Sn, Pb, Sb, Bi, La, Ce, Pr, Nd, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu, and mixtures thereof. In another

embodiment of the present invention, said one or more monovalent cations of said one or more crystalline phosphate salts and said one or more monovalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals K, Rb, Cs, and mixtures thereof; and said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals Mg, Ca, Sr, Ba, Y, Mn, Al, Er, and mixtures thereof.

In one embodiment of the present invention, said one or more phosphate anions of said one or more crystalline phosphate salts are selected from the group represented by molecular formulae (IIa) to (IIg), and mixtures thereof:

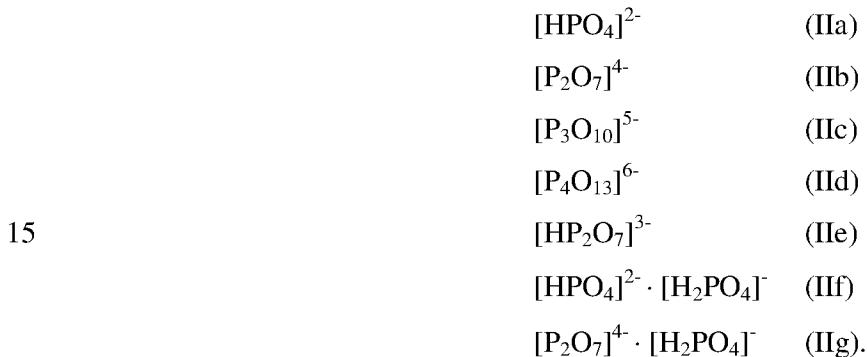

In another embodiment of the present invention, said one or more phosphate anions of said one or more crystalline phosphate salts are selected from the group represented by molecular formulae (IIa), (IIb), and mixtures thereof:



Non limiting examples of said one or more crystalline phosphate salts are phosphates of alkaline earth metals, transition metals, post-transition or poor metals, and metalloids; and phosphates of mixed alkali metals with alkaline earth metals, transition metals, post-transition or poor metals, and metalloids. In one embodiment of the present invention, said one or more crystalline phosphate salts are selected from the group consisting of BeHPO_4 , MgHPO_4 , CaHPO_4 , SrHPO_4 , BaHPO_4 , BeNH_4PO_4 , $\text{Be}_2\text{P}_2\text{O}_7$, $\text{Mg}_2\text{P}_2\text{O}_7$, $\text{MgK}_2\text{P}_2\text{O}_7$, $\text{Mg}_3\text{K}_2(\text{P}_2\text{O}_7)_2$, $\text{Ca}_2\text{P}_2\text{O}_7$, $\text{CaK}_2\text{P}_2\text{O}_7$, $\text{Ca}_3\text{K}_2(\text{P}_2\text{O}_7)_2$, $\text{Ca}_5\text{K}_2(\text{P}_2\text{O}_7)_3$, $\text{CaRb}_2\text{P}_2\text{O}_7$, $\text{CaCs}_2\text{P}_2\text{O}_7$, CaMgP_2O_7 , $\text{Ca}_3(\text{NH}_4)_2(\text{P}_2\text{O}_7)_2$, $\text{Ca}_5(\text{NH}_4)_2(\text{P}_2\text{O}_7)_3$, $\text{Sr}_2\text{P}_2\text{O}_7$, $\text{SrK}_2\text{P}_2\text{O}_7$, $\text{SrRb}_2\text{P}_2\text{O}_7$, $\text{SrCs}_2\text{P}_2\text{O}_7$, SrMgP_2O_7 , $\text{Ba}_2\text{P}_2\text{O}_7$, BaMgP_2O_7 , BaCaP_2O_7 , $\text{Sc}_4(\text{P}_2\text{O}_7)_3$, ScKP_2O_7 , ScRbP_2O_7 , ScCsP_2O_7 , YKP_2O_7 , YRbP_2O_7 , YCsP_2O_7 , TiP_2O_7 , $\text{Ti}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, ZrP_2O_7 , ZrMgP_2O_7 , HfP_2O_7 , $\text{V}_4(\text{P}_2\text{O}_7)_3$, VKP_2O_7 , VRbP_2O_7 , VCsP_2O_7 , $\text{V}_2\text{Sr}(\text{P}_2\text{O}_7)_2$, $\text{V}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, $\text{Nb}_2\text{Mg}(\text{P}_2\text{O}_7)_2$, $\text{Cr}_4(\text{P}_2\text{O}_7)_3$, CrHP_2O_7 , $\text{CrNH}_4\text{P}_2\text{O}_7$, CrKP_2O_7 , CrRbP_2O_7 , CrCsP_2O_7 , $\text{Cr}_2\text{Mg}(\text{P}_2\text{O}_7)_2$, CrCaP_2O_7 , $\text{Cr}_2\text{Ca}(\text{P}_2\text{O}_7)_2$,

Cr₂Sr(P₂O₇)₂, CrBaP₂O₇, Cr₂Ba(P₂O₇)₂, MoP₂O₇, MoKP₂O₇, MoRbP₂O₇, MoCsP₂O₇,
 Mo₂Ba(P₂O₇)₂, Mn₂P₂O₇, MnHP₂O₇, MnK₂P₂O₇, MnKP₂O₇, 2Mn₂P₂O₇·Mn₂KP₃O₁₀,
 MnRb₂P₂O₇, MnRbP₂O₇, MnCsP₂O₇, MnCaP₂O₇, MnSrP₂O₇, MnBaP₂O₇, ReP₂O₇, AlNH₄P₂O₇,
 AlKP₂O₇, AlRbP₂O₇, GaNH₄P₂O₇, GaKP₂O₇, GaRbP₂O₇, InKP₂O₇, InRbP₂O₇, InCsP₂O₇,
 5 In₂Ca(P₂O₇)₂, In₂Sr(P₂O₇)₂, In₂Ba(P₂O₇)₂, SiP₂O₇, GeP₂O₇, SnP₂O₇, PbP₂O₇, Sb^VSb^{III}(P₂O₇)₂,
 Bi₄(P₂O₇)₃, BiHP₂O₇, La₄(P₂O₇)₃, LaHP₂O₇, LaKP₂O₇, CeP₂O₇, Gd₄(P₂O₇)₃, GdKP₂O₇,
 GdRbP₂O₇, GdCsP₂O₇, TbKP₂O₇, TbRbP₂O₇, TbCsP₂O₇, DyKP₂O₇, DyRbP₂O₇, DyCsP₂O₇,
 HoKP₂O₇, HoRbP₂O₇, HoCsP₂O₇, ErKP₂O₇, ErRbP₂O₇, ErCsP₂O₇, TmKP₂O₇, TmRbP₂O₇,
 TmCsP₂O₇, YbHP₂O₇, YbKP₂O₇, YbRbP₂O₇, YbCsP₂O₇, LuKP₂O₇, LuRbP₂O₇, LuCsP₂O₇,
 10 Be₂RbP₃O₁₀, Ca₂KP₃O₁₀, Ca₂RbP₃O₁₀, Ca₂CsP₃O₁₀, Sr₂KP₃O₁₀, Sr₂RbP₃O₁₀, Sr₂CsP₃O₁₀,
 Ba₂KP₃O₁₀, Ba₂RbP₃O₁₀, Ba₂CsP₃O₁₀, Y₅(P₃O₁₀)₃, VC₅P₃O₁₀, CrCs₂P₃O₁₀, Cr₃K(P₃O₁₀)₂,
 Cr₃Rb(P₃O₁₀)₂, Cr₃Cs(P₃O₁₀)₂, MnCs₂P₃O₁₀, AlCs₂P₃O₁₀, Al₃Cs(P₃O₁₀)₂, GaCs₂P₃O₁₀,
 In₅(P₃O₁₀)₃, La₅(P₃O₁₀)₃, Pr₅(P₃O₁₀)₃, Nd₅(P₃O₁₀)₃, Sm₅(P₃O₁₀)₃, Gd₅(P₃O₁₀)₃, Er₅(P₃O₁₀)₃,
 Yb₅(P₃O₁₀)₃, Ca₃P₄O₁₃, Sr₃P₄O₁₃, Ba₃P₄O₁₃, Ba₂MgP₄O₁₃, Y₂P₄O₁₃, Cr₂P₄O₁₃, Mn₂P₄O₁₃,
 15 Gd₂P₄O₁₃, Pb₃P₄O₁₃, Bi₂P₄O₁₃, La₂P₄O₁₃, any of their hydrated forms, and mixtures thereof. In another embodiment of the present invention, said one or more crystalline phosphate salts are selected from the group consisting of MgHPO₄, CaHPO₄, SrHPO₄, BaHPO₄, Mg₂P₂O₇, Ca₂P₂O₇, Sr₂P₂O₇, Ba₂P₂O₇, YKP₂O₇, Mn₂P₂O₇, MnKP₂O₇, AlKP₂O₇, ErKP₂O₇, Ca₃P₄O₁₃, Sr₃P₄O₁₃, Ba₃P₄O₁₃, any of their hydrated forms, and mixtures thereof.

20 In one embodiment of the present invention, said one or more non-phosphate anions are selected from the group represented by molecular formulae (IIIa) to (IIId), (IVa) to (IVg), and mixtures thereof:

	[SO ₄] ²⁻	(IIIa)
	[S ₂ O ₇] ²⁻	(IIIb)
25	[HSO ₄] ¹⁻	(IIIc)
	[SO ₄] ²⁻ · [HSO ₄] ⁻	(IIId)
	[Ta ₂ O ₆] ²⁻	(IVa)
	[Ta ₂ O ₇] ⁴⁻	(IVb)
	[Ta ₂ O ₉] ⁸⁻	(IVc)
30	[Ta ₂ O ₁₀] ¹⁰⁻	(IVd)
	[Ta ₂ O ₁₁] ¹²⁻	(IVe)
	[Ta ₄ O ₁₁] ²⁻	(IVf)
	[Ta ₄ O ₁₅] ¹⁰⁻	(IVg).

In another embodiment of the present invention, said one or more non-phosphate anions are selected from the group represented by molecular formulae (IIIa), (IVa), and mixtures thereof:



5 Non limiting examples of said one or more non-phosphate salts are sulfates of alkaline-earth metals, tantalates of alkaline-earth metals, sulfates of mixed alkali and alkaline earth metals, and tantalates of mixed alkali and alkaline earth metals. In one embodiment of the present invention, said one or more non-phosphate salts are selected from the group consisting of CaSO_4 ,
10 SrSO_4 , BaSO_4 , $\text{SrK}_2(\text{SO}_4)_2$, $\text{SrRb}_2(\text{SO}_4)_2$, $\text{Ca}_2\text{K}_2(\text{SO}_4)_3$, $\text{Ca}_2\text{Rb}_2(\text{SO}_4)_3$, $\text{Ca}_2\text{Cs}_2(\text{SO}_4)_3$, $\text{CaTa}_4\text{O}_{11}$,
 $\text{SrTa}_4\text{O}_{11}$, $\text{BaTa}_4\text{O}_{11}$, MgTa_2O_6 , CaTa_2O_6 , SrTa_2O_6 , BaTa_2O_6 , $\text{Mg}_2\text{Ta}_2\text{O}_7$, $\text{Ca}_2\text{Ta}_2\text{O}_7$, $\text{Sr}_2\text{Ta}_2\text{O}_7$,
 $\text{SrK}_2\text{Ta}_2\text{O}_7$, $\text{Ba}_2\text{Ta}_2\text{O}_7$, $\text{Ba}_3\text{Ta}_2\text{O}_8$, $\text{Mg}_4\text{Ta}_2\text{O}_9$, $\text{Ca}_4\text{Ta}_2\text{O}_9$, $\text{Sr}_4\text{Ta}_2\text{O}_9$, $\text{Ba}_4\text{Ta}_2\text{O}_9$, $\text{Ca}_5\text{Ta}_2\text{O}_{10}$,
 $\text{Ca}_2\text{KTa}_3\text{O}_{10}$, $\text{Ca}_2\text{RbTa}_3\text{O}_{10}$, $\text{Ca}_2\text{CsTa}_3\text{O}_{10}$, $\text{Sr}_2\text{KTa}_3\text{O}_{10}$, $\text{Sr}_2\text{RbTa}_3\text{O}_{10}$, $\text{Sr}_2\text{CsTa}_3\text{O}_{10}$, $\text{Mg}_5\text{Ta}_4\text{O}_{15}$,
 $\text{Sr}_5\text{Ta}_4\text{O}_{15}$, $\text{Ba}_5\text{Ta}_4\text{O}_{15}$, $\text{Sr}_2\text{KTa}_5\text{O}_{15}$, $\text{Ba}_2\text{KTa}_5\text{O}_{15}$, $\text{Sr}_6\text{Ta}_2\text{O}_{11}$, $\text{Ba}_6\text{Ta}_2\text{O}_{11}$, any of their hydrated
15 forms, and mixtures thereof. In another embodiment of the present invention, said one or more non-phosphate salts are selected from the group consisting of CaSO_4 , CaTa_2O_6 , SrSO_4 , SrTa_2O_6 , BaSO_4 , BaTa_2O_6 , any of their hydrated forms, and mixtures thereof. In yet another embodiment of the present invention, said one or more non-phosphate salts are selected from the group consisting of BaSO_4 , BaTa_2O_6 , any of their hydrated forms, and mixtures thereof.

20 In another embodiment of the present invention, said one or more amorphous phosphate salts are selected from the group consisting of $\text{KH}_{2(1-x)}\text{PO}_{(4-x)}$, $\text{RbH}_{2(1-x)}\text{PO}_{(4-x)}$,
 $\text{CsH}_{2(1-x)}\text{PO}_{(4-x)}$, $\text{K}_w\text{Rb}_{(1-w)}\text{H}_{2(1-x)}\text{PO}_{(4-x)}$, $\text{K}_w\text{Cs}_{(1-w)}\text{H}_{2(1-x)}\text{PO}_{(4-x)}$,
 $\text{Rb}_w\text{Cs}_{(1-w)}\text{H}_{2(1-x)}\text{PO}_{(4-x)}$, any of their hydrated forms, and mixtures thereof; wherein x is any real number equal to or greater than 0 and equal to or less than 1 and wherein w is any real
25 number greater than 0 and less than 1; said one or more crystalline phosphate salts are selected from the group consisting of $\text{Ca}_2\text{P}_2\text{O}_7$, CaHPO_4 , $\text{Sr}_2\text{P}_2\text{O}_7$, SrHPO_4 , $\text{Ba}_2\text{P}_2\text{O}_7$, BaHPO_4 , any of their hydrated forms, and mixtures thereof; and said one or more non-phosphate salts are selected from the group consisting of CaSO_4 , CaTa_2O_6 , SrSO_4 , SrTa_2O_6 , BaSO_4 , BaTa_2O_6 , any of their hydrated forms, and mixtures thereof. In another embodiment of the present invention, said one
30 or more amorphous phosphate salts is $\text{KH}_{2(1-x)}\text{PO}_{(4-x)}$, wherein x is any real number equal to or greater than 0 and equal to or less than 1; said one or more crystalline phosphate salts is $\text{Ba}_2\text{P}_2\text{O}_7$; and said one or more non-phosphate compounds is BaSO_4 .

In one embodiment of the present invention, said dehydration catalyst further comprises silicon oxide (SiO_2). In another embodiment of the present invention, said silicon oxide is selected from the group consisting of amorphous silica, quartz, tridymite, cristobalite, moganite, coesite, and mixtures thereof. In another embodiment of the present invention, said silicon oxide 5 is amorphous silica. In yet another embodiment of the present invention, said silicon oxide has a specific surface area of less than about $10 \text{ m}^2/\text{g}$. In another embodiment of the present invention, said dehydration catalyst comprises $\text{KH}_{2(1-x)}\text{PO}_{(4-x)}$, BaSO_4 , $\text{Ba}_2\text{P}_2\text{O}_7$, and amorphous silica; wherein x is any real number equal to or greater than 0 and equal to or less than 1. In another embodiment of the present invention, said dehydration catalyst consists essentially of 10 $\text{KH}_{2(1-x)}\text{PO}_{(4-x)}$, BaSO_4 , $\text{Ba}_2\text{P}_2\text{O}_7$, and amorphous silica; wherein x is any real number equal to or greater than 0 and equal to or less than 1.

The variable x in formulae (I), (Ia), and (Ib) is any real number equal to or greater than 0 and equal to or less than 1. In one embodiment of the present invention, x is equal to about 0. In another embodiment of the present invention, x is equal to about 1. In another embodiment of the 15 present invention, x is less than about 0.8. In another embodiment of the present invention, x is less than about 0.6. In another embodiment of the present invention, x is less than about 0.5. In another embodiment of the present invention, x is between about 0.1 and about 0.5. In another embodiment of the present invention, x is between about 0.25 and about 0.45. In another embodiment of the present invention, x is equal to about 0.4. In yet another embodiment, x is 20 equal to about 0.4 and said one or more monovalent cations is Cs^+ . The variable w in formula (Ib) is any real number greater than 0 and less than 1. In one embodiment of the present invention, w is less than about 0.2 or greater than about 0.8. In another embodiment of the present invention, w is less than about 0.1 or greater than about 0.9.

In one embodiment of the present invention, said one or more amorphous phosphate salts 25 of said dehydration catalyst consist essentially of: (a) one or more monovalent cations, and (b) the phosphate anion represented by molecular formula (Ic):



wherein said one or more amorphous phosphate salts of said dehydration catalyst are neutrally charged. In another embodiment of the present invention, at least one of said one or more amorphous phosphate salts of said dehydration catalyst is replaced by one or more crystalline phosphate salts consisting essentially of: (a) one or more monovalent cations, and (b) the phosphate anion represented by molecular formula (Ic).

5 In one embodiment of the present invention, said one or more amorphous phosphate salts of said dehydration catalyst are selected from the group represented by molecular formula (Id):



wherein M^1 is a monovalent cation. In another embodiment of the present invention, at least one 10 of said one or more amorphous phosphate salts of said dehydration catalyst is replaced by one or more crystalline phosphate salts represented by molecular formula (Id).

In one embodiment of the present invention, said one or more amorphous phosphate salts of said dehydration catalyst are selected from the group represented by molecular formula (Ie):



15 wherein M^1 and N^1 are two different monovalent cations; wherein w is any real number greater than 0 and less than 1. In another embodiment of the present invention, at least one of said one or more amorphous phosphate salts of said dehydration catalyst is replaced by one or more crystalline phosphate salts represented by molecular formula (Ie).

20 In one embodiment of the present invention, said one or more amorphous phosphate salts of said dehydration catalyst consist essentially of: (a) one or more monovalent cations, and (b) the phosphate anion represented by empirical formula (If):



25 wherein said one or more amorphous phosphate salts of said dehydration catalyst are neutrally charged. In another embodiment of the present invention, at least one of said one or more amorphous phosphate salts of said dehydration catalyst is replaced by one or more crystalline phosphate salts consisting essentially of: (a) one or more monovalent cations, and (b) the phosphate anion represented by empirical formula (If). In the context of the present invention, the anion represented by empirical formula (If) can refer either to the anion of cyclophosphate salts 30 or to the anion of long-chain linear polyphosphate salts as described in "Phosphoric Acids and Phosphates, Kirk-Othmer Encyclopedia of Chemical Technology" by David R. Gard (published online: 15 July 2005) and "Phosphorus: Chemistry, Biochemistry and Technology" by D.E.C. Corbridge (2013). When the empirical formula (If) refers to the anion of long chain


polyphosphate salts, the empirical formula is not precise in that it does not include the minor perturbation of excess negative charge owing to the two end-group oxygens.

In one embodiment of the present invention, said one or more amorphous phosphate salts of said dehydration catalyst are selected from the group represented by empirical formula (Ig):



wherein M^1 is a monovalent cation. In another embodiment of the present invention, at least one of said one or more amorphous phosphate salts of said dehydration catalyst is replaced by one or more crystalline phosphate salts represented by empirical formula (Ig).

In one embodiment of the present invention, said one or more amorphous phosphate salts 10 of said dehydration catalyst are selected from the group represented by empirical formula (Ih):



wherein M^1 and N^1 are two different monovalent cations; wherein w is any real number greater than 0 and less than 1. In another embodiment of the present invention, at least one of said one or more amorphous phosphate salts of said dehydration catalyst is replaced by one or more crystalline phosphate salts represented by empirical formula (Ih). In the context of the present invention, the salts represented by empirical formula (Ig) or (Ih) can refer either to cyclophosphate salts or to long-chain linear polyphosphate salts as described in "Phosphoric Acids and Phosphates, Kirk-Othmer Encyclopedia of Chemical Technology" by David R. Gard (published online: 15 July 2005) and "Phosphorus: Chemistry, Biochemistry and Technology" 15 by D.E.C. Corbridge (2013). When the salts represented by empirical formulas (Ig) or (Ih) refer to long chain polyphosphate salts, the empirical formulae are not precise in that they do not include the minor amount of either protons or excess monovalent cations needed to produce a charge neutral structure owing to the two end group oxygens.

20

In one embodiment of the present invention, said dehydration catalyst further comprises 25 one or more inert supports. Non limiting examples of inert supports are silica or silicates, alumina or aluminates, aluminosilicates, titania or titanates, zirconia or zirconates, carbons (such as activated carbon, diamond, graphite, or fullerenes), sulfates, phosphates, tantalates, ceria, other metal oxides, and mixtures thereof. In the context of the reactions expressly described herein, in one embodiment of the present invention, the inert support consists essentially of silicon oxide 30 (SiO_2). In another embodiment of the present invention, said silicon oxide is selected from the group consisting of amorphous silica, quartz, tridymite, cristobalite, moganite, coesite, and mixtures thereof. In another embodiment of the present invention, said silicon oxide is amorphous silica. In another embodiment of the present invention, said silicon oxide has a


specific surface area of less than about 10 m²/g. When present, the inert support represents an amount of about 20 wt% to about 90 wt%, based on the total weight of the dehydration catalyst.

Alternative catalysts comprising one or more anions selected from the group consisting of non-phosphorus-containing anions, heteropolyanions, and phosphate adducts can be utilized for dehydrating hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof to acrylic acid, acrylic acid derivatives, or mixtures thereof. Non limiting examples of non-phosphorus-containing anions are arsenates, condensed arsenates, nitrates, sulfates, condensed sulfates, borates, carbonates, chromates, condensed chromates, vanadates, niobates, tantalates, selenates, condensed silicates, condensed aluminates, germanates, condensed germanates, molybdates, condensed molybdates, and other monomeric oxyanions or polyoxyanions that may be apparent to those having ordinary skill in the art. Non limiting examples of heteropolyanions are heteropolyphosphates, such as arsenatophosphates, phosphoaluminates, phosphoborates, phosphochromates, phosphomolybdates, phosphosilicates, phosphosulfates, phosphotungstates, and others that may be apparent to those having ordinary skill in the art. Non limiting examples of phosphate adducts are adducts of phosphate anions with telluric acid, halides, borates, carbonates, nitrates, sulfates, chromates, silicates, oxalates, mixtures thereof, or others that may be apparent to those having ordinary skill in the art.

III. Catalyst Preparation Methods


20 In one embodiment of the present invention, the method of preparing the dehydration catalyst comprises contacting:

(a) a dehydration catalyst precursor mixture comprising: one or more amorphous phosphate salt precursors, one or more crystalline phosphate salts, and one or more non-phosphate salts; wherein said one or more crystalline phosphate salts and said one or more non-phosphate salts are substantially chemically inert to said one or more amorphous phosphate salt precursors; wherein said one or more amorphous phosphate salt precursors consist essentially of: i) one or more cations, and ii) one or more phosphate anions selected from the group represented by molecular formulae (V) and (VI):




wherein y is any integer number equal to or greater than 1 and z is any integer number equal to or greater than 3; wherein said one or more amorphous phosphate salt precursors are neutrally charged;

wherein said one or more crystalline phosphate salts consists essentially of: i) one or more cations, and ii) one or more phosphate anions selected from the group represented by molecular formula (II):



wherein f is a positive integer; wherein g is a positive integer or zero; wherein h is an integer; wherein (f-2g-h) is equal to or greater than zero; wherein (4f-g) is greater than zero; wherein (2f+h) is greater than zero; wherein (4h/f) is equal to or greater than -2 and equal to or less than 1; wherein said one or more crystalline phosphate salts are neutrally charged; and

10 wherein said one or more non-phosphate salts consist essentially of: i) one or more cations, and ii) one or more non-phosphate anions selected from the group represented by molecular formulae (III) and (IV):



15 wherein a and b are positive integers or zero; wherein c, d, and e are positive integers; wherein (a-2b) is equal to or greater than zero; wherein (2c-a) is greater than zero; wherein said one or more non-phosphate salts are neutrally charged; with


(b) a gas mixture comprising water vapor;

wherein the water partial pressure in said gas mixture is equal to or greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salt precursors; wherein said contacting step between said dehydration catalyst precursor mixture and said gas mixture is performed at a temperature equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salt precursors; and wherein one or more amorphous phosphate salts are produced as a result of said one or more amorphous phosphate salt precursors being contacted with said water vapor. In another embodiment of the present invention, said one or more cations of said one or more amorphous phosphate salt precursors are selected from the group consisting of monovalent cations, polyvalent cations, and mixtures thereof. In another embodiment of the present invention, said one or more cations of said one or more amorphous phosphate salt precursors are selected from the group consisting of monovalent cations. In another embodiment of the present invention, said one or more cations of said one or more crystalline phosphate salts are selected from the group consisting of monovalent cations, polyvalent cations, and mixtures thereof. In another embodiment of the present invention, said one or more cations of said one or more crystalline phosphate salts consists essentially of: i) one or more cations, and ii) one or more phosphate anions selected from the group represented by molecular formula (II);

phosphate salts are selected from the group consisting of polyvalent cations. In another embodiment of the present invention, said one or more cations of said one or more non-phosphate salts are selected from the group consisting of monovalent cations, polyvalent cations, and mixtures thereof. In another embodiment of the present invention, said one or more cations of said one or more non-phosphate salts are selected from the group consisting of 5 polyvalent cations.


In one embodiment of the present invention, the method of preparing the dehydration catalyst comprises contacting:

(a) a dehydration catalyst precursor mixture comprising: one or more amorphous phosphate salt 10 precursors, one or more crystalline phosphate salts, and one or more non-phosphate salts; wherein said one or more crystalline phosphate salts and said one or more non-phosphate salts are substantially chemically inert to said one or more amorphous phosphate salt precursors; wherein said one or more amorphous phosphate salt precursors consist essentially of: i) one or more monovalent cations, and ii) one or more phosphate anions selected from the group 15 represented by molecular formulae (V) and (VI):





wherein y is any integer number equal to or greater than 1 and z is any integer number equal to or greater than 3; wherein said one or more amorphous phosphate salt precursors are neutrally 20 charged;

wherein said one or more crystalline phosphate salts consists essentially of: i) one or more polyvalent cations, and ii) one or more phosphate anions selected from the group represented by molecular formula (II):



25 wherein f is a positive integer; wherein g is a positive integer or zero; wherein h is an integer; wherein (f-2g-h) is equal to or greater than zero; wherein (4f-g) is greater than zero; wherein (2f+h) is greater than zero; wherein (4h/f) is equal to or greater than -2 and equal to or less than 1; wherein said one or more crystalline phosphate salts are neutrally charged; and wherein said one or more non-phosphate salts consist essentially of: i) one or more polyvalent 30 cations, and ii) one or more non-phosphate anions selected from the group represented by molecular formulae (III) and (IV):



wherein a and b are positive integers or zero; wherein c, d, and e are positive integers; wherein (a-2b) is equal to or greater than zero; wherein (2c-a) is greater than zero; wherein said one or more non-phosphate salts are neutrally charged; with

(b) a gas mixture comprising water vapor;

5 wherein the water partial pressure in said gas mixture is equal to or greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salt precursors; wherein said contacting step between said dehydration catalyst precursor mixture and said gas mixture is performed at a temperature equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salt precursors; and wherein
10 one or more amorphous phosphate salts are produced as a result of said one or more amorphous phosphate salt precursors being contacted with said water vapor. In another embodiment of the present invention, said one or more crystalline phosphate salts and said one or more non-phosphate salts are essentially chemically inert to said one or more amorphous phosphate salt precursors. In another embodiment of the present invention, said one or more crystalline
15 phosphate salts and said one or more non-phosphate salts are chemically inert to said one or more amorphous phosphate salt precursors. In yet another embodiment of the present invention, the weight fraction of said one or more amorphous phosphate salt precursors in said dehydration catalyst precursor mixture is between about 0.1 and about 0.8. In the context of the present invention, the anion represented by molecular formula (VI) can refer either to the anion of
20 cyclophosphate salts or to the anion of long-chain linear polyphosphate salts as described in "Phosphoric Acids and Phosphates, Kirk-Othmer Encyclopedia of Chemical Technology" by David R. Gard (published online: 15 July 2005) and "Phosphorus: Chemistry, Biochemistry and Technology" by D.E.C. Corbridge (2013). When the molecular formula (VI) refers to the anion of long chain polyphosphate salts, the molecular formula is not precise in that it does not include
25 the minor perturbation of excess negative charge owing to the two end-group oxygens.

In the context of the present invention, the triple point is the temperature and water partial pressure at which three phases: crystalline dihydrogen monophosphate or dihydrogen diphosphate salt, crystalline polyphosphate salt, and amorphous phosphate salt coexist in thermodynamic equilibrium. By way of example, and not limitation, the triple point can be
30 located by determining the interception of two (out of three) phase boundary curves in the water partial pressure versus temperature phase equilibrium diagram (see Figure 2):

Curve A: phase boundary between i) crystalline dihydrogen monophosphate or crystalline dihydrogen diphosphate salt and ii) crystalline polyphosphate salt, at low temperatures and water

partial pressures (e.g. below about 248 °C and 0.85 bar for potassium salts, below about 267 °C and 0.35 bar for cesium salts);

Curve B: phase boundary between i) crystalline polyphosphate salt and ii) amorphous phosphate salt at high temperatures and medium water partial pressures (e.g. above about 248 °C and 0.85 bar for potassium salts, above about 267 °C and 0.35 bar for cesium salts); and

Curve C: phase boundary between i) crystalline dihydrogen monophosphate or crystalline dihydrogen diphosphate salt and ii) amorphous phosphate salt at high temperatures and high water partial pressures.

The phase boundary curves can be determined by any method known to those skilled in the art, such as, by way of example and not limitation, in-situ x-ray diffraction (XRD), thermal analysis (e.g. thermogravimetric analysis, differential thermal analysis, and differential scanning calorimetry), Raman spectroscopy, infrared spectroscopy (IR), nuclear magnetic resonance (NMR) spectroscopy, or the methods described in Tanimouchi, Y.-k., *et al.*, *J. Electrochem. Soc.* 156:B572-B579 (2009); or Ikeda, A. and Haile, S. M., *Solid State Ionics* 2012, 213:63-71 (2012) (all incorporated herein by reference). As an illustration, in a method based on the in-situ XRD technique, a precursor phosphate salt is contacted at high temperature (e.g. 450 °C) with a gas stream consisting of an inert gas (e.g. nitrogen, helium, or air) and water vapor at a specific water partial pressure until equilibrium is achieved. Then, the temperature is gradually decreased while monitoring changes on x-ray diffraction patterns, until a phase transition is observed. The same procedure is repeated at different water partial pressures and the transition temperatures are recorded. The water partial pressures (in logarithmic scale) are plotted against the transition temperatures (in linear scale) and fitted to the Arrhenius equation ($\log_{10}(P_{H_2O}) = A + B/T$). Finally, the triple point is calculated by determining the interception point between the two phase boundary curves (i.e. curve A and curve B in Figure 2).

In one embodiment of the present invention, the temperature during said contacting step between said dehydration catalyst precursor mixture and said gas mixture is equal to or greater than the temperature at the triple point of at least one of said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step between said dehydration catalyst precursor mixture and said gas mixture is equal to or greater than the lowest triple point temperature of said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step between said dehydration catalyst precursor mixture and said gas mixture is equal to or greater than the highest triple point temperature of said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step between said dehydration


catalyst precursor mixture and said gas mixture is equal to or greater than the average temperature between the lowest triple point temperature and the highest triple point temperature of said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step between said dehydration catalyst precursor mixture and said gas mixture is at least 10 °C greater than the temperature at the triple point of at least one of said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step between said dehydration catalyst precursor mixture and said gas mixture is at least 50 °C greater than the temperature at the triple point of at least one of said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step between said dehydration catalyst precursor mixture and said gas mixture is at least 100 °C greater than the temperature at the triple point of at least one of said one or more precursor phosphate salts.

In one embodiment of the present invention, the water partial pressure in said gas mixture is equal to or greater than the water partial pressure at the triple point of at least one of said one or more precursor phosphate salts. In another embodiment of the present invention, the water partial pressure in said gas mixture is equal to or greater than the lowest triple point water partial pressure of said one or more precursor phosphate salts. In another embodiment of the present invention, the water partial pressure in said gas mixture is equal to or greater than the highest triple point water partial pressure of said one or more precursor phosphate salts. In another embodiment of the present invention, the water partial pressure in said gas mixture is equal to or greater than the average water partial pressure between the lowest triple point water partial pressure and the highest triple point water partial pressure of said one or more precursor phosphate salts. In one embodiment of the present invention, the water partial pressure in said gas mixture is at least 1 bar greater than the water partial pressure at the triple point of at least one of said one or more precursor phosphate salts. In one embodiment of the present invention, the water partial pressure in said gas mixture is at least 2 bar greater than the water partial pressure at the triple point of at least one of said one or more precursor phosphate salts. In one embodiment of the present invention, the water partial pressure in said gas mixture is at least 5 bar greater than the water partial pressure at the triple point of at least one of said one or more precursor phosphate salts.

In another embodiment of the present invention, a method of preparing a dehydration catalyst comprises contacting:


(a) a dehydration catalyst precursor mixture comprising: one or more amorphous phosphate salt precursors, one or more crystalline phosphate salts, and one or more non-phosphate salts;

wherein said one or more crystalline phosphate salts and said one or more non-phosphate salts are substantially chemically inert to said one or more amorphous phosphate salt precursors; wherein said one or more amorphous phosphate salt precursors consist essentially of: i) one or more monovalent cations; and ii) one or more phosphate anions selected from the group 5 represented by molecular formulae (V) and (VI):




wherein y is any integer number equal to or greater than 1 and z is any integer number equal to or greater than 3; wherein said one or more amorphous phosphate salt precursors are neutrally 10 charged;

wherein said one or more crystalline phosphate salts consists essentially of: i) one or more polyvalent cations, and ii) one or more phosphate anions selected from the group represented by molecular formula (II):



15 wherein f is a positive integer; wherein g is a positive integer or zero; wherein h is an integer; wherein (f-2g-h) is equal to or greater than zero; wherein (4f-g) is greater than zero; wherein (2f+h) is greater than zero; wherein (4h/f) is equal to or greater than -2 and equal to or less than 1; wherein said one or more crystalline phosphate salts are neutrally charged; and wherein said one or more non-phosphate salts consist essentially of: i) one or more polyvalent 20 cations, and ii) one or more non-phosphate anions selected from the group represented by molecular formulae (III) and (IV):

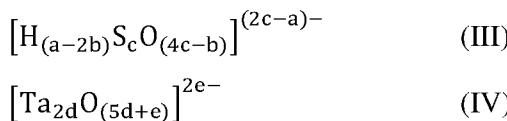

wherein a and b are positive integers or zero; wherein c, d, and e are positive integers; wherein 25 (a-2b) is equal to or greater than zero; wherein (2c-a) is greater than zero; wherein said one or more non-phosphate salts are neutrally charged; with


(b) a gas mixture comprising water;

wherein the water partial pressure in said gas mixture is equal to or greater than about 4.0 bar; wherein said contacting step between said dehydration catalyst precursor mixture and said gas 30 mixture is performed at a temperature equal to or greater than about 250 °C; and wherein one or more amorphous phosphate salts are produced as a result of said one or more amorphous phosphate salt precursors being contacted with said water vapor. In another embodiment of the present invention, said one or more crystalline phosphate salts and said one or more non-

phosphate salts are essentially chemically inert to said one or more amorphous phosphate salt precursors. In another embodiment of the present invention, said one or more crystalline phosphate salts and said one or more non-phosphate salts are chemically inert to said one or more amorphous phosphate salt precursors. In yet another embodiment of the present invention, the 5 weight fraction of said one or more amorphous phosphate salt precursors in said dehydration catalyst precursor mixture is between about 0.1 and about 0.8.


In another embodiment of the present invention, a method of preparing a dehydration catalyst comprises contacting:

(a) a dehydration catalyst precursor mixture comprising: one or more amorphous phosphate salt 10 precursors, one or more crystalline phosphate salts, and one or more non-phosphate salts; wherein said one or more crystalline phosphate salts and said one or more non-phosphate salts are substantially chemically inert to said one or more amorphous phosphate salt precursors; wherein said one or more amorphous phosphate salt precursors consist essentially of: i) one or more monovalent cations selected from the group consisting of K^+ , Rb^+ , Cs^+ , and mixtures 15 thereof; and ii) one or more phosphate anions selected from the group represented by molecular formulae (V) and (VI):




wherein y is any integer number equal to or greater than 1 and z is any integer number equal to or 20 greater than 3; wherein said one or more amorphous phosphate salt precursors are neutrally charged;

wherein said one or more crystalline phosphate salts consists essentially of: i) one or more polyvalent cations, and ii) one or more phosphate anions selected from the group represented by molecular formula (II):



wherein f is a positive integer; wherein g is a positive integer or zero; wherein h is an integer; wherein $(f-2g-h)$ is equal to or greater than zero; wherein $(4f-g)$ is greater than zero; wherein $(2f+h)$ is greater than zero; wherein $(4h/f)$ is equal to or greater than -2 and equal to or less than 1; wherein said one or more crystalline phosphate salts are neutrally charged; and 30 wherein said one or more non-phosphate salts consist essentially of: i) one or more polyvalent cations, and ii) one or more non-phosphate anions selected from the group represented by molecular formulae (III) and (IV):





wherein a and b are positive integers or zero; wherein c, d, and e are positive integers; wherein (a-2b) is equal to or greater than zero; wherein (2c-a) is greater than zero; wherein said one or more non-phosphate salts are neutrally charged; with

5 (b) a gas mixture comprising water;

wherein the water partial pressure in said gas mixture is equal to or greater than about 0.8 bar; wherein said contacting step between said dehydration catalyst precursor mixture and said gas mixture is performed at a temperature equal to or greater than about 250 °C; and wherein one or more amorphous phosphate salts are produced as a result of said one or more amorphous 10 phosphate salt precursors being contacted with said water vapor. In another embodiment of the present invention, said one or more crystalline phosphate salts and said one or more non-phosphate salts are essentially chemically inert to said one or more amorphous phosphate salt precursors. In another embodiment of the present invention, said one or more crystalline phosphate salts and said one or more non-phosphate salts are chemically inert to said one or more 15 amorphous phosphate salt precursors. In yet another embodiment of the present invention, the weight fraction of said one or more amorphous phosphate salt precursors in said dehydration catalyst precursor mixture is between about 0.1 and about 0.8.

In the context of the present invention, “one or more cations” refers to different types of cations and “one or more anions” refers to different types of anions. Non limiting examples of 20 cations are metallic cations, organo-metallic cations, ammonium, substituted ammonium, oxycations, and other cations known by those skilled in the art. Non limiting examples of substituted ammonium and other cations are isopropylammonium, ethylenediammonium, sarcosinium, L-histidinium, glycinium, and 4-aminopyridinium. Non limiting examples of oxycations are pervanadyl and vanadyl ions.

25 Non limiting examples of monovalent cations of said one or more amorphous phosphate salt precursors are cations of alkali metals, organo-metallic cations, ammonium, substituted ammonium, oxycations (e.g. pervanadyl), and other cations known by those skilled in the art. In one embodiment of the present invention, said one or more monovalent cations of said one or more amorphous phosphate salt precursors are selected from the group consisting of Li^+ , Na^+ , K^+ , 30 Rb^+ , Cs^+ , Ag^+ , Tl^+ , and mixtures thereof. In another embodiment of the present invention, said one or more monovalent cations of said one or more amorphous phosphate salt precursors are selected from the group consisting of K^+ , Rb^+ , Cs^+ , and mixtures thereof. In yet another embodiment of the present invention, said one or more monovalent cations of said one or more amorphous phosphate salt precursors is K^+ .

In another embodiment of the present invention, at least one of said one or more amorphous phosphate salt precursors consists of two or more different monovalent cations selected from the group consisting of Li^+ , Na^+ , K^+ , Rb^+ , Cs^+ , Ag^+ , and Tl^+ . In another embodiment of the present invention, at least one of said one or more amorphous phosphate salt precursors consists of two or more different monovalent cations selected from the group consisting of K^+ , Rb^+ , and Cs^+ .

In one embodiment of the present invention, said one or more phosphate anions of said one or more amorphous phosphate salt precursors are selected from the group represented by molecular formulae (Va), (Vb), (IVc), (Vd), (VIa), (VIb), (VIc) and mixtures thereof:

10	$[\text{H}_2\text{PO}_4]^-$	(Va)
	$[\text{H}_2\text{P}_2\text{O}_7]^{2-}$	(Vb)
	$[\text{H}_2\text{P}_3\text{O}_{10}]^{3-}$	(Vc)
	$[\text{H}_2\text{P}_4\text{O}_{13}]^{4-}$	(Vd)
	$[\text{P}_3\text{O}_9]^{3-}$	(VIa)
15	$[\text{P}_6\text{O}_{18}]^{6-}$	(VIb)
	$[\text{PO}_3]_n^n^-$	(VIc);

wherein n is any integer equal to or greater than 3. In the context of the present invention, the anion represented by molecular formula (VIc) can refer either to the anion of cyclophosphate salts or to the anion of long-chain linear polyphosphate salts as described in "Phosphoric Acids and Phosphates, Kirk-Othmer Encyclopedia of Chemical Technology" by David R. Gard (published online: 15 July 2005) and "Phosphorus: Chemistry, Biochemistry and Technology" by D.E.C. Corbridge (2013). When the molecular formula (VIc) refers to the anion of long chain polyphosphate salts, the molecular formula is not precise in that it does not include the minor perturbation of excess negative charge owing to the two end-group oxygens.

25 Non limiting examples of amorphous phosphate salt precursors are dihydrogen monophosphates, dihydrogen diphosphates, dihydrogen triphosphates, dihydrogen tetraphosphates, tricyclophosphates, tetracyclophosphates, pentacyclophosphates, hexacyclophosphates, octacyclophosphates, decacyclophosphates, and linear polyphosphates of alkali metals or mixed alkali metals. In one embodiment of the present invention, said one or 30 more amorphous phosphate salt precursors are selected from the group consisting of LiH_2PO_4 , $\text{Li}_2\text{H}_2\text{P}_2\text{O}_7$, $\text{Li}_3\text{P}_3\text{O}_9$, $\text{Li}_4\text{P}_4\text{O}_{12}$, $\text{Li}_6\text{P}_6\text{O}_{18}$, $\text{Li}_8\text{P}_8\text{O}_{24}$, $(\text{LiPO}_3)_n$, NaH_2PO_4 , $\text{Na}_2\text{H}_2\text{P}_2\text{O}_7$, $\text{Na}_3\text{H}_2\text{P}_3\text{O}_{10}$, $\text{Na}_3\text{P}_3\text{O}_9$, $\text{Na}_5\text{P}_5\text{O}_{15}$, $\text{Na}_4\text{P}_4\text{O}_{12}$, $\text{Na}_6\text{P}_6\text{O}_{18}$, $\text{Na}_8\text{P}_8\text{O}_{24}$, $\text{Na}_{12}\text{P}_{12}\text{O}_{36}$, $(\text{NaPO}_3)_n$, KH_2PO_4 , $\text{K}_2\text{H}_2\text{P}_2\text{O}_7$, $\text{K}_3\text{H}_2\text{P}_3\text{O}_{10}$, $\text{K}_4\text{H}_2\text{P}_4\text{O}_{13}$, $\text{K}_3\text{P}_3\text{O}_9$, $\text{K}_4\text{P}_4\text{O}_{12}$, $\text{K}_6\text{P}_6\text{O}_{18}$, $\text{K}_8\text{P}_8\text{O}_{24}$, $\text{K}_{10}\text{P}_{10}\text{O}_{30}$, $(\text{KPO}_3)_n$, RbH_2PO_4 , $\text{Rb}_2\text{H}_2\text{P}_2\text{O}_7$, $\text{Rb}_3\text{H}_2\text{P}_3\text{O}_{10}$, $\text{Rb}_4\text{H}_2\text{P}_4\text{O}_{13}$, $\text{Rb}_3\text{P}_3\text{O}_9$, $\text{Rb}_4\text{P}_4\text{O}_{12}$, $\text{Rb}_6\text{P}_6\text{O}_{18}$, $\text{Rb}_8\text{P}_8\text{O}_{24}$, $(\text{RbPO}_3)_n$,

CsH_2PO_4 , $\text{Cs}_2\text{H}_2\text{P}_2\text{O}_7$, $\text{Cs}_3\text{H}_2\text{P}_3\text{O}_{10}$, $\text{Cs}_4\text{H}_2\text{P}_4\text{O}_{13}$, $\text{Cs}_3\text{P}_3\text{O}_9$, $\text{Cs}_4\text{P}_4\text{O}_{12}$, $\text{Cs}_6\text{P}_6\text{O}_{18}$, $\text{Cs}_8\text{P}_8\text{O}_{24}$, $(\text{CsPO}_3)_n$, $\text{NaK}_3(\text{H}_2\text{P}_2\text{O}_7)_2$, $\text{LiK}_2\text{P}_3\text{O}_9$, $\text{LiNa}_2\text{P}_3\text{O}_9$, $\text{Na}_2\text{KP}_3\text{O}_9$, $\text{Na}_2\text{RbP}_3\text{O}_9$, $\text{Na}_2\text{CsP}_3\text{O}_9$, $\text{Na}_3\text{KP}_4\text{O}_{12}$, $\text{Na}_2\text{K}_2\text{P}_4\text{O}_{12}$, $\text{Na}_2\text{Rb}_2\text{P}_4\text{O}_{12}$, $\text{Na}_3\text{CsP}_4\text{O}_{12}$, $\text{Li}_3\text{Na}_3\text{P}_6\text{O}_{18}$, $\text{Li}_3\text{K}_3\text{P}_6\text{O}_{18}$, $\text{Li}_2\text{K}_4\text{P}_6\text{O}_{18}$, $\text{Li}_3\text{Na}_3\text{P}_6\text{O}_{18}$, $\text{Li}_3\text{K}_3\text{P}_6\text{O}_{18}$, $\text{Li}_3\text{Rb}_3\text{P}_6\text{O}_{18}$, $\text{Li}_3\text{Cs}_3\text{P}_6\text{O}_{18}$, $\text{Na}_4\text{Rb}_2\text{P}_6\text{O}_{18}$, $\text{Na}_4\text{Cs}_2\text{P}_6\text{O}_{18}$, $\text{LiNa}_7\text{P}_8\text{O}_{24}$,

5 $\text{Na}_6\text{K}_4\text{P}_{10}\text{O}_{30}$, $(\text{LiK}(\text{PO}_3)_2)_n$, $(\text{LiRb}(\text{PO}_3)_2)_n$, $(\text{Li}_2\text{Rb}(\text{PO}_3)_3)_n$, $(\text{LiCs}(\text{PO}_3)_2)_n$, $(\text{Li}_2\text{Cs}(\text{PO}_3)_3)_n$, any of their hydrated forms, and mixtures thereof. In another embodiment of the present invention, said one or more amorphous phosphate salt precursors are selected from the group consisting of LiH_2PO_4 , $(\text{LiPO}_3)_n$, NaH_2PO_4 , $(\text{NaPO}_3)_n$, KH_2PO_4 , $(\text{KPO}_3)_n$, RbH_2PO_4 , $(\text{RbPO}_3)_n$, CsH_2PO_4 , $(\text{CsPO}_3)_n$, any of their hydrated forms, and mixtures thereof. In yet another embodiment of the


10 present invention, said one or more amorphous phosphate salt precursors are selected from the group consisting of KH_2PO_4 , $(\text{KPO}_3)_n$, any of their hydrated forms, and mixtures thereof. In the context of the present invention, the amorphous phosphate salt precursors represented by the formulae $(\text{M}^{\text{I}}\text{PO}_3)_n$, $(\text{M}^{\text{I}}\text{N}^{\text{I}}(\text{PO}_3)_2)_n$, or $(\text{M}^{\text{I}}_2\text{N}^{\text{I}}(\text{PO}_3)_3)_n$, wherein M^{I} and N^{I} are two different monovalent cations, can be either cyclophosphates or long-chain linear polyphosphates.


15 Non limiting examples of said one or more polyvalent cations of said one or more crystalline phosphate salts and of said one or more non-phosphate salts are cations of alkaline earth metals, transition metals, post-transition or poor metals, and metalloids; organo-metallic cations, substituted ammonium cations, oxycations (e.g. vanadyl), and other cations known by those skilled in the art. In one embodiment of the present invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals Be, Mg, Ca, Sr, Ba, Sc, Y, Ti, Zr, Hf, V, Nb, Ta, Cr, Mo, W, Mn, Re, Al, Ga, In, Tl, Si, Ge, Sn, Pb, Sb, Bi, La, Ce, Pr, Nd, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu, and mixtures thereof. In another embodiment of the present invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals Mg, Ca, Sr, Ba, Y, Mn, Al, Er, and mixtures thereof. In another embodiment of the present invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of divalent cations, trivalent cations, tetravalent cations, pentavalent cations, and mixtures thereof. In another embodiment of the present invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of Be^{2+} , Mg^{2+} , Ca^{2+} , Sr^{2+} , Ba^{2+} , Sc^{3+} , Y^{3+} , Ti^{3+} , Ti^{4+} , Zr^{2+} , Zr^{4+} , Hf^{4+} , V^{3+} , V^{4+} , Nb^{3+} , Cr^{2+} , Cr^{3+} ,

Mo³⁺, Mo⁴⁺, Mn²⁺, Mn³⁺, Re⁴⁺, Al³⁺, Ga³⁺, In³⁺, Si⁴⁺, Ge⁴⁺, Sn⁴⁺, Pb⁴⁺, Sb³⁺, Sb⁵⁺, Bi³⁺, La³⁺, Ce³⁺, Ce⁴⁺, Pr³⁺, Nd³⁺, Sm³⁺, Eu³⁺, Gd³⁺, Tb³⁺, Dy³⁺, Ho³⁺, Er³⁺, Tm³⁺, Yb³⁺, Lu³⁺, and mixtures thereof. In another embodiment of the present invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of Mg²⁺, Ca²⁺, Sr²⁺, Ba²⁺, Y³⁺, Mn²⁺, Mn³⁺, Al³⁺, Er³⁺, and mixtures thereof. In yet another embodiment of the present invention, said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are Ba²⁺.

In one embodiment of the present invention, said one or more crystalline phosphate salts further consist of one or more monovalent cations. In another embodiment of the present invention, said one or more non-phosphate salts further consist of one or more monovalent cations. Non limiting examples of said one or more monovalent cations of said one or more crystalline phosphate salts and of said one or more non-phosphate salts are cations of alkali metals. In one embodiment of the present invention, said one or more monovalent cations of said one or more crystalline phosphate salts and said one or more monovalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals Li, Na, K, Rb, Cs, Ag, Tl, and mixtures thereof; and said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals Be, Mg, Ca, Sr, Ba, Sc, Y, Ti, Zr, Hf, V, Nb, Ta, Cr, Mo, W, Mn, Re, Al, Ga, In, Tl, Si, Ge, Sn, Pb, Sb, Bi, La, Ce, Pr, Nd, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu, and mixtures thereof. In another embodiment of the present invention, said one or more monovalent cations of said one or more crystalline phosphate salts and said one or more monovalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals K, Rb, Cs, and mixtures thereof; and said one or more polyvalent cations of said one or more crystalline phosphate salts and said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals Mg, Ca, Sr, Ba, Y, Mn, Al, Er, and mixtures thereof.

In one embodiment of the present invention, said one or more phosphate anions of said one or more crystalline phosphate salts are selected from the group represented by molecular formulae (IIa) to (IIg), and mixtures thereof:

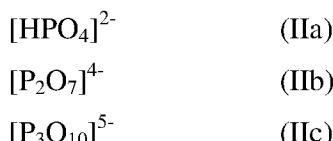

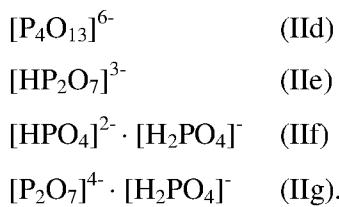

5 In another embodiment of the present invention, said one or more phosphate anions of said one or more crystalline phosphate salts are selected from the group represented by molecular formulae (IIa), (IIb), and mixtures thereof:



10 Non limiting examples of said one or more crystalline phosphate salts are phosphates of alkaline earth metals, transition metals, post-transition or poor metals, and metalloids; and phosphates of mixed alkali metals with alkaline earth metals, transition metals, post-transition or poor metals, and metalloids. In one embodiment of the present invention, said one or more crystalline phosphate salts are selected from the group consisting of BeHPO_4 , MgHPO_4 ,
15 CaHPO_4 , SrHPO_4 , BaHPO_4 , BeNH_4PO_4 , $\text{Be}_2\text{P}_2\text{O}_7$, $\text{Mg}_2\text{P}_2\text{O}_7$, $\text{Mg}_3\text{K}_2(\text{P}_2\text{O}_7)_2$,
 $\text{Ca}_2\text{P}_2\text{O}_7$, $\text{CaK}_2\text{P}_2\text{O}_7$, $\text{Ca}_3\text{K}_2(\text{P}_2\text{O}_7)_2$, $\text{Ca}_5\text{K}_2(\text{P}_2\text{O}_7)_3$, $\text{CaRb}_2\text{P}_2\text{O}_7$, $\text{CaCs}_2\text{P}_2\text{O}_7$, CaMgP_2O_7 ,
 $\text{Ca}_3(\text{NH}_4)_2(\text{P}_2\text{O}_7)_2$, $\text{Ca}_5(\text{NH}_4)_2(\text{P}_2\text{O}_7)_3$, $\text{Sr}_2\text{P}_2\text{O}_7$, $\text{SrK}_2\text{P}_2\text{O}_7$, $\text{SrRb}_2\text{P}_2\text{O}_7$, $\text{SrCs}_2\text{P}_2\text{O}_7$, SrMgP_2O_7 ,
 $\text{Ba}_2\text{P}_2\text{O}_7$, BaMgP_2O_7 , BaCaP_2O_7 , $\text{Sc}_4(\text{P}_2\text{O}_7)_3$, ScKP_2O_7 , ScRbP_2O_7 , ScCsP_2O_7 , YKP_2O_7 ,
 YRbP_2O_7 , YCsP_2O_7 , TiP_2O_7 , $\text{Ti}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, ZrP_2O_7 , ZrMgP_2O_7 , HfP_2O_7 , $\text{V}_4(\text{P}_2\text{O}_7)_3$, VKP_2O_7 ,
20 VRbP_2O_7 , VCsP_2O_7 , $\text{V}_2\text{Sr}(\text{P}_2\text{O}_7)_2$, $\text{V}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, $\text{Nb}_2\text{Mg}(\text{P}_2\text{O}_7)_2$, $\text{Cr}_4(\text{P}_2\text{O}_7)_3$, CrHP_2O_7 ,
 $\text{CrNH}_4\text{P}_2\text{O}_7$, CrKP_2O_7 , CrRbP_2O_7 , CrCsP_2O_7 , $\text{Cr}_2\text{Mg}(\text{P}_2\text{O}_7)_2$, CrCaP_2O_7 , $\text{Cr}_2\text{Ca}(\text{P}_2\text{O}_7)_2$,
 $\text{Cr}_2\text{Sr}(\text{P}_2\text{O}_7)_2$, CrBaP_2O_7 , $\text{Cr}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, MoP_2O_7 , MoKP_2O_7 , MoRbP_2O_7 , MoCsP_2O_7 ,
 $\text{Mo}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, $\text{Mn}_2\text{P}_2\text{O}_7$, MnHP_2O_7 , $\text{MnK}_2\text{P}_2\text{O}_7$, MnKP_2O_7 , $2\text{Mn}_2\text{P}_2\text{O}_7 \cdot \text{Mn}_2\text{KP}_3\text{O}_{10}$,
 $\text{MnRb}_2\text{P}_2\text{O}_7$, MnRbP_2O_7 , MnCsP_2O_7 , MnCaP_2O_7 , MnSrP_2O_7 , MnBaP_2O_7 , ReP_2O_7 , $\text{AlNH}_4\text{P}_2\text{O}_7$,
25 AlKP_2O_7 , AlRbP_2O_7 , $\text{GaNH}_4\text{P}_2\text{O}_7$, GaKP_2O_7 , GaRbP_2O_7 , InKP_2O_7 , InRbP_2O_7 , InCsP_2O_7 ,
 $\text{In}_2\text{Ca}(\text{P}_2\text{O}_7)_2$, $\text{In}_2\text{Sr}(\text{P}_2\text{O}_7)_2$, $\text{In}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, SiP_2O_7 , GeP_2O_7 , SnP_2O_7 , PbP_2O_7 , $\text{Sb}^{\text{V}}\text{Sb}^{\text{III}}(\text{P}_2\text{O}_7)_2$,
 $\text{Bi}_4(\text{P}_2\text{O}_7)_3$, BiHP_2O_7 , $\text{La}_4(\text{P}_2\text{O}_7)_3$, LaHP_2O_7 , LaKP_2O_7 , CeP_2O_7 , $\text{Gd}_4(\text{P}_2\text{O}_7)_3$, GdKP_2O_7 ,
 GdRbP_2O_7 , GdCsP_2O_7 , TbKP_2O_7 , TbRbP_2O_7 , TbCsP_2O_7 , DyKP_2O_7 , DyRbP_2O_7 , DyCsP_2O_7 ,
 HoKP_2O_7 , HoRbP_2O_7 , HoCsP_2O_7 , ErKP_2O_7 , ErRbP_2O_7 , ErCsP_2O_7 , TmKP_2O_7 , TmRbP_2O_7 ,
30 TmCsP_2O_7 , YbHP_2O_7 , YbKP_2O_7 , YbRbP_2O_7 , YbCsP_2O_7 , LuKP_2O_7 , LuRbP_2O_7 , LuCsP_2O_7 ,
 $\text{Be}_2\text{RbP}_3\text{O}_{10}$, $\text{Ca}_2\text{KP}_3\text{O}_{10}$, $\text{Ca}_2\text{RbP}_3\text{O}_{10}$, $\text{Ca}_2\text{CsP}_3\text{O}_{10}$, $\text{Sr}_2\text{KP}_3\text{O}_{10}$, $\text{Sr}_2\text{RbP}_3\text{O}_{10}$, $\text{Sr}_2\text{CsP}_3\text{O}_{10}$,
 $\text{Ba}_2\text{KP}_3\text{O}_{10}$, $\text{Ba}_2\text{RbP}_3\text{O}_{10}$, $\text{Ba}_2\text{CsP}_3\text{O}_{10}$, $\text{Y}_5(\text{P}_3\text{O}_{10})_3$, $\text{VCsP}_3\text{O}_{10}$, $\text{CrCsP}_3\text{O}_{10}$, $\text{Cr}_3\text{K}(\text{P}_3\text{O}_{10})_2$,
 $\text{Cr}_3\text{Rb}(\text{P}_3\text{O}_{10})_2$, $\text{Cr}_3\text{Cs}(\text{P}_3\text{O}_{10})_2$, $\text{MnCs}_2\text{P}_3\text{O}_{10}$, $\text{AlCs}_2\text{P}_3\text{O}_{10}$, $\text{Al}_3\text{Cs}(\text{P}_3\text{O}_{10})_2$, $\text{GaCs}_2\text{P}_3\text{O}_{10}$,
 $\text{In}_5(\text{P}_3\text{O}_{10})_3$, $\text{La}_5(\text{P}_3\text{O}_{10})_3$, $\text{Pr}_5(\text{P}_3\text{O}_{10})_3$, $\text{Nd}_5(\text{P}_3\text{O}_{10})_3$, $\text{Sm}_5(\text{P}_3\text{O}_{10})_3$, $\text{Gd}_5(\text{P}_3\text{O}_{10})_3$, $\text{Er}_5(\text{P}_3\text{O}_{10})_3$

Yb₅(P₃O₁₀)₃, Ca₃P₄O₁₃, Sr₃P₄O₁₃, Ba₃P₄O₁₃, Ba₂MgP₄O₁₃, Y₂P₄O₁₃, Cr₂P₄O₁₃, Mn₂P₄O₁₃, Gd₂P₄O₁₃, Pb₃P₄O₁₃, Bi₂P₄O₁₃, La₂P₄O₁₃, any of their hydrated forms, and mixtures thereof. In another embodiment of the present invention, said one or more crystalline phosphate salts are selected from the group consisting of MgHPO₄, CaHPO₄, SrHPO₄, BaHPO₄, Mg₂P₂O₇, Ca₂P₂O₇, 5 Sr₂P₂O₇, Ba₂P₂O₇, YKP₂O₇, Mn₂P₂O₇, MnKP₂O₇, AlKP₂O₇, ErKP₂O₇, Ca₃P₄O₁₃, Sr₃P₄O₁₃, Ba₃P₄O₁₃, any of their hydrated forms, and mixtures thereof.

In one embodiment of the present invention, said one or more non-phosphate anions are selected from the group represented by molecular formulae (IIIa) to (IIId), (IVa) to (IVg), and mixtures thereof:

10	[SO ₄] ²⁻	(IIIa)
	[S ₂ O ₇] ²⁻	(IIIb)
	[HSO ₄] ¹⁻	(IIIc)
	[SO ₄] ²⁻ · [HSO ₄] ⁻	(IIIId)
	[Ta ₂ O ₆] ²⁻	(IVa)
15	[Ta ₂ O ₇] ⁴⁻	(IVb)
	[Ta ₂ O ₉] ⁸⁻	(IVc)
	[Ta ₂ O ₁₀] ¹⁰⁻	(IVd)
	[Ta ₂ O ₁₁] ¹²⁻	(IVe)
	[Ta ₄ O ₁₁] ²⁻	(IVf)
20	[Ta ₄ O ₁₅] ¹⁰⁻	(IVg).

In another embodiment of the present invention, said one or more non-phosphate anions are selected from the group represented by molecular formulae (IIIa), (IVa), and mixtures thereof:

25	[SO ₄] ²⁻	(IIIa)
	[Ta ₂ O ₆] ²⁻	(IVa).

Non limiting examples of said one or more non-phosphate salts are sulfates of alkaline-earth metals, tantalates of alkaline-earth metals, sulfates of mixed alkali and alkaline earth metals, and tantalates of mixed alkali and alkaline earth metals. In one embodiment of the present invention, said one or more non-phosphate salts are selected from the group consisting of CaSO₄, SrSO₄, BaSO₄, SrK₂(SO₄)₂, SrRb₂(SO₄)₂, Ca₂K₂(SO₄)₃, Ca₂Rb₂(SO₄)₃, Ca₂Cs₂(SO₄)₃, CaTa₄O₁₁, SrTa₄O₁₁, BaTa₄O₁₁, MgTa₂O₆, CaTa₂O₆, SrTa₂O₆, BaTa₂O₆, Mg₂Ta₂O₇, Ca₂Ta₂O₇, Sr₂Ta₂O₇, SrK₂Ta₂O₇, Ba₂Ta₂O₇, Ba₃Ta₂O₈, Mg₄Ta₂O₉, Ca₄Ta₂O₉, Sr₄Ta₂O₉, Ba₄Ta₂O₉, Ca₅Ta₂O₁₀, Ca₂KTa₃O₁₀, Ca₂RbTa₃O₁₀, Ca₂CsTa₃O₁₀, Sr₂KTa₃O₁₀, Sr₂RbTa₃O₁₀, Sr₂CsTa₃O₁₀, Mg₅Ta₄O₁₅, Sr₅Ta₄O₁₅, Ba₅Ta₄O₁₅, Sr₂KTa₅O₁₅, Ba₂KTa₅O₁₅, Sr₆Ta₂O₁₁, Ba₆Ta₂O₁₁, any of their hydrated

forms, and mixtures thereof. In another embodiment of the present invention, said one or more non-phosphate salts are selected from the group consisting of CaSO_4 , CaTa_2O_6 , SrSO_4 , SrTa_2O_6 , BaSO_4 , BaTa_2O_6 , any of their hydrated forms, and mixtures thereof. In yet another embodiment of the present invention, said one or more non-phosphate salts are selected from the group 5 consisting of BaSO_4 , BaTa_2O_6 , any of their hydrated forms, and mixtures thereof.

In another embodiment of the present invention, said one or more amorphous phosphate salt precursors are selected from the group consisting of KH_2PO_4 , $(\text{KPO}_3)_n$, RbH_2PO_4 , $(\text{RbPO}_3)_n$, CsH_2PO_4 , $(\text{CsPO}_3)_n$, any of their hydrated forms, and mixtures thereof; said one or more crystalline phosphate salts are selected from the group consisting of $\text{Ca}_2\text{P}_2\text{O}_7$, CaHPO_4 , $\text{Sr}_2\text{P}_2\text{O}_7$, 10 SrHPO_4 , $\text{Ba}_2\text{P}_2\text{O}_7$, BaHPO_4 , any of their hydrated forms, and mixtures thereof; and said one or more non-phosphate salts are selected from the group consisting of CaSO_4 , CaTa_2O_6 , SrSO_4 , SrTa_2O_6 , BaSO_4 , BaTa_2O_6 , any of their hydrated forms, and mixtures thereof. In another embodiment of the present invention, said one or more amorphous phosphate salt precursors is KH_2PO_4 or $(\text{KPO}_3)_n$; said one or more crystalline phosphate salts is $\text{Ba}_2\text{P}_2\text{O}_7$; and said one or 15 more non-phosphate compounds is BaSO_4 .

In one embodiment of the present invention, said dehydration catalyst precursor mixture further comprises silicon oxide (SiO_2). In another embodiment of the present invention, said silicon oxide is selected from the group consisting of amorphous silica, quartz, tridymite, cristobalite, moganite, coesite, and mixtures thereof. In another embodiment of the present 20 invention, said silicon oxide is amorphous silica. In yet another embodiment of the present invention, said silicon oxide has a specific surface area of less than about $10 \text{ m}^2/\text{g}$. In another embodiment of the present invention, said dehydration catalyst comprises $(\text{KPO}_3)_n$, BaSO_4 , $\text{Ba}_2\text{P}_2\text{O}_7$, and amorphous silica. In another embodiment of the present invention, said dehydration catalyst consists essentially of $(\text{KPO}_3)_n$, BaSO_4 , $\text{Ba}_2\text{P}_2\text{O}_7$, and amorphous silica.

25 In one embodiment of the present invention, the method of preparing the dehydration catalyst further comprises mixing one or more inert supports with said dehydration catalyst precursor mixture before said contacting step with said gas mixture. Non limiting examples of inert supports are silica or silicates, alumina or aluminates, aluminosilicates, titania or titanates, zirconia or zirconates, carbons (such as activated carbon, diamond, graphite, or fullerenes), phosphates, sulfates, tantalates, ceria, other metal oxides, and mixtures thereof. In the context of the reactions expressly described herein, in one embodiment of the present invention, said one or more inert supports comprise silicon oxide (SiO_2). In another embodiment of the present invention, said one or more inert supports consists essentially of silicon oxide (SiO_2). In another embodiment of the present invention, said silicon oxide is selected from the group consisting of 30

amorphous silica, quartz, tridymite, cristobalite, moganite, coesite, and mixtures thereof. In another embodiment of the present invention, said silicon oxide is amorphous silica. In another embodiment of the present invention, said silicon oxide has a specific surface area of less than about 10 m²/g.

5 The method of preparing the dehydration catalyst comprises contacting said dehydration catalyst precursor mixture with a gas mixture comprising water vapor. In one embodiment of the present invention, the water partial pressure in said gas mixture is equal to or greater than about 0.4 bar. In another embodiment of the present invention, the water partial pressure in said gas mixture is equal to or greater than about 0.8 bar. In another embodiment of the present invention, 10 the water partial pressure in said gas mixture is equal to or greater than about 4 bar. In another embodiment of the present invention, the water partial pressure in said gas mixture is between about 5 bar and about 35 bar. In another embodiment of the present invention, said contacting step is performed under a total pressure equal to or greater than about 1 bar. In another embodiment of the present invention, said contacting step is performed under a total pressure 15 equal to or greater than about 4 bar. In yet another embodiment of the present invention, said contacting step is performed under a total pressure between about 4 bar and about 35 bar.

In another embodiment of the present invention, said contacting step between said dehydration catalyst precursor mixture and said gas mixture is performed at a temperature equal to or greater than about 250 °C. In another embodiment of the present invention, said contacting 20 step between said dehydration catalyst precursor mixture and said gas mixture is performed at a temperature between about 300 °C and about 450 °C.

The method of preparing the dehydration catalyst can comprise mixing of two or more different materials. This mixing step can be performed by any method known to those skilled in the art, such as, by way of example and not limitation: solid mixing, impregnation, or co-precipitation. In the solid mixing method, the various components are physically mixed together with optional grinding using any method known to those skilled in the art, such as, by way of example and not limitation, shear, extensional, kneading, extrusion, ball milling, and others, and alternatively followed by any additional treatment or activation step. In the impregnation method, 25 a suspension of insoluble material (e.g. inert support) is treated with a solution of catalyst soluble ingredients, and the resulting material is then treated or activated under conditions that will convert the mixture to a more active or preferred state. In the co-precipitation method, a homogenous solution of the catalyst ingredients is precipitated by the addition of additional ingredients, followed by optional filtration and heating to remove solvents and volatile materials 30 (e.g., water, nitric acid, carbon dioxide, ammonia, or acetic acid).

Mixing of catalyst components with surfactants followed by heating can increase catalyst surface area. In one embodiment of the present invention, the method of preparing the dehydration catalyst further comprises mixing one or more surfactants with said one or more amorphous phosphate salt precursors, said one or more crystalline phosphate salts, said one or 5 more non-phosphate salts, or said dehydration catalyst precursor mixture before said contacting step with said gas mixture. In another embodiment of the present invention, said one or more surfactants are cationic or zwitterionic. Non limiting examples of surfactants are myristyltrimethylammonium bromide, hexadecyltrimethylammonium bromide, dodecyltrimethylammonium bromide, decyltrimethylammonium bromide, and 10 octadecyltrimethyl ammonium bromide.

Heating can promote chemical reactions, thermal decompositions, phase transitions, and/or removal of volatile materials. In one embodiment of the present invention, the method of preparing the dehydration catalyst further comprises heating said one or more amorphous phosphate salt precursors, said one or more crystalline phosphate salts, said one or more non- 15 phosphate salts, or said dehydration catalyst precursor mixture at a temperature equal to or greater than 180 °C before said contacting step with said gas mixture. In another embodiment of the present invention, the method of preparing the dehydration catalyst further comprises heating said one or more amorphous phosphate salt precursors, said one or more crystalline phosphate salts, said one or more non-phosphate salts, or said dehydration catalyst precursor mixture at a 20 temperature equal to or greater than 300 °C before said contacting step with said gas mixture. In another embodiment of the present invention, the method of preparing the dehydration catalyst further comprises heating said one or more amorphous phosphate salt precursors, said one or more crystalline phosphate salts, said one or more non-phosphate salts, or said dehydration catalyst precursor mixture at a temperature between about 350 °C and about 650 °C before said 25 contacting step with said gas mixture. In another embodiment of the present invention, the method of preparing the dehydration catalyst further comprises heating said one or more amorphous phosphate salt precursors, said one or more crystalline phosphate salts, said one or more non-phosphate salts, or said dehydration catalyst precursor mixture at a temperature between about 400 °C and about 450 °C before said contacting step with said gas mixture. Said 30 heating step is typically done using any method known to those skilled in the art, such as, by way of example and not limitation, convection, conduction, radiation, microwave heating, and others. The heating step is performed with equipment such as, by way of example and not limitation, furnaces, atomizers, or reactors of various designs, comprising shaft furnaces, rotary kilns, hearth furnaces, fluidized bed reactors, spay dryers. The duration of said heating step is, in one

embodiment of the present invention, about one hour to about seventy-two hours. In another embodiment, the duration of said heating step is between about two hours and about twelve hours. In yet another embodiment, the duration of said heating step is about four hours. In one embodiment, the temperature ramp in said heating step is between about 0.5 °C/min and about 20 °C/min. In another embodiment, the temperature ramp in said heating step is about 10 °C/min.

In one embodiment of the present invention, the method of preparing the dehydration catalyst further comprises molding the particles of said one or more amorphous phosphate salt precursors, said one or more crystalline phosphate salts, said one or more non-phosphate salts, or said dehydration catalyst precursor mixture before said contacting step with said gas mixture.

10 Non limiting examples of molding operations are granulation, agglomeration, compaction, pelleting, and extrusion. In another embodiment of the present invention, the method of preparing the dehydration catalyst further comprises size reduction or grinding of the particles of said one or more amorphous phosphate salt precursors, said one or more crystalline phosphate salts, said one or more non-phosphate salts, or said dehydration catalyst precursor mixture before said

15 contacting step with said gas mixture. In one embodiment of the present invention, the method of preparing the dehydration catalyst further comprises sieving the particles of said one or more amorphous phosphate salt precursors, said one or more crystalline phosphate salts, said one or more non-phosphate salts, or said dehydration catalyst precursor mixture to select a material of specific size distribution before said contacting step with said gas mixture. In another

20 embodiment of the present invention, the method of preparing the dehydration catalyst further comprises sieving the particles of said one or more amorphous phosphate salt precursors, said one or more crystalline phosphate salts, said one or more non-phosphate salts, or said dehydration catalyst precursor mixture to a median particle size of about 50 µm to about 500 µm.

25 In yet another embodiment of the present invention, the method of preparing the dehydration catalyst further comprises sieving the particles of said one or more amorphous phosphate salt precursors, said one or more crystalline phosphate salts, said one or more non-phosphate salts, or said dehydration catalyst precursor mixture to a median particle size of about 100 µm to about 200 µm.

In another embodiment, the dehydration catalyst is prepared by the following steps, which

30 comprise: (a) mixing KH_2PO_4 , BaSO_4 , $\text{Ba}_2\text{P}_2\text{O}_7$, and amorphous silica to produce a dehydration catalyst precursor mixture, (b) heating said dehydration catalyst precursor mixture between about 200°C and about 650°C for about one hour to about twelve hours, to produce a calcined dehydration catalyst precursor mixture, (c) optionally grinding and sieving said calcined dehydration catalyst precursor mixture, to produce a ground dehydration catalyst precursor

mixture, and (d) contacting said calcined dehydration catalyst precursor mixture or said ground dehydration catalyst precursor mixture with a gas mixture comprising nitrogen and water vapor; wherein the water partial pressure in said gas mixture is between about 5 bar and about 15 bar and wherein said contacting step is performed at a temperature between about 325 °C and about 5 425 °C, to produce said dehydration catalyst.

Following preparation, the catalyst can be utilized to catalyze several chemical reactions. Non limiting examples of reactions are: dehydration of lactic acid to acrylic acid (as described in further detail below); dehydration of 3-hydroxypropionic acid or 3-hydroxypropionic acid derivatives, or mixtures thereof to acrylic acid; dehydration of glycerin to acrolein; isomerization 10 of lactic acid to 3-hydroxypropionic acid in the presence of water; reduction of hydroxypropionic acid to propionic acid or 1-propanol in the presence of hydrogen gas; dehydration of aliphatic alcohols to alkenes or olefins; dehydrogenation of aliphatic alcohols to ethers; other dehydrogenations, hydrolyses, alkylations, dealkylations, oxidations, disproportionations, esterifications, cyclizations, isomerizations, condensations, aromatizations, polymerizations; and 15 other reactions that may be apparent to those having ordinary skill in the art.

IV. Methods of Producing Acrylic Acid, Acrylic Acid Derivatives, or Mixtures Thereof

The inventors have unexpectedly found that the method of dehydrating hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof can produce high yield to and 20 selectivity of acrylic acid, acrylic acid derivatives, or mixtures thereof when the dehydration catalyst is prepared according to the present invention and the dehydration reaction is operated under a water partial pressure of more than about 0.4 bar. Not wishing to be bound by theory, the inventors believe that the elevated water partial pressure enhances the catalyst activity due to the 25 formation (or preservation) of Brønsted acid sites from less protonated catalyst precursors. Thus, the inventors have also unexpectedly found that the process of dehydrating hydroxypropionic acid can be more efficient in the presence of elevated water partial pressure than under low water partial pressure or atmospheric conditions usually preferred in the art.

A method for dehydrating hydroxypropionic acid, hydroxypropionic acid derivatives, or 30 mixtures thereof to acrylic acid, acrylic acid derivatives, or mixtures thereof is provided. In one embodiment of the present invention, said hydroxypropionic acid is selected from the group consisting of lactic acid (2-hydroxypropionic), 3-hydroxypropionic acid, and mixtures thereof; and said hydroxypropionic acid derivatives are selected from the group consisting of lactic acid derivatives, 3-hydroxypropionic acid derivatives, and mixtures thereof. In another embodiment

of the present invention, said hydroxypropionic acid is lactic acid and said hydroxypropionic acid derivatives are lactic acid derivatives.

Lactic acid can be D-lactic acid, L-lactic acid, or mixture thereof. Lactic acid derivatives can be metal or ammonium salts of lactic acid, alkyl esters of lactic acid, lactic acid oligomers, 5 cyclic di-esters of lactic acid, lactic acid anhydride, 2-alkoxypropionic acids or their alkyl esters, 2-aryloxypropionic acids or their alkyl esters, 2-acyloxypropionic acids or their alkyl esters, or a mixture thereof. Non limiting examples of metal salts of lactic acid are sodium lactate, potassium lactate, and calcium lactate. Non limiting examples of alkyl esters of lactic acid are methyl lactate, ethyl lactate, butyl lactate, 2-ethylhexyl lactate, and mixtures thereof. A non limiting 10 example of cyclic di-esters of lactic acid is dilactide. Non limiting examples of 2-alkoxypropionic acids are 2-methoxypropionic acid and 2-ethoxypropionic acid. A non limiting example of 2-aryloxypropionic acid is 2-phenoxypropionic acid. A non limiting example of 2-acyloxypropionic acid is 2-acetoxypropionic acid. In one embodiment of the present invention, the lactic acid derivative is methyl lactate. Methyl lactate can be neat or in a solution with water, 15 methanol, or mixtures thereof.

3-hydroxypropionic acid derivatives can be metal or ammonium salts of 3-hydroxypropionic acid, alkyl esters of 3-hydroxypropionic acid, 3-hydroxypropionic acid oligomers, 3-alkoxypropionic acids or their alkyl esters, 3-aryloxypropionic acids or their alkyl esters, 3-acyloxypropionic acids or their alkyl esters, or a mixture thereof. Non limiting examples 20 of metal salts of 3-hydroxypropionic acid are sodium 3-hydroxypropionate, potassium 3-hydroxypropionate, and calcium 3-hydroxypropionate. Non limiting examples of alkyl esters of hydroxypropionic acid are methyl 3-hydroxypropionate, ethyl 3-hydroxypropionate, butyl 3-hydroxypropionate, 2-ethylhexyl 3-hydroxypropionate, and mixtures thereof. Non limiting examples of 3-alkoxypropionic acids are 3-methoxypropionic acid and 3-ethoxypropionic acid. A 25 non limiting example of 3-aryloxypropionic acid is 3-phenoxypropionic acid. A non limiting example of 3-acyloxypropionic acid is 3-acetoxypropionic acid.

Acrylic acid derivatives can be metal or ammonium salts of acrylic acid, alkyl esters of acrylic acid, acrylic acid oligomers, or mixtures thereof. Non limiting examples of metal salts of acrylic acid are sodium acrylate, potassium acrylate, and calcium acrylate. Non limiting 30 examples of alkyl esters of acrylic acid are methyl acrylate, ethyl acrylate, butyl acrylate, 2-ethylhexyl acrylate, or mixtures thereof.

In one embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting: a) hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; b) water vapor; and c) any dehydration

catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step is equal to or greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; wherein said contacting step is performed at a temperature equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; and whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid, acrylic acid derivatives, or mixtures thereof are lactic acid, lactic acid derivatives, or mixtures thereof.

In another embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting: a) hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; b) water vapor; and c) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step is equal to or greater than about 4 bar; wherein said contacting step is performed at a temperature equal to or greater than about 250 °C; and whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid, acrylic acid derivatives, or mixtures thereof are lactic acid, lactic acid derivatives, or mixtures thereof.

In another embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting: a) hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; b) water vapor; and c) any dehydration

catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention, wherein said one or more monovalent cations are selected from the group consisting of K^+ , Rb^+ , Cs^+ , and 5 mixtures thereof; wherein the water partial pressure during said contacting step is equal to or greater than about 0.8 bar; wherein said contacting step is performed at a temperature equal to or greater than about 250 °C; and whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration 10 catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid, acrylic acid derivatives, or mixtures thereof are lactic acid, lactic acid derivatives, or mixtures thereof.

In one embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting: a) hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; b) water vapor; c) an essentially chemically inert gas or essentially chemically inert liquid; and d) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture 15 disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step is equal to or greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; wherein said contacting step is performed at a temperature equal to or 20 greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; and whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted 25 with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid, acrylic acid derivatives, or mixtures thereof are lactic acid, lactic acid derivatives, or mixtures thereof.

In another embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting: a) hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; b) water vapor; c) an essentially chemically inert gas or essentially chemically inert liquid; and d) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step is equal to or greater than about 4 bar; wherein said contacting step is performed at a temperature equal to or greater than about 250 °C; and

5 whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid,

10 acrylic acid derivatives, or mixtures thereof are lactic acid, lactic acid derivatives, or mixtures thereof.

15

In another embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting: a) hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; b) water vapor; c) an essentially chemically inert gas or essentially chemically inert liquid; and d) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention, wherein said one or more monovalent cations are selected from the group consisting of K⁺, Rb⁺, Cs⁺, and

20 mixtures thereof; wherein the water partial pressure during said contacting step is equal to or greater than about 0.8 bar; wherein said contacting step is performed at a temperature equal to or greater than about 250 °C; and whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration

25 catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid, acrylic acid derivatives, or mixtures thereof are lactic acid,

30 lactic acid derivatives, or mixtures thereof.

In one embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof are in the gas phase, at least partially, during said contacting step with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, 5 hydroxypropionic acid derivatives, or mixtures thereof are in the liquid phase, at least partially, during said contacting step with said dehydration catalyst or said dehydration catalyst precursor mixture.

In one embodiment of the present invention, a method of making acrylic acid is provided. The method comprises contacting: (a) a gas mixture comprising: i) hydroxypropionic acid, 10 hydroxypropionic acid derivatives, or mixtures thereof; and ii) water vapor; with (b) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step in said gas mixture is equal to or 15 greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; wherein said contacting step is performed at a temperature equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate 20 salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; and whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, 25 hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid, acrylic acid derivatives, or mixtures thereof are lactic acid, lactic acid derivatives, or mixtures thereof.

In one embodiment of the present invention, a method of making acrylic acid is provided. The method comprises contacting: (a) a gas mixture comprising: i) hydroxypropionic acid, 30 hydroxypropionic acid derivatives, or mixtures thereof; and ii) water vapor; with (b) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step in said gas mixture is equal to or

greater than about 4 bar; wherein said contacting step is performed at a temperature equal to or greater than about 250 °C; and whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid, acrylic acid derivatives, or mixtures thereof are lactic acid, lactic acid derivatives, or mixtures thereof.

In one embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting: (a) a gas mixture comprising: i) hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; and ii) water vapor; with (b) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention, wherein said one or more monovalent cations are selected from the group consisting of K⁺, Rb⁺, Cs⁺, and mixtures thereof; wherein the water partial pressure during said contacting step in said gas mixture is equal to or greater than about 0.8 bar; wherein said contacting step is performed at a temperature equal to or greater than about 250 °C; and whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid, acrylic acid derivatives, or mixtures thereof are lactic acid, lactic acid derivatives, or mixtures thereof.

In one embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting: (a) a liquid mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; and (b) a gas mixture comprising water vapor; with (c) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step in said gas mixture is equal to or greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst

precursor mixture; wherein said contacting step is performed at a temperature equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; and whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid, acrylic acid derivatives, or mixtures thereof are lactic acid, 5 lactic acid derivatives, or mixtures thereof.

10

In one embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting: (a) a liquid mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; and (b) a gas mixture comprising water vapor; with (c) any dehydration catalyst disclosed in Section II 15 (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step in said gas mixture is equal to or greater than about 4 bar; wherein said contacting step is performed at a temperature equal to or greater than about 250 °C; and whereby said 20 acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid, acrylic acid derivatives, or 25 mixtures thereof are lactic acid, lactic acid derivatives, or mixtures thereof.

In one embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting: (a) a liquid mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; and (b) a gas mixture comprising water vapor; with (c) any dehydration catalyst disclosed in Section II 30 (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention, wherein said one or more monovalent cations are selected from the group consisting of K⁺, Rb⁺, Cs⁺, and mixtures thereof; wherein the water partial pressure during said contacting step in said gas mixture is equal to or greater than about

0.8 bar; wherein said contacting step is performed at a temperature equal to or greater than about 250 °C; and whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration catalyst or said 5 dehydration catalyst precursor mixture. In another embodiment of the present invention, said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said method of making acrylic acid, acrylic acid derivatives, or mixtures thereof are lactic acid, lactic acid derivatives, or mixtures thereof.

In another embodiment of the present invention, said gas mixture further comprises an 10 essentially chemically inert gas. In the context of the present invention, an essentially chemically inert gas is any gas that is essentially chemically inert to said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof, but not necessarily to said dehydration catalyst or said dehydration catalyst precursor mixture. Non limiting examples of essentially chemically inert gases are nitrogen, helium, argon, carbon dioxide, carbon monoxide, air, water 15 vapor, and mixtures thereof. In another embodiment of the present invention, said essentially chemically inert gas comprises nitrogen. In yet another embodiment of the present invention, said essentially chemically inert gas consists essentially of nitrogen.

In another embodiment, said liquid mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof can further comprise one or more 20 essentially chemically inert liquids. Non limiting examples of essentially chemically inert liquids are water, hydrocarbons, chlorinated hydrocarbons, fluorinated hydrocarbons, brominated hydrocarbons, esters, ethers, ketones, aldehydes, acids, alcohols, or mixtures thereof. Non limiting examples of hydrocarbons are C5 to C8 linear and branched alkanes. A non limiting example of esters is ethyl acetate. A non limiting example of ethers is diphenyl ether. A non 25 limiting example of ketones is acetone. Non limiting examples of alcohols are methanol, ethanol, and C3 to C8 linear and branched alcohols. In one embodiment of the present invention, said one or more essentially chemically inert liquids comprise water. In one embodiment of the present invention, said one or more essentially chemically inert liquids consists essentially of water.

In one embodiment of the present invention, a liquid mixture comprising 30 hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof is fed into an evaporator upstream of the catalytic reactor for the liquid mixture to become a gas mixture, at least partially, before contacting said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, a liquid mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof is fed directly into

the catalytic reactor and contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, an essentially chemically inert gas or an essentially chemically inert liquid is fed into the evaporator or into the catalytic reactor. The liquid mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof and the essentially chemically inert gas or the essentially chemically inert liquid can be jointly or separately fed into said evaporator or said catalytic reactor. Non limiting examples of essentially chemically inert gases are nitrogen, helium, air, argon, carbon dioxide, carbon monoxide, water vapor, and mixtures thereof. Non limiting examples of essentially chemically inert liquids are water, hydrocarbons, chlorinated hydrocarbons, fluorinated hydrocarbons, brominated hydrocarbons, esters, ethers, ketones, 5 aldehydes, acids, alcohols, or mixtures thereof.

10 hydrocarbons, fluorinated hydrocarbons, brominated hydrocarbons, esters, ethers, ketones, aldehydes, acids, alcohols, or mixtures thereof.

In one embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises: a) providing a liquid mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; b) optionally 15 combining said liquid mixture with an essentially chemically inert gas to form a liquid / gas blend; and c) contacting said liquid mixture or said liquid / gas blend with any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) under a water partial pressure of about 20 0.4 bar or more to produce an acrylic acid mixture comprising said acrylic acid, acrylic acid derivatives, or mixtures thereof.

In one embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises: a) providing a liquid mixture comprising an aqueous solution of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; b) 25 optionally combining said liquid mixture with an essentially chemically inert gas to form a liquid / gas blend; and c) contacting said liquid mixture or said liquid / gas blend with any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) under a water partial pressure of about 30 0.4 bar or more to produce an acrylic acid mixture comprising said acrylic acid, acrylic acid derivatives, or mixtures thereof.

In one embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises: a) providing a liquid mixture comprising an aqueous solution of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; b)

optionally combining said liquid mixture with an essentially chemically inert gas to form a liquid / gas blend; c) evaporating said liquid mixture or said liquid / gas blend to produce a gas mixture; and d) contacting said gas mixture with any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) under a water partial pressure of about 0.4 bar or more to produce an acrylic acid mixture comprising said acrylic acid, acrylic acid derivatives, or mixtures thereof.

In one embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises: a) providing a liquid mixture comprising an aqueous solution of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof, wherein the hydroxypropionic acid is essentially in monomeric form in the aqueous solution; b) optionally combining said liquid mixture with an essentially chemically inert gas to form a liquid / gas blend; c) evaporating said liquid mixture or said liquid / gas blend to produce a gas mixture; and d) contacting said gas mixture with any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) under a water partial pressure of about 0.4 bar or more to produce an acrylic acid mixture comprising said acrylic acid, acrylic acid derivatives, or mixtures thereof.

In another embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises: a) providing a liquid mixture comprising an aqueous solution of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof, wherein the hydroxypropionic acid is essentially in monomeric form in the aqueous solution, and wherein the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof comprise between about 10 wt% and about 25 wt% of the aqueous solution; b) optionally combining said liquid mixture with an essentially chemically inert gas to form a liquid / gas blend; c) evaporating said liquid mixture or said liquid / gas blend to produce a gas mixture; and d) contacting said gas mixture with any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) under a water partial pressure of about 0.4 bar or more to produce an acrylic acid mixture comprising said acrylic acid, acrylic acid derivatives, or mixtures thereof.

In another embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises: a) providing a liquid mixture comprising an aqueous solution of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures

thereof, wherein the hydroxypropionic acid comprises oligomers in the aqueous solution; b) heating said liquid mixture at a temperature between about 50 °C and about 100 °C to hydrolyze the oligomers of the hydroxypropionic acid and produce a liquid mixture comprising monomeric hydroxypropionic acid; c) optionally combining said liquid mixture comprising monomeric hydroxypropionic acid with an essentially chemically inert gas to form a liquid / gas blend; d) evaporating said liquid mixture comprising monomeric hydroxypropionic acid or said liquid / gas blend to produce a gas mixture; and e) contacting said gas mixture with any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) under a water partial pressure of about 0.4 bar or more to produce an acrylic acid mixture comprising said acrylic acid, acrylic acid derivatives, or mixtures thereof.

In another embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises: a) providing a liquid mixture comprising an aqueous solution of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof; b) optionally combining the liquid mixture with an essentially chemically inert gas to form a liquid / gas blend; c) evaporating said liquid mixture or said liquid / gas blend to produce a gas mixture; d) contacting said gas mixture with any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) under a water partial pressure of about 0.4 bar or more to produce an acrylic acid mixture comprising acrylic acid, acrylic acid derivatives, or mixtures thereof; and e) cooling said acrylic acid mixture to produce a liquid acrylic acid composition comprising acrylic acid, acrylic acid derivatives, or mixtures thereof.

In one embodiment of the present invention, the concentration of the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said liquid mixture is between about 2 wt% and about 95 wt%. In another embodiment of the present invention, the concentration of the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said liquid mixture is between about 5 wt% and about 60 wt%. In another embodiment of the present invention, the concentration of the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said liquid mixture is between about 10 wt% and about 40 wt%. In yet another embodiment of the present invention, the concentration of the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in said liquid mixture is about 20 wt%.

In one embodiment of the present invention, the liquid mixture comprises an aqueous solution of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof. In another embodiment of the present invention, the liquid mixture comprises an aqueous solution of lactic acid, lactic acid derivatives, or mixtures thereof. In another embodiment of the present 5 invention, said lactic acid derivatives in said aqueous solution are selected from the group consisting of metal or ammonium salts of lactic acid, alkyl esters of lactic acid, lactic acid oligomers, cyclic di-esters of lactic acid, lactic acid anhydride, 2-alkoxypropionic acids or their alkyl esters, 2-aryloxypropionic acids or their alkyl esters, 2-acyloxypropionic acids or their alkyl esters, or a mixture thereof.

10 In one embodiment of the present invention, the concentration of the lactic acid, lactic acid derivatives, or mixtures thereof in said aqueous solution is between about 2 wt% and about 95 wt%. In another embodiment of the present invention, the concentration of the lactic acid, lactic acid derivatives, or mixtures thereof in said aqueous solution is between about 5 wt% and about 60 wt%. In another embodiment of the present invention, the concentration of the lactic 15 acid, lactic acid derivatives, or mixtures thereof in said aqueous solution is between about 10 wt% and about 40 wt%. In another embodiment of the present invention, the concentration of the lactic acid, lactic acid derivatives, or mixtures thereof in said aqueous solution is about 20 wt%. In another embodiment of the present invention, the liquid mixture comprises an aqueous solution of lactic acid along with lactic acid derivatives. In another embodiment of the present 20 invention, the liquid mixture comprises less than about 30 wt% of lactic acid derivatives, based on the total weight of the liquid mixture. In another embodiment of the present invention, the liquid mixture comprises less than about 10 wt% of lactic acid derivatives, based on the total weight of the liquid mixture. In yet another embodiment of the present invention, the liquid mixture comprises less than about 5 wt% of lactic acid derivatives, based on the total weight of 25 the liquid mixture.

Lactic acid can be in monomeric form or as oligomers in said aqueous solution of lactic acid, lactic acid derivatives, or mixtures thereof. In one embodiment of the present invention, the oligomers of the lactic acid in said aqueous solution of lactic acid, lactic acid derivatives, or mixtures thereof are less than about 30 wt% based on the total amount of lactic acid, lactic acid 30 derivatives, or mixtures thereof. In another embodiment of the present invention, the oligomers of the lactic acid in said aqueous solution of lactic acid, lactic acid derivatives, or mixtures thereof are less than about 10 wt% based on the total amount of lactic acid, lactic acid derivatives, or mixtures thereof. In another embodiment of the present invention, the oligomers of the lactic acid in said aqueous solution of lactic acid, lactic acid derivatives, or mixtures

thereof are less than about 5 wt% based on the total amount of lactic acid, lactic acid derivatives, or mixtures thereof. In yet another embodiment of the present invention, the lactic acid is essentially in monomeric form in said aqueous solution of lactic acid, lactic acid derivatives, or mixtures thereof.

5 The process to remove the oligomers from the aqueous solution of lactic acid, lactic acid derivatives, and mixtures thereof can comprise a purification step or hydrolysis by heating step. In one embodiment of the present invention, the heating step can involve heating the aqueous solution of lactic acid, lactic acid derivatives, or mixtures thereof at a temperature between about 10 50 °C and about 100 °C to hydrolyze the oligomers of the lactic acid. In another embodiment of the present invention, the heating step can involve heating the aqueous solution of lactic acid, lactic acid derivatives, or mixtures thereof at a temperature between about 95 °C and about 100 °C to hydrolyze the oligomers of the lactic acid. In another embodiment of the present invention, the heating step can involve heating the aqueous solution of lactic acid, lactic acid derivatives, or mixtures thereof at a temperature between about 50 °C and about 100 °C to hydrolyze the 15 oligomers of the lactic acid and produce a monomeric lactic acid aqueous solution comprising at least 80 wt% of lactic acid in monomeric form based on the total amount of lactic acid, lactic acid derivatives, or mixtures thereof. In another embodiment of the present invention, the heating step can involve heating the aqueous solution of lactic acid, lactic acid derivatives, or mixtures thereof at a temperature between about 50 °C and about 100 °C to hydrolyze the oligomers of the 20 lactic acid and produce a monomeric lactic acid aqueous solution comprising at least 95 wt% of lactic acid in monomeric form based on the total amount of lactic acid, lactic acid derivatives, or mixtures thereof. In another embodiment of the present invention, an about 88 wt% aqueous solution of lactic acid, lactic acid derivatives, or mixtures thereof is diluted with water and the oligomers are hydrolyzed to produce an aqueous solution of about 20 wt% lactic acid. The lactic 25 acid oligomers can result in loss of acrylic acid selectivity due to their high boiling point. As the water content decreases in the aqueous solution, the loss of feed material to the catalyst reaction, due to losses in the evaporating step, increases. Additionally, lactic acid oligomers can cause coking, catalyst deactivation, and reactor plugging.

In another embodiment of the present invention, the liquid mixture comprising 30 hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof can further comprise one or more antioxidants. In another embodiment of the present invention, the liquid mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof further comprises butylated hydroxy toluene (BHT), butylated hydroxy anisole (BHA), or mixtures thereof. In yet another embodiment of the present invention, the liquid mixture

comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof further comprises ethylene glycol, ethanedithiol, methanol, methanethiol, or mixtures thereof.

The liquid mixture can be introduced into the evaporator or into the catalytic reactor with a simple tube or through atomization nozzles. Non limiting examples of atomization nozzles 5 comprise fan nozzles, pressure swirl atomizers, air blast atomizers, two-fluid atomizers, rotary atomizers, and supercritical carbon dioxide atomizers. In one embodiment of the present invention, the droplets of the aqueous solution are less than about 500 μm in diameter. In another embodiment of the present invention, the droplets of the aqueous solution are less than about 200 μm in diameter. In yet another embodiment of the present invention, the droplets of the aqueous 10 solution are less than about 100 μm in diameter.

In the evaporating step, said liquid mixture or said liquid / gas blend are heated to produce a gas mixture. In one embodiment of the present invention, the temperature during the evaporating step is between about 165 °C and about 450 °C. In another embodiment of the present invention, the temperature during the evaporating step is between about 200 °C and about 15 400 °C. In another embodiment of the present invention, the temperature during the evaporating step is between about 250 °C and about 375 °C. In one embodiment of the present invention, the residence time in the evaporator during said evaporating step is between about 0.5 s and about 10 s. In another embodiment of the present invention, the residence time in the evaporator during 20 said evaporating step is between about 1 s and about 5 s.

The evaporating step can be performed under vacuum, at atmospheric pressure, or at 25 higher than atmospheric pressure. In one embodiment of the present invention, the evaporating step is performed under a total pressure of at least about 1 bar. In another embodiment of the present invention, the evaporating step is performed under a total pressure between about 5 bar and about 40 bar. In yet another embodiment of the present invention, the evaporating step is performed under a pressure between about 10 bar and about 35 bar. In yet another embodiment of the present invention, the evaporating step is performed under a total pressure of about 25 bar.

The evaporating step can be performed in various types of evaporators, such as, but not limited to, atomizer, plate heat exchanger, empty flow reactor, and fixed bed flow reactor. The evaporating step can be performed in an evaporator with the liquid mixture flowing down, or 30 flowing up, or flowing horizontally. In one embodiment of the present invention, the evaporating step is performed in an evaporator with the liquid flowing down. Also, the evaporating step can be done in a batch form.

In one embodiment of the present invention, the material of the evaporator interior surface is selected from the group consisting of amorphous silica, quartz, other silicon oxides,

borosilicate glass, silicon, and mixtures thereof. In yet another embodiment of the present invention, the material of the evaporator interior surface is amorphous silica or borosilicate glass.

In one embodiment of the present invention, the evaporating and contacting steps are combined in a single step. In another embodiment of the present invention, the evaporating and 5 contacting steps are performed sequentially in a single reactor. In yet another embodiment of the present invention, the evaporating and contacting steps are performed sequentially in a tandem reactor.

The gas mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof or the liquid mixture comprising hydroxypropionic acid, hydroxypropionic 10 acid derivatives, or mixtures thereof are converted to acrylic acid, acrylic acid derivatives, and mixture thereof by contacting said mixtures with a dehydration catalyst. The dehydration catalyst can be selected from the group comprising phosphates, sulfates, tantalates, metal oxides, aluminates, silicates, aluminosilicates (e.g., zeolites), arsenates, nitrates, vanadates, niobates, selenates, arsenatophosphates, phosphoaluminates, phosphoborates, phosphochromates, 15 phosphomolybdates, phosphosilicates, phosphosulfates, phosphotungstates, and mixtures thereof, and others that may be apparent to those having ordinary skill in the art. The dehydration catalyst can contain one or more inert supports. Non limiting examples of inert supports are silica or silicates, alumina or aluminates, aluminosilicates, titania or titanates, zirconia or zirconates, carbons (such as activated carbon, diamond, graphite, or fullerenes), sulfates, phosphates, 20 tantalates, ceria, other metal oxides, and mixtures thereof. In one embodiment of the present invention, the dehydration catalyst is any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”).

25 In the context of the present invention, “contacting” refers to the action of bringing said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof in close proximity to the surface of said dehydration catalyst or dehydration catalyst precursor mixture. The hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof must contact the surface of the dehydration catalyst or the dehydration catalyst precursor mixture at a rate that is 30 slow enough for the dehydration reaction to occur, yet fast enough to avoid the degradation of hydroxypropionic acid, acrylic acid, or their derivatives to undesirable products at the temperature of said contacting step. Several parameters can be used to describe the rate of said contacting step, such as, by way of example and not limitation, WHSV, GHSV, LHSV, and weight velocity per unit of accessible catalyst surface area (WVSA) that can be calculated as the

ratio of WHSV and the dehydration catalyst specific surface area (SA), (WVSA = WHSV/SA); with units: $\text{g/m}^2 \cdot \text{h}$, where g refer to g of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof. A number of methods, based on the adsorption of an inert gas, can be used to determine the accessible surface area, including, but not limited to, the static 5 volumetric and gravimetric methods and the dynamic method that are well-known by those skilled in the art.

In one embodiment of the present invention, the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof contact the dehydration catalyst or the dehydration catalyst precursor mixture at a WVSA between about $10^4 \text{ g} \cdot \text{m}^{-2} \cdot \text{h}^{-1}$ and about $10^4 \text{ g} \cdot \text{m}^{-2} \cdot \text{h}^{-1}$. In another embodiment of the present invention, the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof contact the dehydration catalyst or the dehydration catalyst precursor mixture at a WVSA between about $10^2 \text{ g} \cdot \text{m}^{-2} \cdot \text{h}^{-1}$ and about $10^{-2} \text{ g} \cdot \text{m}^{-2} \cdot \text{h}^{-1}$. In another embodiment of the present invention, the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof contact the dehydration catalyst or the dehydration catalyst precursor mixture at a WVSA between about $10 \text{ g} \cdot \text{m}^{-2} \cdot \text{h}^{-1}$ and about $0.1 \text{ g} \cdot \text{m}^{-2} \cdot \text{h}^{-1}$.

In one embodiment of the present invention, the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof contact the dehydration catalyst or the dehydration catalyst precursor mixture at a WHSV between about 0.02 h^{-1} and about 10 h^{-1} . In another embodiment of the present invention, the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof contact the dehydration catalyst or the dehydration catalyst precursor mixture at a WHSV between about 0.2 h^{-1} and about 1 h^{-1} . In another embodiment of the present invention, the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof contact the dehydration catalyst or the dehydration catalyst precursor mixture at a WHSV between about 0.4 h^{-1} and about 0.7 h^{-1} . In another embodiment of the present invention, the hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof contact the dehydration catalyst or the dehydration catalyst precursor mixture at a WHSV of about 0.5 h^{-1} .

When hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof are in the gas phase during said contacting step with said dehydration catalyst or said dehydration catalyst precursor mixture, and in another embodiment of the present invention, the gas mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof contacts the dehydration catalyst or the dehydration catalyst precursor mixture at a GHSV between about 720 h^{-1} and about $36,000 \text{ h}^{-1}$. In another embodiment of the present invention, the gas mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures

thereof contacts the dehydration catalyst or the dehydration catalyst precursor mixture at a GHSV between about 1,800 h⁻¹ and about 9,000 h⁻¹. In another embodiment of the present invention, the gas mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof contacts the dehydration catalyst or the dehydration catalyst precursor mixture at a GHSV between about 3,600 h⁻¹ and about 6,000 h⁻¹. In another embodiment of the present invention, a gas mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof contacts the dehydration catalyst or the dehydration catalyst precursor mixture at a GHSV of about 4,500 h⁻¹.

When hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof are in the gas phase during said contacting step with said dehydration catalyst or said dehydration catalyst precursor mixture, and in one embodiment of the present invention, the concentration of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof before the dehydration reaction and based on the total moles in the gas mixture (calculated under STP conditions) is between about 0.5 mol% and about 50 mol%. In another embodiment of the present invention, the concentration of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof before the dehydration reaction and based on the total moles in the gas mixture (calculated under STP conditions) is between about 1 mol% and about 10 mol%. In another embodiment of the present invention, the concentration of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof before the dehydration reaction and based on the total moles in the gas mixture (calculated under STP conditions) is between about 1.5 mol% and about 3.5 mol%. In yet another embodiment of the present invention, the concentration of hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof before the dehydration reaction and based on the total moles in the gas mixture (calculated under STP conditions) is about 2.5 mol%.

In one embodiment of the present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is greater than about 150 °C. In another embodiment of the present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is greater than about 250 °C. In another embodiment of the present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is between about 300 °C and about 500 °C. In another embodiment of the present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is between about 325 °C and about 400 °C. In yet another embodiment of the

present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is between about 350 °C and about 375 °C.

In one embodiment of the present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is equal to or greater than the lowest triple point temperature of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is equal to or greater than the highest triple point temperature of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is equal to or greater than the average temperature between the lowest triple point temperature and the highest triple point temperature of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is at least 10 °C greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is at least 50 °C greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In another embodiment of the present invention, the temperature during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is at least 100 °C greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more precursor phosphate salts.

In another embodiment of the present invention, said water partial pressure during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is equal to or greater than about 0.4 bar. In another embodiment of the present invention, said water partial pressure during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is equal to or greater than about 0.8 bar. In another embodiment of the present invention, said water partial pressure during said contacting step with the dehydration

catalyst or the dehydration catalyst precursor mixture is equal to or greater than about 4 bar. In another embodiment of the present invention, said water partial pressure during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is between about 5 bar and about 35 bar.

5 In one embodiment of the present invention, the water partial pressure during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is equal to or greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In another embodiment of the present invention, the water partial pressure during said contacting step with 10 the dehydration catalyst or the dehydration catalyst precursor mixture is equal to or greater than the lowest triple point water partial pressure of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In another embodiment of the present invention, the water partial pressure during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is equal to or greater than the highest triple point water partial pressure 15 of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In another embodiment of the present invention, the water partial pressure during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is equal to or greater than the average water partial pressure between the lowest triple point water partial pressure and the highest triple point water partial pressure of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In one embodiment of the present invention, the water partial 20 pressure during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is at least 1 bar greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In one embodiment of the present invention, the water partial pressure during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is at 25 least 2 bar greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salts or said one or more precursor phosphate salts. In one embodiment of the present invention, the water partial pressure during said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is at least 5 bar greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salts or said one or more precursor phosphate salts.

The contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture can be performed under vacuum, at atmospheric pressure, or at higher than atmospheric pressure. In one embodiment of the present invention, the contacting step with the dehydration

catalyst or the dehydration catalyst precursor mixture is performed under a total pressure of at least about 1 bar. In another embodiment of the present invention, the contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is performed under a total pressure between about 5 bar and about 40 bar. In another embodiment of the present invention, 5 the contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is performed under a total pressure between about 10 bar and about 35 bar. In yet another embodiment of the present invention, the contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is performed under a total pressure of about 25 bar.

When hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof are 10 in the gas phase, and in another embodiment of the present invention, the contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is performed in a catalytic reactor with the gas mixture flowing down, flowing up, or flowing horizontally. In another embodiment of the present invention, the contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is performed in a catalytic reactor with the gas mixture 15 flowing down. Also, the contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture can be done in a batch form. In another embodiment of the present invention, the dehydration catalyst or the dehydration catalyst precursor mixture is suspended in an essentially chemically inert liquid. The contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture can be performed by using different catalytic reactors 20 known to those skilled in the art, such as, by way of example and not limitation, static reactor, stirred reactor, recirculation reactor, packed-bed flow reactor, and combinations thereof.

In one embodiment of the present invention, the contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is carried out in an apparatus, which is pressurized to ensure that all major components are in the liquid phase. In another embodiment of 25 the present invention, the contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is carried out in an apparatus, which is operated at low temperature to ensure that all major components are in the liquid phase. In yet another embodiment of the present invention, the liquid mixture comprises an essentially chemically inert liquid. When all major components are in the liquid phase, the contacting step with the dehydration catalyst or the 30 dehydration catalyst precursor mixture can be performed by using different catalytic reactors, known to those skilled in the art, such as, by way of example and not limitation, static reactor, fixed bed reactor, single-stage stirred tank reactor, multi-stage stirred tank reactor, multi-stage distillation column, and combinations thereof. The contacting step can be conducted batch-wise or continuously. The contacting step with the dehydration catalyst or the dehydration catalyst

precursor mixture can be performed in a catalytic reactor with the liquid mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof flowing down, flowing up, or flowing horizontally. In another embodiment of the present invention, the contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is 5 performed in a catalytic reactor with the liquid mixture comprising hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof flowing up.

In one embodiment of the present invention, the dehydration or isomerizations reactions of hydroxypropionic acid, hydroxypropionic acid derivatives or mixtures thereof occur in the aqueous phase, at least partially, and the pH of the reaction is between about 3 and about 8. In 10 another embodiment of the present invention, the pH of the reaction in the aqueous phase is between about 4 and about 7. In yet another embodiment of the present invention, the pH of the reaction in the aqueous phase is between about 5 and about 6.

In one embodiment of the present invention, hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof and water vapor contact the dehydration catalyst or the 15 dehydration catalyst precursor mixture in a catalytic reactor with an interior surface material selected from the group consisting of amorphous silica, quartz, other silicon oxides, borosilicate glass, silicon, and mixtures thereof. In another embodiment of the present invention, hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof and water vapor contact the dehydration catalyst or the dehydration catalyst precursor mixture in a catalytic 20 reactor with an interior surface material selected from the group consisting of amorphous silica, quartz, borosilicate glass, and mixtures thereof. In another embodiment of the present invention, hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof and water vapor contact the dehydration catalyst or the dehydration catalyst precursor mixture in a catalytic reactor with an interior surface material consisting essentially of borosilicate glass.

25 The acrylic acid mixture comprising acrylic acid, acrylic acid derivatives, or mixtures thereof produced in said contacting step with the dehydration catalyst or the dehydration catalyst precursor mixture is cooled to give a liquid acrylic acid composition as the product stream. The time required to cool the acrylic acid mixture must be controlled to reduce acrylic acid polymerization or decomposition to ethylene. In one embodiment of the present invention, the 30 residence time of the acrylic acid mixture in the cooling step is less than about 30 s. In one embodiment of the present invention, the residence time of the acrylic acid mixture in the cooling step is between about 0.1 s and about 10 s.

The liquid acrylic acid composition comprising acrylic acid, acrylic acid derivatives, or mixtures thereof produced according with the present invention can be purified using some or all

of the processes of extraction, drying, distilling, cooling, partial melting, and decanting described in US20130274518A1 (incorporated herein by reference) to produce crude and glacial acrylic acid. After purification, the crude and glacial acrylic acid can be polymerized to produce a superabsorbent polymer using processes that are similar to those described in 5 US20130274697A1 (incorporated herein by reference).

In one embodiment of the present invention, said crude acrylic acid is esterified with an alcohol to produce an acrylate monomer. Non-limiting examples of alcohols are methanol, ethanol, butanol (n-butyl alcohol), 2-ethyl hexanol, isobutanol, tert-butyl alcohol, hexyl alcohol, octyl alcohol, iso octyl alcohol, lauryl alcohol, propyl alcohol, isopropyl alcohol, hydroxyethyl alcohol, hydroxypropyl alcohol, and polyols, such as hydroxyalkyl and alkylalkanolamine. In another embodiment of the present invention, said crude acrylic acid is esterified with methanol, ethanol, n-butyl alcohol, or 2-ethyl hexanol to produce methyl acrylate monomer, ethyl acrylate monomer, n-butyl acrylate monomer, or 2-ethylhexyl acrylate monomer, respectively. In yet another embodiment of the present invention, said methyl acrylate monomer, ethyl acrylate 10 monomer, n-butyl acrylate monomer, or 2-ethylhexyl acrylate monomer is polymerized to produce methyl acrylate polymer, ethyl acrylate polymer, n-butyl acrylate polymer, or 2-ethylhexyl acrylate polymer, respectively. In even yet another embodiment of the present invention, said methyl acrylate monomer, ethyl acrylate monomer, n-butyl acrylate monomer, or 2-ethylhexyl acrylate monomer is co-polymerized with other monomer to produce methyl 15 acrylate co-polymer, ethyl acrylate co-polymer, n-butyl acrylate co-polymer, or 2-ethylhexyl acrylate co-polymer, respectively. Non-limiting examples of other monomers are vinyl acetate and ethylene. In one embodiment of the present invention, said methyl acrylate polymer, ethyl acrylate polymer, n-butyl acrylate polymer, or 2-ethylhexyl acrylate polymer is blended with methyl methacrylate (MMA) to produce blends of MMA and methyl acrylate polymer, blends of 20 MMA and ethyl acrylate polymer, blends of MMA and n-butyl acrylate polymer, or blends of MMA and 2-ethylhexyl acrylate polymer, respectively. Non-limiting applications of polymers, co-polymers, or blends are in surface coatings, paints, resins, adhesives, plastics, and dispersions. In another embodiment of the present invention, said alcohol is bio-based alcohol. In yet another embodiment of the present invention, said other monomer is bio-based monomer. In even yet 25 another embodiment of the present invention, said MMA is bio-based MMA.

In one embodiment of the present invention, the method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting said hydroxypropionic acid, hydroxypropionic acid derivatives, and mixture thereof and said water vapor with said dehydration catalyst or said dehydration catalyst precursor mixture under conditions sufficient to

produce acrylic acid, acrylic acid derivatives, or mixtures thereof in a yield of at least 50%. In another embodiment of the present invention, the method comprises contacting said hydroxypropionic acid, hydroxypropionic acid derivatives, and mixture thereof and said water vapor with said dehydration catalyst or said dehydration catalyst precursor mixture under 5 conditions are sufficient to produce acrylic acid, acrylic acid derivatives, or mixtures thereof in a yield of at least about 70%. In another embodiment of the present invention, the method comprises contacting said hydroxypropionic acid, hydroxypropionic acid derivatives, and mixture thereof and said water vapor with said dehydration catalyst or said dehydration catalyst precursor mixture under conditions are sufficient to produce acrylic acid, acrylic acid derivatives, 10 or mixtures thereof in a yield of at least about 80%. In another embodiment of the present invention, the method conditions are sufficient to produce acrylic acid, acrylic acid derivatives, or mixtures thereof with a selectivity of at least about 50%. In another embodiment of the present invention, the method conditions are sufficient to produce acrylic acid, acrylic acid derivatives, or mixtures thereof with a selectivity of at least about 70%. In another embodiment of the present 15 invention, the method conditions are sufficient to produce acrylic acid, acrylic acid derivatives, or mixtures thereof with a selectivity of at least about 80%. In another embodiment of the present invention, the method conditions are sufficient to produce acrylic acid, acrylic acid derivatives, or mixtures thereof with propionic acid as an impurity, wherein the propionic acid selectivity is less than about 5%. In another embodiment of the present invention, the method conditions are 20 sufficient to produce acrylic acid, acrylic acid derivatives, or mixtures thereof with propionic acid as an impurity, wherein the propionic acid selectivity is less than about 1%. In another embodiment of the present invention, the method conditions are sufficient to produce acrylic acid, acrylic acid derivatives, or mixtures thereof with a conversion of said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof of more than about 50%. In another 25 embodiment of the present invention, the method conditions are sufficient to produce acrylic acid, acrylic acid derivatives, or mixtures thereof with a conversion of said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof of more than about 80%.

Among the benefits attainable by the foregoing embodiments is the low yield of side products. In one embodiment of the present invention, the conditions are sufficient to produce 30 propionic acid in a yield of less than about 5% from hydroxypropionic acid. In another embodiment of the present invention, the conditions are sufficient to produce propionic acid in a yield of less than about 1%, from hydroxypropionic acid. In one embodiment of the present invention, the conditions are sufficient to produce each of acetic acid, pyruvic acid, 1,2-propanediol, hydroxyacetone, acrylic acid dimer, and 2,3-pentanedione in a yield of less than

about 2% from hydroxypropionic acid present in the gaseous mixture. In another embodiment of the present invention, the conditions are sufficient to produce each of acetic acid, pyruvic acid, 1,2-propanediol, hydroxyacetone, acrylic acid dimer, and 2,3-pentanedione in a yield of less than about 0.5%, from hydroxypropionic acid present in the gaseous mixture. In one embodiment of 5 the present invention, the conditions are sufficient to produce acetaldehyde in a yield of less than about 8% from hydroxypropionic acid present in the gaseous mixture. In another embodiment of the present invention, the conditions are sufficient to produce acetaldehyde in a yield of less than about 4% from hydroxypropionic acid present in the gaseous mixture. In another embodiment of the present invention, the conditions are sufficient to produce acetaldehyde in a yield of less than 10 about 3%, from hydroxypropionic acid present in the gaseous mixture. These yields are believed to be, heretofore, unattainably low. Yet, these benefits are indeed achievable as further evidenced in the Examples set out below.

In one embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises: a) diluting an about 88 wt% lactic acid aqueous 15 solution with water to form an about 20 wt% lactic acid aqueous solution; b) heating the about 20 wt% lactic acid aqueous solution at a temperature from about 95 °C to about 100 °C to hydrolyze oligomers of the lactic acid, producing a monomeric lactic acid solution comprising at least about 95 wt% of the lactic acid in monomeric form based on the total amount of lactic acid, lactic acid derivatives, or mixtures thereof; c) combining the monomeric lactic acid solution with nitrogen to 20 form a liquid / gas blend; d) evaporating the liquid / gas blend in a evaporator with inside surface of borosilicate glass with a residence time of about 0.5 s to about 0.6 s at a temperature between about 300 °C and about 375 °C to produce a gas mixture comprising about 2.5 mol% lactic acid and about 50 mol% water; e) contacting said gas mixture with any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to 25 Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) in a catalytic reactor with an interior surface of borosilicate glass at a GHSV of about 4,500 h⁻¹, at a temperature from about 325 °C to about 400 °C under a total pressure from about 10 barg to about 25 barg producing the acrylic acid; and f) cooling the acrylic acid with a residence time between about 0.1 s and about 10 s.

30 In one embodiment of the present invention, a method of making acrylic acid is provided. The method comprises contacting: (a) a gas mixture comprising: i) lactic acid, ii) water, and iii) nitrogen, wherein said lactic acid is present in an amount of about 2.5 mol% and wherein said water is present in an amount of about 50 mol% based on the total moles of said gas mixture, with (b) a dehydration catalyst precursor mixture comprising: (KPO₃)_n, BaSO₄, Ba₂P₂O₇, and

SiO₂; wherein said contacting step of said gas mixture with said dehydration catalyst precursor mixture is performed at a temperature from about 325°C to about 400°C, at a WHSV between about 0.15 (g of lactic acid / g of catalyst · h) and about 1.0 (g of lactic acid / g of catalyst · h), and at a total pressure between about 10 barg and about 25 barg, in a reactor having an interior 5 surface material selected from the group consisting of amorphous silica and borosilicate glass; whereby acrylic acid is produced as a result of said water and said lactic acid being contacted with said dehydration catalyst precursor mixture.

In another embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises contacting: a) alkyl lactates or a solution 10 comprising alkyl lactates and a solvent; b) water vapor; and c) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step is equal to or greater than the water partial pressure at the 15 triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; wherein said contacting step is performed at a temperature equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said 20 dehydration catalyst precursor mixture; and whereby said acrylic acid, acrylic acid derivatives, or mixtures thereof is produced as a result of said water vapor and said alkyl lactate being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said alkyl lactates are selected from the group consisting of methyl lactate, ethyl lactate, butyl lactate, 2-ethylhexyl lactate, and mixtures thereof. In another 25 embodiment of the present invention, said solvent is selected from the group consisting of water, methanol, ethanol, butanol, 2-ethylhexanol, isobutanol, isoctyl alcohol, and mixtures thereof.

In another embodiment of the present invention, a method of making acrylic acid, acrylic acid derivatives, or mixtures thereof comprises: a) providing alkyl lactates or a solution comprising alkyl lactates and a solvent; b) optionally combining the alkyl lactates or the solution 30 comprising the alkyl lactates and a solvent with an essentially chemically inert gas to form a liquid / gas blend; c) evaporating said alkyl lactates, or said solution comprising alkyl lactates and a solvent, or said liquid / gas blend to produce a gas mixture; and d) contacting said gas mixture with any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration

catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) under a water partial pressure of about 0.4 bar or more to produce said acrylic acid, acrylic acid derivatives, or mixtures thereof.

A method for dehydrating glycerin to acrolein is provided. The method comprises contacting: (a) glycerin, (b) water vapor, and (c) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step is equal to or greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; wherein said contacting step is performed at a temperature equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; and whereby said acrolein is produced as a result of said water vapor and said glycerin being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture.

A method for isomerization of lactic acid, lactic acid derivatives, or mixtures thereof into 3-hydroxypropionic acid, 3-hydroxypropionic acid derivatives, or mixtures thereof is provided.

The method comprises contacting: (a) 3-hydroxypropionic acid, 3-hydroxypropionic acid derivatives, or mixtures thereof, (b) water vapor, and (c) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step is equal to or greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; wherein said contacting step is performed at a temperature equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; and whereby said 3-hydroxypropionic acid, 3-hydroxypropionic acid derivatives, or mixtures thereof are produced as a result of said water vapor and said lactic acid, lactic acid derivatives, or mixtures thereof being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture.

A method for reduction of hydroxypropionic acid, hydroxypropionic acid derivatives, and mixtures thereof into propionic acid, propionic acid derivatives, 1-propanol, 1-propanol derivatives, or mixtures thereof is provided. The method comprises contacting: (a) hydroxypropionic acid, hydroxypropionic acid derivatives, and mixtures thereof; (b) water vapor, 5 (c) hydrogen gas, and (d) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step is equal to or greater than the water partial pressure at the triple point of at least one of said one 10 or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; wherein said contacting step is performed at a temperature equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor 15 mixture; and whereby said propionic acid, propionic acid derivatives, 1-propanol, 1-propanol derivatives, or mixtures thereof are produced as a result of said water vapor, said hydrogen gas, and said hydroxypropionic acid, hydroxypropionic acid derivatives, or mixtures thereof being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. In another embodiment of the present invention, said dehydration catalyst or said dehydration 20 catalyst precursor mixture further comprises one or more transition metals selected from the groups 8 to 12 of the periodic table. Derivatives of propionic acid can be metal or ammonium salts of propionic acid, alkyl esters of propionic acid, or a mixture thereof. Non limiting examples of metal salts of propionic acid are sodium propionate, potassium propionate, and calcium propionate. Non limiting examples of alkyl esters of propionic acid are methyl propionate, ethyl 25 propionate, butyl propionate, 2-ethylhexyl propionate, or mixtures thereof. A derivative of 1-propanol can be 1-alkyloxypropanol.

A method for dehydrating alcohols to alkenes is provided. The method comprises contacting: (a) one or more aliphatic alcohols, (b) water vapor, and (c) any dehydration catalyst disclosed in Section II (“Catalysts for the Conversion of Hydroxypropionic Acid or its Derivatives to Acrylic Acid or its Derivatives”) or any dehydration catalyst precursor mixture disclosed in Section III (“Catalyst Preparation Method”) of the present invention; wherein the water partial pressure during said contacting step is equal to or greater than the water partial pressure at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration

catalyst precursor mixture; wherein said contacting step is performed at a temperature equal to or greater than the temperature at the triple point of at least one of said one or more amorphous phosphate salts or said one or more amorphous phosphate salt precursors in said dehydration catalyst or said dehydration catalyst precursor mixture; and whereby one or more alkenes are 5 produced as a result of said water vapor and said one or more aliphatic alcohols being contacted with said dehydration catalyst or said dehydration catalyst precursor mixture. Non limiting examples of alcohols are ethanol, *n*-propanol, isopropanol, *n*-butanol, *sec*-butanol, isobutanol, *tert*-butanol, pentanol, ethylene glycol, propylene glycol, glycerol, other polyhydric alcohols, and alicyclic alcohols.

10

V. Examples

EXAMPLE 1

15 Potassium phosphate monobasic (KH_2PO_4), barium phosphate dibasic (BaHPO_4), barium sulfate (BaSO_4), and amorphous silicon oxide (SiO_2) are combined and ground together using a planetary ball mill to obtain a fine solid. The solid is transferred to a glass beaker and calcined at a temperature between about 450 °C and about 450 °C for 4 h to 12 h. The calcined solid is ground and sieved to obtain a dehydration catalyst precursor mixture with particle size between 20 106 μm and 212 μm . The dehydration catalyst precursor mixture is mainly composed of T- (KPO_3)_n, $\text{Ba}_2\text{P}_2\text{O}_7$, BaSO_4 , and amorphous SiO_2 .

25 The dehydration catalyst precursor mixture prepared as described above is tested for the conversion of lactic acid to acrylic acid. A glass-lined stainless steel tube is packed with glass wool at the bottom, followed by dehydration catalyst precursor mixture in the middle and free space at the top. The tube is placed inside an aluminum block and a clam shell furnace in a down-flow arrangement and the bottom of the reactor is connected to a catch tank using fused silica lined stainless steel tubing. The reactor is purged by flowing N_2 gas (45 mL/min) at 360 psig (25 barg). Then, the reactor is heated until a final temperature of about 375 °C (tube wall 30 temperature) is reached. A liquid solution of lactic acid in water (20.0 wt%) is fed at the top of the reactor at 0.045 mL/min though polyetheretherketone (PEEK™) tubing using a pump. Before contacting the dehydration catalyst, the gas phase concentrations are: nitrogen: 47.9 mol%; lactic acid: 2.5 mol%; and water: 49.6 mol% and the water partial pressure is 186 psi (12.8 bar). After

contacting the dehydration catalyst, the reactor effluent is cooled and the liquid containing acrylic acid is collected in the catch tank. The uncondensed gas effluents are discharged.

5 The foregoing description is given for clearness of understanding only, and no unnecessary limitations should be understood therefrom, as modifications within the scope of the invention may be apparent to those having ordinary skill in the art.

10 The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as "40 mm" is intended to mean "about 40 mm."

15 Every document cited herein, comprising any cross referenced or related patent or application, is hereby incorporated herein by reference in its entirety unless expressly excluded or otherwise limited. The citation of any document is not an admission that it is prior art with respect to any invention disclosed or claimed herein or that it alone, or in any combination with any other reference or references, teaches, suggests or discloses any such invention. Further, to the extent that any meaning or definition of a term in this document conflicts with any meaning or definition of the same term in a document incorporated by reference, the meaning or definition assigned to that term in this document shall govern.

20 While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

CLAIMS

What is claimed is:

1. A dehydration catalyst consisting essentially of:
 - a. one or more amorphous phosphate salts consisting essentially of:
 - i) one or more monovalent cations, and
 - ii) one or more phosphate anions selected from the group represented by empirical formula (I):

$$[H_{2(1-x)}PO_{(4-x)}]^- \quad (I);$$
 wherein x is any real number equal to or greater than 0 and equal to or less than 1; wherein said one or more amorphous phosphate salts are neutrally charged;
 - b. one or more crystalline phosphate salts consisting essentially of:
 - i) one or more polyvalent cations, and
 - ii) one or more phosphate anions selected from the group represented by molecular formula (II):


$$[H_{(f-2g-h)}P_fO_{(4f-g)}]^{(2f+h)-} \quad (II);$$
 wherein f is a positive integer; wherein g is a positive integer or zero; wherein h is an integer; wherein (f-2g-h) is equal to or greater than zero; wherein (4f-g) is greater than zero; wherein (2f+h) is greater than zero; wherein (4h/f) is equal to or greater than -2 and equal to or less than 1; wherein said one or more crystalline phosphate salts are neutrally charged; and
 - c. one or more non-phosphate salts consisting essentially of:
 - i) one or more polyvalent cations, and
 - ii) one or more non-phosphate anions selected from the group represented by molecular formulae (III) and (IV):

$$[H_{(a-2b)}S_cO_{(4c-b)}]^{(2c-a)-} \quad (III)$$

$$[Ta_{2d}O_{(5d+e)}]^{2e-} \quad (IV);$$
 wherein a and b are positive integers or zero; wherein c, d, and e are positive integers; wherein (a-2b) is equal to or greater than zero; wherein (2c-a) is greater than zero; wherein said one or more non-phosphate salts are neutrally charged;


wherein said one or more crystalline phosphate salts and said one or more non-phosphate salts are substantially chemically inert to said one or more amorphous phosphate salts.

2. The dehydration catalyst of claim 1, wherein said one or more monovalent cations are selected from the group consisting of K^+ , Rb^+ , Cs^+ , and mixtures thereof.
3. The dehydration catalyst of claim 1, wherein at least one of said one or more amorphous phosphate salts consists of two or more different monovalent cations selected from the group consisting of K^+ , Rb^+ , and Cs^+ .
4. The dehydration catalyst of claim 1, wherein said one or more amorphous phosphate salts are selected from the group represented by empirical formula (Ia):



wherein M^I is a monovalent cation; wherein x is any real number equal to or greater than 0 and equal to or less than 1.


5. The dehydration catalyst of claim 4, wherein said one or more amorphous phosphate salts are selected from the group consisting of $KH_{2(1-x)} PO_{(4-x)}$, $RbH_{2(1-x)} PO_{(4-x)}$, $CsH_{2(1-x)} PO_{(4-x)}$, any of their hydrated forms, and mixtures thereof; wherein x is any real number equal to or greater than 0 and equal to or less than 1.
6. The dehydration catalyst of claim 5, wherein said one or more amorphous phosphate salts is $KH_{2(1-x)} PO_{(4-x)}$; wherein x is any real number equal to or greater than 0 and equal to or less than 1.
7. The dehydration catalyst of claim 1, wherein said one or more amorphous phosphate salts are selected from the group represented by empirical formula (Ib):



wherein M^I and N^I are two different monovalent cations; wherein x is any real number equal to or greater than 0 and equal to or less than 1; wherein w is any real number greater than 0 and less than 1.

8. The dehydration catalyst of claim 7, wherein said one or more amorphous phosphate salts are selected from the group consisting of $K_w Rb_{(1-w)} H_{2(1-x)} PO_{(4-x)}$, $K_w Cs_{(1-w)} H_{2(1-x)} PO_{(4-x)}$, $Rb_w Cs_{(1-w)} H_{2(1-x)} PO_{(4-x)}$, any of their hydrated forms, and mixtures thereof; wherein x is any real number equal to or greater than 0 and equal to or less than 1; wherein w is any real number greater than 0 and less than 1.

9. The dehydration catalyst of claim 1, wherein said one or more polyvalent cations of said one or more crystalline phosphate salts and wherein said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals Be, Mg, Ca, Sr, Ba, Sc, Y, Ti, Zr, Hf, V, Nb, Ta, Cr, Mo, W, Mn, Re, Al, Ga, In, Tl, Si, Ge, Sn, Pb, Sb, Bi, La, Ce, Pr, Nd, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu, and mixtures thereof.
10. The dehydration catalyst of claim 1, wherein said one or more polyvalent cations of said one or more crystalline phosphate salts and wherein said one or more polyvalent cations of said one or more non-phosphate salts are selected from the group consisting of the cations of the metals Mg, Ca, Sr, Ba, Y, Mn, Al, Er, and mixtures thereof.
11. The dehydration catalyst of claim 1, wherein said one or more polyvalent cations of said one or more crystalline phosphate salts and wherein said one or more polyvalent cations of said one or more non-phosphate salts are Ba^{2+} .
12. The dehydration catalyst of claim 1, wherein said one or more phosphate anions of said one or more crystalline phosphate salts are selected from the group represented by molecular formulae (IIa) to (IIg), and mixtures thereof:

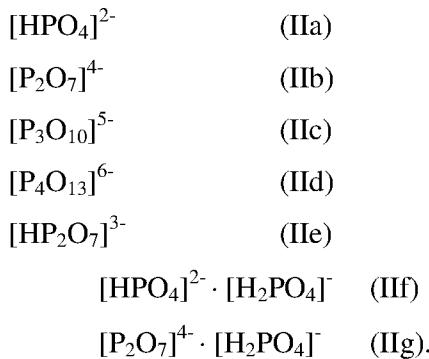

13. The dehydration catalyst of claim 12, wherein said one or more phosphate anions of said one or more crystalline phosphate salts are selected from the group represented by molecular formulae (IIa), (IIb), and mixtures thereof:



14. The dehydration catalyst of claim 1, wherein said one or more crystalline phosphate salts are selected from the group consisting of BeHPO_4 , MgHPO_4 , CaHPO_4 , SrHPO_4 , BaHPO_4 , BeNH_4PO_4 , $\text{Be}_2\text{P}_2\text{O}_7$, $\text{Mg}_2\text{P}_2\text{O}_7$, $\text{MgK}_2\text{P}_2\text{O}_7$, $\text{Mg}_3\text{K}_2(\text{P}_2\text{O}_7)_2$, $\text{Ca}_2\text{P}_2\text{O}_7$, $\text{CaK}_2\text{P}_2\text{O}_7$, $\text{Ca}_3\text{K}_2(\text{P}_2\text{O}_7)_2$, $\text{Ca}_5\text{K}_2(\text{P}_2\text{O}_7)_3$, $\text{CaRb}_2\text{P}_2\text{O}_7$, $\text{CaCs}_2\text{P}_2\text{O}_7$, CaMgP_2O_7 , $\text{Ca}_3(\text{NH}_4)_2(\text{P}_2\text{O}_7)_2$, $\text{Ca}_5(\text{NH}_4)_2(\text{P}_2\text{O}_7)_3$, $\text{Sr}_2\text{P}_2\text{O}_7$, $\text{SrK}_2\text{P}_2\text{O}_7$, $\text{SrRb}_2\text{P}_2\text{O}_7$, $\text{SrCs}_2\text{P}_2\text{O}_7$, SrMgP_2O_7 , $\text{Ba}_2\text{P}_2\text{O}_7$, BaMgP_2O_7 , BaCaP_2O_7 , $\text{Sc}_4(\text{P}_2\text{O}_7)_3$, ScKP_2O_7 , ScRbP_2O_7 , ScCsP_2O_7 , YKP_2O_7 , YRbP_2O_7 , YCsP_2O_7 , TiP_2O_7 , $\text{Ti}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, ZrP_2O_7 , ZrMgP_2O_7 , HfP_2O_7 , $\text{V}_4(\text{P}_2\text{O}_7)_3$, VKP_2O_7 , VRbP_2O_7 , VCsP_2O_7 , $\text{V}_2\text{Sr}(\text{P}_2\text{O}_7)_2$, $\text{V}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, $\text{Nb}_2\text{Mg}(\text{P}_2\text{O}_7)_2$, $\text{Cr}_4(\text{P}_2\text{O}_7)_3$, CrHP_2O_7 , $\text{CrNH}_4\text{P}_2\text{O}_7$, CrKP_2O_7 , CrRbP_2O_7 , CrCsP_2O_7 , $\text{Cr}_2\text{Mg}(\text{P}_2\text{O}_7)_2$, CrCaP_2O_7 , $\text{Cr}_2\text{Ca}(\text{P}_2\text{O}_7)_2$, $\text{Cr}_2\text{Sr}(\text{P}_2\text{O}_7)_2$, CrBaP_2O_7 , $\text{Cr}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, MoP_2O_7 , MoKP_2O_7 , MoRbP_2O_7 , MoCsP_2O_7 , $\text{Mo}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, $\text{Mn}_2\text{P}_2\text{O}_7$, MnHP_2O_7 , $\text{MnK}_2\text{P}_2\text{O}_7$, MnKP_2O_7 , $2\text{Mn}_2\text{P}_2\text{O}_7\cdot\text{Mn}_2\text{KP}_3\text{O}_{10}$, $\text{MnRb}_2\text{P}_2\text{O}_7$, MnRbP_2O_7 , MnCsP_2O_7 , MnCaP_2O_7 , MnSrP_2O_7 , MnBaP_2O_7 , ReP_2O_7 , $\text{AlNH}_4\text{P}_2\text{O}_7$, AlKP_2O_7 , AlRbP_2O_7 , $\text{GaNH}_4\text{P}_2\text{O}_7$, GaKP_2O_7 , GaRbP_2O_7 , InKP_2O_7 , InRbP_2O_7 , InCsP_2O_7 , $\text{In}_2\text{Ca}(\text{P}_2\text{O}_7)_2$, $\text{In}_2\text{Sr}(\text{P}_2\text{O}_7)_2$, $\text{In}_2\text{Ba}(\text{P}_2\text{O}_7)_2$, SiP_2O_7 , GeP_2O_7 , SnP_2O_7 , PbP_2O_7 , $\text{Sb}^{\text{V}}\text{Sb}^{\text{III}}(\text{P}_2\text{O}_7)_2$, $\text{Bi}_4(\text{P}_2\text{O}_7)_3$, BiHP_2O_7 , $\text{La}_4(\text{P}_2\text{O}_7)_3$, LaHP_2O_7 , LaKP_2O_7 , CeP_2O_7 , $\text{Gd}_4(\text{P}_2\text{O}_7)_3$, GdKP_2O_7 , GdRbP_2O_7 , GdCsP_2O_7 , TbKP_2O_7 , TbRbP_2O_7 , TbCsP_2O_7 , DyKP_2O_7 , DyRbP_2O_7 , DyCsP_2O_7 , HoKP_2O_7 , HoRbP_2O_7 , HoCsP_2O_7 , ErKP_2O_7 , ErRbP_2O_7 , ErCsP_2O_7 , TmKP_2O_7 , TmRbP_2O_7 , TmCsP_2O_7 , YbHP_2O_7 , YbKP_2O_7 , YbRbP_2O_7 , YbCsP_2O_7 , LuKP_2O_7 , LuRbP_2O_7 , LuCsP_2O_7 , $\text{Be}_2\text{RbP}_3\text{O}_{10}$, $\text{Ca}_2\text{KP}_3\text{O}_{10}$, $\text{Ca}_2\text{RbP}_3\text{O}_{10}$, $\text{Ca}_2\text{CsP}_3\text{O}_{10}$, $\text{Sr}_2\text{KP}_3\text{O}_{10}$, $\text{Sr}_2\text{RbP}_3\text{O}_{10}$, $\text{Sr}_2\text{CsP}_3\text{O}_{10}$, $\text{Ba}_2\text{KP}_3\text{O}_{10}$, $\text{Ba}_2\text{RbP}_3\text{O}_{10}$, $\text{Ba}_2\text{CsP}_3\text{O}_{10}$, $\text{Y}_5(\text{P}_3\text{O}_{10})_3$, $\text{VCsP}_3\text{O}_{10}$, $\text{CrCs}_2\text{P}_3\text{O}_{10}$, $\text{Cr}_3\text{K}(\text{P}_3\text{O}_{10})_2$, $\text{Cr}_3\text{Rb}(\text{P}_3\text{O}_{10})_2$, $\text{Cr}_3\text{Cs}(\text{P}_3\text{O}_{10})_2$, $\text{MnCs}_2\text{P}_3\text{O}_{10}$, $\text{AlCs}_2\text{P}_3\text{O}_{10}$, $\text{Al}_3\text{Cs}(\text{P}_3\text{O}_{10})_2$, $\text{GaCs}_2\text{P}_3\text{O}_{10}$, $\text{In}_5(\text{P}_3\text{O}_{10})_3$, $\text{La}_5(\text{P}_3\text{O}_{10})_3$, $\text{Pr}_5(\text{P}_3\text{O}_{10})_3$, $\text{Nd}_5(\text{P}_3\text{O}_{10})_3$, $\text{Sm}_5(\text{P}_3\text{O}_{10})_3$, $\text{Gd}_5(\text{P}_3\text{O}_{10})_3$, $\text{Er}_5(\text{P}_3\text{O}_{10})_3$, $\text{Yb}_5(\text{P}_3\text{O}_{10})_3$, $\text{Ca}_3\text{P}_4\text{O}_{13}$, $\text{Sr}_3\text{P}_4\text{O}_{13}$, $\text{Ba}_3\text{P}_4\text{O}_{13}$, $\text{Ba}_2\text{MgP}_4\text{O}_{13}$, $\text{Y}_2\text{P}_4\text{O}_{13}$, $\text{Cr}_2\text{P}_4\text{O}_{13}$, $\text{Mn}_2\text{P}_4\text{O}_{13}$, $\text{Gd}_2\text{P}_4\text{O}_{13}$, $\text{Pb}_3\text{P}_4\text{O}_{13}$, $\text{Bi}_2\text{P}_4\text{O}_{13}$, $\text{La}_2\text{P}_4\text{O}_{13}$, any of their hydrated forms, and mixtures thereof.

15. The dehydration catalyst of claim 14, wherein said one or more crystalline phosphate salts are selected from the group consisting of MgHPO_4 , CaHPO_4 , SrHPO_4 , BaHPO_4 , $\text{Mg}_2\text{P}_2\text{O}_7$, $\text{Ca}_2\text{P}_2\text{O}_7$, $\text{Sr}_2\text{P}_2\text{O}_7$, $\text{Ba}_2\text{P}_2\text{O}_7$, YKP_2O_7 , $\text{Mn}_2\text{P}_2\text{O}_7$, MnKP_2O_7 , AlKP_2O_7 , ErKP_2O_7 , $\text{Ca}_3\text{P}_4\text{O}_{13}$, $\text{Sr}_3\text{P}_4\text{O}_{13}$, $\text{Ba}_3\text{P}_4\text{O}_{13}$, any of their hydrated forms, and mixtures thereof.

FIGURES

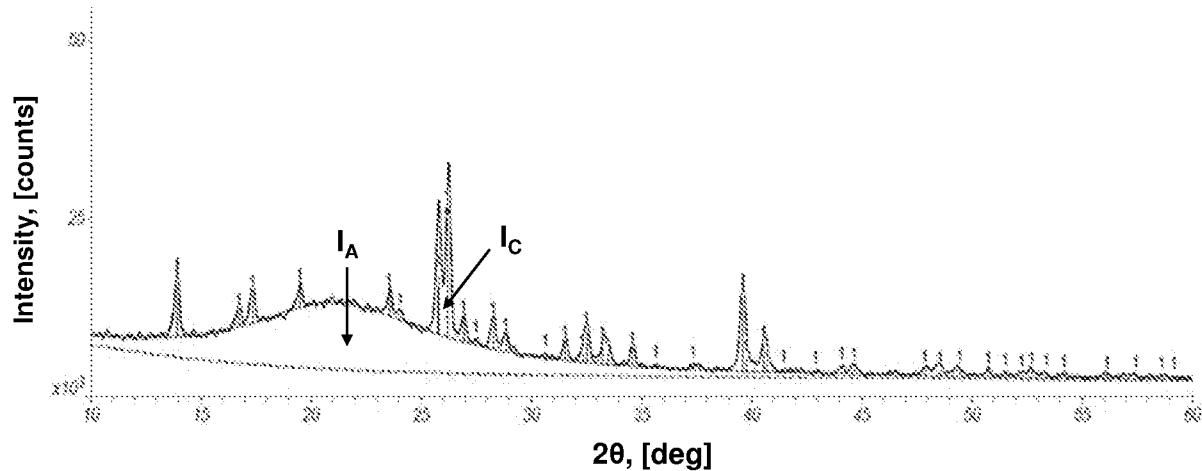


Fig. 1

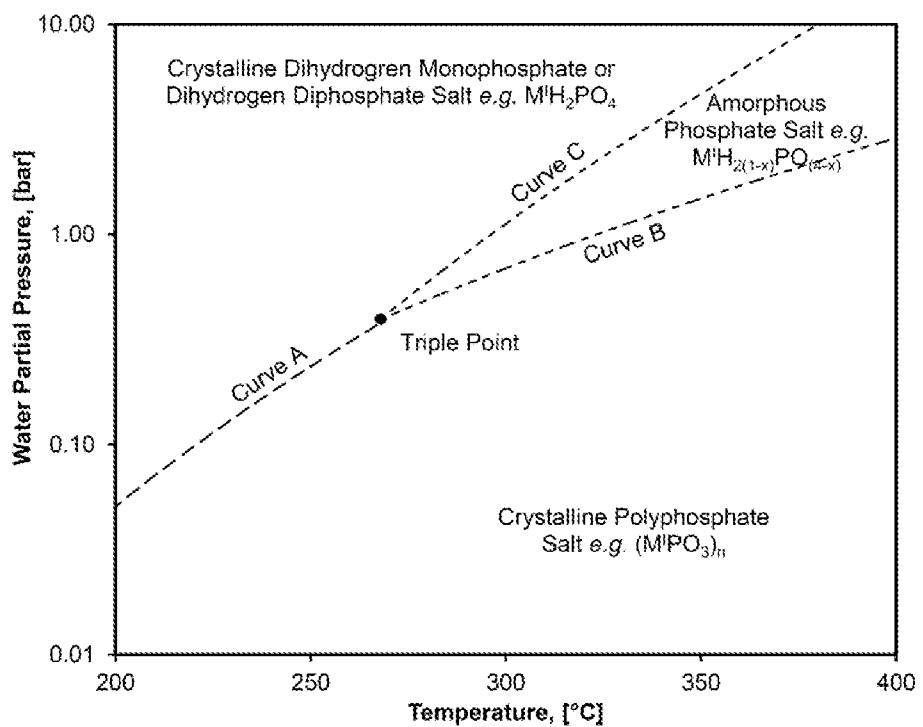


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/049224

A. CLASSIFICATION OF SUBJECT MATTER				
INV.	B01J23/20	B01J37/04	B01J37/08	B01J27/055
	B01J35/02	B01J37/00	C07C51/00	B01J27/18

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B01J C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 859 240 A (HOLMEN REYNOLD E) 4 November 1958 (1958-11-04) example 35; claims; examples -----	1-15
X	US 5 071 754 A (WALKUP PAUL C [US] ET AL) 10 December 1991 (1991-12-10) column 12, line 32 - line 46; claims column 11, line 36 - column 12, line 68 -----	1-15
X	US 2013/274517 A1 (GODLEWSKI JANE ELLEN [US] ET AL) 17 October 2013 (2013-10-17) sentence 124, paragraph 113; examples -----	1-15
X	US 2013/273384 A1 (GODLEWSKI JANE ELLEN [US] ET AL) 17 October 2013 (2013-10-17) paragraph [0095] - paragraph [0117]; claims; examples -----	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

25 November 2016

06/12/2016

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

de Cauwer, Robby

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2016/049224

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
US 2859240	A 04-11-1958	NONE			
US 5071754	A 10-12-1991	AU 647081 B2 AU 7225391 A BR 9105944 A EP 0512021 A1 US 5071754 A WO 9111527 A2			17-03-1994 21-08-1991 17-11-1992 11-11-1992 10-12-1991 08-08-1991
US 2013274517	A1 17-10-2013	US 2013274517 A1 US 2016107974 A1			17-10-2013 21-04-2016
US 2013273384	A1 17-10-2013	AU 2013245857 A1 CA 2869141 A1 CN 104204004 A EP 2836520 A1 JP 2015520253 A SG 11201406508U A US 2013273384 A1 WO 2013155296 A1			30-10-2014 17-10-2013 10-12-2014 18-02-2015 16-07-2015 27-11-2014 17-10-2013 17-10-2013