



(11) **EP 3 616 552 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
05.07.2023 Bulletin 2023/27

(51) International Patent Classification (IPC):
A44B 11/25^(2006.01) A44B 11/26^(2006.01)

(21) Application number: **18191645.3**

(52) Cooperative Patent Classification (CPC):
A44B 11/2592; A44B 11/266; A44D 2203/00

(22) Date of filing: **30.08.2018**

(54) **AN AUTOMATIC MAGNETIC BUCKLE AND ITS USE METHOD**

AUTOMATISCHE MAGNETISCHE SCHNALLE UND DEREN VERWENDUNGSVERFAHREN
BOUCLE MAGNÉTIQUE AUTOMATIQUE ET SON PROCÉDÉ D'UTILISATION

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(74) Representative: **Cabinet Chaillot**
16/20, avenue de l'Agent Sarre
B.P. 74
92703 Colombes Cedex (FR)

(43) Date of publication of application:
04.03.2020 Bulletin 2020/10

(56) References cited:
CN-A- 107 448 445 CN-U- 203 570 760
DE-U1-202018 101 841 GB-A- 2 511 104
US-A1- 2013 185 901

(73) Proprietor: **Chu, Fang Meng**
Dong Guan City Guangdong (CN)

(72) Inventor: **Chu, Fang Meng**
Dong Guan City Guangdong (CN)

EP 3 616 552 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical field

[0001] The present invention relates to an automatic magnetic buckle.

Background art

[0002] The current buckle is magnetically connected by adding a magnetic subassembly. Due to the unreasonable structure design of the existing buckle, the connection between the buckle base and the clamping head is not firm enough. However, the existing buckle is designed in a flat shape, and it can be fastened and separated by two hands and at a single angle and is used inconveniently. The existing buckle and the buckle base cannot rotate 360°. Therefore, the buckle base and the clamping buckle cannot be connected and disconnected. Document GB 2 511 104 A discloses an automatic magnetic buckle, which comprises a matching clamping head and a buckle base, wherein the clamping head comprises a clamping head housing, and the said clamping head housing has a cavity extending through the upper and lower ends of the clamping head housing, whereby the cavity is set with a buckle subassembly, and the said buckle base is set with a buckle head matching with the said buckle subassembly, and the said clamping head and the buckle base are set with magnetic subassemblies which are mutually attracted.

Summary of the invention

[0003] In order to solve the above problems, the present invention discloses an automatic magnetic buckle.

[0004] The present invention further discloses a method of using the automatic magnetic buckle.

[0005] In order to achieve the above objective, the technical solution adopted by the present invention is:

An automatic magnetic buckle comprises a matching clamping head and a buckle base. The said clamping head comprises a clamping head housing, and the said clamping head housing has a cavity extending through the upper and lower ends of the clamping head housing. The said cavity is set with a buckle subassembly, and the said buckle base is set with a buckle head matching with the said buckle subassembly, and the said clamping head and the buckle base are set with magnetic subassemblies which are mutually attracted. Clamping head and buckle base are attracted together through the matching of the magnetic subassembly. The buckle subassembly is matched with the buckle head to securely connect the clamping head and the buckle base.

[0006] The said buckle subassembly comprises a left fastener and a right fastener which are symmetrically set in the cavity and have the same structure. The middle parts of the said left fastener and right fastener are hinged

asway in the cavity. A pressure spring is connected between the upper inner sides of the left fastener and the right fastener, and the lower ends of the left fastener and the right fastener are oppositely set with a clamping block matching with the said buckle head. A fastener unfolding device is connected to the upper ends of the left fastener and the right fastener. An acting force is applied to the fastener unfolding device to make the upper parts of the left fastener and the right fastener swing toward each other. The distance between the lower parts of the left fastener and the right fastener is increased, and the buckle head is not covered by the clamping block. An acting force is applied to the clamping head and the buckle base. When the acting force is greater than the magnetic attraction force between the magnetic subassemblies, the buckle head and the buckle base can be separated. The magnetic subassembly of the said clamping head is set at a lower end of the said cavity, and the lower part of the said buckle subassembly is located at the magnetic subassembly of the clamping head. The magnetic subassembly of the said buckle base is set in the said buckle base, and the magnetic subassembly of the said buckle base is located under the said buckle head. When the magnetic subassemblies of the clamping head and the buckle base are mutually attracted, the buckle head can be automatically inserted between the two clamping blocks. A pressure spring is connected between the upper inner sides of the left fastener and the right fastener to make the two clamping blocks tighten the buckle head.

[0007] The said clamping head housing includes a front housing and a rear housing, and the opposite walls of the front housing and the rear housing are respectively set with a half recess forming the said cavity.

[0008] A metal piece is further fixed between the upper ends of the front housing and the rear housing, and the upper end of the metal piece is set with a pull ring stretching out the top of the front housing and the rear housing. During use, the belt and the clamping head housing can be connected when the belt passes through the pull ring and is tightened.

[0009] The said automatic magnetic buckle, according to Claim 4 is characterized in that the said fastener unfolding device is a rope, and the two ends of the said rope are respectively fixed with the upper ends of the left fastener and the right fastener. The middle part of the rope passes through the clamping head housing from the top of the said cavity. When the buckle base is separated from the clamping head, the rope shall be pulled to make the upper ends of the left fastener and the right fastener swing toward each other. The distance between the clamping blocks is increased, and the buckle head can be pulled out.

[0010] The said fastener unfolding device has two pressing members, and the said pressing members include a pressing rod and a pressing head which are interconnected. The pressing rods of the two pressing members are respectively in contact with the outer sides of the left fastener and the right fastener, and the said

pressing head stretches out the outer periphery of the clamping head housing.

[0011] The said clamping block is laterally set, and the end of the buckle block is set with a triangular or semi-circular notch. The said buckle head is a mushroom-shaped protrusion matching with the said clamping block. The mushroom-shaped protrusion is like a mushroom and comprises a lower cylinder and an upper clamping body. The diameter of the clamping body is greater than the diameter of the cylinder. The said two clamping blocks are clamped on the cylinder, and the two clamping blocks are located under the clamping body.

[0012] The said buckle base has a plate shape, and the two ends of the buckle base are respectively set with long-striped webbing slots. The two long-striped slots are respectively set in parallel. During use, another belt passes through the two long-striped webbing slots to firmly and stably connect the buckle base and the belt.

[0013] The buckle base has a rectangular groove shape, the bottom of the buckle base is set with a rectangular groove-shaped webbing slot, and the long-striped webbing slot is set in parallel. During use, another belt passes through the two long-striped webbing slots to firmly and stably connect the buckle base and the belt.

[0014] The upper surface of the buckle base is set with a circular groove, the inner diameter of the said circular groove is greater than the outer peripheral diameter of the clamping head housing, and the buckle head is located in the middle of the said circular groove. The circular groove can prevent the joint between the clamping head and the buckle base from being impacted by an external force and make the connection firm and stable.

[0015] The said buckle base is cylindrical, the lower part of the buckle base is set with a metal piece, and the metal piece is set with a long-striped webbing slot.

[0016] The upper surface of the buckle base is set with a circular groove, the inner diameter of the said circular groove is greater than the outer peripheral diameter of the clamping head housing, and the buckle head is located in the middle of the said circular groove.

[0017] The opposite walls of the front housing and the rear housing are set with matching positioning columns and positioning holes, and the front housing and the rear housing are matched and connected with screws and nuts. Thus, the connection between the front housing and the rear housing is firm and stable without misplacement.

[0018] A non-claimed method of using an automatic magnetic buckle includes the following steps:

Step 1: The buckle base is close to the clamping head, and the buckle base is mutually attracted with the magnetic subassembly on the clamping head. Under the action of the magnetic attraction force, the buckle head is inserted into the cavity of the clamping head housing, the buckle subassembly is used to fix the buckle head, and the clamping head is fixedly connected with the buckle base.

Step 2: An acting force is applied to the left fastener and the right fastener via the fastener unfolding device to make the upper ends of the left fastener and the right fastener swing toward each other. The distance between the two clamping blocks is increased, and the clamping head can be removed from the buckle head to separate the clamping head and the buckle base.

[0019] The present invention has the following advantageous effects: The structural design of the present invention is reasonable and ingenious. The fixed connection between the buckle base and the clamping head can be easily realized by the action of the magnetic sub-assembly, and the connection is stable and firm. The buckle base and the clamping head can be conveniently separated by the design of the fastener unfolding device. Moreover, the buckle base and the clamping head can rotate at 360°, so the buckle base and the clamping head can be buckled or separated at any angle. It can be operated conveniently and saves time and effort.

[0020] The present invention is further described below through the figures and specific embodiments.

25 Description of figures

[0021]

30 Fig. 1 is a perspective view for Embodiment 1 of the present invention;
 Fig. 2 is a structure view for the buckle base of Fig. 1;
 Fig. 3 is a breakdown view for Fig. 2;
 Fig. 4 is an assembly diagram for the buckle base and the clamping head of Fig. 1;
 35 Fig. 5 is a structure view for the left fastener of the present invention;
 Fig. 6 is a structure view for a rear housing of the present invention;
 Fig. 7 is a perspective view for Embodiment 2 of the present invention;
 40 Fig. 8 is a structure view for the buckle base in Fig. 7;
 Fig. 9 is an assembly diagram for the metal piece and the rear housing in the present invention;
 Fig. 10 is a breakdown view for Fig. 8;
 45 Fig. 11 is an assembly diagram for the buckle base and the clamping head in Fig. 7;
 Fig. 12 is a perspective view for a clamping head in Embodiment 3 of the present invention;
 Fig. 13 is a structure view for the internal structure of the clamping head of Fig. 12;
 50 Fig. 14 is an internal structure view for the left fastener, the right fastener and the pressing member in Fig. 12;
 Fig. 15 is a structure view for the rear housing of Fig. 12.

Description of the preferred embodiments

[0022] Refer to Fig. 1 to Fig. 6 and Fig. 9 for Embodiment 1. An automatic magnetic buckle provided by the present embodiment comprises a matching clamping head 1 and a buckle base 2. The said clamping head 1 comprises a clamping head housing, and the said clamping head housing has a cavity extending through the upper and lower ends of the clamping head housing. The said cavity is set with a buckle subassembly, and the said buckle base 2 is set with a buckle head 21 matching with the said buckle subassembly, and the said clamping head 1 and the buckle base 2 are set with magnetic subassemblies which are mutually attracted. Clamping head 1 and buckle base 2 are attracted together through the matching of the magnetic subassembly. The buckle subassembly is matched with the buckle head 21 to securely connect the clamping head 1 and the buckle base 2.

[0023] As shown in Fig. 4 and Fig. 5, the said buckle subassembly comprises a left fastener 13 and a right fastener 14 which are symmetrically set in the cavity and have the same structure. The middle parts of the said left fastener 13 and right fastener 14 are hinged asway in the cavity. A pressure spring 90 is connected between the upper inner sides of the left fastener 13 and the right fastener 14, and the upper opposite sides of the left fastener 13 and the right fastener 14 are respectively set with a spring positioning hole 132. The two ends of the said pressure spring are respectively set in the spring location hole 132. The lower ends of the left fastener 13 and the right fastener 14 are oppositely set with a clamping block 131 matching with the said buckle head 21. A fastener unfolding device is connected to the upper ends of the left fastener 13 and the right fastener 14. The middle part of the left fastener 13 and the right fastener 14 is set with a hinge hole 134. The left fastener 13 and the right fastener 14 can swing by matching the hinge hole 134 and the screw. An acting force is applied to the fastener unfolding device to make the upper parts of the left fastener 13 and the right fastener 14 swing toward each other. The distance between the lower parts of the left fastener 13 and the right fastener 14 is increased, and the buckle head 21 is not covered by the clamping block 131. An acting force is applied to the clamping head 1 and the buckle base 2. When the acting force is greater than the magnetic attraction force between the magnetic subassemblies, the buckle head 21 and the buckle base can be separated.

[0024] The magnetic subassembly of the said clamping head 1 is set at a lower end of the said cavity, and the lower part of the said buckle subassembly is located at the magnetic subassembly of the clamping head 1. The magnetic subassembly of the said buckle base 2 is set in the said buckle base 2, and the magnetic subassembly of the said buckle base 2 is located under the said buckle head 21. The magnetic subassembly of the said buckle base 2 is a magnetic ring 29, and the mag-

netic ring 29 is fixed in the buckle base 2. When the magnetic subassemblies of the clamping head 1 and the buckle base 2 are mutually attracted, the buckle head 21 can be automatically inserted between the two clamping blocks 131. A pressure spring is connected between the upper inner sides of the left fastener 13 and the right fastener 14 to make the two clamping blocks 131 tighten the buckle head 21.

[0025] The said clamping head housing includes a front housing 11 and a rear housing 12, and the opposite walls of the front housing 11 and the rear housing 12 are respectively set with a half recess 16 forming the said cavity.

[0026] A metal piece 3 is further fixed between the upper ends of the front housing 11 and the rear housing 12. The upper opposite walls of the front housing 11 and the rear housing 12 are respectively set with a locating slot of the metal piece 31 (see Fig.15). The upper end of the metal piece 3 is set with a pull ring 31 stretching out the top of the front housing 11 and the rear housing 12. The lower end of the metal piece 3 is set with two pin holes 32, two pin shafts 4 are connected between the front housing 11 and the rear housing 12. The two pin holes 32 of the said metal piece 3 are covered with the said pin shafts 4 to fix the metal piece 3 with the front housing 11 and the rear housing 12. During use, the belt 5 and the clamping head housing can be connected when the belt 5 passes through the pull ring 31 and is tightened.

[0027] In other embodiments, several tapered protrusions for fixing belts are set at the upper ends of the opposite walls of the front housing 11 and the rear housing 12. During assembly, one end of the belt is placed between the front housing 11 and the rear housing 12. When the front housing 11 and the rear housing 12 are fixedly connected, the tapered protrusion presses the said belt to fix the belt at the upper end of the clamping head housing.

[0028] The magnetic subassembly of the clamping head 1 includes a front magnetic block and a rear magnetic block 121 (the front magnetic block and rear magnetic block 121 are not indicated in the figure). The front magnetic block and the rear magnetic block 121 are respectively fixed at the lower end of the recess 16 of the front housing 11 and the rear housing 12. As shown in Fig.5, the rear magnetic block 121 is fixed in the fixed slot at the lower end of the recess 16 of the rear housing 12, and the front magnetic block is fixed in the fixed slot at the lower end of the recess 16 of the front housing 11.

[0029] As shown in Fig. 4, the said fastener unfolding device is a rope 19, and the two ends of the said rope 19 are respectively fixed with the upper ends of the left fastener 13 and the right fastener 14. The upper ends of the left fastener 13 and the right fastener 14 are set with the rope fixing holes 133, and two ends of the said rope 19 are respectively fixed in the rope fixing holes 133 of the left fastener 13 and the right fastener 14. The middle part of the rope 19 passes through the clamping head housing from the top of the said cavity. When the buckle base 2

is separated from the clamping head 1, the rope 19 shall be pulled to make the upper ends of the left fastener 13 and the right fastener 14 swing toward each other. The distance between the clamping blocks 131 is increased, and the buckle head 21 can be pulled out. The said clamping block is laterally set, and the end of the buckle block 131 is set with a triangular or semi-circular notch 1311. The said buckle head 21 is a mushroom-shaped protrusion matching with the said clamping block 131. The mushroom-shaped protrusion is like a mushroom and comprises a lower cylinder 211 and an upper clamping body 212. The diameter of the clamping body 212 is greater than the diameter of the cylinder 211. The buckle base 2 is set with nuts. The said cylinder 211 is connected with nuts. The said two clamping blocks 131 are clamped on the cylinder 211, and the two clamping blocks 131 are located under the clamping body 212.

[0030] The said buckle base 2 has a plate shape, and the two ends of the buckle base are respectively set with long-stripped webbing slots 22. The two long-stripped slots 22 are respectively set in parallel. During use, another belt passes through the two long-stripped webbing slots 22 to firmly and stably connect between the buckle base 2 and the belt.

[0031] In other embodiments, the said buckle base 2 may also be in a rectangular groove shape, the bottom of the buckle base is set with a rectangular groove-shaped webbing slot 22, and the long-stripped webbing slot 22 is set in parallel. During use, another belt passes through the two long-stripped webbing slots 22 to firmly and stably connect the buckle base and the belt. The upper surface of the buckle base 2 is set with a circular groove 23, the inner diameter of the said circular groove 23 is greater than the outer peripheral diameter of the clamping head housing, and the said buckle head 21 is located in the middle of the said circular groove 23. The middle of the said circular groove 23 is further set with a receiving groove of magnetic ring 28. The said magnetic ring 29 is placed in the receiving groove of magnetic ring 28, and its position is limited by the cover plate 27 at the top of the receiving groove of magnetic ring 28. The circular groove 23 can prevent the joint between the clamping head 1 and the buckle base 2 from being impacted by an external force and make the connection firm and stable.

[0032] The opposite walls of the front housing 11 and the rear housing 12 are set with matching positioning columns 17 and positioning holes, and the front housing 11 and the rear housing 12 are matched and connected with screws and nuts. Thus, the connection between the front housing 11 and the rear housing 12 is firm and stable without misplacement.

[0033] A method of using an automatic magnetic buckle includes the following steps:

Step 1: The buckle base 2 is close to the clamping head 1, and the buckle base 2 is mutually attracted with the magnetic subassembly on the clamping head 1. Under the action of the magnetic attraction force, the buckle

head 21 is inserted into the cavity of the clamping head housing, the buckle subassembly is used to fix the buckle head 21, and the clamping head 1 is fixedly connected with the buckle base 2.

5 **[0034]** In Step 1, the magnetic force of the magnetic subassembly on the buckle base 2 and the clamping head 1 has the buckle base 2 and the clamping head 1 attached together. At this moment, the lower end of the clamping head is located in the said circular groove 23.
10 The buckle head 21 is inserted between the two clamping blocks 131, and the clamping body 212 of the clamping head 21 is located above the clamping block 131. Due to the action of the pressure spring, the cylinder 211 of the two clamping blocks 131. The matching of the buckle head 21 and the clamping block 131 makes the connection between the buckle base 2 and the clamping head 1 stable and firm. Step 2: An acting force is applied to the left fastener 13 and the right fastener 14 via the fastener unfolding device to make the upper ends of the left fastener 13 and the right fastener 14 swing toward each other. The distance between the two clamping blocks 131 is increased, and the buckle head 21 can be removed from the clamping head 1 to separate the clamping head 1 and the buckle base 2.

25 **[0035]** In Step 2, the rope 19 is pulled up to make the upper ends of the left fastener 13 and the right fastener 14 swing toward each other. The distance between the two clamping blocks 131 is increased. When the distance between the two clamping blocks 131 is greater than the diameter of the clamping body 212, the buckle head 21 can be pull out from the clamping head 1. During use, a rope passes through the two long strip-shaped grooves 22 and fixedly connects with people, animals or other objects which need to be towed. The upper end of the clamping head housing is fixedly connected with the tow rope to conveniently fix and connect the tow rope to people, animals or other objects which need to be towed. They can be separated very easily. The structural design of the present invention is reasonable and ingenious. The fixed connection between the buckle base 2 and the clamping head 1 can be easily realized by the action of the magnetic subassembly, and the connection is stable and firm. The buckle base 2 and the clamping head 1 can be conveniently separated by the design of the fastener unfolding device. Moreover, the buckle base and the clamping head can rotate at 360°, so the buckle base and the clamping head can be buckled or separated at any angle. It can be operated conveniently and saves time and effort.

50 **[0036]** Refer to Fig. 5 to Fig. 10 for Embodiment 2. The present embodiment is substantially the same as Embodiment 1, but their differences are as follows: The said buckle base 2 is cylindrical, the lower part of the buckle base 2 is set with a metal piece 210, and the metal piece 210 is set with a long-stripped webbing slot 22.

55 **[0037]** The upper surface of the buckle base 2 is set with a circular groove 23, the inner diameter of the said circular groove 23 is greater than the outer peripheral

diameter of the clamping head housing, and the said buckle head 21 is located in the middle of the said circular groove 23. The middle of the said buckle base 2 is further set with a receiving groove of magnetic ring 28. The said buckle head 21 is a mushroom-shaped protrusion matching with the said clamping block 131. The mushroom-shaped protrusion is like a mushroom and comprises a lower cylinder 211 and an upper clamping body 212. The diameter of the clamping body 212 is greater than the diameter of the cylinder 211. The buckle base 2 is set with nuts. The said cylinder 211 is connected with nuts.

[0038] Refer to Fig. 12 to Fig. 15 for Embodiment 3. The present embodiment is substantially the same as Embodiments 1 and 2, but their differences are as follows: the said fastener unfolding device has two pressing members 9, and the said pressing members include a pressing rod 91 and a pressing head 92 which are interconnected. The pressing rods 91 of the two pressing members 9 are respectively in contact with the outer sides of the left fastener 13 and the right fastener 14, and the said pressing head 92 stretches out the outer periphery of the clamping head housing.

[0039] The said clamping head housing includes a front housing 11 and a rear housing 12, and the opposite walls of the front housing 11 and the rear housing 12 are respectively set with a half recess 16 forming the said cavity.

[0040] The opposite walls of the front housing 11 and the rear housing 12 are respectively relative to the pressing rod 91 and the pressing head 92, forming a holding tank 10.

[0041] The above is only a preferred embodiment of the present invention and is not intended to limit the present invention in any way. Any technician who is familiar with the present field can make many possible changes and modifications for the technical solution of the present invention within the scope of the appended claims.

Claims

1. An automatic magnetic buckle, which comprises a matching clamping head (1) and a buckle base (2), wherein the said clamping head (1)

comprises a clamping head housing, and the said clamping head housing has a cavity extending through the upper and lower ends of the clamping head housing; the said cavity is set with a buckle subassembly, and the said buckle base is set with a buckle head (21) matching with the said buckle subassembly, and the said clamping head (1) and the buckle base (2) are set with magnetic subassemblies which are mutually attracted, wherein the said magnetic subassembly of the clamping head (1) is set at a lower end of the

said cavity, and the lower part of the buckle subassembly is located at the magnetic subassembly of the clamping head (1);

the magnetic subassembly of the said buckle base (2) is set in the said buckle base (2), and the magnetic subassembly of the said buckle base (2) is located under the buckle head (21), wherein the said buckle base (2) has a plate shape, and the two ends of the buckle base (2) are respectively set with long-stripped webbing slots (22) being respectively set in parallel or wherein the said buckle base (2) is cylindrical, the lower part of the buckle base (2) is set with a metal piece (210), and the metal piece (210) is set with a long-stripped webbing slot (22); wherein the upper surface of the buckle base (2) is set with a circular groove (23), the inner diameter of the said circular groove (23) is greater than the outer peripheral diameter of the clamping head housing, and the said buckle head (21) is located in the middle of the said circular groove (23); and

characterized in that the middle of the said circular groove (23) is further set with a receiving groove (28) of magnetic ring, the said magnetic ring (29) being placed in the receiving groove (28) of magnetic ring, and its position is limited by a cover plate (27) at the top of the receiving groove (28) of magnetic ring.

2. The said automatic magnetic buckle, according to Claim 1, is **characterized in that** the said buckle subassembly comprises a left fastener (13) and a right fastener (14) which are symmetrically set in the cavity and have the same structure; the middle parts of the said left fastener (13) and right fastener (14) are hinged asway in the cavity; a pressure spring (90) is connected between the upper inner sides of the left fastener (13) and the right fastener (14), and the lower ends of the left fastener (13) and the right fastener (14) are oppositely set with a clamping block (131) matching with the said buckle head (21); a fastener unfolding device is connected to the upper ends of the left fastener (13) and the right fastener (14).
3. The said automatic magnetic buckle, according to Claim 1 or 2, is **characterized in that** the said clamping head housing includes a front housing (11) and a rear housing (12), and the opposite walls of the front housing (11) and the rear housing (12) are respectively set with a half recess (16) forming the said cavity; a metal piece (3) is further fixed between the upper ends of the front housing (11) and the rear housing (12), and the upper end of the metal piece (3) is set with a pull ring (31) stretching out the top of the front housing (11) and the rear housing (12).

4. The said automatic magnetic buckle, according to Claim 2, is **characterized in that** the said fastener unfolding device is a rope (19), and the two ends of the said rope (19) are respectively fixed with the upper ends of the left fastener (13) and the right fastener (14); the middle part of the rope (19) passes through the clamping head housing from the top of the said cavity.
5. The said automatic magnetic buckle, according to Claim 2, is **characterized in that** the said fastener unfolding device has two pressing members, and the said pressing members include a pressing rod (91) and a pressing head (92) which are interconnected; the pressing rods (91) of the two pressing members are respectively in contact with the outer sides of the left fastener (13) and the right fastener (14), and the said pressing head (92) stretches out the outer periphery of the clamping head housing.
6. The said automatic magnetic buckle, according to Claim 2, is **characterized in that** the said clamping block is laterally set, and the end of the buckle block (131) is set with a triangular or semi-circular notch (1311); the said buckle head (21) is a mushroom-shaped protrusion matching with the said clamping block (131).
7. The said automatic magnetic buckle, according to Claim 3, is **characterized in that** the opposite walls of the front housing (11) and the rear housing (12) are set with matching positioning columns (17) and positioning holes, and the front housing (11) and the rear housing (12) are matched and connected with screws and nuts.
8. The said automatic magnetic buckle, according to Claim 1, is **characterized in that** the buckle base (2) has a rectangular groove shape, the bottom of the buckle base (2) is set with a rectangular groove-shaped webbing slot (22), and the long-stripped webbing slot is set in parallel.

Patentansprüche

1. - Automatischer Magnetverschluss, der einen passenden Klemmkopf (1) und eine Verschlussbasis (2) umfasst, wobei der Klemmkopf (1) ein Klemmkopfgehäuse umfasst und das Klemmkopfgehäuse einen Hohlraum aufweist, der sich durch das obere und das untere Ende des Klemmkopfgehäuses erstreckt, wobei der Hohlraum mit einer Verschlussunterbaugruppe versehen ist und die Verschlussba-

sis mit einem Verschlusskopf (21) versehen ist, der mit der Verschlussunterbaugruppe zusammenpasst, und der Klemmkopf (1) und die Verschlussbasis (2) mit magnetischen Unterbaugruppen versehen sind, die sich gegenseitig anziehen,

wobei die magnetische Unterbaugruppe des Klemmkopfes (1) an einem unteren Ende des Hohlraums bereitgestellt ist und der untere Teil der Verschlussunterbaugruppe an der magnetischen Unterbaugruppe des Klemmkopfes (1) angeordnet ist,

wobei die magnetische Unterbaugruppe der Verschlussbasis (2) in der Verschlussbasis (2) bereitgestellt ist und die magnetische Unterbaugruppe der Verschlussbasis (2) unter dem Verschlusskopf (21) angeordnet ist,

wobei die Verschlussbasis (2) eine Plattenform aufweist und die zwei Enden der Verschlussbasis (2) jeweils mit langgestreckten Gurtbandschlitz (22) versehen sind, die entsprechend parallel bereitgestellt sind, oder wobei die Verschlussbasis (2) zylinderförmig ist, wobei der untere Teil der Verschlussbasis (2) mit einem Metallstück (210) versehen ist und das Metallstück (210) mit einem langgestreckten Gurtbandschlitz (22) versehen ist,

wobei die Oberseite der Verschlussbasis (2) mit einer kreisförmigen Auskehlung (23) versehen ist, wobei der Innendurchmesser der kreisförmigen Auskehlung (23) größer als der Außenumfangsdurchmesser des Klemmkopfgehäuses ist und der Verschlusskopf (21) in der Mitte der kreisförmigen Auskehlung (23) angeordnet ist, und

dadurch gekennzeichnet, dass die Mitte der kreisförmigen Auskehlung (23) ferner mit einer aufnehmenden Auskehlung (28) für einen Magnetring versehen ist, wobei der Magnetring (29) in der aufnehmenden Auskehlung (28) für den Magnetring platziert ist und seine Position durch eine Deckplatte (27) an der Oberseite der aufnehmenden Auskehlung (28) für den Magnetring begrenzt ist.

2. - Automatischer Magnetverschluss nach Anspruch 1, **dadurch gekennzeichnet, dass** die Verschlussunterbaugruppe ein linkes Befestigungsmittel (13) und ein rechtes Befestigungsmittel (14) umfasst, die in dem Hohlraum symmetrisch bereitgestellt sind und die gleiche Struktur aufweisen, wobei die Mittelteile des linken Befestigungsmittels (13) und des rechten Befestigungsmittels (14) schwenkbar in dem Hohlraum angelenkt sind, wobei zwischen den oberen Innenseiten des linken Befestigungsmittels (13) und des rechten Befestigungsmittels (14) eine Druckfeder (90) eingebunden ist und die unteren Enden des linken Befestigungsmittels (13) und des

- rechten Befestigungsmittels (14) gegenüberliegend mit einem Klemmblock (131) versehen sind, der mit dem Verschlusskopf (21) zusammenpasst, wobei eine Befestigungsmittel-Ausklappvorrichtung mit den oberen Enden des linken Befestigungsmittels (13) und des rechten Befestigungsmittels (14) verbunden ist.
- 5
3. - Automatischer Magnetverschluss nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** das Klemmkopfgehäuse ein vorderes Gehäuse (11) und ein hinteres Gehäuse (12) beinhaltet und die gegenüberliegenden Wände des vorderen Gehäuses (11) und des hinteren Gehäuses (12) jeweils mit einer halben Vertiefung (16) gebildet sind, die den Hohlraum bildet,
- 10
- wobei zwischen den oberen Enden des vorderen Gehäuses (11) und des hinteren Gehäuses (12) ferner ein Metallstück (3) fixiert ist und das obere Ende des Metallstücks (3) mit einem Zugring (31) versehen ist, der sich aus der Oberseite des vorderen Gehäuses (11) und des hinteren Gehäuses (12) ausdehnt.
- 15
4. - Automatischer Magnetverschluss nach Anspruch 2, **dadurch gekennzeichnet, dass** die Befestigungsmittel-Ausklappvorrichtung ein Seil (19) ist und die zwei Enden des Seils (19) an den oberen Enden des linken Befestigungsmittels (13) beziehungsweise des rechten Befestigungsmittels (14) fixiert sind, wobei der Mittelteil des Seils (19) von der Oberseite des Hohlraums durch das Klemmkopfgehäuse verläuft.
- 20
5. - Automatischer Magnetverschluss nach Anspruch 2, **dadurch gekennzeichnet, dass** die Befestigungsmittel-Ausklappvorrichtung zwei Presselemente aufweist und die Presselemente einen Pressstab (91) und einen Presskopf (92) beinhalten, die miteinander verbunden sind, wobei die Pressstäbe (91) der zwei Presselemente jeweils in Kontakt mit den Außenseiten des linken Befestigungsmittels (13) und des rechten Befestigungsmittels (14) stehen und sich der Presskopf (92) aus dem Außenumfang des Klemmkopfgehäuses erstreckt.
- 25
6. - Automatischer Magnetverschluss nach Anspruch 2, **dadurch gekennzeichnet, dass** der Klemmblock seitlich bereitgestellt ist und das Ende des Verschlussblocks (131) mit einer dreieckigen oder halbrunden Kerbe (1311) versehen ist, wobei der Verschlusskopf (21) ein pilzförmiger Vorsprung ist, der mit dem Klemmblock (131) zusammenpasst.
- 30
7. - Automatischer Magnetverschluss nach Anspruch 3, **dadurch gekennzeichnet, dass** die gegenüberliegenden Wände des vorderen Gehäuses (11) und des hinteren Gehäuses (12) mit zusammenpassen-
- 35
- 40
- 45
- 50
- 55

den Positionierungsstützen (17) und Positionierungsöffnungen versehen sind und das vordere Gehäuse (11) und das hintere Gehäuse (12) zusammenpassend und mit Schrauben und Muttern verbunden sind.

8. - Automatischer Magnetverschluss nach Anspruch 1, **dadurch gekennzeichnet, dass** die Verschlussbasis (2) die Form einer rechteckigen Auskehlung aufweist, wobei der Boden der Verschlussbasis (2) mit einem rechteckigen auskehlungsförmigen Gurtbandschlitz (22) versehen ist und der langgestreckte Gurtbandschlitz parallel bereitgestellt ist.

Revendications

1. - Boucle magnétique automatique, qui comprend une tête de serrage (1) et une base de boucle (2) en correspondance, ladite tête de serrage (1) comprenant un boîtier de tête de serrage, et ledit boîtier de tête de serrage ayant une cavité s'étendant à travers les extrémités supérieure et inférieure du boîtier de tête de serrage ; ladite cavité étant munie d'un sous-ensemble boucle, et ladite base de boucle étant munie d'une tête de boucle (21) en correspondance avec ledit sous-ensemble boucle, et ladite tête de serrage (1) et la base de boucle (2) étant munies de sous-ensembles magnétiques qui s'attirent mutuellement,

ledit sous-ensemble magnétique de la tête de serrage (2) étant placé à une extrémité inférieure de ladite cavité, et la partie inférieure du sous-ensemble boucle étant située au sous-ensemble magnétique de la tête de serrage (1) ; le sous-ensemble magnétique de ladite base de boucle (2) étant placé dans ladite base de boucle (2), et le sous-ensemble magnétique de ladite base de boucle (2) étant situé sous la tête de boucle (21), ladite base de boucle (2) ayant une forme de plaque, et les deux extrémités de la base de boucle (2) étant respectivement munies de fentes oblongues à sangle (22) placées respectivement en parallèle, ou ladite base de boucle (2) étant cylindrique, la partie inférieure de la base de boucle (2) étant munie d'une pièce métallique (210), et la pièce métallique (210) étant munie d'une fente oblongue à sangle (22) ; la surface supérieure de la base de boucle (2) étant munie d'une rainure circulaire (23), le diamètre intérieur de ladite rainure circulaire (23) étant supérieur au diamètre périphérique extérieur du boîtier de tête de serrage, et ladite tête de boucle (21) étant située au milieu de ladite rainure circulaire (23) ; et

caractérisée par le fait que le milieu de ladite

- rainure circulaire (23) est en outre muni d'une rainure de réception (28) d'anneau magnétique, ledit anneau magnétique (29) étant placé dans la rainure de réception (28) d'anneau magnétique, et sa position étant limitée par une plaque de recouvrement (27) au-dessus de la rainure de réception (28) d'anneau magnétique.
2. - Boucle magnétique automatique selon la revendication 1, **caractérisée par le fait que** ledit sous-ensemble boucle comprend une attache gauche (13) et une attache droite (14) qui sont placées de manière symétrique dans la cavité et ont la même structure ; les parties centrales de ladite attache gauche (13) et de ladite attache droite (14) sont articulées de part et d'autre dans la cavité ; un ressort de pression (90) est relié entre les côtés intérieurs supérieurs de l'attache gauche (13) et de l'attache droite (14), et les extrémités inférieures de l'attache gauche (13) et de l'attache droite (14) sont munies, de manière opposée, d'un bloc de serrage (131) en correspondance avec ladite tête de boucle (21) ; un dispositif de dépliage d'attaches est relié aux extrémités supérieures de l'attache gauche (13) et de l'attache droite (14) .
3. - Boucle magnétique automatique selon la revendication 1 ou 2, **caractérisée par le fait que** ledit boîtier de tête de serrage comprend un boîtier avant (11) et un boîtier arrière (12), et les parois opposées du boîtier avant (11) et du boîtier arrière (12) sont respectivement munies d'un demi-évidement (16) formant ladite cavité ; une pièce métallique (3) est en outre fixée entre les extrémités supérieures du boîtier avant (11) et du boîtier arrière (12), et l'extrémité supérieure de la pièce métallique (3) est munie d'un anneau de traction (31) s'étendant hors de la partie supérieure du boîtier avant (11) et du boîtier arrière (12).
4. - Boucle magnétique automatique selon la revendication 2, **caractérisée par le fait que** ledit dispositif de dépliage d'attaches est un cordon (19), et les deux extrémités dudit cordon (19) sont respectivement fixées aux extrémités supérieures de l'attache gauche (13) et de l'attache droite (14) ; la partie centrale du cordon (19) traverse le boîtier de tête de serrage à partir de la partie supérieure de ladite cavité.
5. - Boucle magnétique automatique selon la revendication 2, **caractérisée par le fait que** ledit dispositif de dépliage d'attaches a deux organes de pression, et lesdits organes de pression comprennent une tige de pression (91) et une tête de pression (92) qui sont interconnectées ; les tiges de pression (91) des deux organes de pression sont respectivement en contact avec les côtés extérieurs de l'attache gauche (13) et de l'attache droite (14), et ladite tête de pression (92) s'étend hors de la périphérie extérieure du boîtier de tête de serrage.
6. - Boucle magnétique automatique selon la revendication 2, **caractérisée par le fait que** ledit bloc de serrage est placé latéralement, et l'extrémité du bloc de boucle (131) est munie d'une encoche triangulaire ou semi-circulaire (1311) ; ladite tête de boucle (21) est une saillie en forme de champignon en correspondance avec ledit bloc de serrage (131).
7. - Boucle magnétique automatique selon la revendication 3, **caractérisée par le fait que** les parois opposées du boîtier avant (11) et du boîtier arrière (12) sont munies de colonnes de positionnement (17) et de trous de positionnement en correspondance, et le boîtier avant (11) et le boîtier arrière (12) sont mis en correspondance et reliés par des vis et des écrous.
8. - Boucle magnétique automatique selon la revendication 1, **caractérisée par le fait que** la base de boucle (2) a une forme de rainure rectangulaire, le fond de la base de boucle (2) est muni d'une fente à sangle en forme de rainure rectangulaire (22), et la fente oblongue à sangle est placée en parallèle.

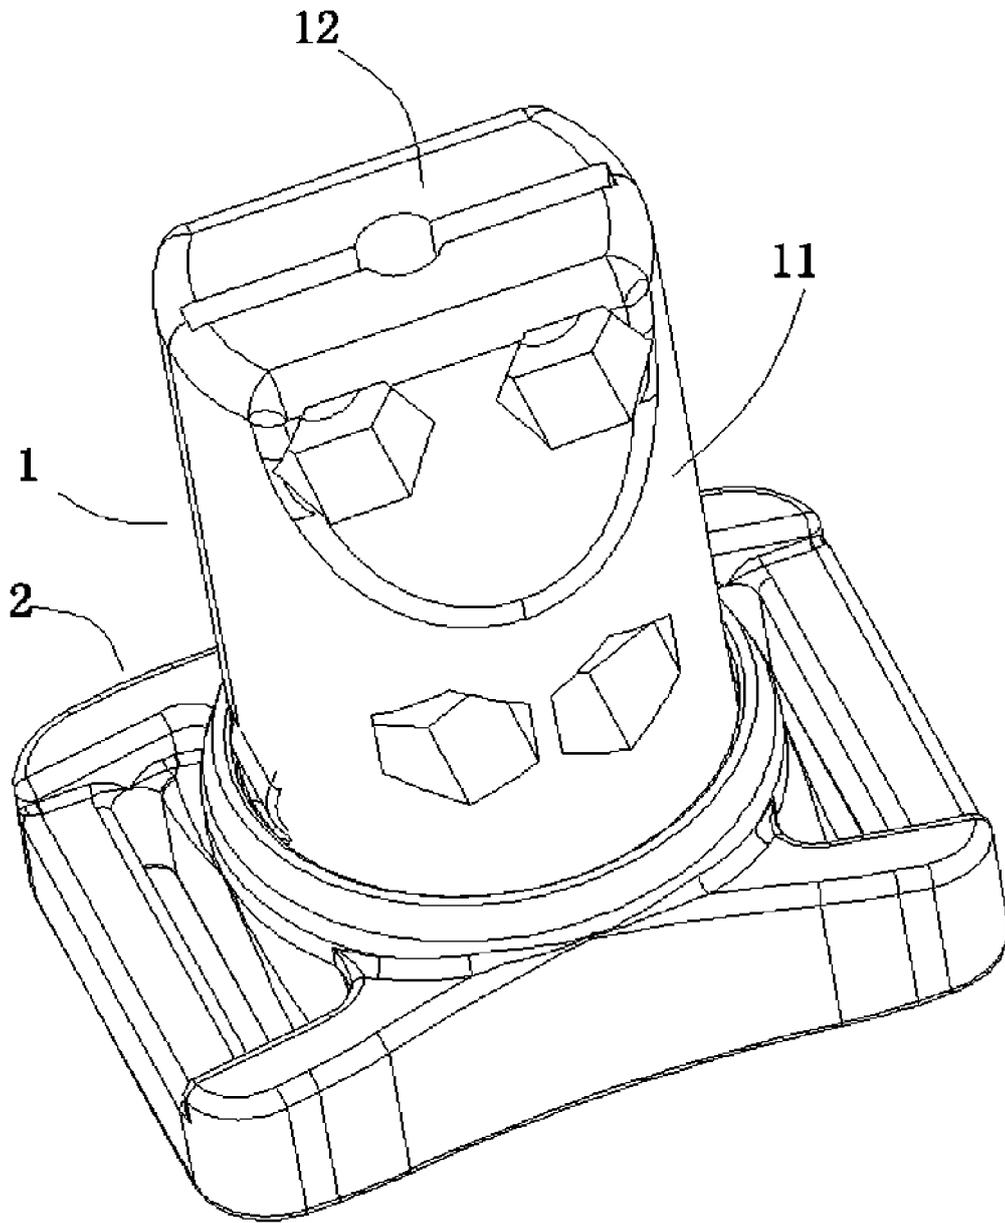


Fig. 1

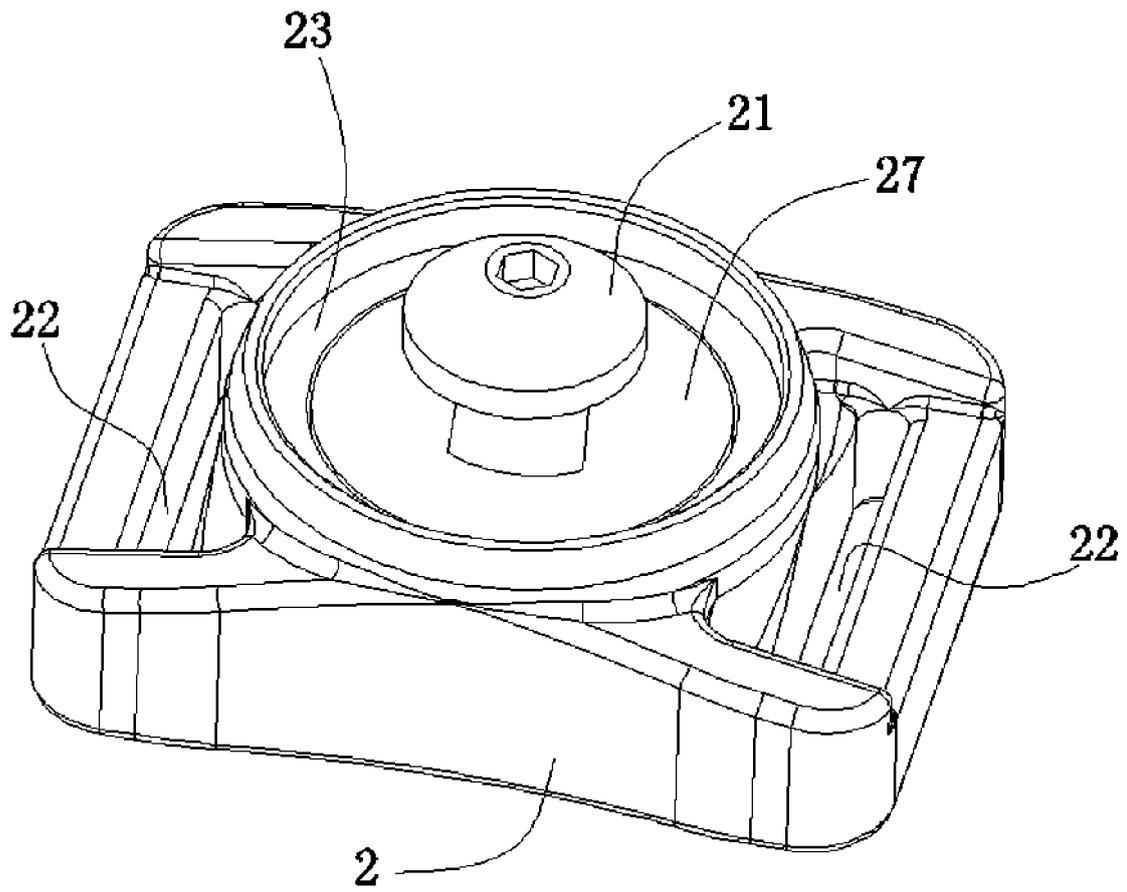


Fig. 2

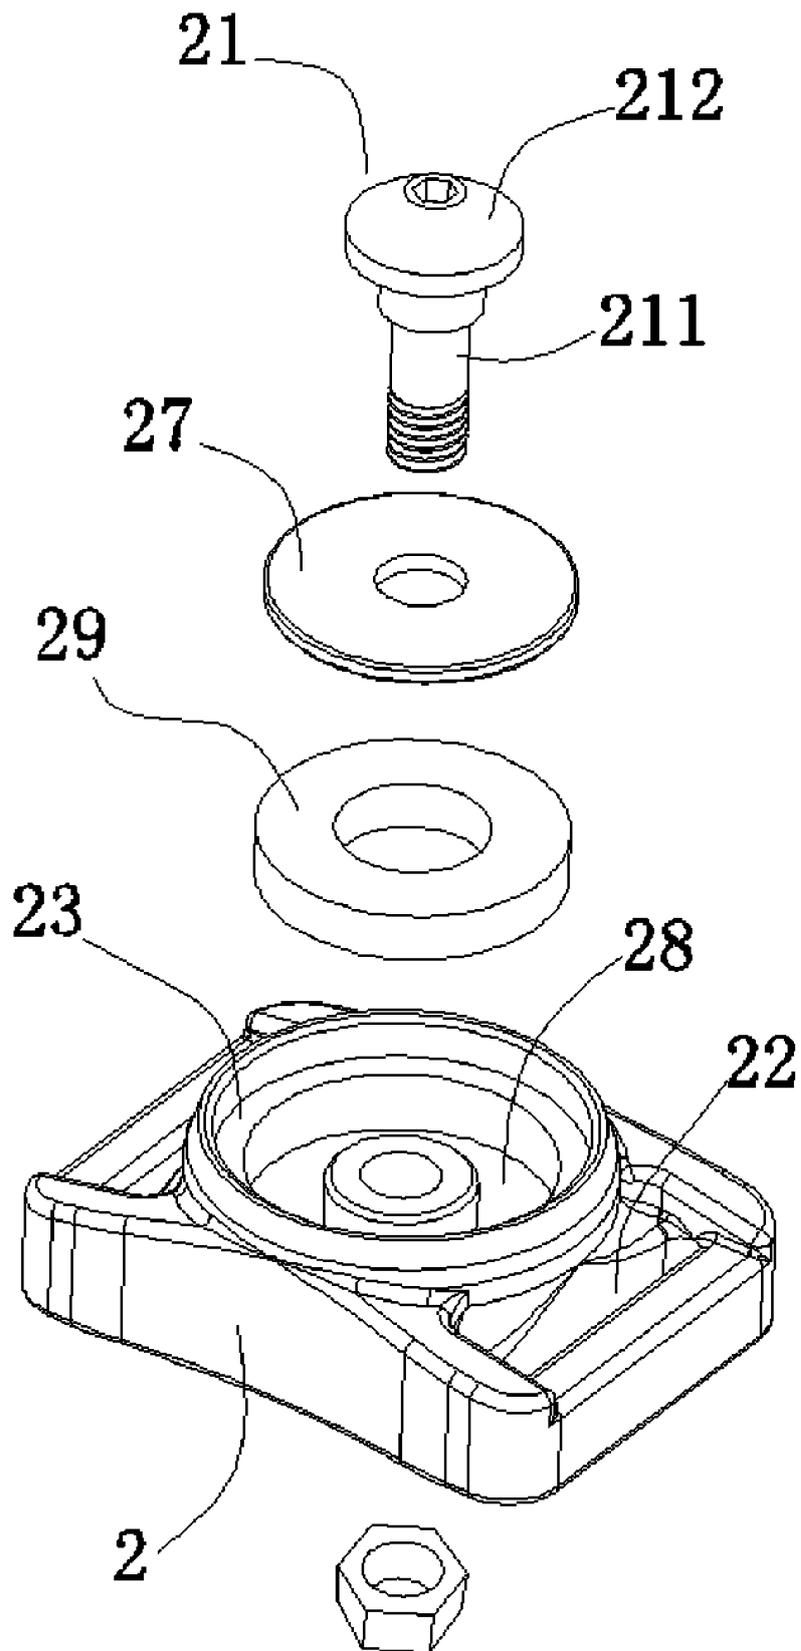


Fig. 3

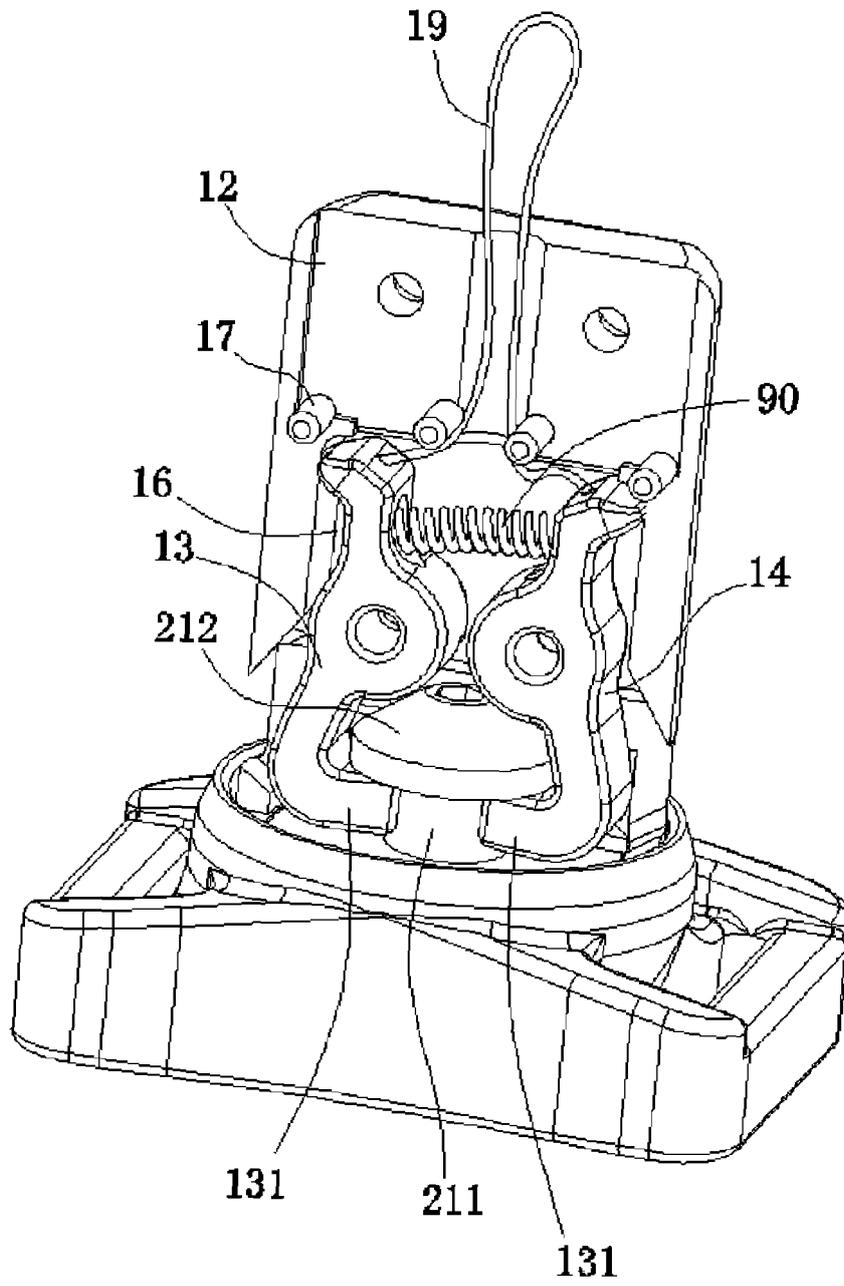


Fig. 4

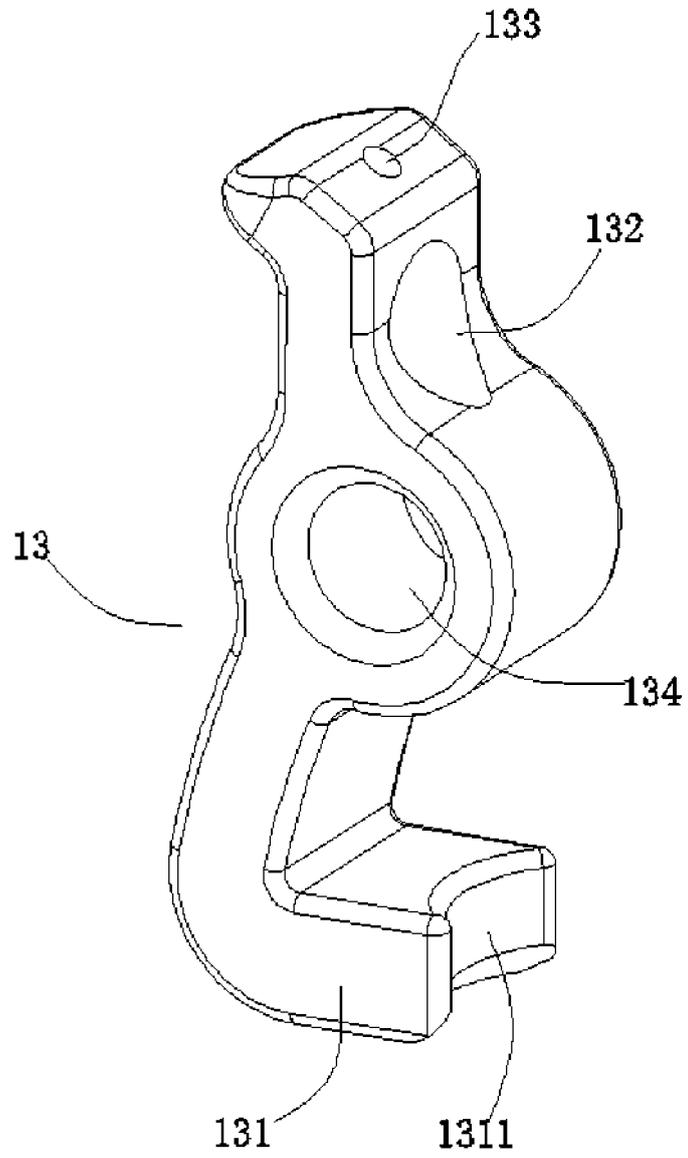


Fig. 5

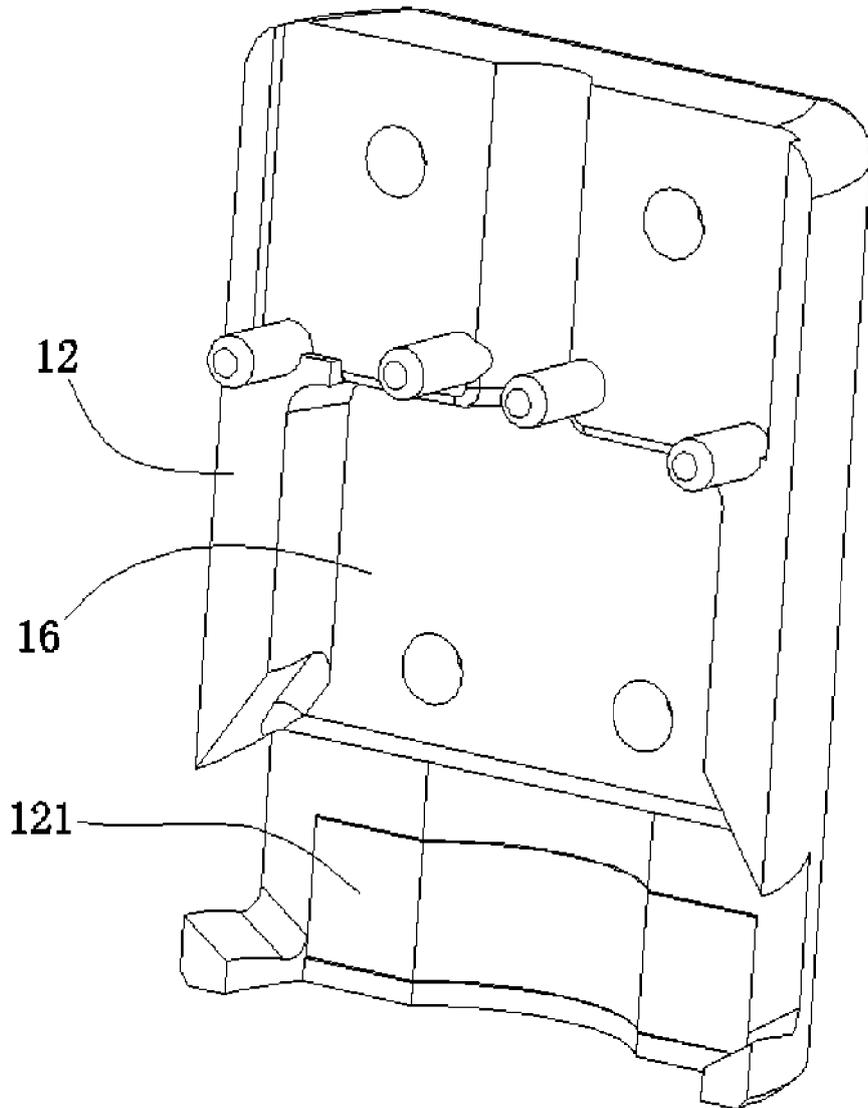


Fig. 6

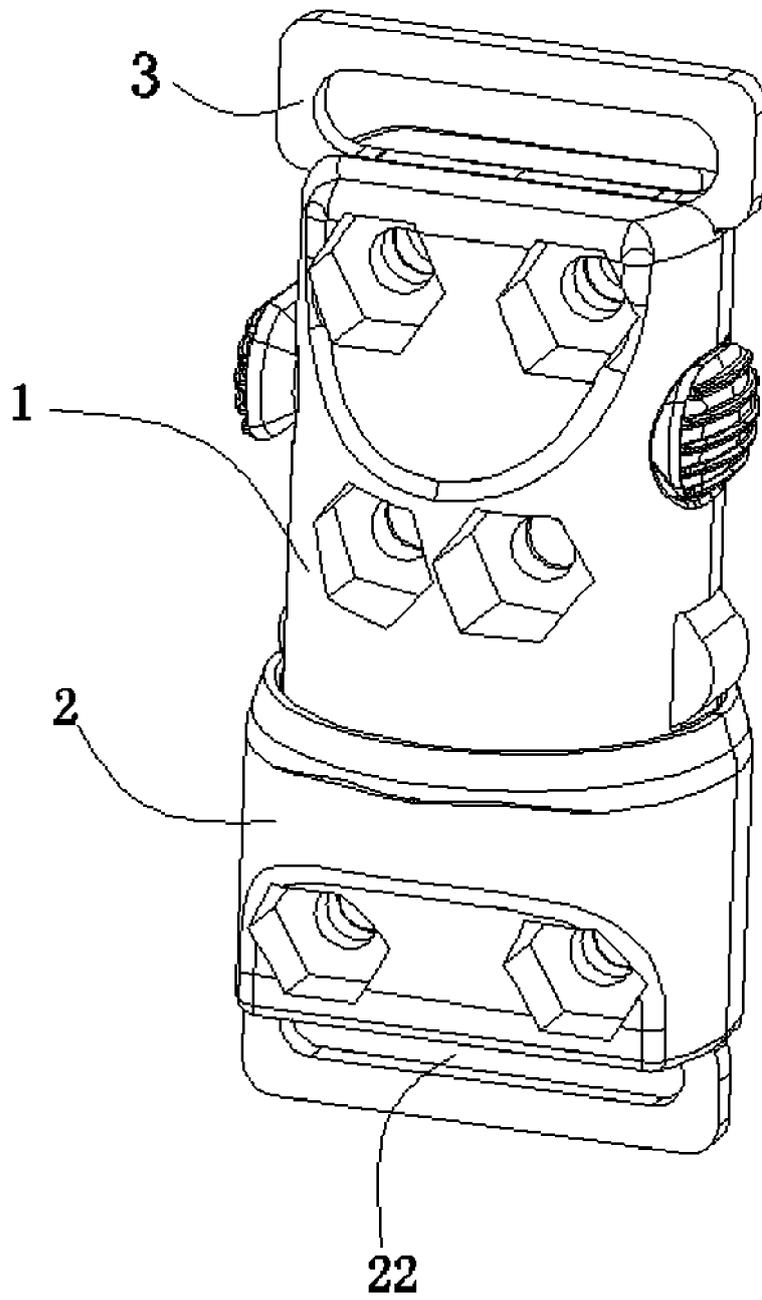


Fig. 7

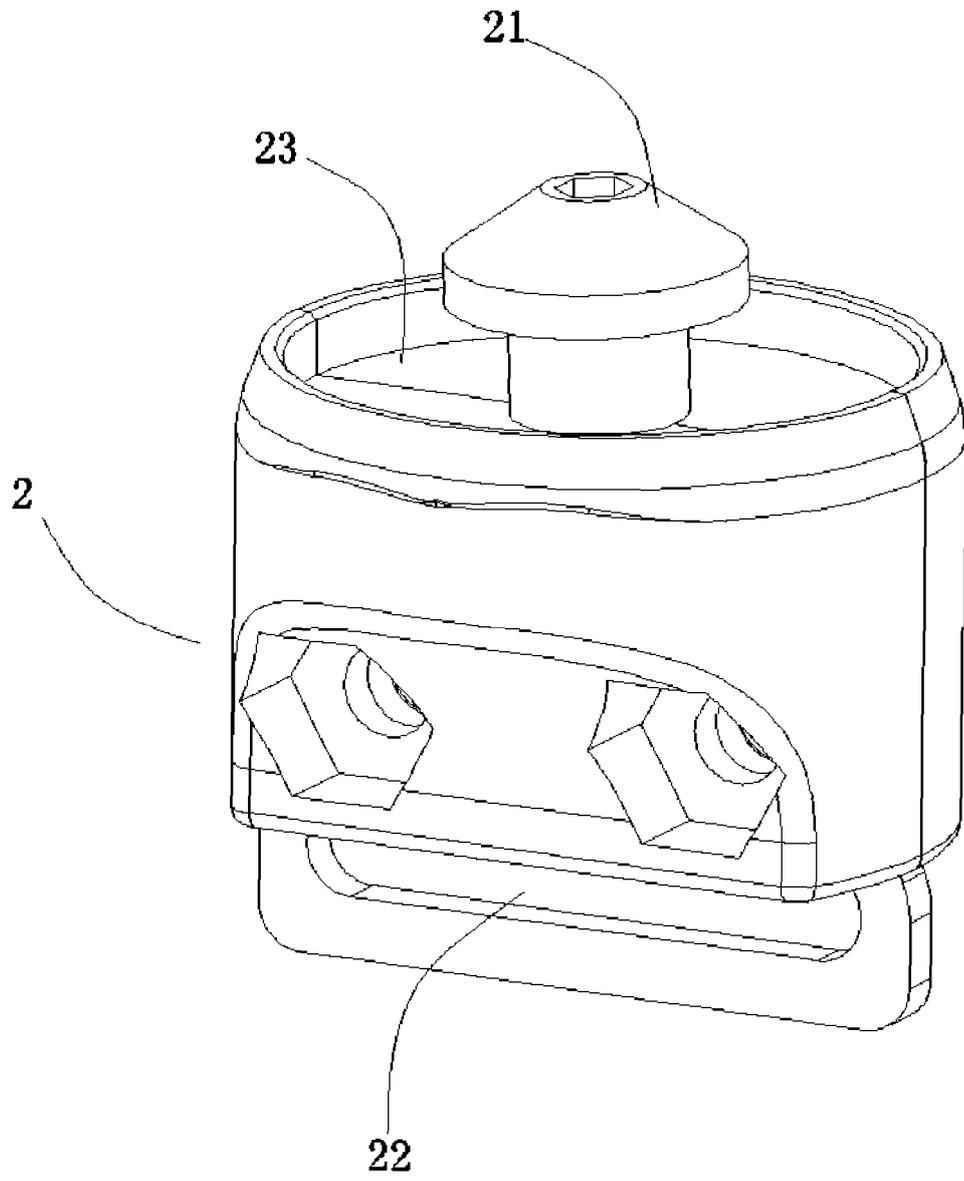


Fig. 8

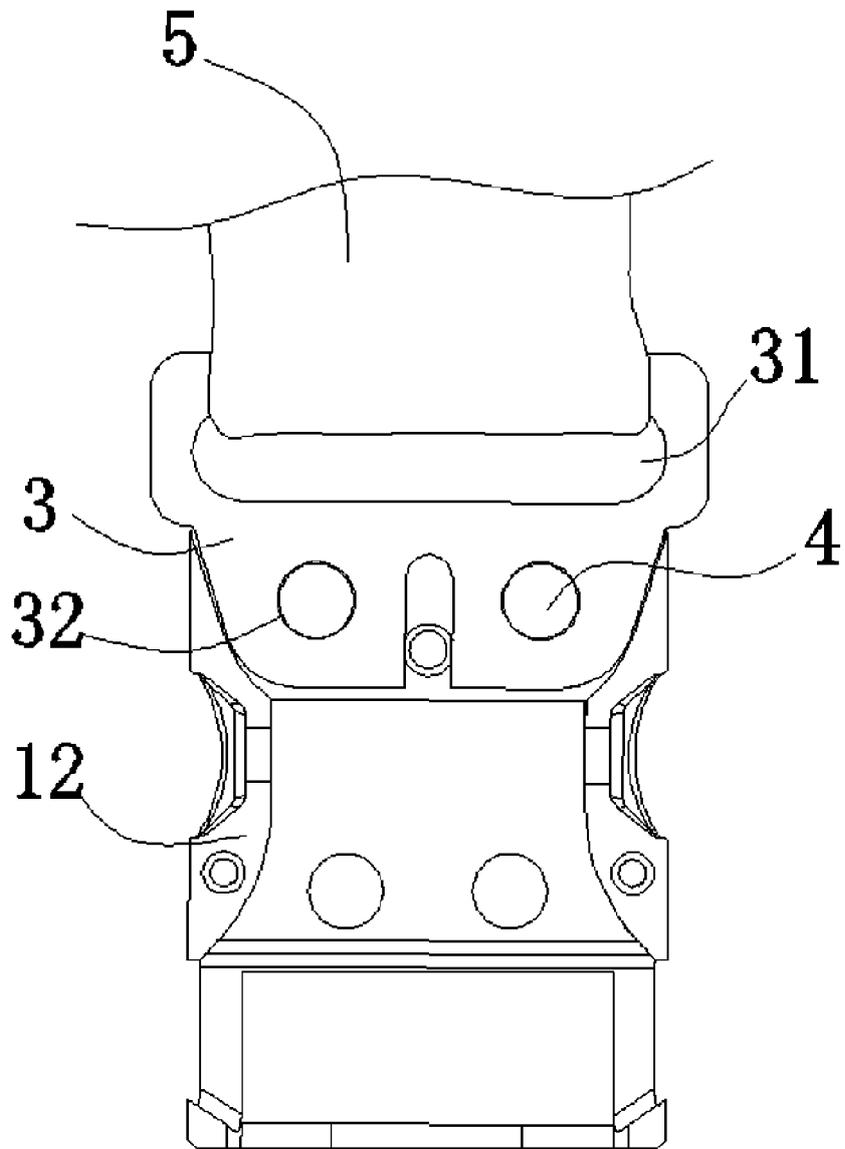


Fig. 9

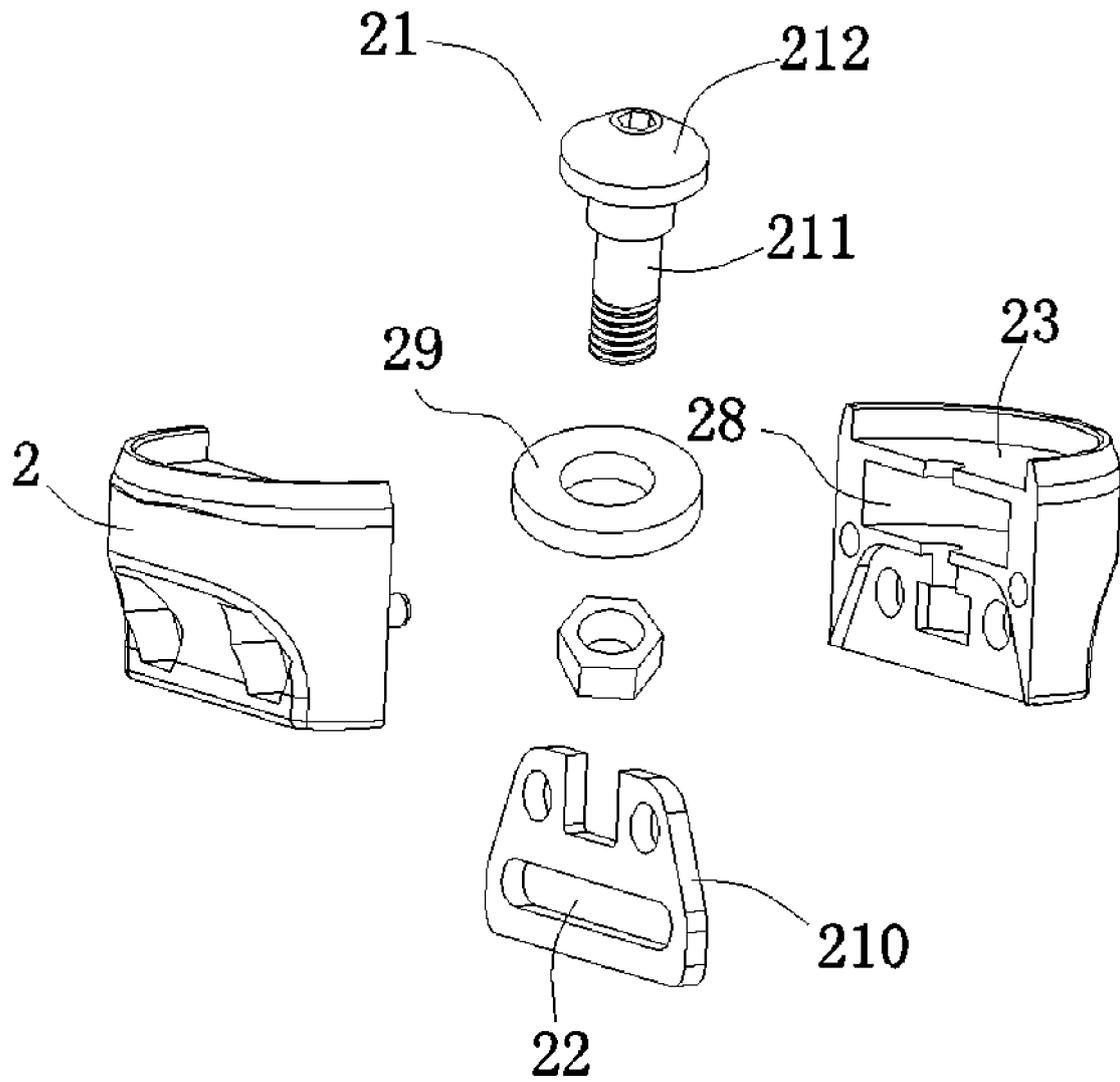


Fig. 10

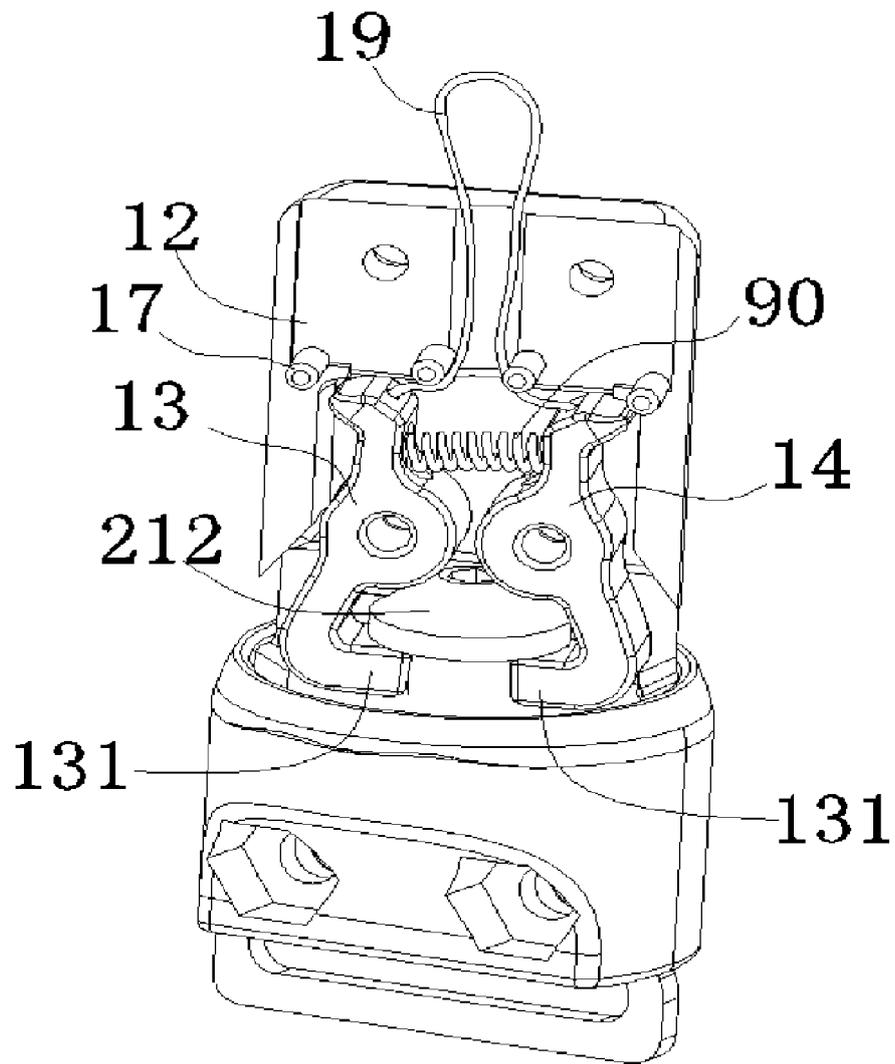


Fig. 11

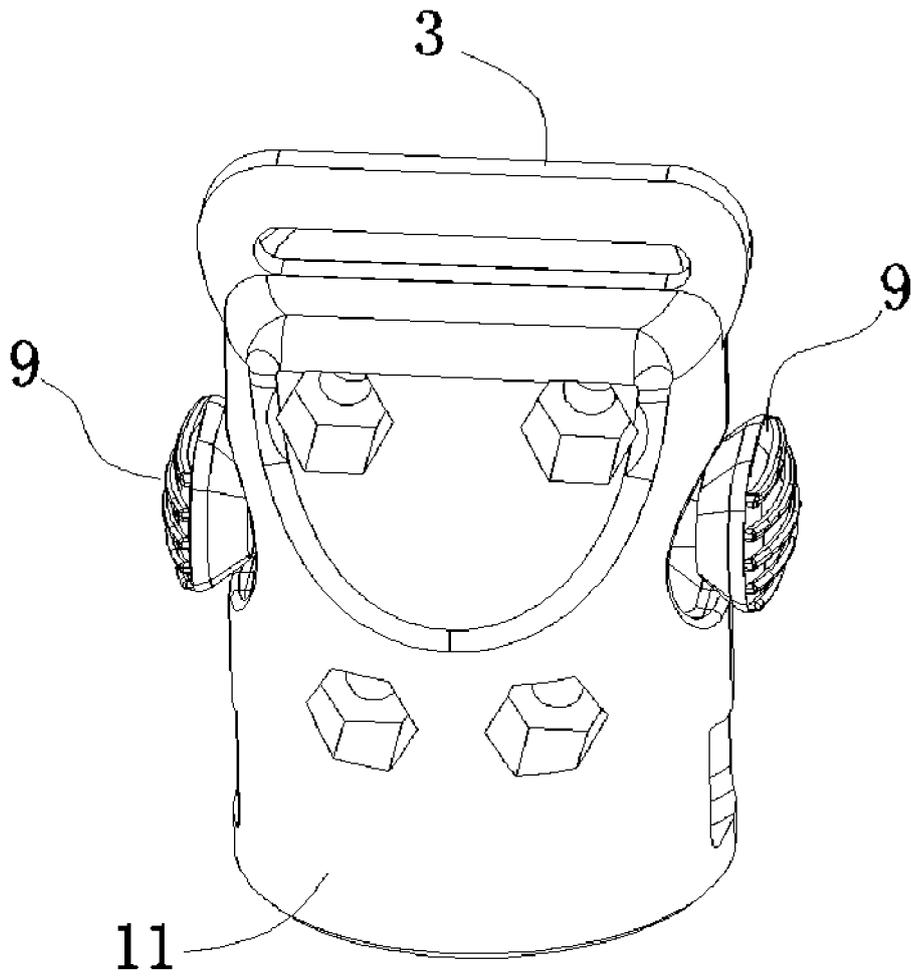


Fig. 12

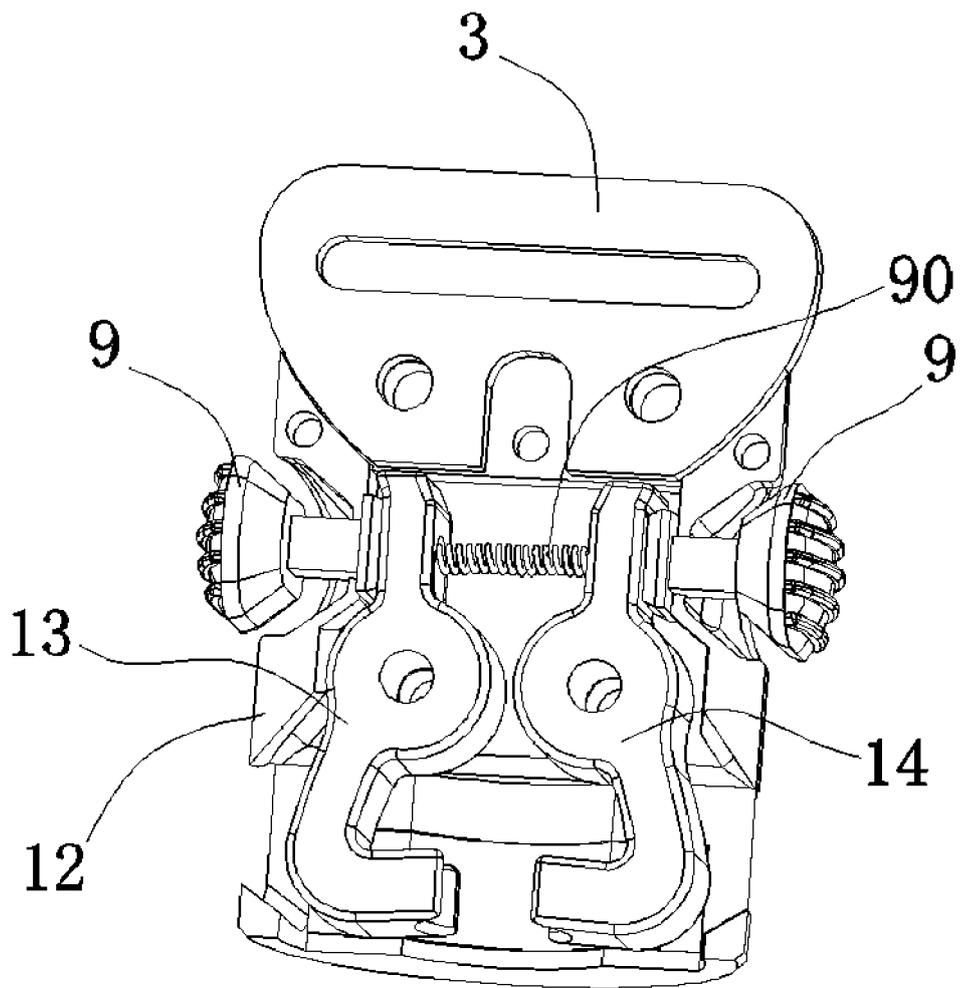


Fig. 13

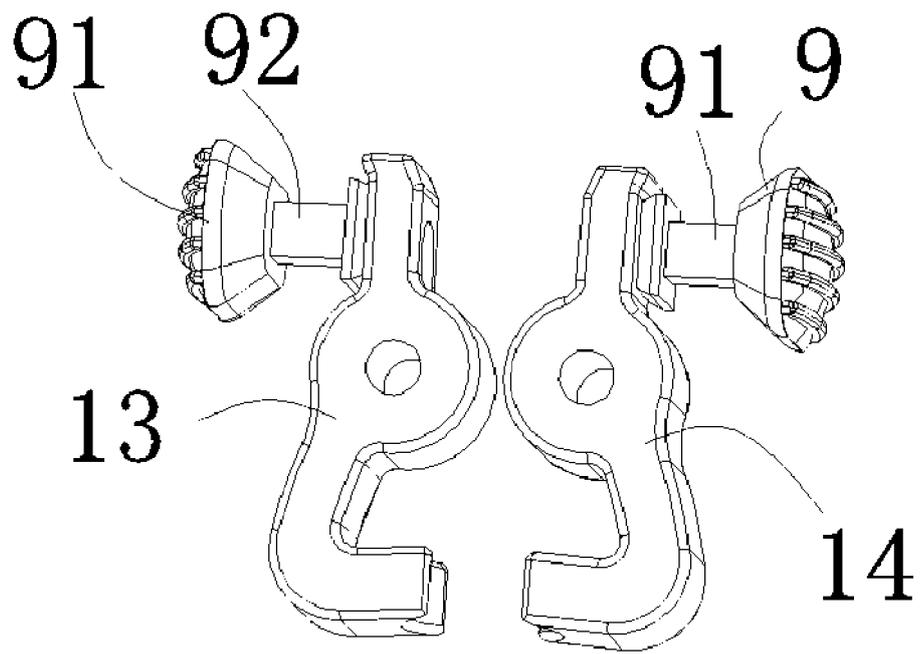


Fig. 14

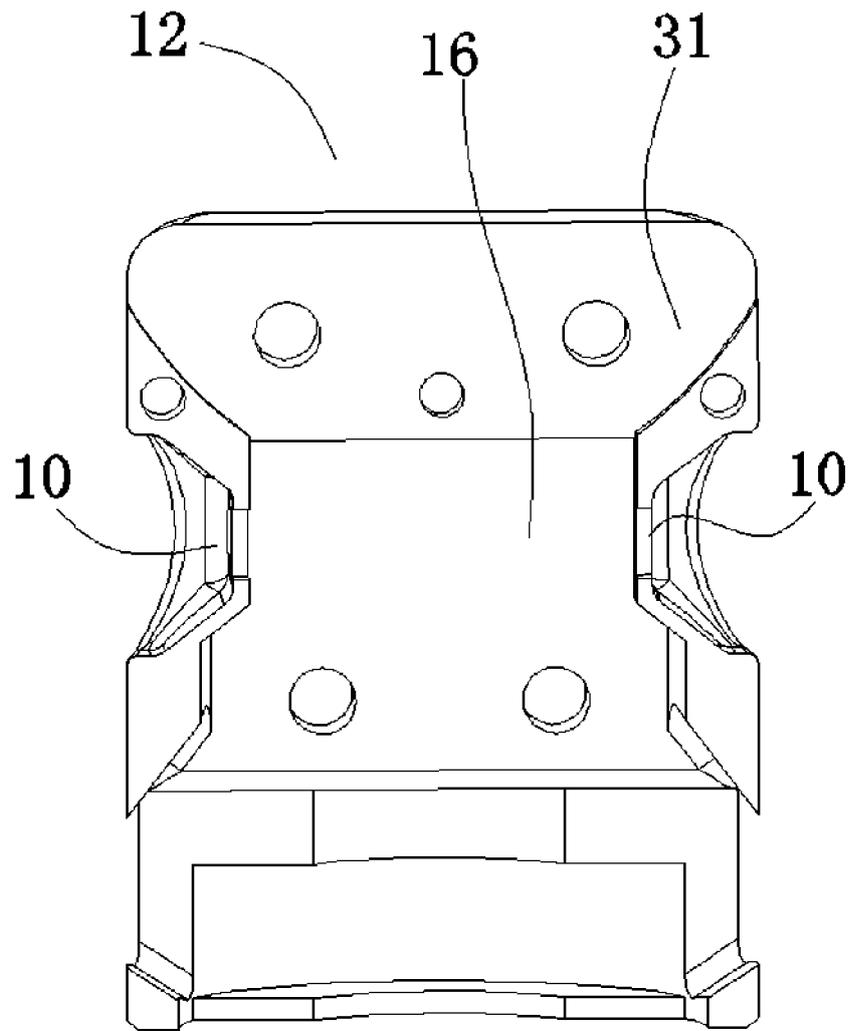


Fig. 15

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 2511104 A [0002]