



(51) International Patent Classification:
C10G 1/04 (2006.01)

(21) International Application Number:
PCT/FI2016/050414

(22) International Filing Date:
10 June 2016 (10.06.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/174,553 12 June 2015 (12.06.2015) US
20155501 25 June 2015 (25.06.2015) FI

(71) Applicant: KEMIRA OYJ [FI/FI]; Porkkalankatu 3, FI-00180 Helsinki (FI).

(72) Inventors: KYLLÖNEN, Lasse; Lehtitie 33b, FI-02730 Espoo (FI). AUJLA, Sukhjot; 11 Rafters Row, The Woodlands, Texas 77380 (US). FOURNIER, Frances; 113 Hearthstone Walk, Woodstock, Georgia 30189 (US). FENDERSON, Tom; 199 Roseland Village NW, Edmonton, Alberta T5E5R6 (CA). KING, Alistair; Soidintie 12 D 20, FI-00700 Helsinki (FI). SKLAVOUNOS, Evangelos; Risupadontie 6 D 22, FI-00640 Helsinki (FI).

(74) Agent: TURUN PATENTTITOIMISTO OY; P.O. Box 99, FI-20521 Turku (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: SURFACTANT COMPOSITION AND METHOD FOR TREATING BITUMEN FROTH

(57) Abstract: The invention relates to a surfactant composition comprising an ionic liquid prepared from an unsubstituted or substituted primary, secondary or tertiary amine, or from an unsubstituted or substituted pyridine, amidine or guanidine with at least one fatty acid and/or resin acid. The invention also relates to a method for treating bitumen froth from a separation process, where bitumen is separated from mineral solids. The method comprises addition of said surfactant composition to the diluent and/or to the froth before phase separation.



SURFACTANT COMPOSITION AND METHOD FOR TREATING BITUMEN FROTH

The invention relates to a surfactant composition comprising an ionic liquid and a
5 method for treating bitumen froth according to the preambles of the enclosed independent claims.

Oil sands, which are also known as tar sands, are mixtures of clay, sand, water,
and heavy hydrocarbons, especially bitumen, and they provide a potential source
10 of hydrocarbons for petrochemical industry. Many of the known processes for separating and recovering hydrocarbons from oil sands are, however, expensive. Some conventional bitumen extraction methods use a froth-flotation process to separate bitumen from mineral solids and water. In the process oil sand is mixed
15 with heated water or steam, optionally also with caustic solution. Mixing results in formation of two fractions, where the first fraction is bitumen froth, which comprises bitumen, water and small amount of mineral solids. The second fraction comprises mainly water and mineral solids. The two fractions are separated from each other and the bitumen froth fraction is processed further for recovery of the bitumen.

20

In the further processing the bitumen froth is diluted with a suitable hydrocarbon solvent in order to reduce the viscosity and density of the bitumen oil phase, which accelerates the separation of the solid impurities, for example by gravity. The separated bitumen from the froth-flotation process should contain so small
25 amounts of water and mineral solids as possible, preferably < 2 weight-% and < 0.5 weight-%, respectively. If the amount of water and/or minerals solids is too high, the bitumen is not directly suitable for pipelining or further refining. Sometimes the process operators are forced to slow down the froth treatment in order to achieve acceptable low levels of water and mineral solids in the separated
30 bitumen. One or more additional process steps may also be required for upgrading the separated bitumen to an acceptable quality level. All this naturally complicates the production and increases the production costs. Similar problems may also be related to recovery of oil from oil shale.

Surfactants may be used in froth-flotation process to separate mineral solids and water from bitumen froth.

- 5 There exists a need to improve methods for treating bitumen froth for separation of mineral solids and water from bitumen.

An object of this invention is to minimise or even totally eliminate the disadvantages existing in the prior art.

10

Another object of the present invention is to provide a simple method for treating bitumen froth from a separation process.

- 15 A further object of the present invention is to improve separation of water and especially mineral solids from bitumen in a surfactant assisted froth treatment.

Another further object of the present invention is to provide a surfactant composition, which is easily biodegradable, non-toxic and provides good separation results in treatment of bitumen froth.

20

The invention is defined in the characterising parts of the enclosed independent claims. Some preferable embodiments of the invention are defined in the dependent claims. All described features apply both for the composition, its use as well as the method of the invention, whenever applicable, even if it not necessarily
25 always stated so.

- Typical surfactant composition according to the present invention comprises at least one ionic liquid prepared from an unsubstituted or substituted primary, secondary or tertiary amine, or from an unsubstituted or substituted pyridine, amidine or guanidine with at least one fatty acid and/or resin acid.
30

Typical use of a surfactant composition according to the present invention is for separation of bitumen from an aqueous phase and mineral solids phase.

Typical method according to the present invention for treating bitumen froth from a separation process, where bitumen is separated from mineral solids, comprises

- obtaining bitumen froth that comprises bitumen, water and mineral solids,
- 5 - adding organic diluent, such as naphthenic or paraffenic solvent, to the froth,
- providing a phase separation between an organic phase, aqueous phase and solid phase, and
- adding a surfactant composition according to the present invention to the diluent and/or to the froth before the phase separation in amount of less than 1500 ppm,
- 10 preferably less than 1000 ppm.

Now it has been found that a surfactant composition comprising ionic liquid can provide an efficient phase separation between water, bitumen and mineral particles in bitumen froth. The origin of the phenomenon is not yet fully understood, and it is surprising that even an addition of relatively small amount of surfactant composition, which comprises ionic liquid, to the bitumen froth may enable a good phase separation, especially the separation of particles of mineral solids. Furthermore, use of surfactant composition comprising ionic liquid facilitates a significant reduction in water content of the produced bitumen and/or significant improvement in bitumen recovery.

15

20

In the present context the term "bitumen" is understood as a highly viscous mixture of crude oil, comprising hydrocarbons heavier than pentanes, and which mixture has a viscosity above 10 000 cP, and is non-mobile at reservoir conditions. Bitumen may have an API gravity < 12°, preferably < 10°, more preferably < 8°. The API gravity of bitumen may be in the range of 12° – 6°. Bitumen may comprise > 15 weight-%, preferably > 25 weight-%, of asphaltenes. The total amount of asphaltenes and resins in bitumen may be >40 weight-%, preferably >45 weight-%. The bitumen froth may comprise 30 – 75 weight-% of bitumen, 15 – 35 weight-% of water and 5 – 20 weight-% of mineral solids before the phase separation step.

25

30

Surfactants comprising ionic liquid are relatively simple to manufacture, as the synthesis of ionic liquid is not complicated. This means that the surfactant

composition may be manufactured on-site, if needed. The raw materials for the ionic liquid component may be delivered as solid products.

Ionic liquids are non-flammable and thermally stable. Therefore surfactants which
5 comprise ionic liquids are safe to handle and transport and minimize the occupational hazards during their use. The surfactant composition according to the present invention can be used even in harsh environments at high temperatures and alkaline conditions.

10 In the present context the term "ionic liquid" is understood to denote an ionic salt-like material, which is liquid at temperature of $< 100\text{ }^{\circ}\text{C}$, preferably temperature of $< 50\text{ }^{\circ}\text{C}$, at atmospheric pressure. Ionic liquids include two components, namely a cationic component and an anionic component. The ionic liquids suitable for use in the present invention are soluble in water and insoluble in non-polar organic
15 solvents. The ionic liquids are preferably biodegradable. In this context compounds and compositions are referred biodegradable if they reach a biodegradation level higher than 60 %, evaluation being based on the so-called BOD5 (Biochemical oxygen demand after 5 days) or "Closed Bottle Test" (OECD 301D).

20

Ionic liquids suitable for use in the present invention may be reversible, which means that they can be easily recycled and reused, which may improve the process economy. Reversible ionic liquid means that the molecular components forming the ionic liquid can be transformed into ionic liquid and vice versa, either
25 by application of heat, vacuum or by bubbling suitable gas, such as N_2 or suitable acid gas, such as CO_2 , in the mixture of components. It may also be possible to dissociate the ionic liquid by using acid-base chemistry. Preferably the reversible ionic liquid may be a combination of dissociated acid and base, which can be converted back to distillable acid and base forms by application of heat. Ionic
30 liquids where the positive charge cannot be removed, such as 1,3-dialkylimidazoliums, tetraalkylphosphoniums, trialkylsulphoniums and tetraalkylammoniums are preferably excluded from the ionic liquids which are used in the present invention.

The surfactant composition comprises at least one ionic liquid prepared from an unsubstituted or substituted primary, secondary or tertiary amine, such as tributylamine; or from an unsubstituted or substituted pyridine, amidine or
5 guanidine together with a fatty acid or rosin acid. According to one preferable embodiment of the present invention the ionic liquid is prepared from substituted tertiary amine which is choline or from substituted guanidine, which is tetramethylguanidine (TMG). According to one embodiment the substituted
10 guanidine is 1,1,2,3,3-pentamethylguanidine (PMG) or 2-butyl-1,1,3,3-tetramethylguanidine (BTMG). It was observed that these ionic liquids provided unexpectedly effective separation of the organic phase, which mainly comprises bitumen, from the mineral solids phase.

The surfactant composition may also comprise a plurality of, i.e. two or more,
15 different ionic liquids.

The surfactant composition comprises also at least one fatty and/or resin acid. According to one embodiment of the invention the surfactant composition comprises a mixture of fatty acids and/or resin acids. Suitable fatty acids may be
20 saturated or unsaturated, and they can be branched or linear. Examples of suitable fatty acids are stearic acid, hexanoic acid and isostearic acid. According to one preferable embodiment of the invention the fatty acid is selected from stearic acid or isostearic acid. By proper selection of fatty and/or resin acids the properties of the surfactant composition may be tailored to provide optimal phase
25 separation between the organic bitumen phase, the aqueous phase and the mineral solids phase.

Fatty acid, which may be used in the surfactant composition, may originate from Kraft pulp process or from biodiesel production. Alternatively fatty acid may
30 originate from natural and/or agricultural sources, and it can originate from oil crops, such as rapeseed oil, linseed oil, sunflower oil, soya oil or any mixture thereof. According to one preferable embodiment the fatty acid may be tall oil fatty

acid (TOFA), preferably originating from Kraft pulp process or from biodiesel production.

5 According to one preferable embodiment of the invention the resin acid is rosin acid.

According to one embodiment of the invention the molar ratio between the cationic component, i.e. amine, pyridine, amidine or guanidine, and the anionic component, i.e. fatty acid/resin acid, may be 1:1. In some embodiments the molar amount of
10 the cationic component may be higher than the molar amount of anionic component, i.e. fatty acid/resin acid.

According to one embodiment of the invention an organic diluent is added to the bitumen froth that contains bitumen, mineral solids and water. The organic diluent
15 may be naphthenic or paraffenic solvent, such as toluene or pentane. The surfactant composition may be added to the organic diluent before it is added to the bitumen froth, or the surfactant composition may be added to the froth after the addition of the organic diluent. The surfactant composition may be added in amount of less than 1500 ppm, preferably less than 1000 ppm. According to one
20 embodiment of the invention the surfactant composition is added in amount of 5 – 1500 ppm, preferably 10 – 1000 ppm, more preferably 10 – 500 ppm or 10 – 300 ppm, even more preferably 10 – 200 ppm. The amount of surfactant composition is calculated on the basis of the total weight of both the froth and the organic diluent.

25

The phase separation between the organic phase, aqueous phase and solid phase may be performed by using centrifugation, which may be followed by gravity settling, or by using gravity settling alone.

30 According to one embodiment of the present invention the bitumen froth originates from a process that use oil sand, oil shale, oil contaminated sand or oil contaminated earth, tailing pond material and/or sand containing crude oil as raw material. The bitumen froth may comprise 30 – 75 weight-%, preferably 40 – 70

weight-%, of bitumen; and 15 – 35 weight-% of water; as well as 5 – 20 weight-%, preferably 5 – 15 weight-%, of mineral solids before the phase separation step.

According to one embodiment the present invention is especially suitable for
5 treating bitumen froth from oil sand processing. Oil sand is a mixture, which comprises hydrocarbons, such as semi-solid crude bitumen, water and mineral solids, such as silica sands and clay minerals. Oil sand may comprise 80 – 90 weight-%, preferably 82 – 90 weight-%, of mineral solids, such as mineral particles, and 1 – 18 weight-%, preferably 1 – 10 weight-% of hydrocarbons.

10

The organic phase after the phase separation step may comprise 83 – 95 weight-%, preferably 85 – 95 weight-%, of bitumen; and 0.1 – 0.5 weight-%, preferably 0.1 – 0.3 weight-%, of water; as well as 0.0 – 0.5 weight-%, preferably 0.01 – 0.2 weight-%, of mineral solids. The obtained organic phase from the present process
15 may be used for manufacture of synthetic crude oil. The obtained bitumen may be processed further e.g. for removal of excess carbon and for addition of hydrogen.

EXPERIMENTAL

20 Preparation of Froth Samples

Froth sample was obtained from an industrial process. During the transport to the laboratory the sample was phase-separated. In the laboratory the froth sample was homogenized by using a 5 dm³ glass jacketed reactor equipped with stirrer over 3 hours under heating at 90 °C. The froth sample comprised 10.6 weight-% of
25 solid matter, 65.0 weight-% of bitumen and 24.4 weight-% of water.

Tested Ionic Liquids

Following ionic liquids were tested as surfactants:

- N,N,N,N*-tetramethylguanidinium stearate [TMG][Ster]
- 30 *N,N,N,N*-tetramethylguanidinium isostearate [TMG][iSter]
- N,N,N,N*-tetramethylguanidinium rosin [TMG][Ros]
- Guanidine isostearate [Gd][iSter]
- Choline isostearate [Ch][iSter]

Mixing of froth with surfactant/toluene solution and centrifugation

Homogenized froth was removed from the glass jacketed reactor through the bottom valve into a glass beaker. 31 g of homogenized froth was transferred into each 50 ml Falcon centrifuge sample tubes while still hot. Approximately 8 g of surfactant/toluene solution was quickly added to maintain a surfactant/toluene:froth ratio of 1:3.9 or surfactant/toluene:bitumen ratio of 1:2.5. A blank sample comprising only toluene and froth and a reference sample comprising froth and a commercial surfactant comprising sodium dodecyl sulfate were also prepared at similar conditions.

Phase Separation and Bitumen Recovery

The Falcon centrifuge sample tubes were shaken vigorously by hand for a few minutes and then placed in a centrifuge to perform separation of the toluene-bitumen phase from the other froth constituents. Centrifugation was performed at 40 °C at 3000 rpm for 20 minutes. Solid material appeared in the bottom of the tube as a separate phase. The Falcon centrifuge sample tubes were allowed to rest for approximately 30 min. No visible phase separation of toluene-bitumen phase was observed. The liquid phase was removed to a second Falcon centrifuge sample tube where the phase separation is observed from bottom to top as follows: 0.1 – 2 ml of solid residue, 0.5 – 6.5 ml of clear liquid phase, 22 – 27 ml of toluene-bitumen phase.

Primary bitumen recovery is defined by measuring the volume of the bitumen-toluene phase in the second Falcon centrifuge sample tube by using the volumetric scale of the tube and using the known density of the bitumen sample in the calculations. Highly viscous bitumen remaining on top of the solid material layer in the first Falcon centrifuge sample tube used in the centrifugation was collected to form the secondary recovery of bitumen. Total bitumen recovery comprises both the primary bitumen recovery and the secondary bitumen recovery.

Samples for determining the water content by Karl Fischer analysis and solid matter content in toluene-bitumen phase were taken from the middle of the toluene-bitumen layer from the primary bitumen recovery.

5 Results

The bitumen recovery and water content results for [TMG][Ster] when used as surfactant are presented in Figure 1. The results indicate that it is possible to provide 10.5 % higher bitumen recovery with [TMG][Ster], used as 750 ppm concentration. At the same time, however, the water content in bitumen increases
10 2.56 fold. The optimum dosage was estimated to be somewhat lower, namely 500 ppm. This results a bitumen recovery which is 1.7 % higher and a water content, which is 16 % lower than the corresponding values for the reference sample.

The bitumen recovery and water content results for [TMG][iSter] when used as
15 surfactant are presented in Figure 2. The results indicate a higher bitumen recovery and relatively stable water content throughout the concentration series. The optimum dosage was estimated to be 500 ppm also for [TMG][iSter]. This concentration results a bitumen recovery which is 9.4 % higher and a water content, which is only 8 % higher than the corresponding values for the reference
20 sample.

The bitumen recovery and water content results for [TMG][Ros] when used as surfactant are presented in Figure 3. The optimum dosages were estimated to be drastically lower, either 137 ppm, which resulted 9.5 % higher bitumen recovery
25 with identical bitumen water content, or 274 ppm, which resulted identical bitumen recovery but 28 % lower water content. This provides further degrees of freedom, depending whether the bitumen recovery or water content is of primary interest.

The bitumen recovery and water content results for [Gd][iSter] when used as
30 surfactant are presented in Figure 4. The optimum dosages were estimated to be either 240 ppm, which resulted a bitumen recovery which is 7.5 % higher with similar water content, or 480 ppm, which resulted identical bitumen recovery but 48 % lower water content than the corresponding value for the reference sample.

The bitumen recovery and water content results for [Ch][iSter] when used as surfactant are presented in Figure 5. The optimum dosage was estimated to be 514 ppm, which resulted 52 % lower water content than the corresponding value
5 for the reference sample.

Conclusions

All ionic liquids comprising tetramethylguanidinium are able to provide higher bitumen recovery than the corresponding reference sample, but may cause
10 increase in bitumen water content. One of the promising alternatives seem to be [TMG][Ros] which provides a positive response at significantly lower dosages. Furthermore [TMG][Ros] can provide significant improvement either in bitumen recovery, with increase by 9.5 % units, or in water content with reduction of 28 % units, depending on which parameter is more critical in the process. Results
15 obtained with [Gd][iSter] and [Ch][iSter] are particularly interesting for operators who are suffering from high bitumen water content. These ionic liquids were able to provide a reduction of approximately 50 % in water content, compared to corresponding value of the reference sample.

20 Even if the invention was described with reference to what at present seems to be the most practical and preferred embodiments, it is appreciated that the invention shall not be limited to the embodiments described above, but the invention is intended to cover also different modifications and equivalent technical solutions within the scope of the enclosed claims.

CLAIMS

1. A surfactant composition comprising at least one ionic liquid prepared from an unsubstituted or substituted primary, secondary or tertiary amine, or from an unsubstituted or substituted pyridine, amidine or guanidine with at least one fatty acid and/or resin acid.
2. Surfactant composition according to claim 1, **characterised** in that the composition comprises a mixture of fatty acids and/or resin acids.
3. Surfactant composition according to claim 1 or 2, **characterised** in that the fatty acid is selected from stearic acid or isostearic acid.
4. Surfactant composition according to any of preceding claims 1 to 3, **characterised** in that the fatty acid originates from Kraft pulp process or from biodiesel production.
5. Surfactant composition according to claim 4, **characterised** in that the fatty acid is tall oil fatty acid.
6. Surfactant composition according to any of preceding claims 1 to 5, **characterised** in that the substituted tertiary amine is choline.
7. Surfactant composition according to any of preceding claims 1 to 6, **characterised** in that the substituted guanidine is tetramethylguanidine (TMG).
8. Surfactant composition according to any of preceding claims 1 to 7, **characterised** in that the surfactant composition comprises two or more different ionic liquids.
9. Use of a surfactant composition according to any of claims 1 to 8 for separation of bitumen from an aqueous phase and mineral solids phase.

10. Method for treating bitumen froth from a separation process, where bitumen is separated from mineral solids, the method comprising

- obtaining bitumen froth that comprises bitumen, water and mineral solids,
- adding organic diluent, such as naphthenic or paraffenic solvent, to the froth,

- 5 - providing a phase separation between an organic phase, aqueous phase and solid phase,

characterised in

adding a surfactant composition according to any of claims 1 – 9 to the diluent and/or to the froth before the phase separation in amount of less than 1500 ppm,

- 10 preferably less than 1000 ppm.

11. Method according to claim 10, **characterised** in adding the surfactant composition in amount of 5 – 1500 ppm, preferably 10 – 1000 ppm, more preferably 10 – 500 ppm.

15

12. Method according to claim 10 or 11, **characterised** in that bitumen is separated from mineral solids in a process that use oil sand, oil shale, oil contaminated sand or oil contaminated earth, tailing pond material and/or sand containing crude oil as raw material.

20

13. Method according to preceding claims 10, 11 or 12, **characterised** in that the obtained bitumen froth comprises 30 – 75 weight-% of bitumen, 15 – 35 weight-% of water and 5 – 20 weight-% of mineral solids before the phase separation step.

- 25 14. Method according to any of preceding claims 10 – 13, **characterised** in that the organic phase comprises 83 – 95 weight-% of bitumen, 0.1 – 0.5 weight-% of water and 0.0 – 0.5 weight-% of mineral solids after the phase separation step.

- 30 15. Method according to any of preceding claims 10 – 14, **characterised** in that the phase separation between the organic phase, aqueous phase and solid phase is performed by using centrifugation and/or gravity settling.

1/3

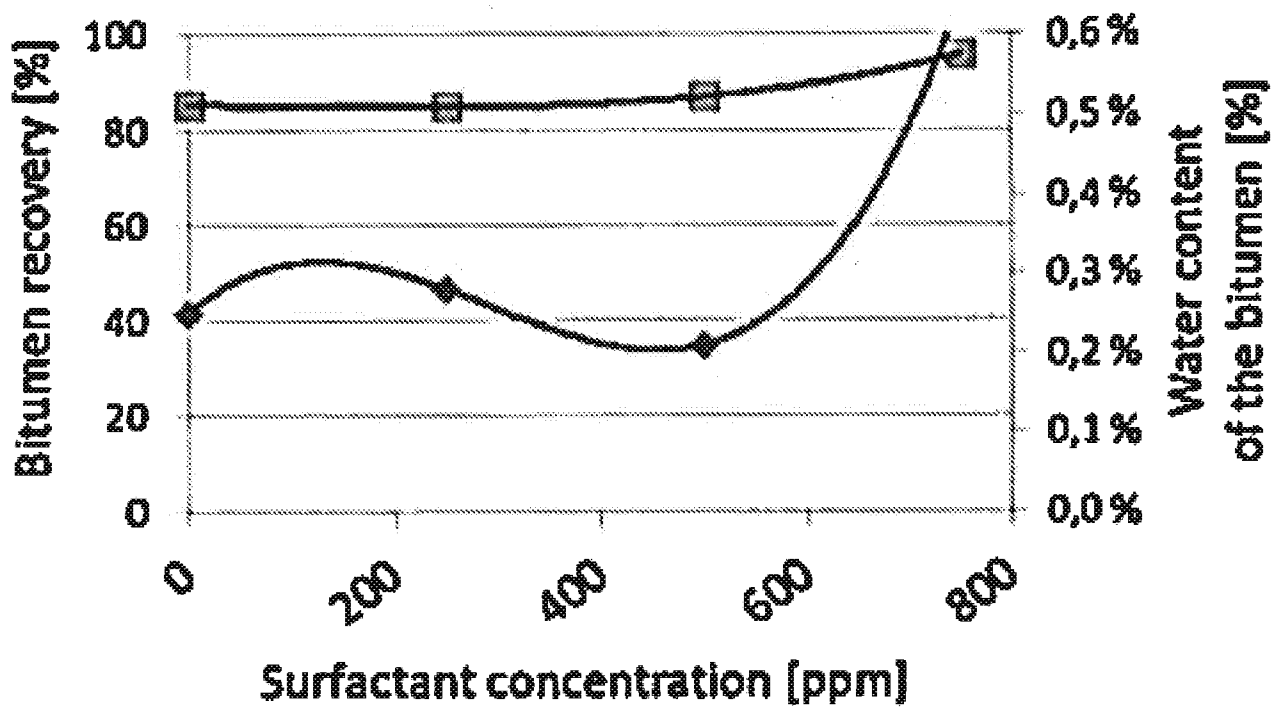


FIGURE 1

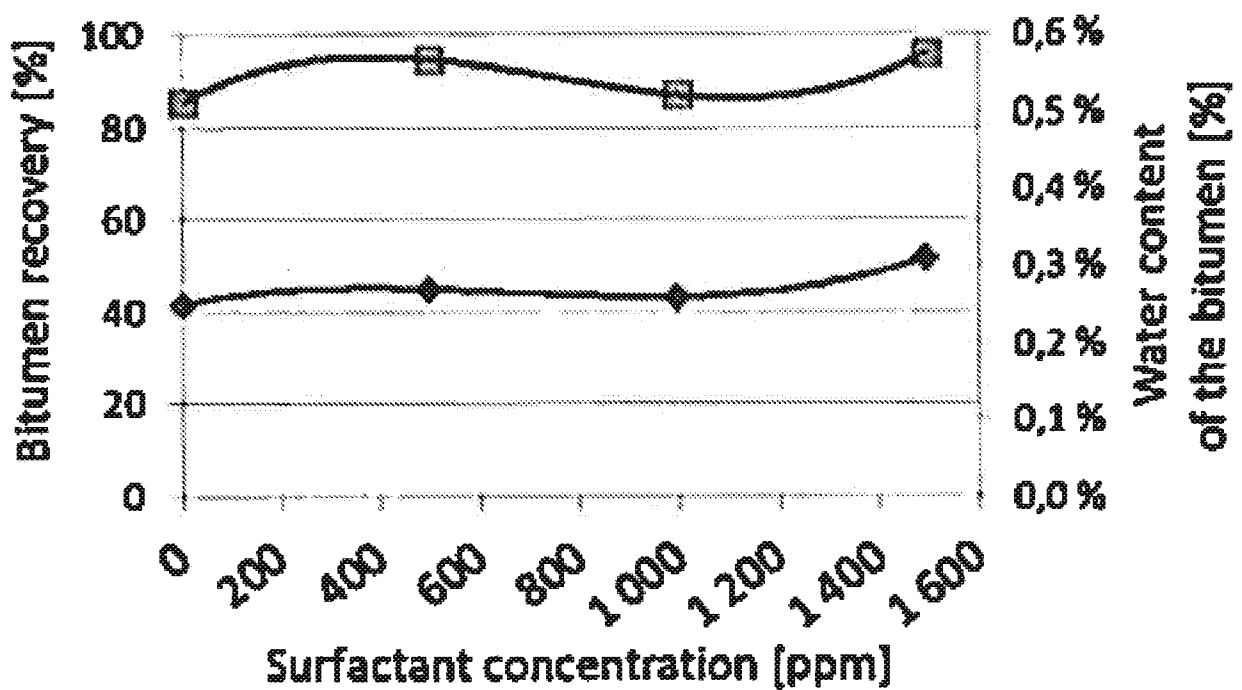


FIGURE 2

2/3

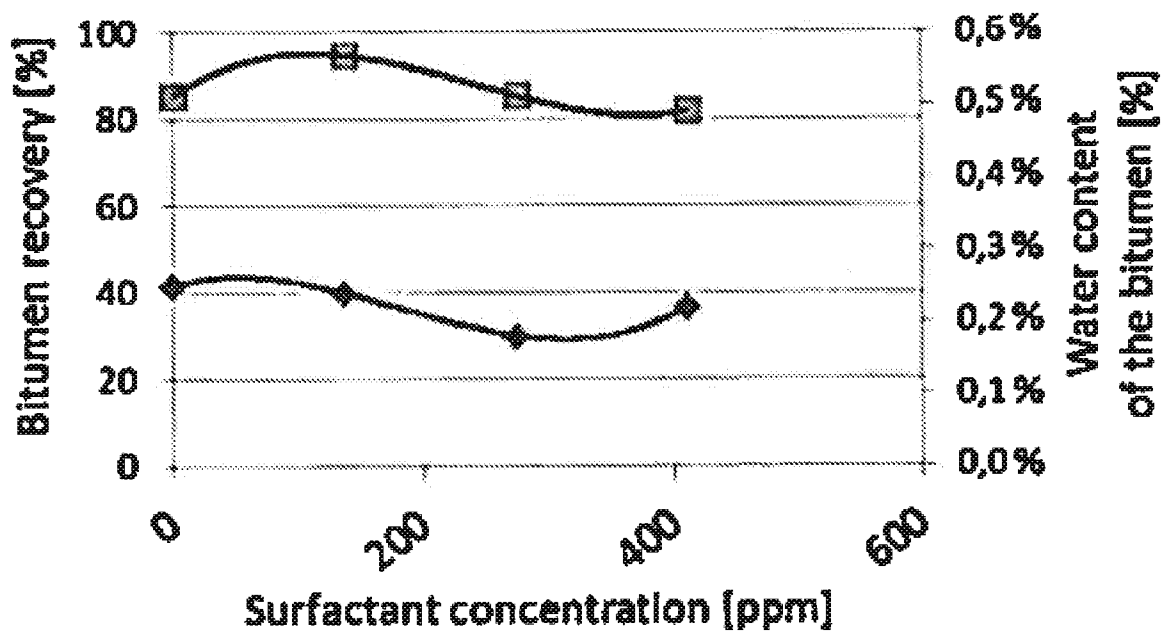


FIGURE 3

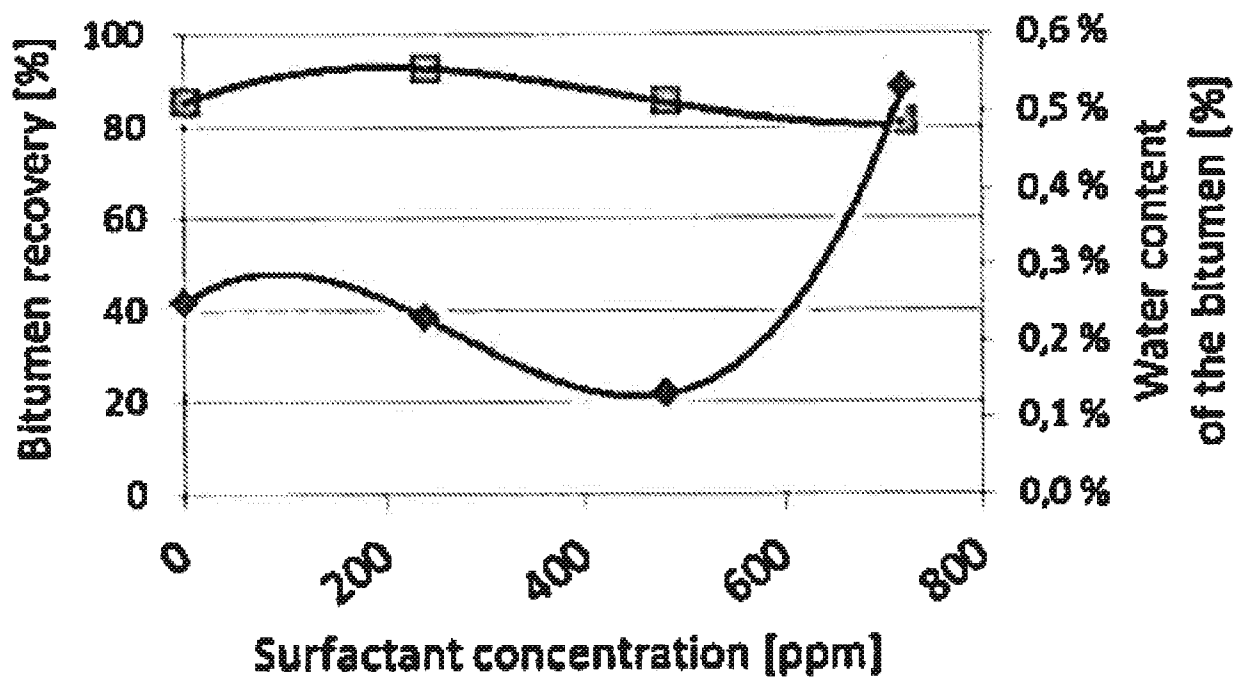


FIGURE 4

3/3

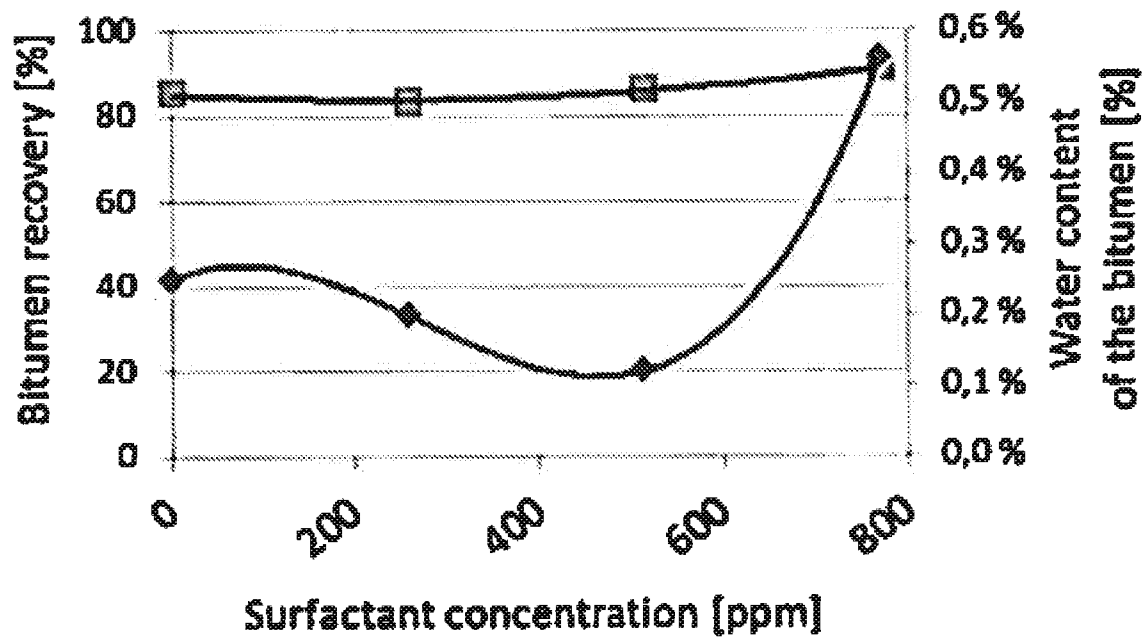


FIGURE 5

All figures:

- Bitumen recovery [%]
- ◆ Bitument water content [%]

INTERNATIONAL SEARCH REPORT

International application No
PCT/FI2016/050414

A. CLASSIFICATION OF SUBJECT MATTER
INV. C10G1/04
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C10G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 388 170 A (SCHMID KLAUS [DE] ET AL) 14 June 1983 (1983-06-14)	1-8
A	claims 1-17	9-15
X	EP 2 266 626 A1 (ANGES MG INC [JP]; MEDRX CO LTD [JP]) 29 December 2010 (2010-12-29) claims 1-4	1-8
X	US 2010/256174 A1 (YAMAGUCHI TOSHIKAZU [JP] ET AL) 7 October 2010 (2010-10-07) paragraphs [0014], [0066] - [0068] claims 1-25	1-8
X	EP 0 640 121 B1 (PROCTER & GAMBLE [US]) 7 July 1999 (1999-07-07) paragraphs [0026], [0042] claims 1-8	1-8
	-/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 October 2016

Date of mailing of the international search report

28/10/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Pardo Torre, J

INTERNATIONAL SEARCH REPORT

International application No.
PCT/FI2016/050414

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No

PCT/FI2016/050414

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/071371 A1 (ZHANG KEWEI [CA]) 22 March 2012 (2012-03-22)	1,9
A	claim 1 paragraphs [0003], [0008], [0009] -----	10-15
X	CN 103 194 193 A (UNIV SOUTHWEST PETROLEUM) 10 July 2013 (2013-07-10)	1-3,8,9
A	abstract claims 1-10 -----	10-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/FI2016/050414

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4388170	A	14-06-1983	CA 1155409 A 18-10-1983
		EP 0030020 A1 10-06-1981	
		NO 803649 A 05-06-1981	
		US 4388170 A 14-06-1983	
		WO 8101576 A1 11-06-1981	
EP 2266626	A1	29-12-2010	CN 102046208 A 04-05-2011
		EP 2266626 A1 29-12-2010	
		JP 5674020 B2 18-02-2015	
		KR 20100127300 A 03-12-2010	
		US 2011092438 A1 21-04-2011	
		US 2016090600 A1 31-03-2016	
		WO 2009119836 A1 01-10-2009	
US 2010256174	A1	07-10-2010	AU 2008327436 A1 28-05-2009
		CA 2705965 A1 28-05-2009	
		CN 101909651 A 08-12-2010	
		CN 103239721 A 14-08-2013	
		EP 2223703 A1 01-09-2010	
		EP 3011954 A1 27-04-2016	
		JP 5333972 B2 06-11-2013	
		JP 5704367 B2 22-04-2015	
		JP 2013173805 A 05-09-2013	
		KR 20100095446 A 30-08-2010	
		US 2010256174 A1 07-10-2010	
		US 2014066471 A1 06-03-2014	
		WO 2009066457 A1 28-05-2009	
EP 0640121	B1	07-07-1999	AT 181956 T 15-07-1999
		AT 245689 T 15-08-2003	
		AU 4227393 A 13-12-1993	
		CA 2134640 A1 25-11-1993	
		CN 1082101 A 16-02-1994	
		CZ 9402769 A3 12-04-1995	
		DE 69325578 D1 12-08-1999	
		DE 69325578 T2 27-01-2000	
		DE 69333120 D1 28-08-2003	
		DE 69333120 T2 01-07-2004	
		EP 0640121 A1 01-03-1995	
		EP 0894848 A1 03-02-1999	
		ES 2133397 T3 16-09-1999	
		FI 945327 A 11-11-1994	
		HU 215586 B 28-01-1999	
		JP 3442387 B2 02-09-2003	
		JP H07507107 A 03-08-1995	
		JP 2003253561 A 10-09-2003	
		NO 944302 A 11-11-1994	
		PH 30955 A 23-12-1997	
		RU 94046015 A 10-10-1996	
		SK 134694 A3 08-11-1995	
		US 5545350 A 13-08-1996	
		WO 9323510 A1 25-11-1993	
US 2012071371	A1	22-03-2012	AR 066031 A1 15-07-2009
		AU 2008238556 A1 23-10-2008	
		BR PI0810896 A2 29-10-2014	
		CA 2585065 A1 13-10-2008	
		CA 2683516 A1 23-10-2008	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/FI2016/050414

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 101675142 A	17-03-2010
		EA 200901398 A1	30-04-2010
		EP 2142616 A1	13-01-2010
		US 2010204071 A1	12-08-2010
		US 2012071371 A1	22-03-2012
		WO 2008124919 A1	23-10-2008

CN 103194193	A	10-07-2013	NONE

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-8

Composition

2. claims: 9-15

Separation of bitumen from a froth
