




(22) Date de dépôt/Filing Date: 1999/02/18
(41) Mise à la disp. pub./Open to Public Insp.: 1999/08/25
(45) Date de délivrance/Issue Date: 2007/03/27
(30) Priorité/Priority: 1998/02/25 (US09/030,408)

(51) Cl.Int./Int.Cl. *A61F 2/04* (2006.01),
A61F 2/06 (2006.01), *A61F 2/00* (2006.01)
(72) Inventeurs/Inventors:
RAKOS, RONALD, US;
LUND, SIGNE, US;
CHARLES, TOMONTO, US
(73) Propriétaire/Owner:
CORDIS CORPORATION, US
(74) Agent: SIM & MCBURNEY

(54) Titre : PROTHESE VASCULAIRE A ARMATURE METALLIQUE
(54) Title: WIRE REINFORCED VASCULAR PROSTHESIS

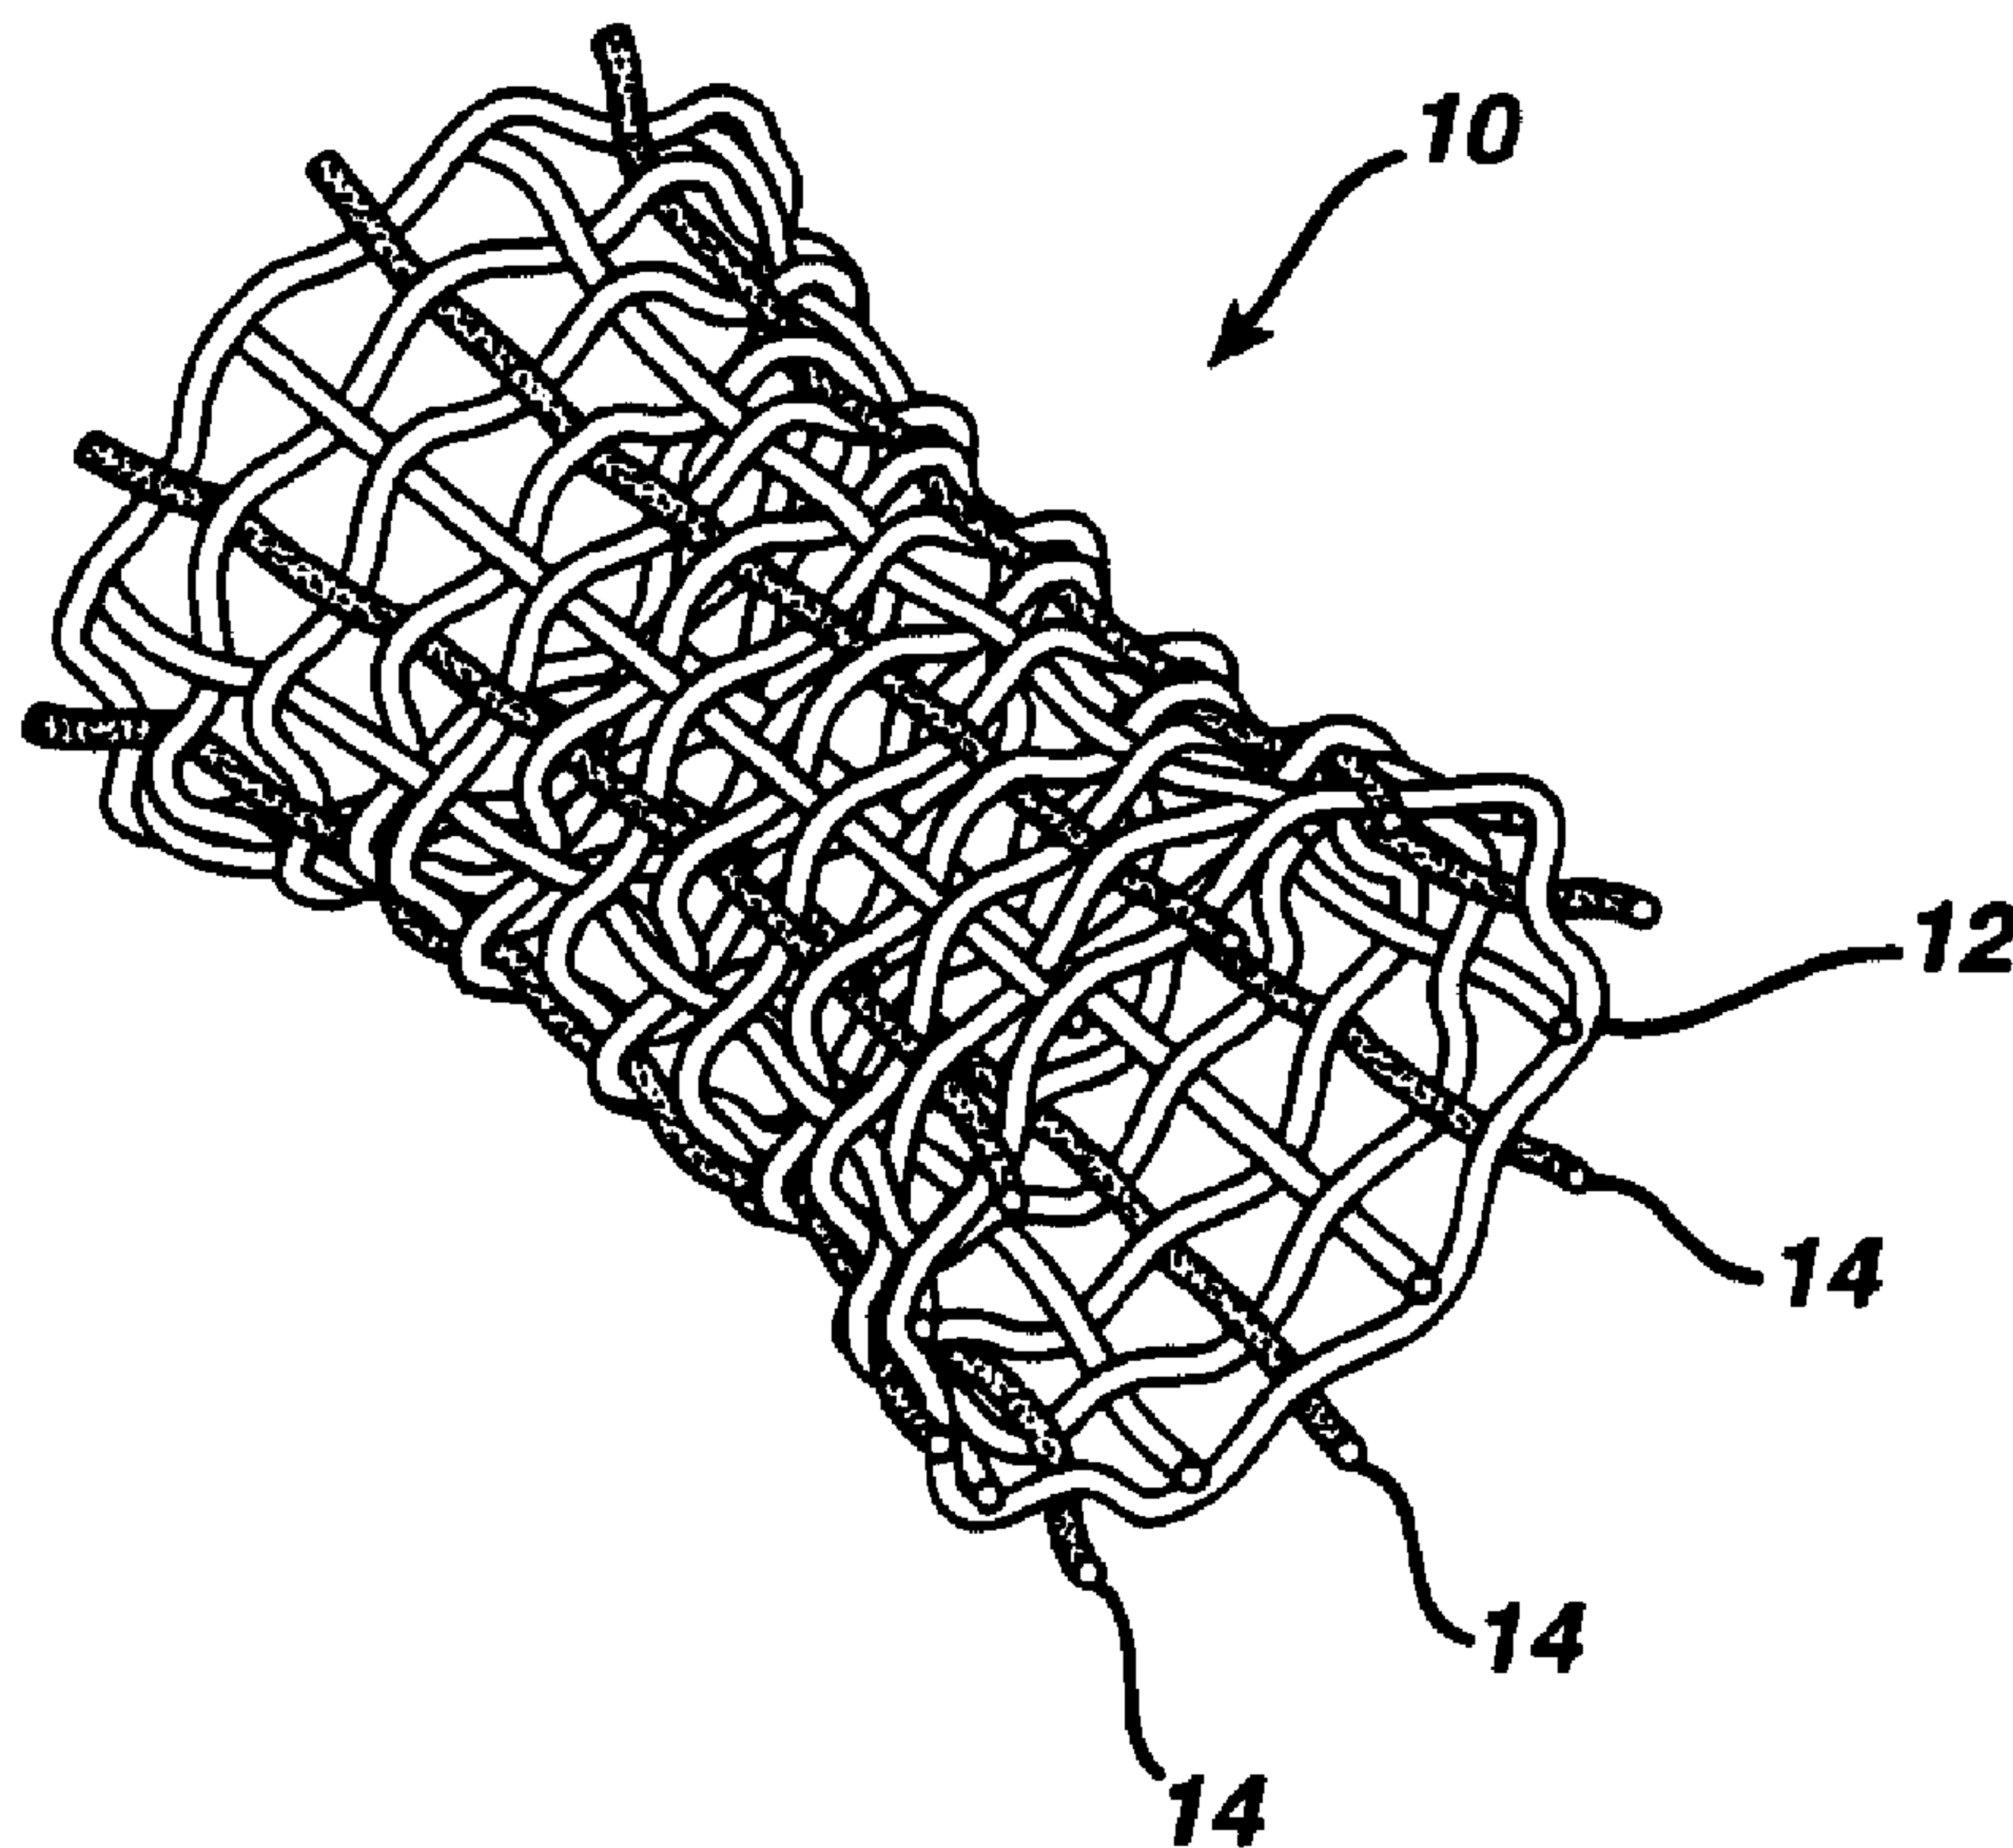

(57) Abrégé/Abstract:

What is described herein is a endovascular tube or bifurcated prosthesis used for the repair of aneurysms or other vessel disease. This can be soft or hard occlusive disease. This prosthesis is constructed by fabricating a structure that consists of a textile or other polymeric material and through which is threaded a superelastic metal wire such as a nitinol, a ductile wire or other filament material. The textile can be a polymeric material. The wire provides the self-expandability of the current device. Ideally, the thickness of the device should be minimized, so that it can be delivered to the diseased site using a percutaneous procedure.

- 12 -

5

ABSTRACT

10 What is described herein is a endovascular tube or
bifurcated prosthesis used for the repair of aneurysms or
other vessel disease. This can be soft or hard occlusive
disease. This prosthesis is constructed by fabricating a
structure that consists of a textile or other polymeric
material and through which is threaded a superelastic
metal wire such as a nitinol, a ductile wire or other
filament material. The textile can be a polymeric
15 material. The wire provides the self-expandability of the
current device. Ideally, the thickness of the device
should be minimized, so that it can be delivered to the
diseased site using a percutaneous procedure.

5

WIRE REINFORCED VASCULAR PROSTHESIS**Field of the Invention**

10 In general, this invention relates to prosthetic devices used for the repair of aneurysms or other vessel disease, including soft or hard occlusive diseases. More specifically, this invention is related to prostheses which are constructed by a weaving, braiding or other process using two different types of materials, typically
15 a superelastic metal wire mesh such as nitinol and a polymeric material.

Background of the Invention

20 Graft materials are known in the art. However, the current graft materials have certain disadvantages. First of all most graft materials are not self-expanding. In addition, the prosthesis will not typically need a radial crimping to give the prosthesis a shape, kink resistance
25 or twist resistance. Current prostheses are not known to provide such a benefit. Naturally, it is desired to have a stronger, easier to construct device as compared to present prosthesis.

30 Further, it is desirable to have a graft, which does not need a stent placed at one or both ends of the graft, in order to firmly embed the graft into the lumen of the body. Further, naturally, it is desirable to have a device wherein the superelastic material does not protrude

from the outside of the graft. In fact, it is most desirable to have a device where the wire is co-extensive with the textile or other material from which the graft is formed.

5 Summary of the Invention

These and other aspects of the invention are described by the current device. What is described herein is a endovascular tube or bifurcated prosthesis used for the repair of aneurysms or other vessel
10 disease, which can be either soft or hard occlusive disease. This prosthesis is constructed by fabricating generally a tubular structure that consists of a textile or other polymeric material and through which is threaded a superelastic metal wire such as: nitinol;
15 a ductile wire; or other filament material. The textile can be a polymeric material such as polyethyleneteraphthalate PET or a biocompatible polymer. The wire, if it is superelastic provides the self-expandability of the current device.

20 Ideally, the thickness of the device should be minimized, so that it can be delivered to the diseased site using a percutaneous procedure, typically catherization. When a superelastic material is used in the interweave of the device, the wire is "set" prior
25 to the textile fabrication. In other words, the "set" takes place when the wire is manufactured or annealed, so that the wire is capable of returning to a particularly

- 3 -

5 identified shape. In this fashion, the wire can be placed
within the delivery device and then released so that it
expands into position.

10 The wire is straightened and incorporated with the
polymeric material as a component structure. The
prosthesis is then heat set as necessary and loaded into a
delivery system. Upon delivery, the superelastic wire
returns or self-expands to its set shape.

15 In the case of a woven structure, the wire can be
either formed from a wrapped yarn (running lengthwise) or
a "filling" yarn (running crosswise). If the device
contains a wrap yarn, the yarn can be shape set into a
"sawtooth" pattern, so that when it is expanded it forms a
20 crimp-like serration on the prosthesis surface. This
gives the prosthesis clear longitudinal flexibility for
sizing to the vessel diameter at the luminal wall, as well
as a certain amount of radial strength from the self-
expanding material.

25 To obtain the desired self-expanding properties any
number of superelastic wires can be run parallel to the
longitudinal axis of the prosthesis. Or, the wires can be
interposed circumferentially about the prosthesis. In
30 either event, upon self-expansion, the prosthesis sets
with a desired outer diameter or in a desired diametral or
angle, and becomes firmly implanted against the vessel
wall. Because the material is rather impermeable to fluid
flow, the aneurysmal area is bridged and healing of the

aneurysm can begin. Or, if a lesion is bridged, the superelastic aspects of the device cause the material to expand and take the shape of the graft enlarged lumen, so formed by the disclosed bi-directional graft material. Or, a area which has more direct correlation to Young's modulus can be used, so that the prostheses is more balloon expandable.

Detailed Description of the Drawings

The aspects of the invention will be better understood from the following figures:

Figure 1 is a perspective view of the reinforced endovascular prosthesis;

Figure 2 is the flat braid weave from which the fabrication mechanism from which the device is put into place;

Figure 3 is a side view of the tubular prosthesis; and

Figure 4 is an end view of the weave of the tubular prosthesis.

Detailed Description of the Invention

As can be seen from the figures, a device 10 is formed from a graft material 12. The graft material 12 is

5 a woven mesh such as Dacron® or a biocompatible graft 12
on polymer graft. Interposed within interstitial spaces
of the device 10 is a series of self-expanding wires 14.
These wires 14 are generally placed lengthwise as can be
seen in Figures 1 and 3. However, as in Figure 2, the
10 wires 14 are placed circumferentially around the graft 10.

In either event, it is the self-expandability of nitinol
that proves useful to enhance the particular working
qualifications of the Dacron® graft material 12. As seen
in Figures 3 and 4, in that is the side view and end view
15 figures, it can be shown that the graft 12 is formed so
that the wires 14 expand after having been woven through
the graft 12. This, of course, causes the device itself
to expand upon release within a desired lumen of the body.

20 Typically, the wire 14 is chosen from a self-
expanding material such as nitinol. Of course, wire 14
can be made from some other sort of ductile wire or other
filament material. The only necessity is that the
structural integrity provided by the wire or other
25 filament be interposed within the graft, as can be seen
from the weaves of Figures 1-4. If a superelastic
material is used, such that the graft can be expanded
without need for a balloon, then of course the wire will
provide a certain advantage over current self expanding
30 stent-graft combinations, that is, an ability to reduce
the overall diametral width of the wire/graft device.
This is accomplished due to the combined weave and graft
occurring in the same diametral thickness.

- 6 -

5 So, as can be readily seen, this design is unique in
that the superelastic or ductile wire or other filament
material is fully incorporated into the textile structure
of the polymer base material. Furthermore, it is unique
in that the prosthesis itself can be made to be self-
10 expanding.

 The prosthesis 10 does not need to be radially
crimped, like some precursor devices, due to its integral
construction. The nitinol material (in the self-expanding
15 version); or the steel or other filament material (in the
balloon expandable version) forms the prosthesis backbone
and provides the prosthesis with structure and integrity
as well as providing a strengthening device for the graft
to prevent proliferation of occlusive or typically or
20 other aneurysminal disease. Further, the wires 14 are
more radiopaque than the textile structure, and will make
the entire prosthesis radiopaque and this more readily
visible under X-ray in the body.

25 Depending on the construction and configuration of
the supporting backbone material, stents of either
superelastic, ductile or combination of materials can be
placed on either end of the prosthesis 10 to anchor the
prosthesis 10 to the body wall. However, as can be seen,
30 with the current invention, stents are not per se
necessary to provide support to the system.

 Naturally, because the superelastic nitinol material
is provided within the shape of the current device, it is

- 7 -

5 typically thinner than a layered approach using a stent and a graft combination when the wire 14 is placed on the interior (where it is exposed to the interior side of the graft 12) prosthesis 10 is held by force against the luminal wall.

10

Finally, if desired, the ductile or superelastic wire 14 with a loosely wrapped textile graft 12 can be made to be extremely porous. Additionally, the device can tightened (as indicated in the Figures) so that the pore sizes (P) are much less than about 30 microns. This enables the device to provide adequate protection for the coronary artery system, which is one intentional area of use.

20

In use therefore, the device 10 of the present invention is formed by interweaving a nitinol 14, typically a superelastic nitinol, into a Dacron® or Teflon® graft 12. Upon weaving, the device is given a "memory" so that it will take a permanent set at a certain size. Then, the device 10 is compressed into a catheter or other delivery system (not shown) useful for delivering self-expanding stents. When this happens, the device is further compressed and placed in the catheter and furthermore placed in the body. The device is presented to the lesion site in the same way as is done by typical self-expanding stent users. Thereafter, when in place, a sheath (not shown) of the stent delivery system is pulled back, and the device 10 is released. This allows the device 10 to be placed at the lesion site, and

30
CRD-570

5 with little blood leakage. This provides capable
application for either aneurysmal or occlusive disease.
Once the prosthesis 10 is in place, the device prevents
blood flow and turbulence and pressure on an aneurysm at
the situs of graft 10. With respect occlusive disease,
10 the prosthesis 10 can be passed into a lesion of about 1-
2.5mm. By doing so, the occlusive disease (or the
aneurysmal area is hopefully well treated.

15 Minor modifications are certainly possible without
departing from the scope of the invention. For instance,
the wire materials can be substituted to be either
stainless steel, stiffer polymer materials, tantalum or
cobalt based superalloys. Whereas the superelastic wires
are intended to be self-expanding and supporting, other
20 materials can be interwoven or braided as into the
prosthesis 10 to create a self-expanding prosthesis. The
wires can be placed in such a manner as to obviate the
need for stents on one end of the construction, and more
typical grafts on the other end. Naturally, the
25 prosthesis itself can either be straight, tapered or
bifurcated. The device can be formed into any shape to
conform to various vessel configurations and differing
anatomies.

30 The invention certainly can be used to treat in other
conditions such as TIPPS (trans intrahapetic peripheral
prosthetic surgeries), diffusive occlusive disease, and
soft tissue occlusions where a covered stent would
normally be used. The wire can be coated with a textile

- 9 -

5 material such that the prosthesis itself presents uniform
biocompatible surface to the body. Or, multiple types of
metal wires can be incorporated into the prosthesis to
make it more or less radiopaque, as well as to restrict
10 the superelastic material from over-dilating the vessel
wall. Depending on the application, the wire or textile
can be coated with therapeutic agents such as rapamycin to
enhance or retard endothelization of the prosthesis.

15 Naturally, all these modifications are considered
part of the invention. The invention therefore is to be
known from the attached claims and their structural and
other equivalents.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A prosthesis comprising a non-metallic woven graft material, said woven material having a plurality of openings in its structure, wherein at least one essentially straight wire is emplaced in said plurality of openings in an alternating fashion so as to describe a weave.
2. A prosthesis of claim 1 wherein the wire is a self-expanding alloy.
3. The prosthesis of claim 1 wherein the prosthesis is self-expanding.
4. The prosthesis of claim 1 wherein the prosthesis is made with said wire placed circumferentially about said graft.
5. The prosthesis of claim 1 wherein the prosthesis is made with said wire placed longitudinally about said graft.

FIG. 1

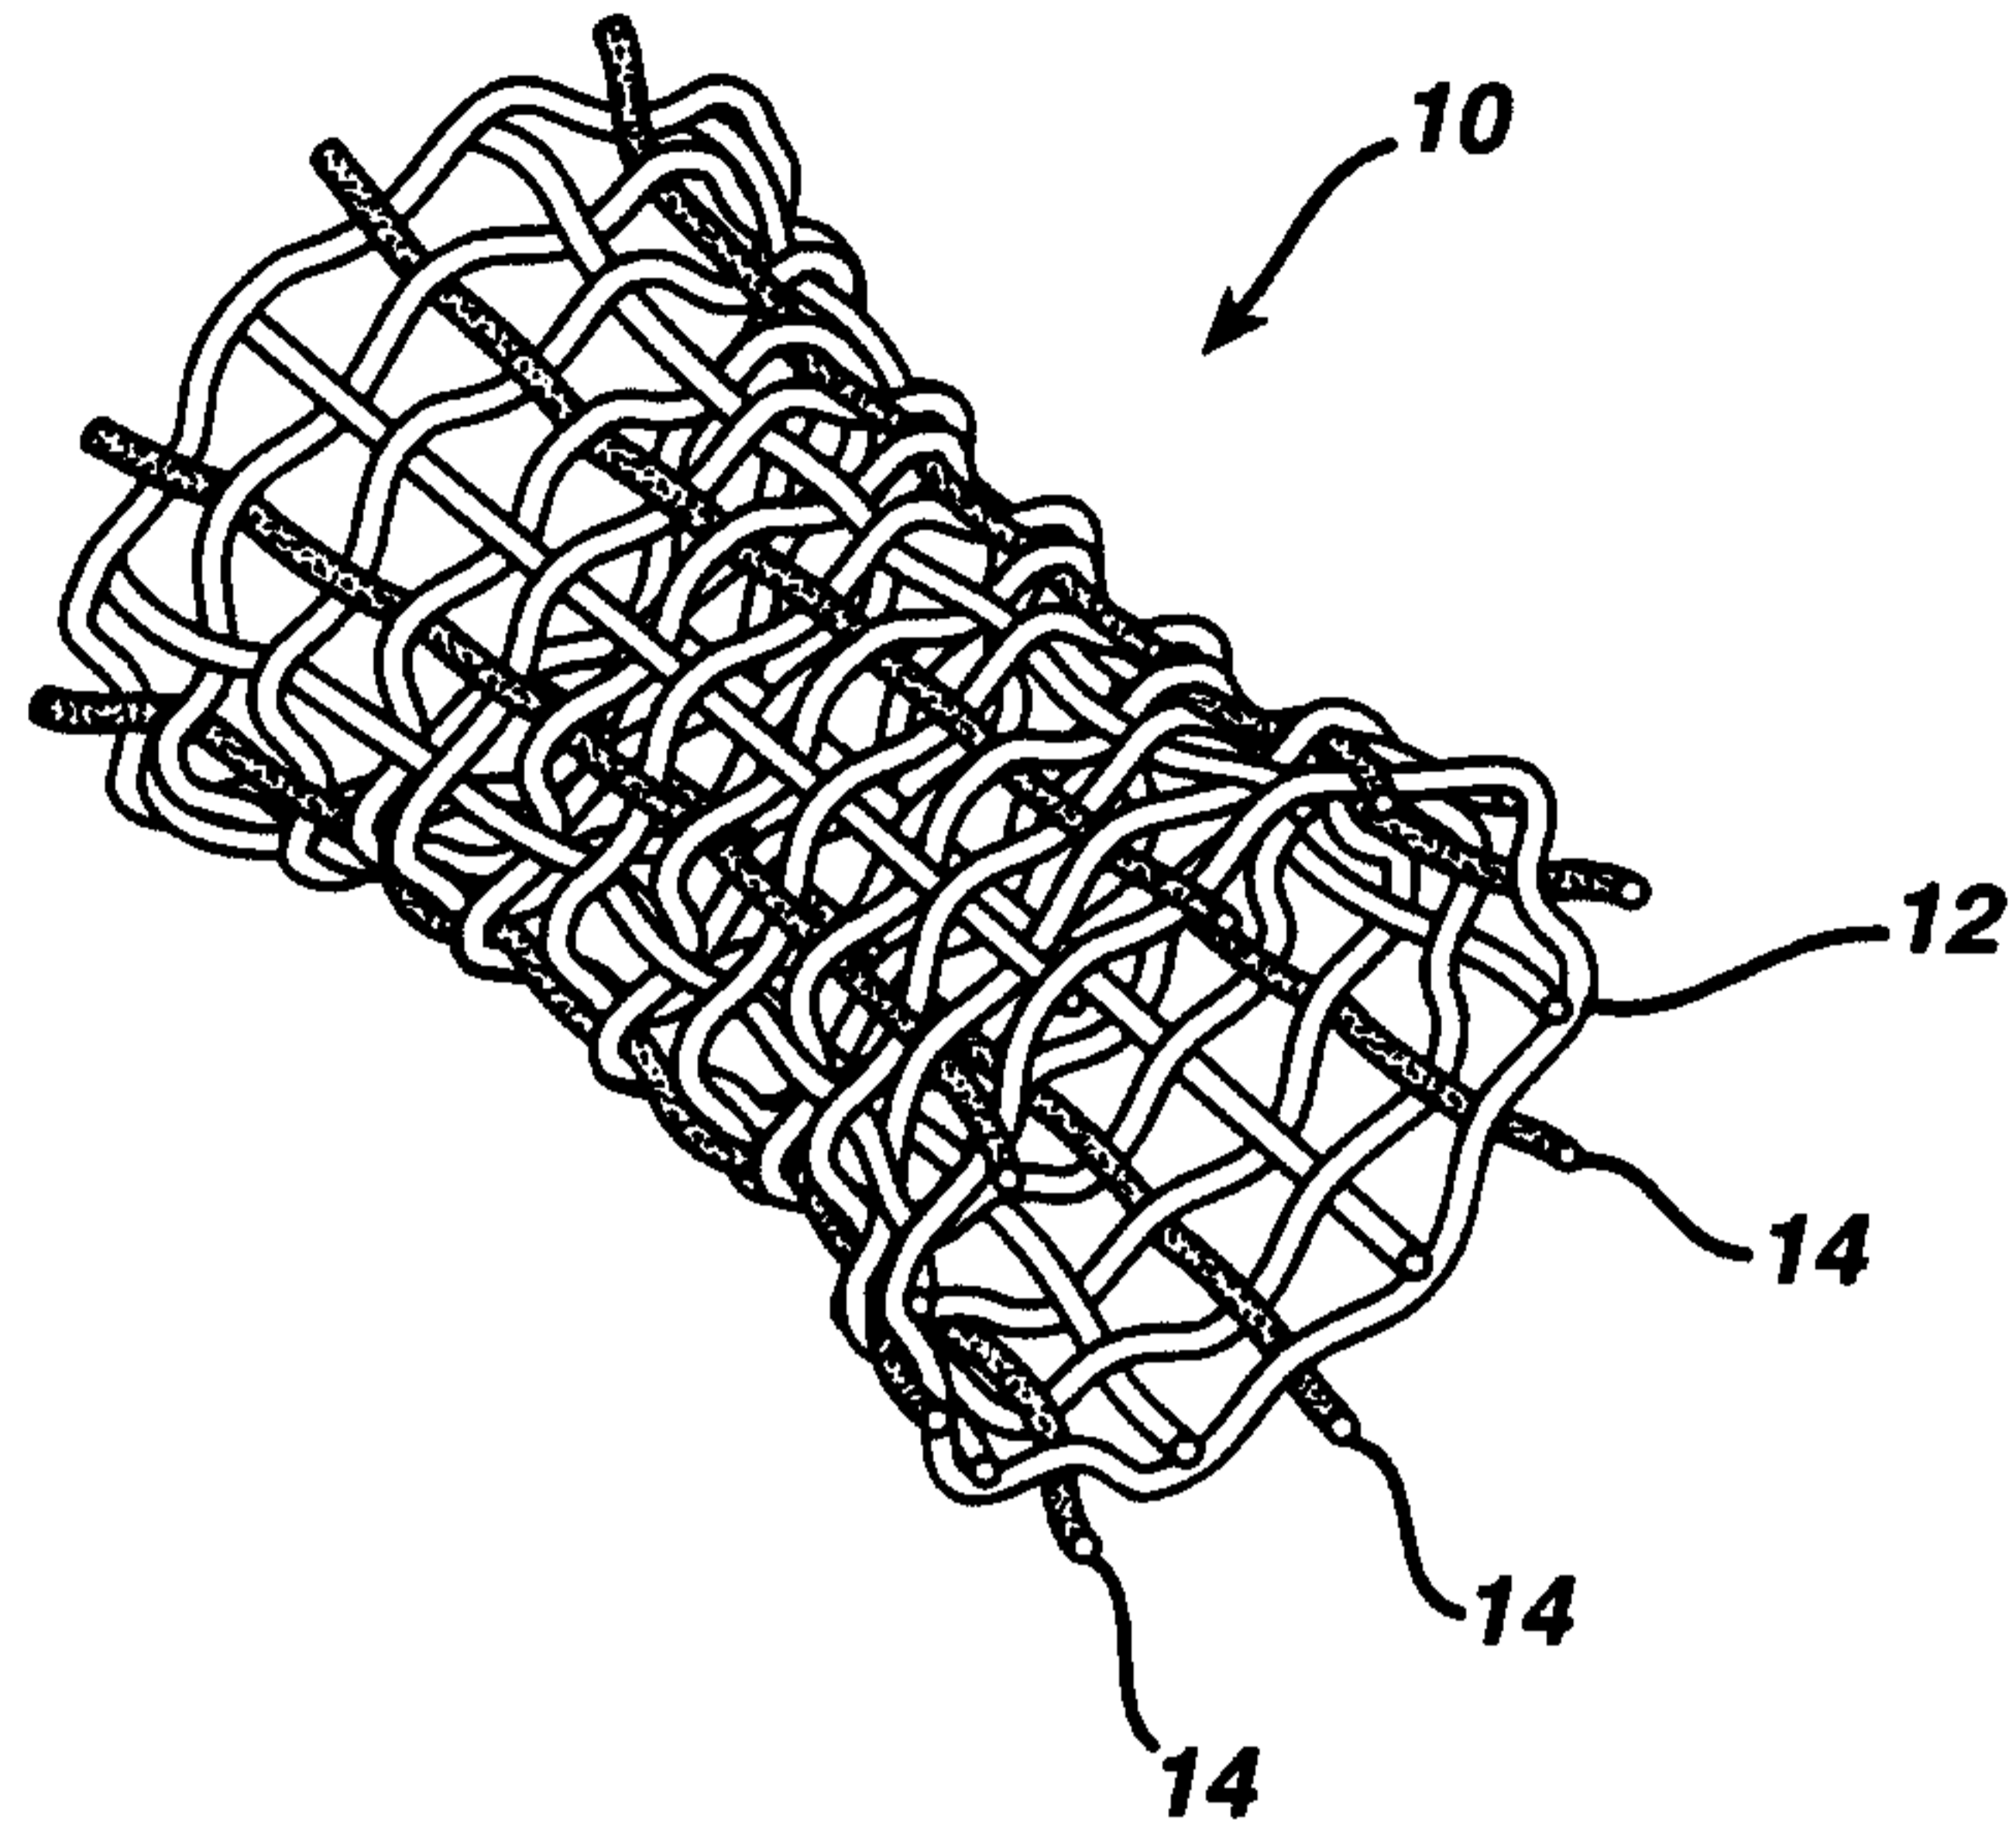


FIG. 2

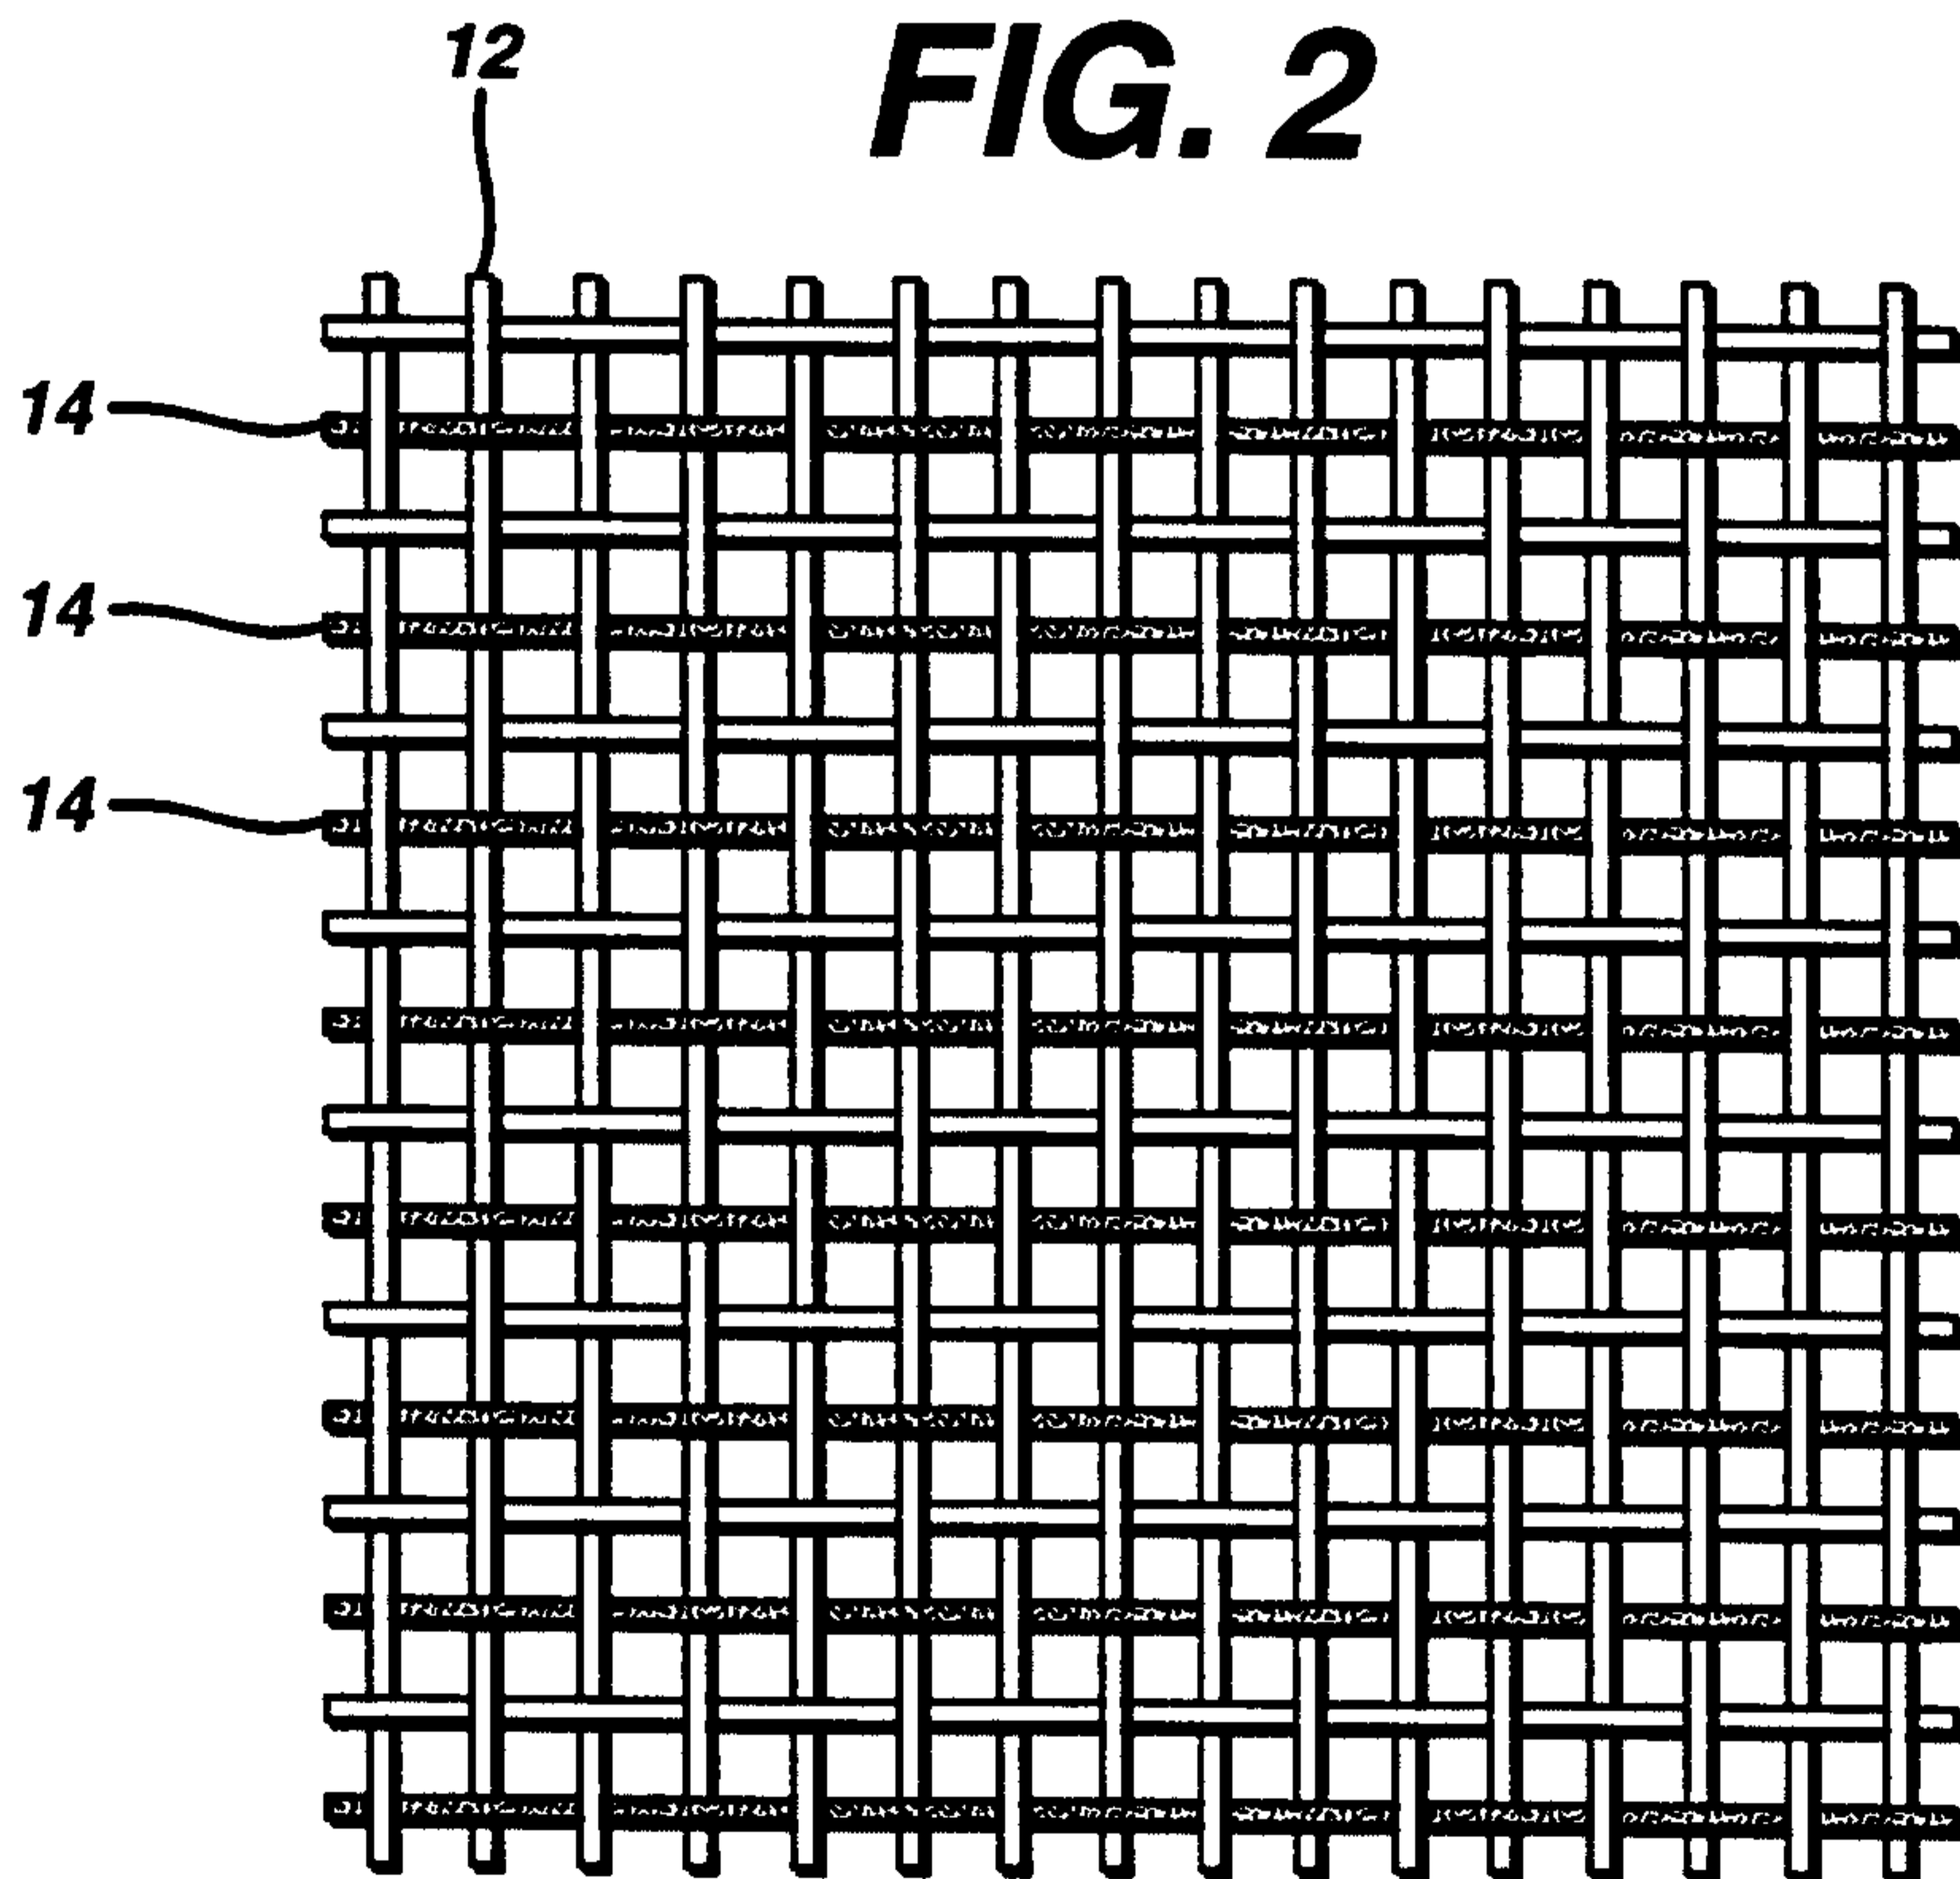


FIG. 3

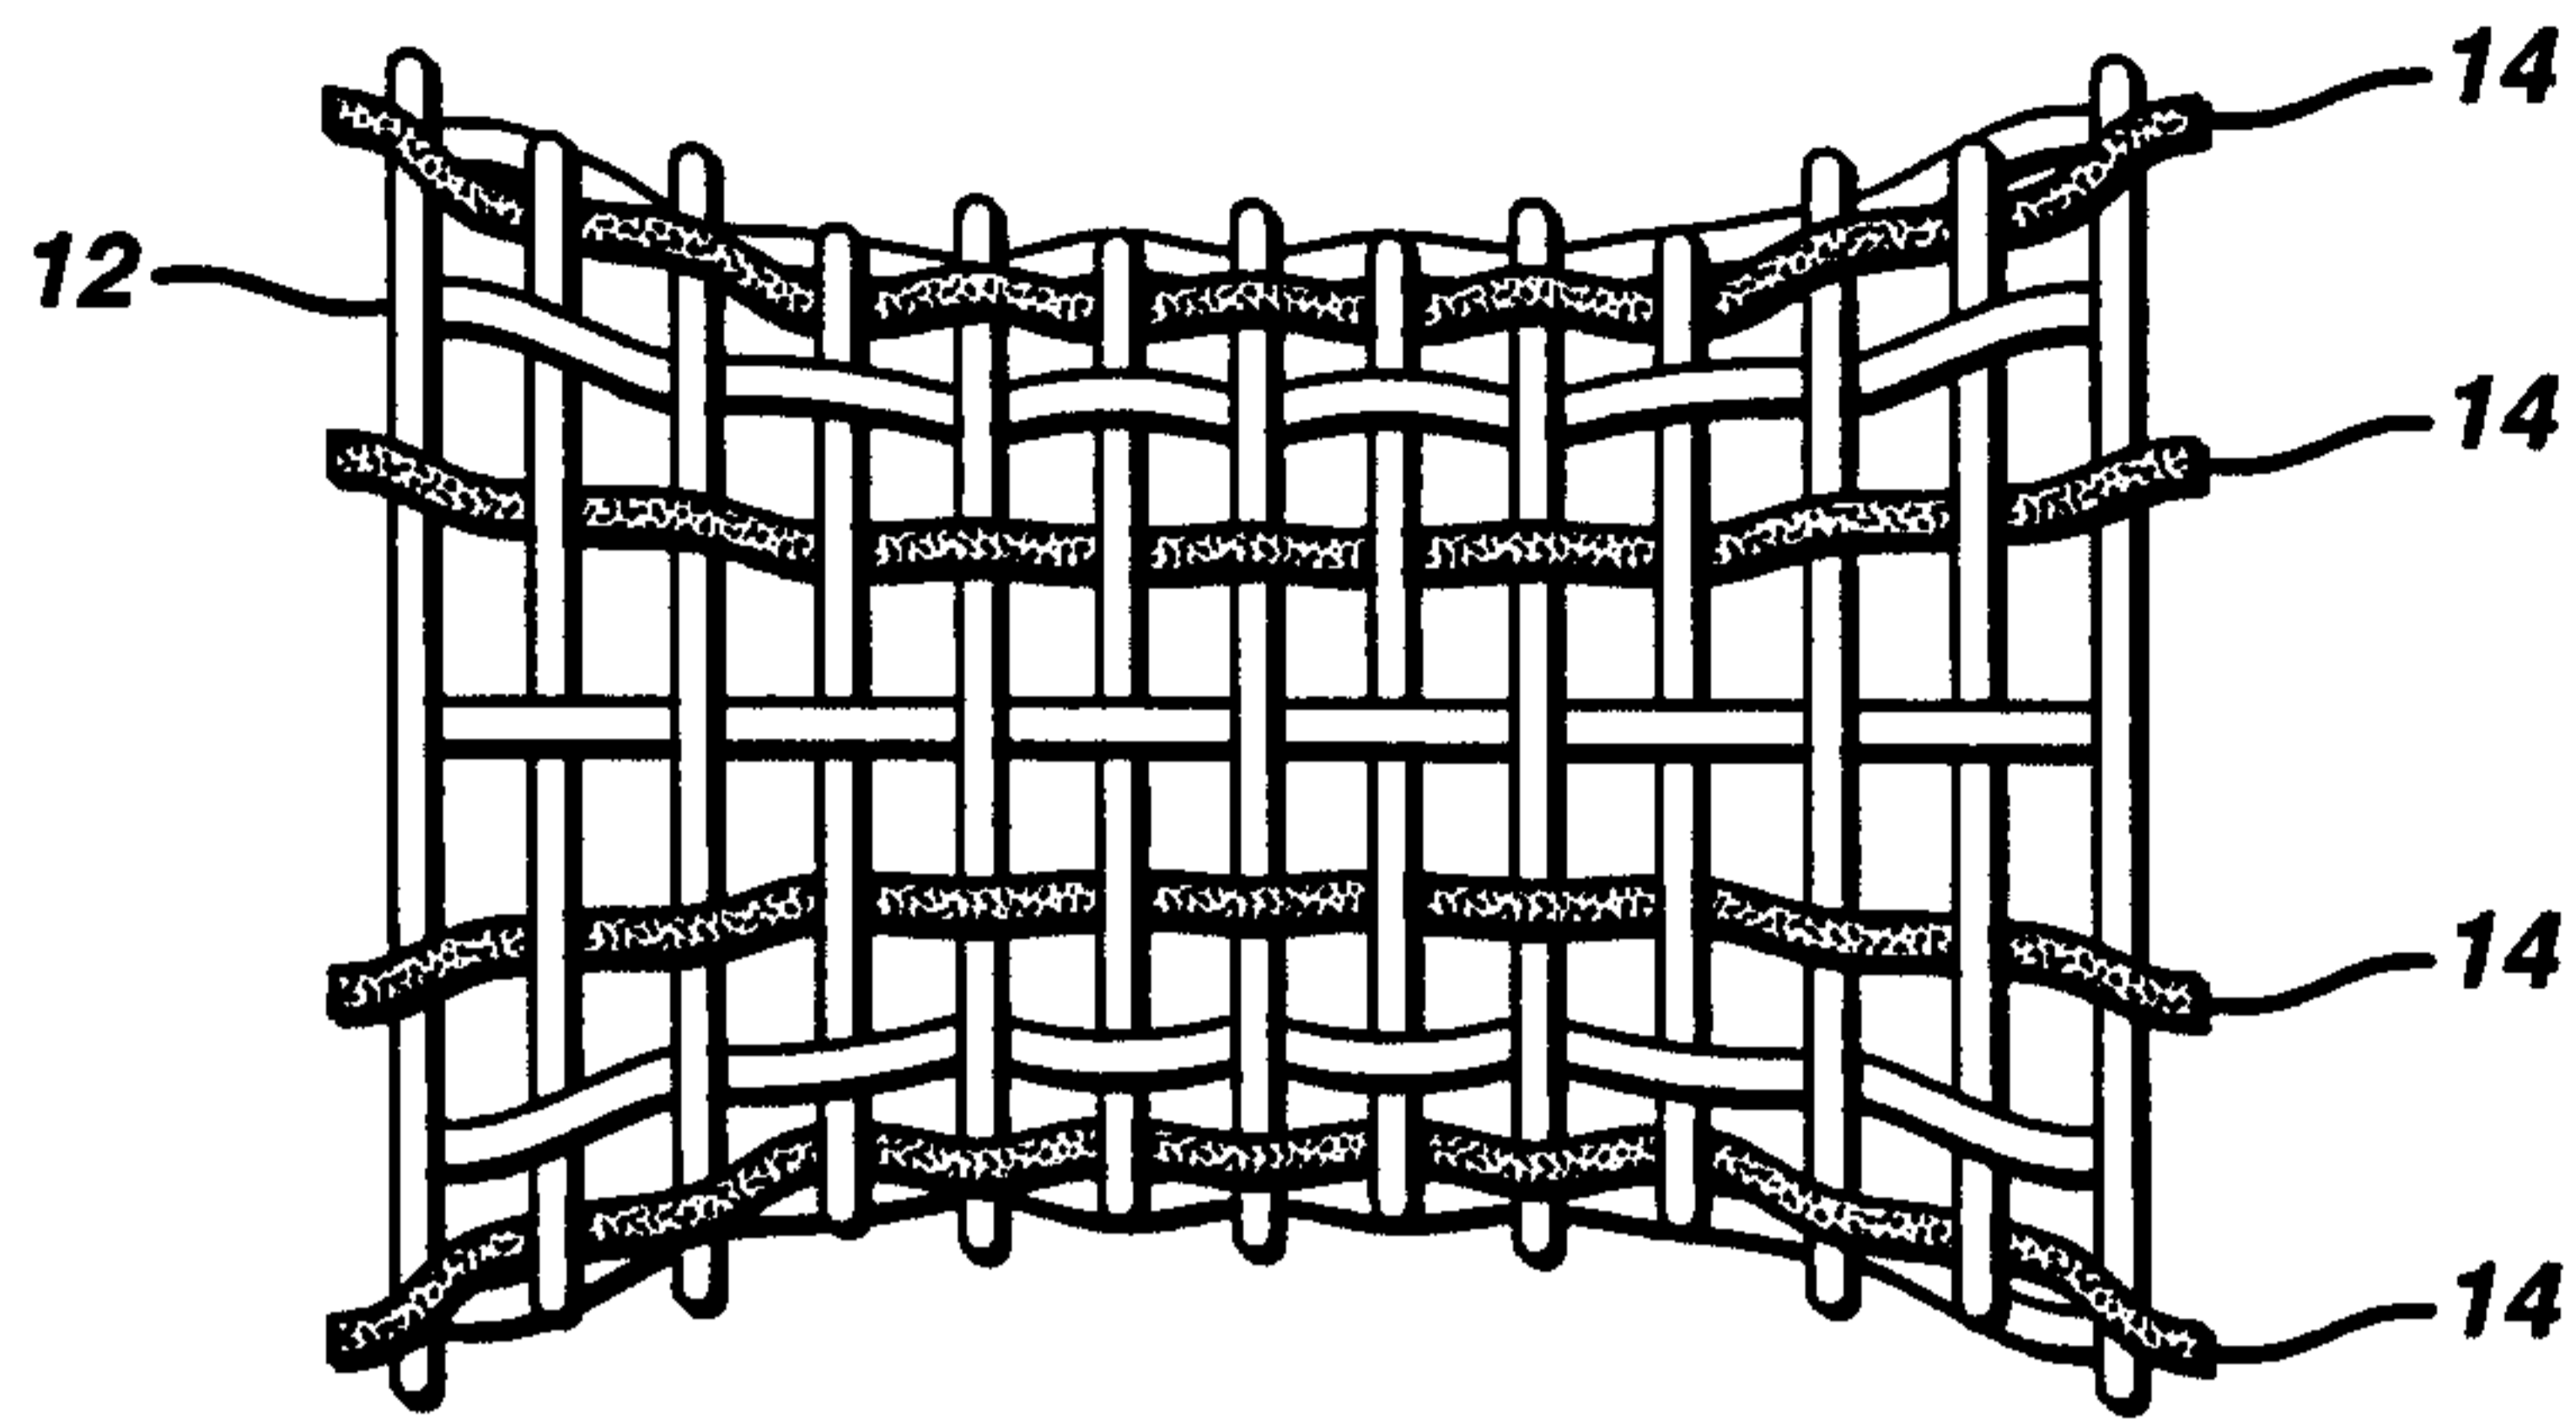


FIG. 4

