



US 20090300497A1

(19) **United States**
(12) **Patent Application Publication**
Billmaier et al.

(10) **Pub. No.: US 2009/0300497 A1**
(43) **Pub. Date: Dec. 3, 2009**

(54) **SYSTEM AND METHOD FOR FOCUSED NAVIGATION WITHIN A USER INTERFACE**

continuation of application No. 10/138,810, filed on May 3, 2002, now Pat. No. 7,107,532.

(75) Inventors: **James A. Billmaier**, Woodinville, WA (US); **John M. Kellum**, Seattle, WA (US); **Anthony F. Istvan**, Snoqualmie, WA (US); **Dewey M. Reid**, Woodinville, WA (US); **Philip A. Rogan**, Bozeman, MT (US)

(60) Provisional application No. 60/315,731, filed on Aug. 29, 2001, provisional application No. 60/317,612, filed on Sep. 6, 2001, provisional application No. 60/324,997, filed on Sep. 26, 2001.

Publication Classification

(51) **Int. Cl.**
G06F 3/00 (2006.01)
G06F 3/048 (2006.01)
H04N 5/445 (2006.01)
(52) **U.S. Cl.** **715/716; 715/784; 725/39; 715/719; 715/720; 715/721**

Correspondence Address:
Vulcan, Inc. C/O Stoel Rives LLP
201 S. Main St., Ste 1100
Salt Lake City, UT 84111 (US)

(73) Assignee: **Vulcan Ventures, Inc.**, Seattle, WA (US)

(57) **ABSTRACT**


(21) Appl. No.: **12/538,703**

A sequence of cards is stored that graphically represents available options within an information system. In response to a single user action, the sequence of cards is successively displayed within a focus area of the user interface. In response to a subsequent user action, the successive display is discontinued to display a particular card representing a selected option.

(22) Filed: **Aug. 10, 2009**

Related U.S. Application Data

(63) Continuation of application No. 11/519,521, filed on Sep. 12, 2006, now Pat. No. 7,574,656, which is a

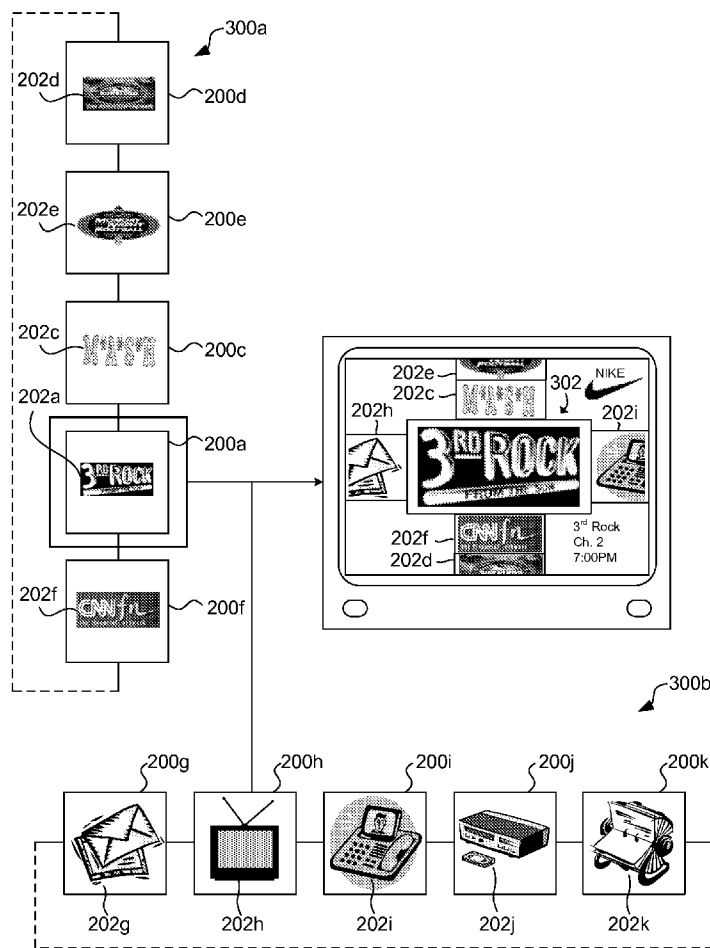

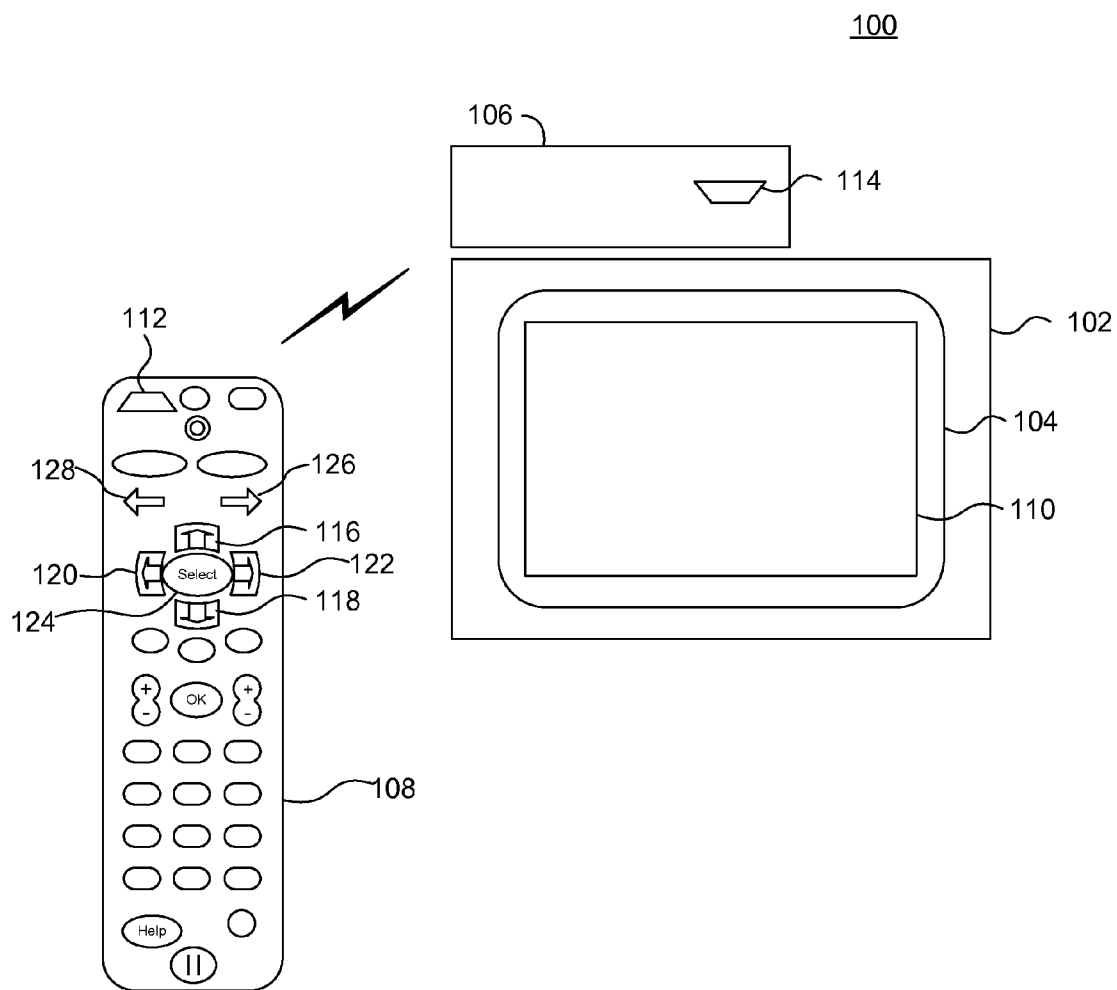


FIG. 1

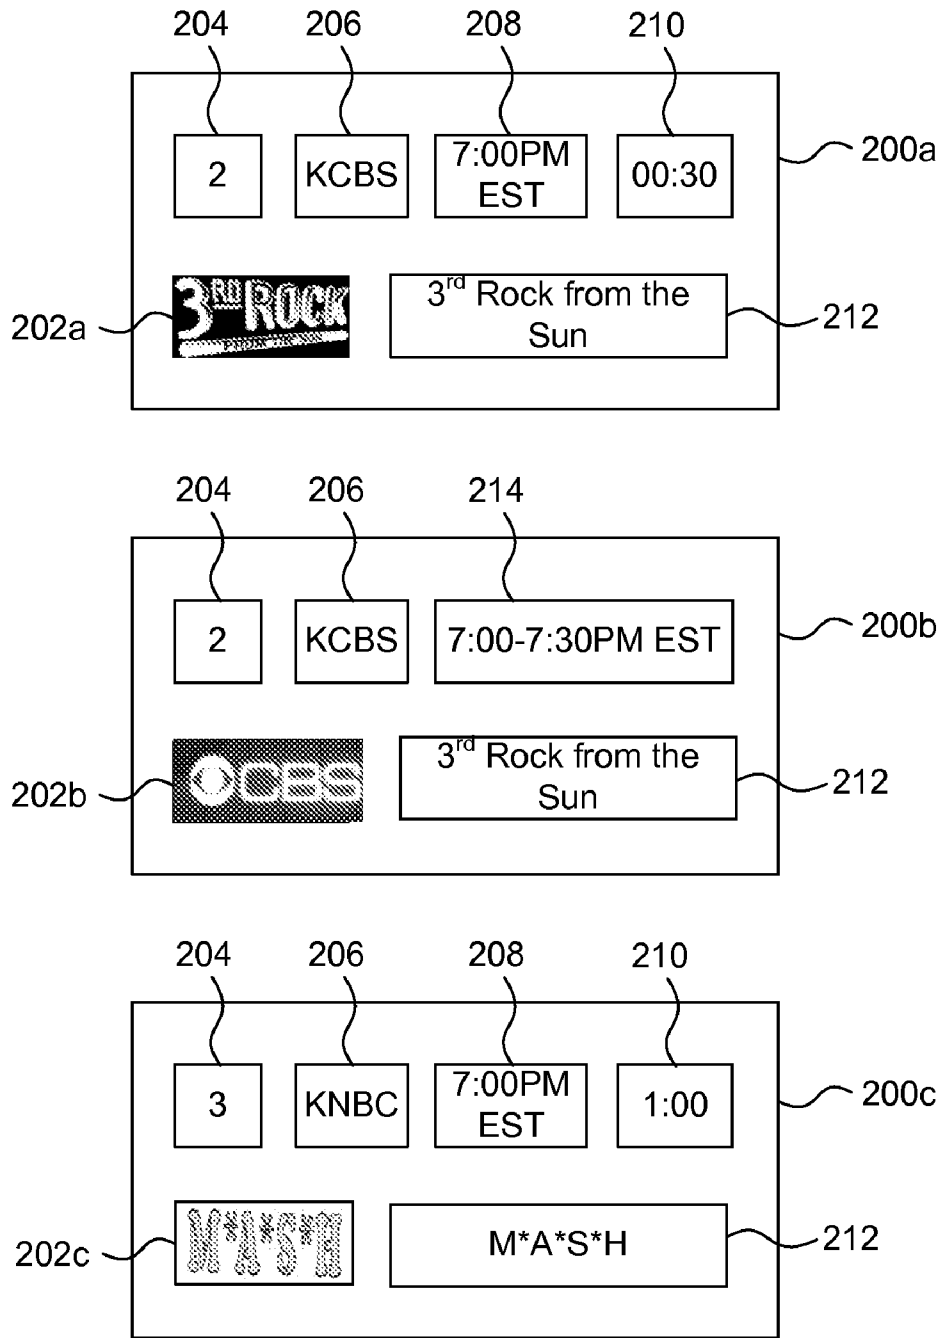


FIG. 2

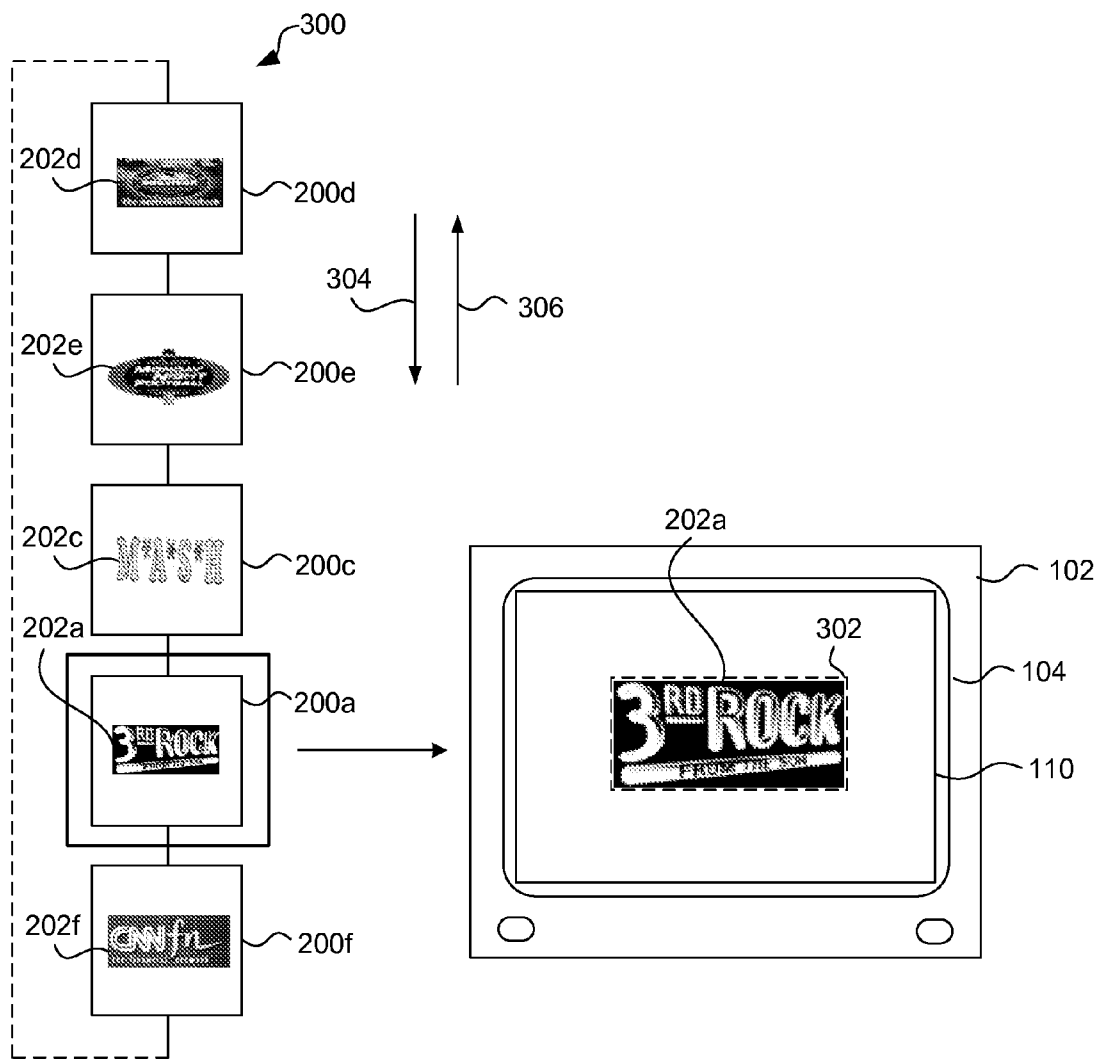


FIG. 3

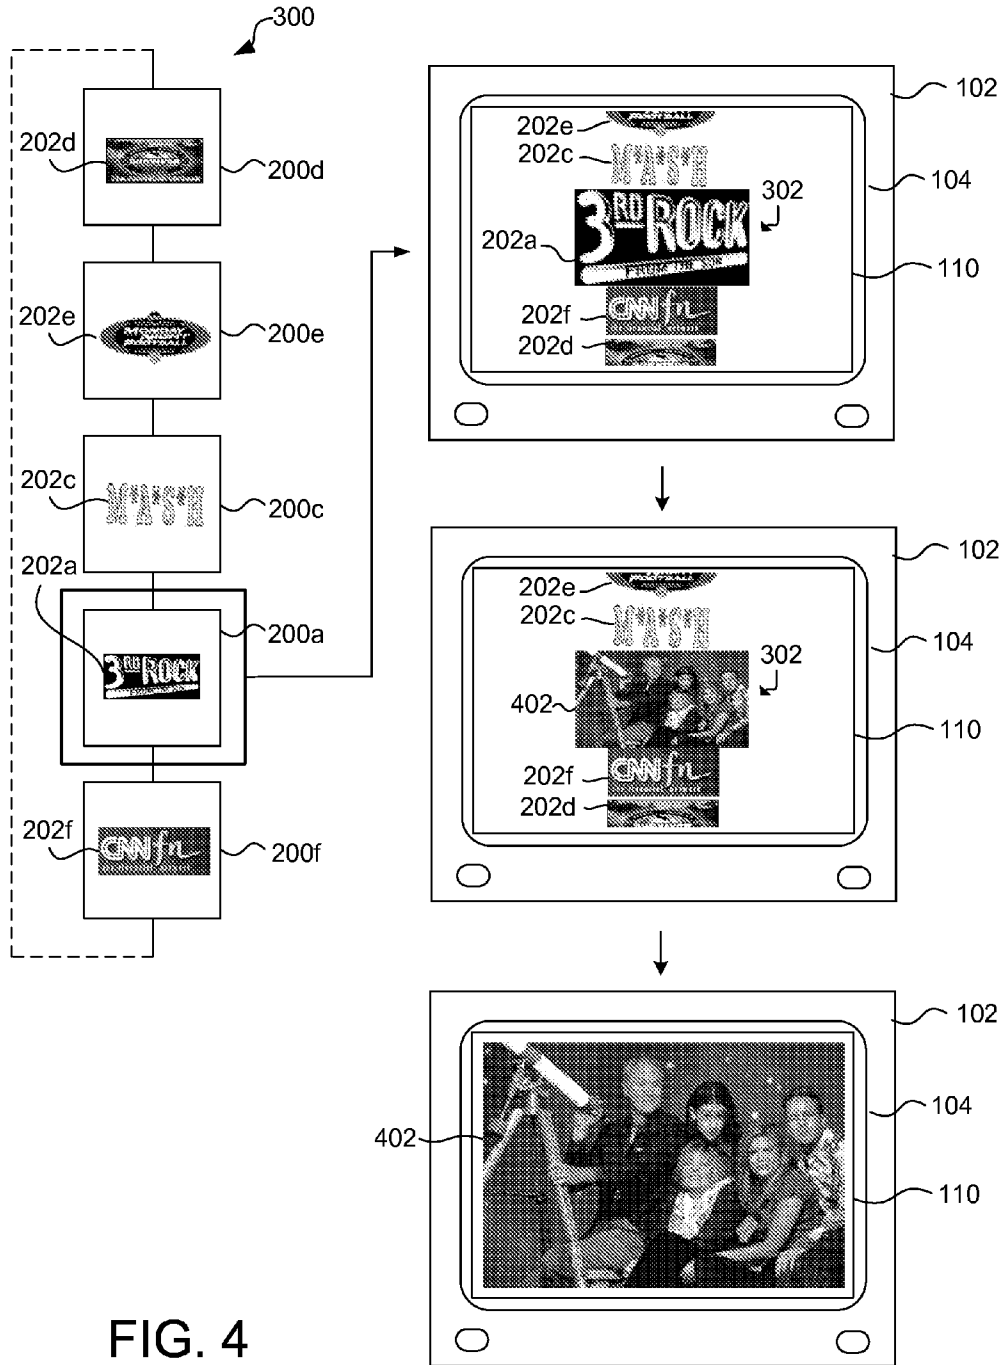


FIG. 4

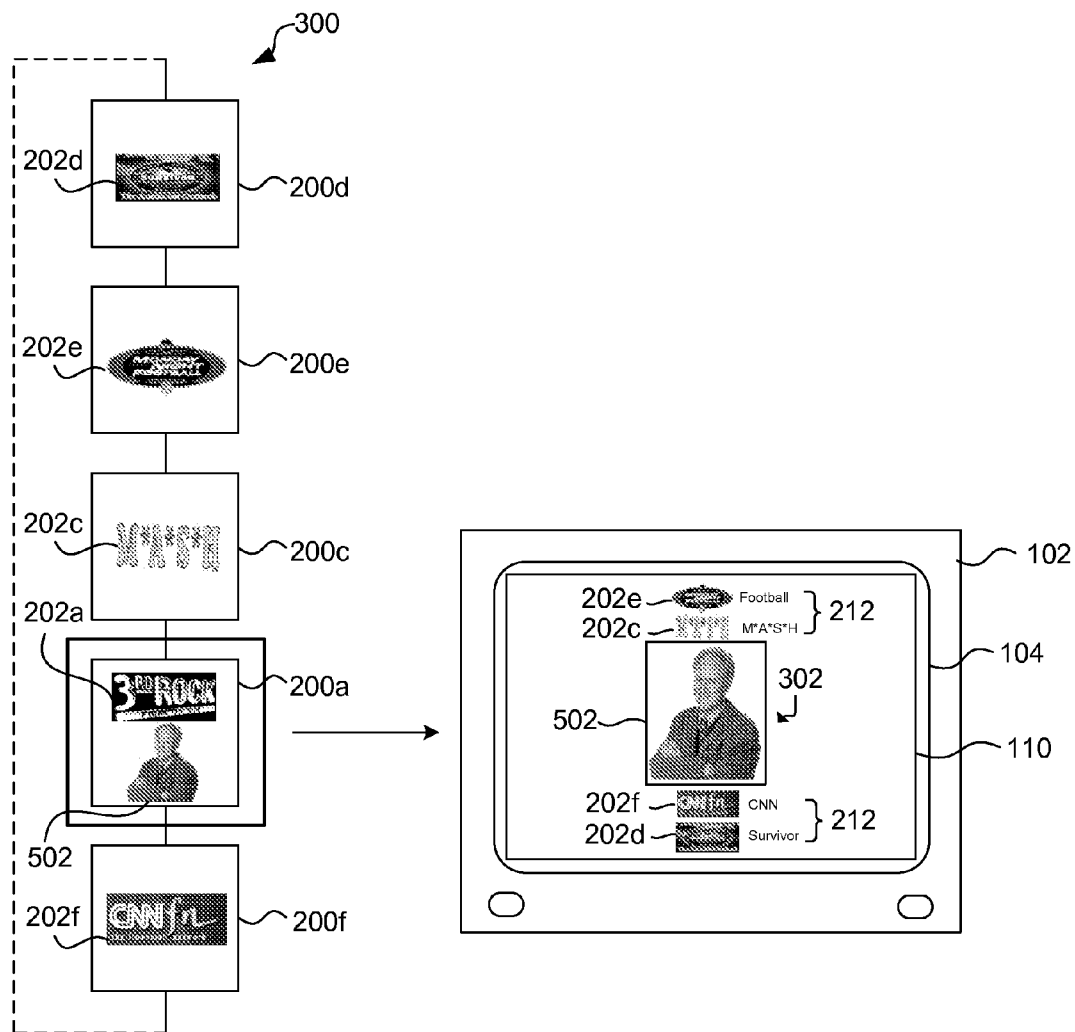


FIG. 5

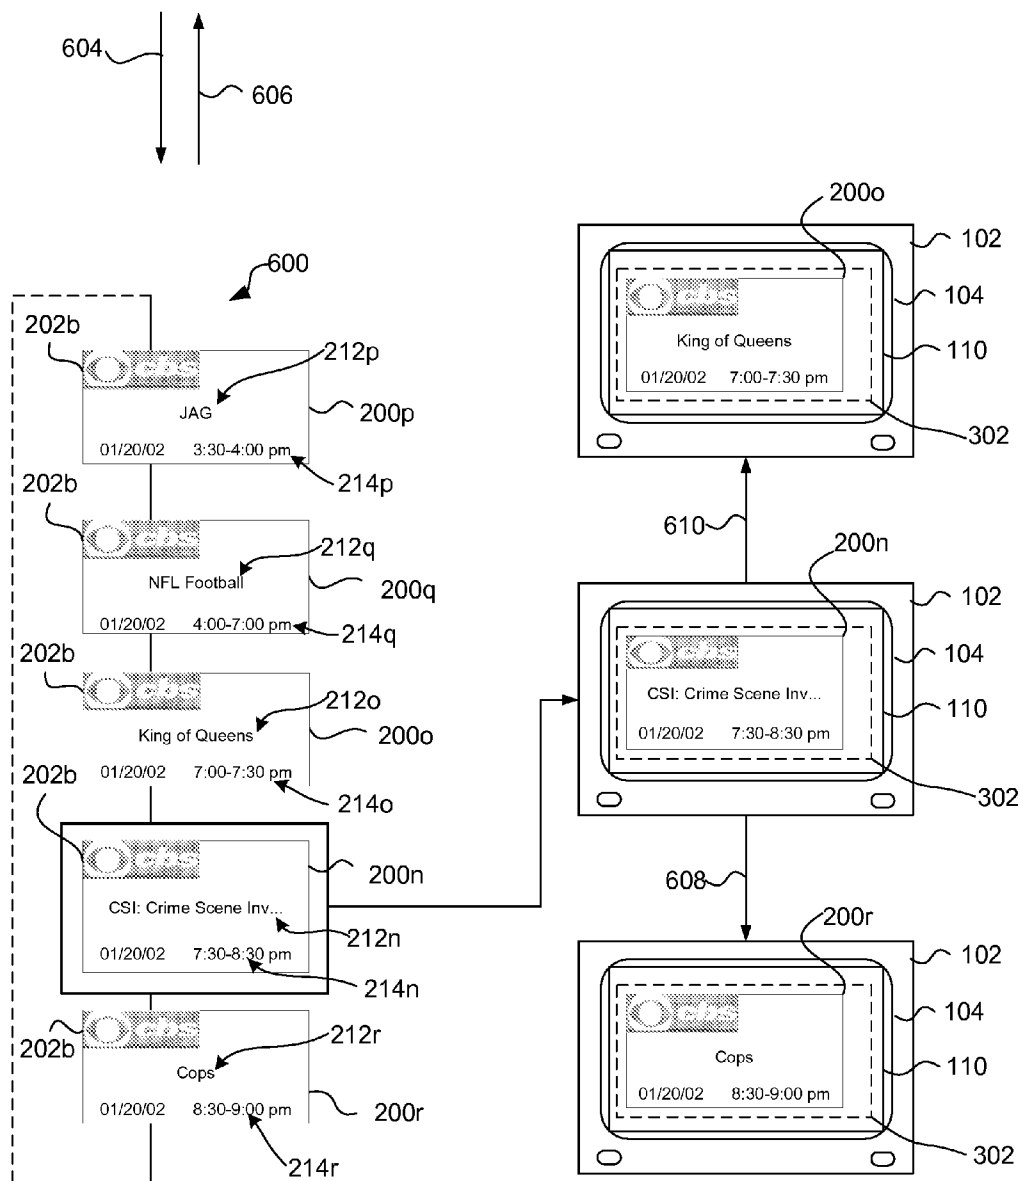


FIG. 6

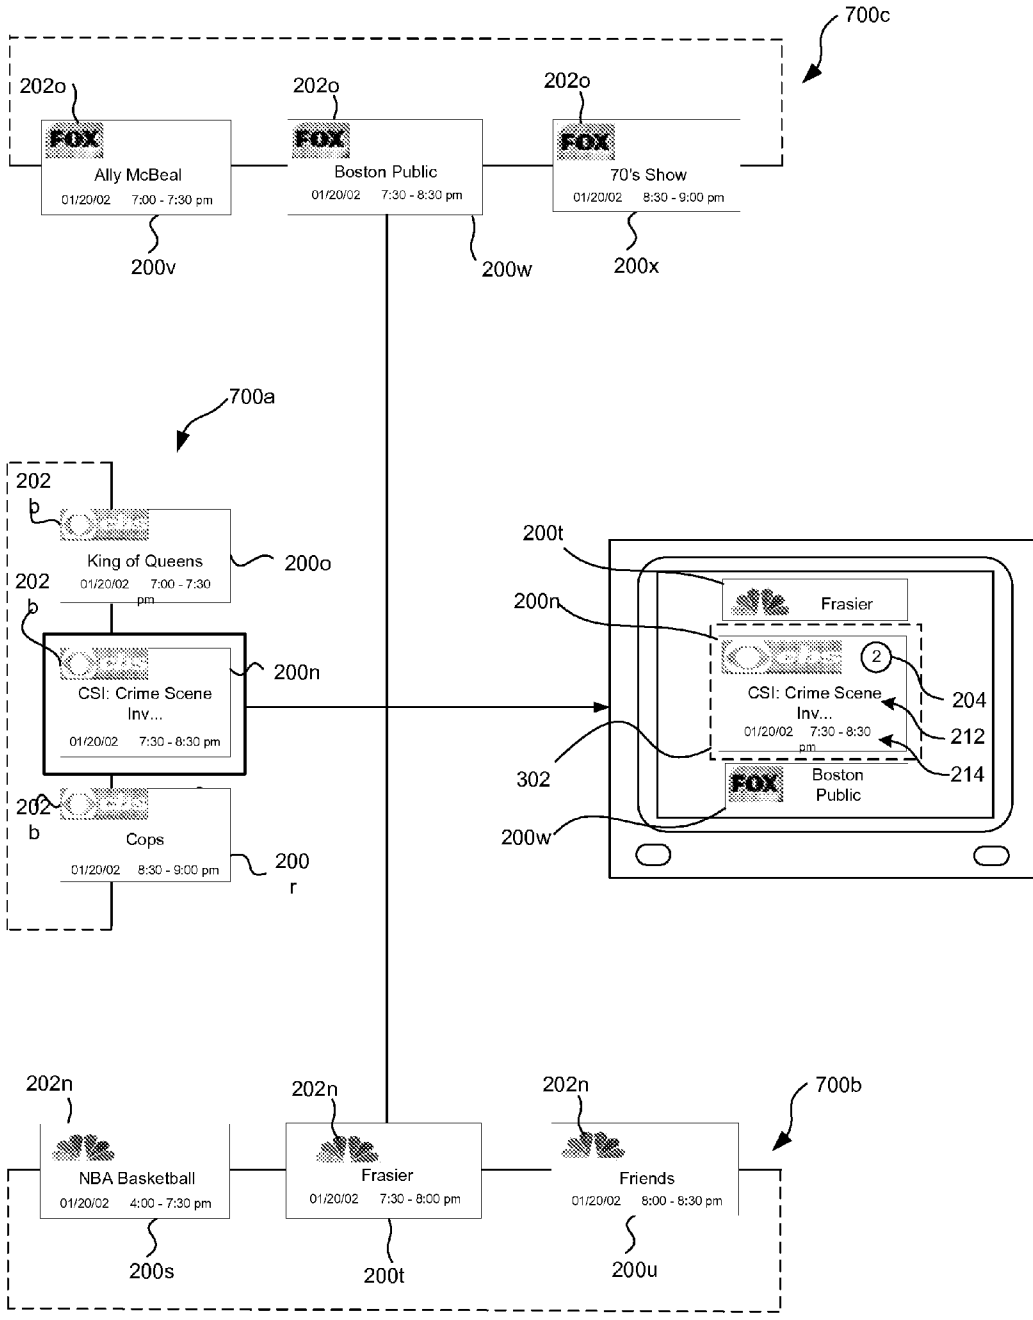


FIG. 7

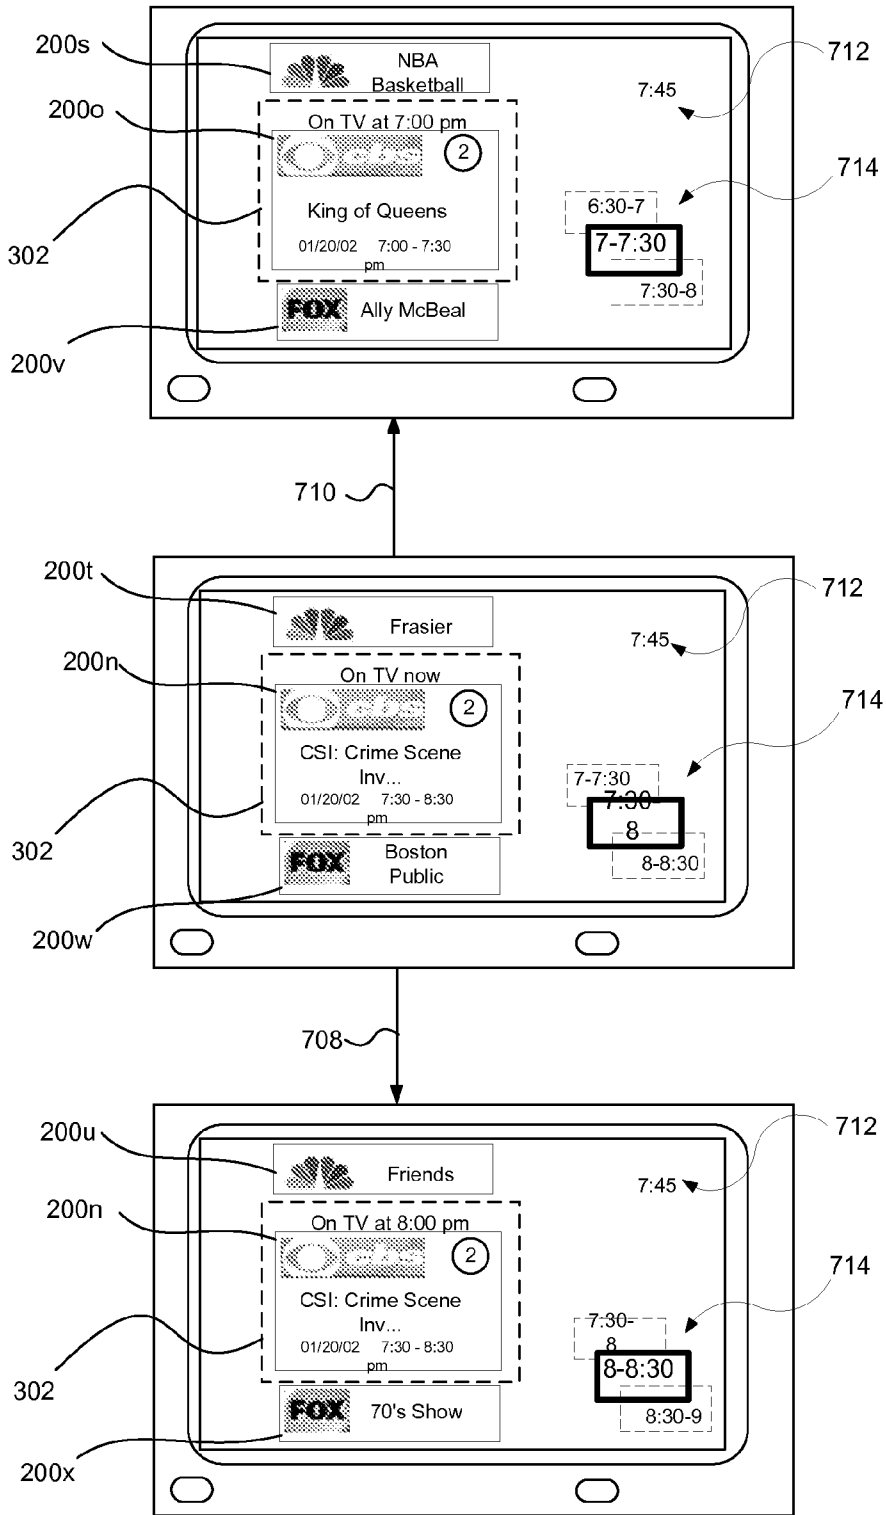


FIG. 7A

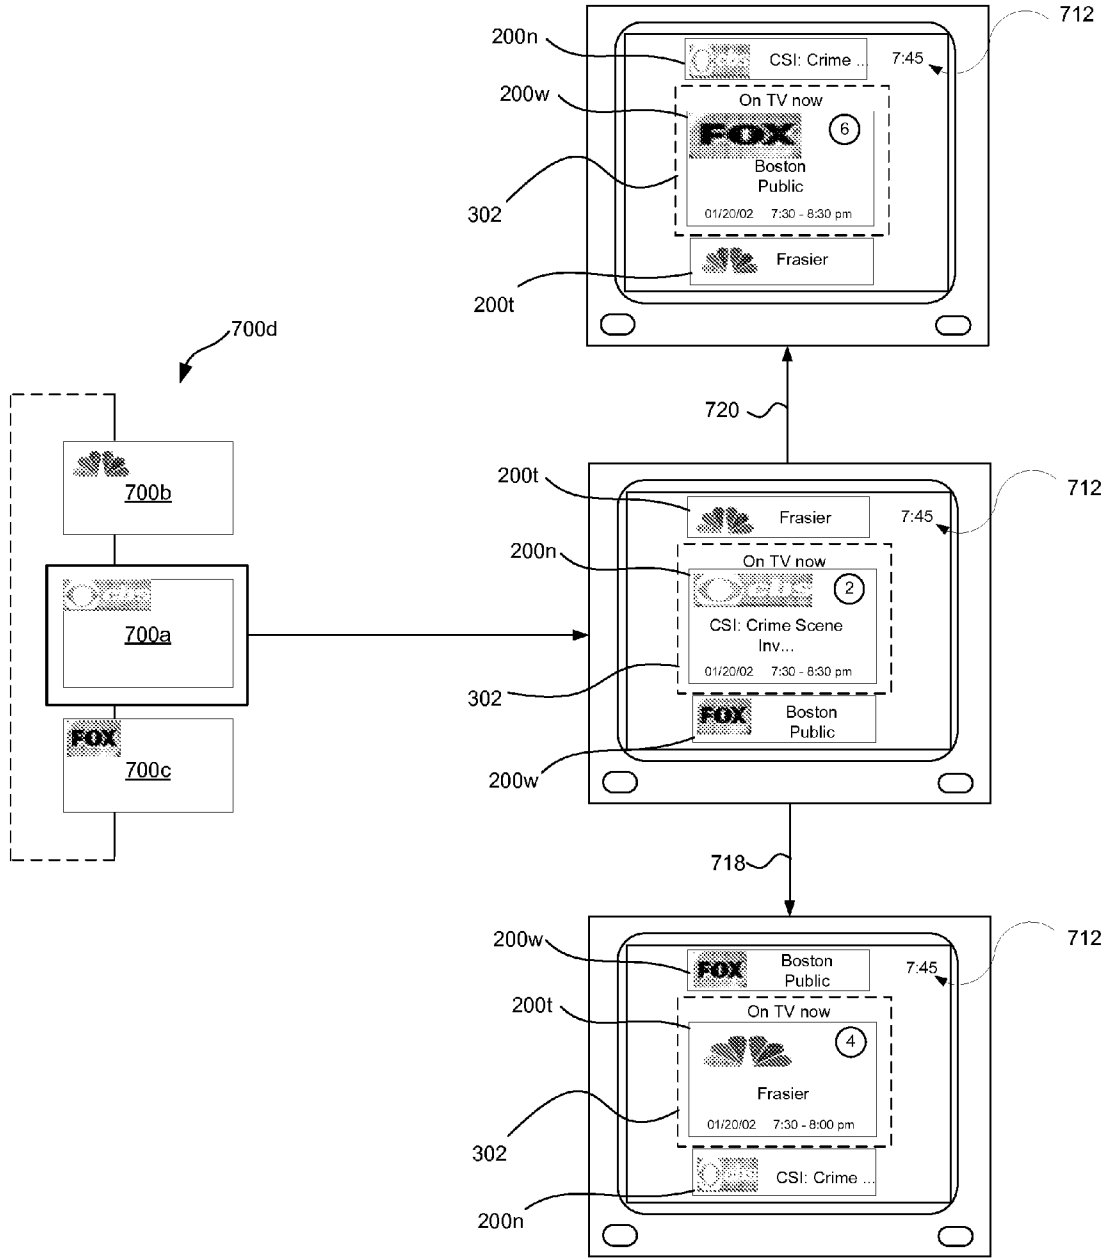


FIG. 7B

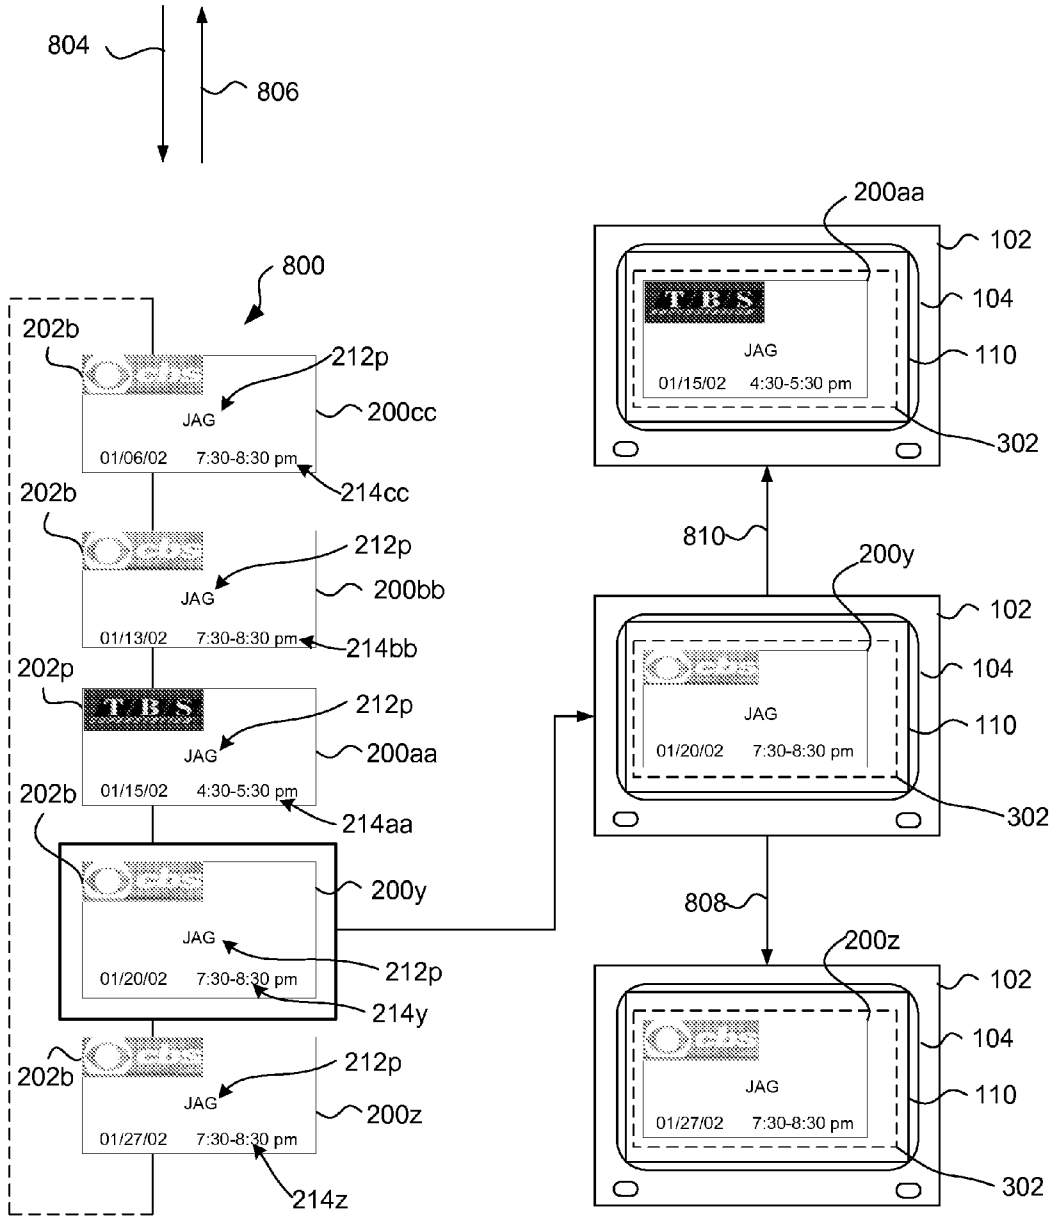


FIG. 8

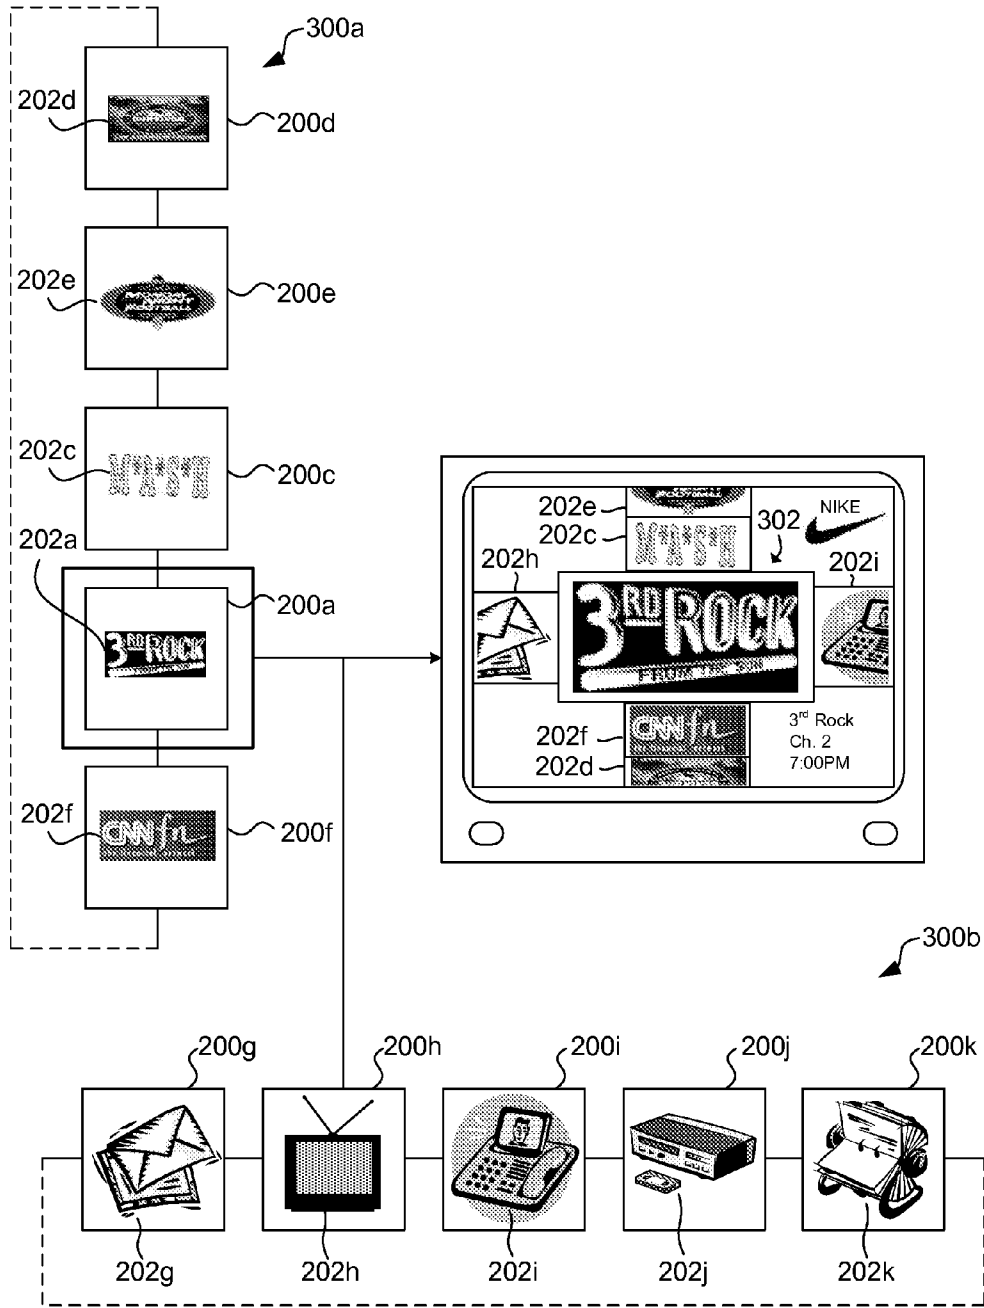


FIG. 9

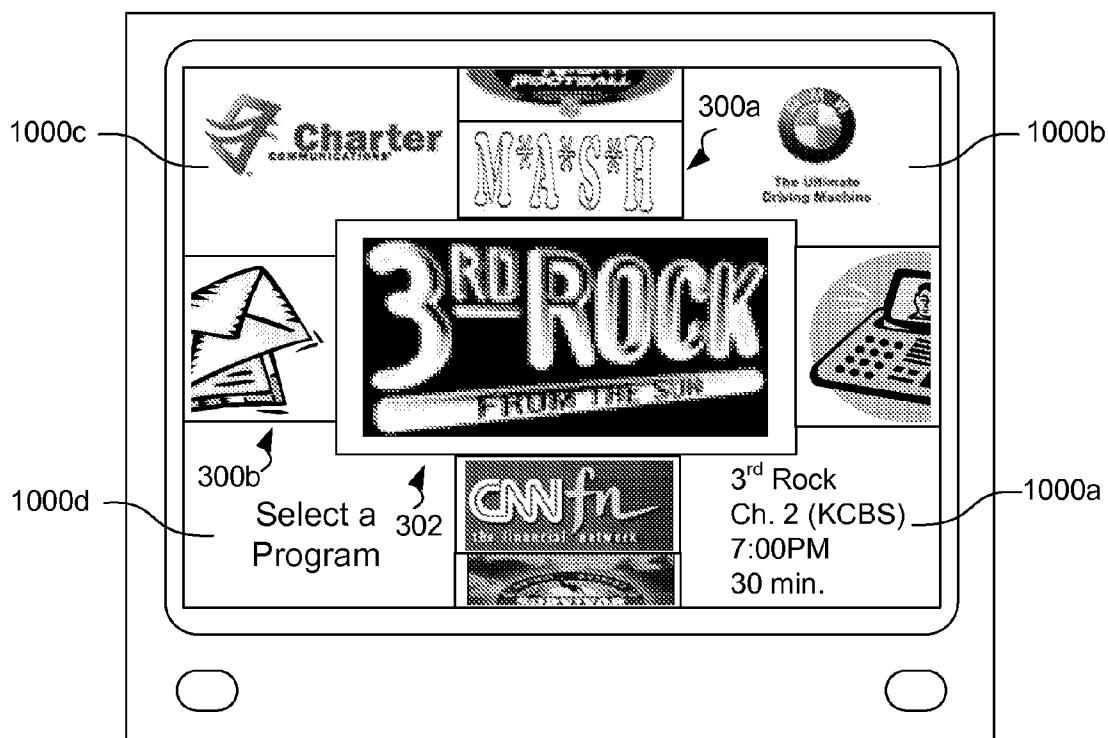


FIG. 10

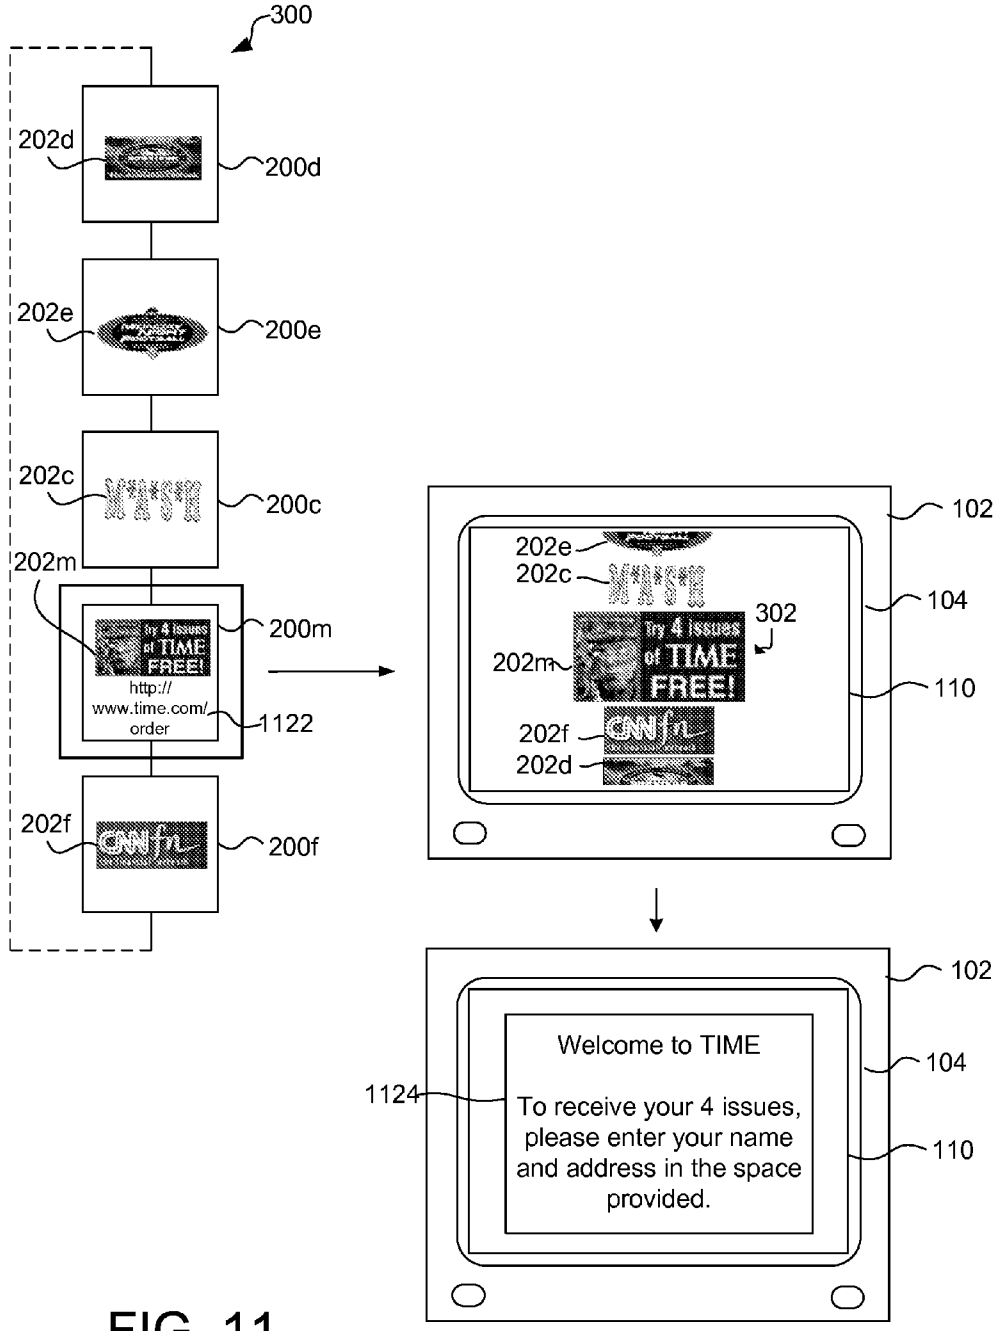


FIG. 11

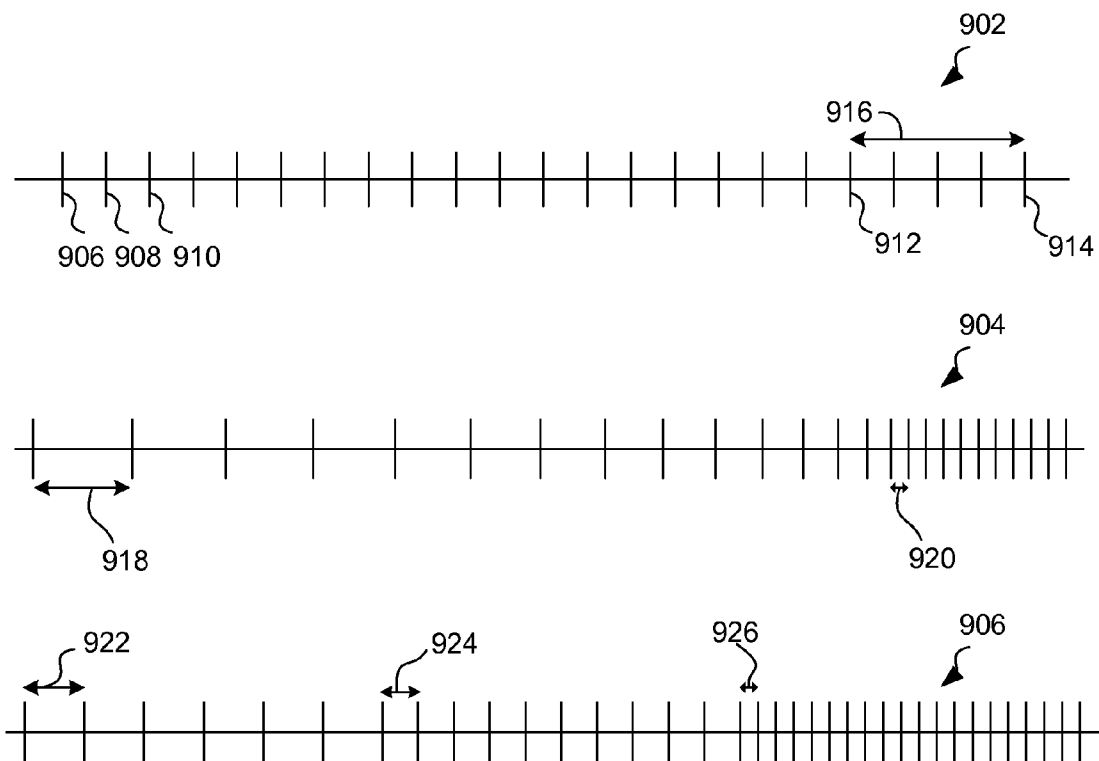


FIG. 12

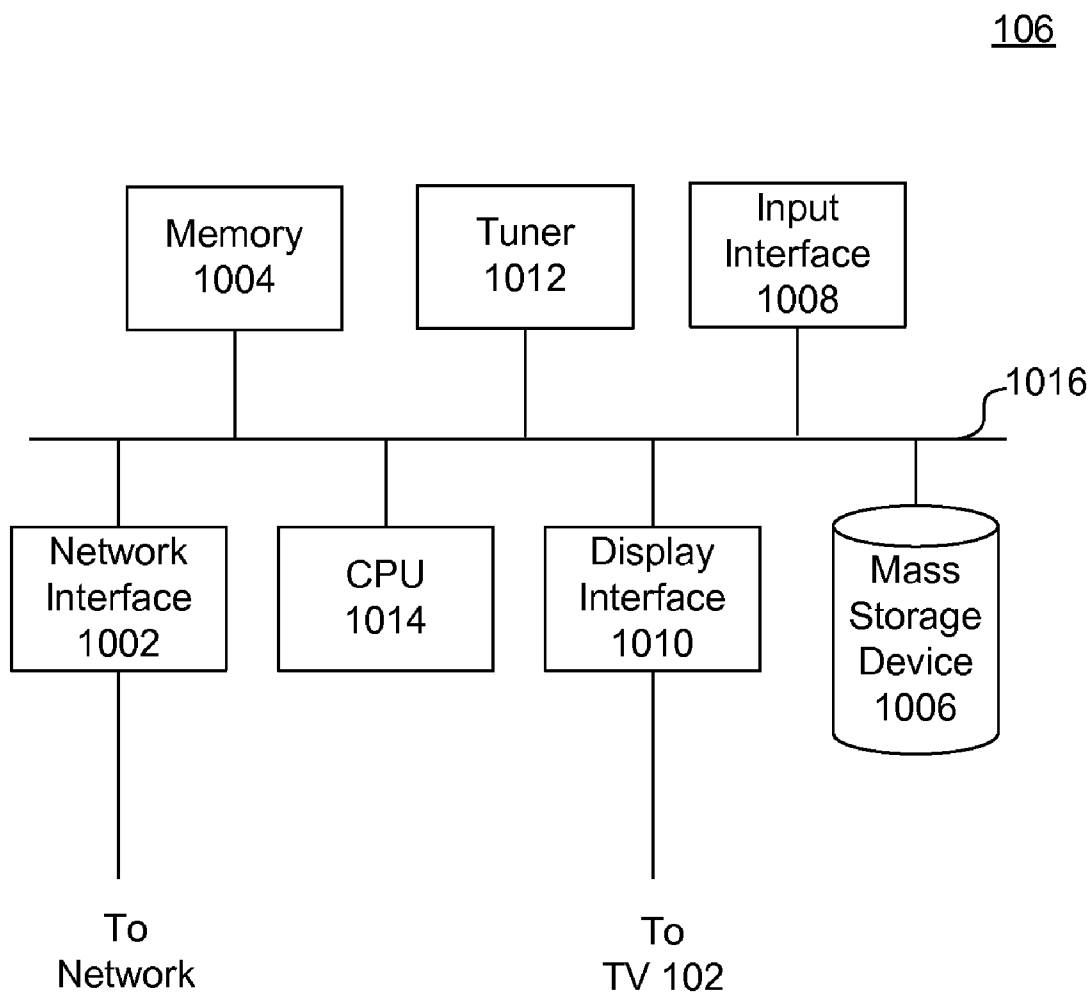


FIG. 13

1100

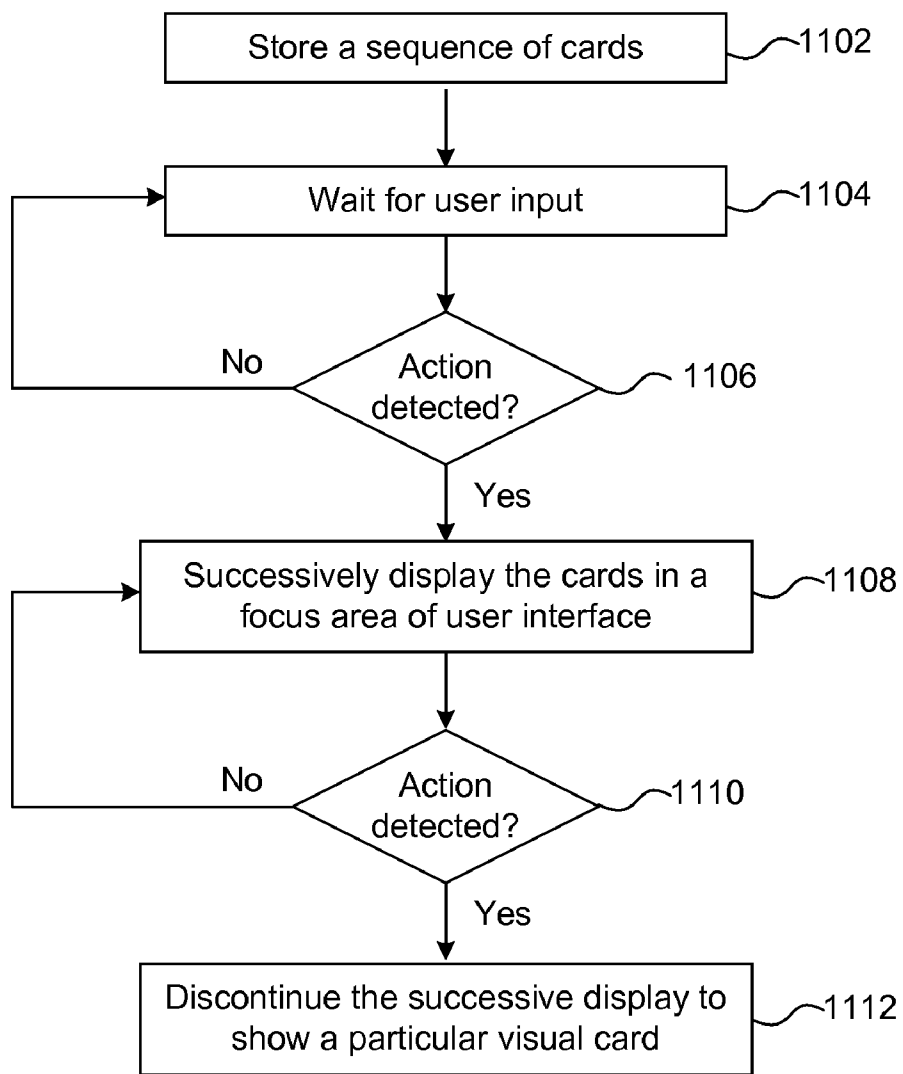


FIG. 14

SYSTEM AND METHOD FOR FOCUSED NAVIGATION WITHIN A USER INTERFACE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. patent application Ser. No. 11/519,521, filed Sep. 12, 2006, for “System and Method for Focused Navigation within a User Interface,” now U.S. Pat. No. 7,574,656, which is a continuation of U.S. patent application Ser. No. 10/138,810, filed May 3, 2002, for “System and Method for Focused Navigation within a User Interface,” now U.S. Pat. No. 7,107,532, which claims priority from U.S. Provisional Application No. 60/315,731, filed Aug. 29, 2001, for “System and Method for Visual Channel Surfing,” and also claims priority from U.S. Provisional Application No. 60/317,612, filed Sep. 6, 2001, for “System and Method for Visual Channel Surfing,” and further claims priority from U.S. Provisional Application No. 60/324,997, filed Sep. 26, 2001, for “System and Method for Visual Channel Surfing Using Center-Focused Navigation.” All of the foregoing applications are hereby incorporated by reference.

FIELD OF THE INVENTION

[0002] The present invention relates generally to the field of information systems. More specifically, the present invention relates to a system and method for focused navigation within a user interface of an information system.

DESCRIPTION OF THE RELATED ART

[0003] Recent advances in technology have vastly increased the number of available options within personal computers (PCs), interactive television (ITV) systems, personal digital assistants (PDAs), cellular telephones, and other information systems. For instance, current ITV systems offer hundreds of broadcast channels and a variety of interactive options, including e-mail, videoconferencing, instant messaging, online banking, online purchasing, and so forth.

[0004] Unfortunately, despite technological advances, user interfaces for these systems have remained largely unchanged, making navigation through all of the newly available options no easy task. For example, a user of a modern ITV system must scan through potentially hundreds of channels and other options, often by repeatedly pressing a button on a remote control. Such an outdated approach is far too slow and inconvenient to facilitate effective operation of a modern ITV system.

[0005] Similar problems exist with PC interfaces. The graphical user interface (GUI) of a modern PC looks remarkably similar to the first GUI developed twenty years ago. Small icons representing user options are arranged in rows and columns on a graphical representation of a desktop. Many of the icons are identical, requiring the addition of text labels as a distinguishing feature. Typically, a user must individually examine each icon and read each label—a time-consuming process that does not lend itself to effective navigation of the numerous options available in a modern PC.

[0006] Accordingly, it would be an advancement in the art to provide a user interface that allows for rapid and efficient navigation of a plurality of options without the drawbacks of conventional approaches.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0007] Non-exhaustive embodiments of the invention are described with reference to the figures, in which:
- [0008] FIG. 1 is a block diagram of an ITV system;
- [0009] FIG. 2 is an illustration of a plurality of cards;
- [0010] FIGS. 3-11 are illustrations of various techniques for focused navigation of a plurality of options within a user interface;
- [0011] FIG. 12 is a timing diagram for displaying a sequence of cards;
- [0012] FIG. 13 is a schematic block diagram of a set-top box (STB);
- [0013] FIG. 14 a flowchart of a method for focused navigation of a plurality of options within a user interface.

DETAILED DESCRIPTION

[0014] Reference throughout this specification to “one embodiment” or “an embodiment” means that a particular described feature, structure, or characteristic is included in at least one embodiment of the present invention. Thus, appearances of the phrases “in one embodiment” or “in an embodiment” in various places throughout this specification are not necessarily all referring to the same embodiment.

[0015] Furthermore, the described features, structures, or characteristics may be combined in any suitable manner in one or more embodiments. In the following description, numerous specific details are provided, such as examples of programming, software modules, user selections, network transactions, database queries, database structures, etc., to provide a thorough understanding of embodiments of the invention. One skilled in the relevant art will recognize, however, that the invention can be practiced without one or more of the specific details, or with other methods, components, materials, etc. In other instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of the invention.

[0016] While the following description makes particular reference to ITV systems, it should be recognized that the present invention may be used in conjunction with any type of information system in which selectable options may be displayed on a display screen. Examples of such information systems include, but are not limited to, ITV systems, personal computers, and mobile computing devices, such as PDAs, webpads, cellular telephones, and the like.

[0017] Referring now to FIG. 1, there is shown a block diagram of an ITV system 100 according to an embodiment of the invention. In one configuration, the ITV system 100 includes a television (TV) 102 or other display device having a display screen 104, a set-top box (STB) 106, and a remote control 108.

[0018] The STB 106 serves as a gateway between the TV 102 and a broadband communication network (not shown), such as a cable television network or a direct broadcast satellite (DBS) network. One commercially-available example of an STB 106 is the Motorola DCT5000® interactive set-top terminal.

[0019] The STB 106 receives encoded television signals and other data from the broadband network and processes the same for display on the display screen 104. The STB 106 may also include hardware and software for presenting a graphical user interface (GUI) 110 on the display screen 104 for operating the various functions and services of the STB 106. In alternative embodiments, the STB 106 may be integrated into

the TV **102** or may be embodied within a personal computer (PC), mobile computing device, or the like.

[0020] The remote control **108** is provided for convenient remote operation of the STB **106** and the TV **102**. The remote control **108** may include a wireless transmitter **112** for transmitting control signals to a wireless receiver **114** within the STB **106** using radio frequency (RF) or infrared (IR) techniques.

[0021] In addition, the remote control **108** may include a number of buttons or other similar controls. For instance, the remote control **108** may include an “Up” button **116**, a “Down” button **118**, a “Left” button **120**, a “Right” button **122**, and a “Select” button **124**. In an embodiment, the remote control **108** may further include a “Forward” button **126** and a “Backward” button **128**. Of course, a variety of other buttons or controls may be provided within the scope of the invention. In alternative implementations, the remote control **108** may be embodied as a keyboard, mouse, or other suitable input device.

[0022] As noted, an ITV system **100** typically provides access to a plurality of selectable options, such as channels, programs, applications, digital media files, etc. For instance, an ITV system **100** may provide access to literally hundreds of broadcast TV channels, pay-per-view (PPV) channels, music channels, and the like. Additionally, an ITV system **100** may provide access to a number of interactive channels or applications, including web browsers, e-mail programs, chat clients, personal video recorder (PVR) applications, contact directories, and the like. Furthermore, an ITV system **100** may store or provide access to stored PVR recordings, digital photographs, audio (MP3) files, or other forms of digital media.

[0023] As shown in FIG. 2, each selectable option within the ITV system **100** may be associated with a card **200**. A card **200** is an object or other suitable data structure that provides information about and/or access to an available option within an ITV system **100**. A card **200** may be a container of all of the attributes, actions, and/or states needed to facilitate interaction with the option represented thereby. Cards **200** may be stored in any suitable format within a memory or disk drive of the ITV system **100**.

[0024] Each card **200** may include a graphical representation **202** for display in the GUI **110**, as described in detail below. The graphical representation **202** may include various types or combinations of artwork, digital photography, captured video frames, animations, or the like.

[0025] As depicted in FIG. 2, cards **200a-c** may be used to represent television programs or channels. The television programs may be ongoing (live), upcoming, or previously-recorded as of the time of review by a user of cards **200**. In addition to a graphical representation **202**, such cards **200** may include but not necessarily display, for instance, a channel number **204**, a channel name or identifier **206**, a starting time **208**, a running time **210**, and a text description **212**. In one embodiment, and as an alternative or in addition to the starting time **208** and running time **210**, cards **200** may include a time slot **214**. Of course, cards **200** representing other types of options may include additional or different types of information, such as audio/video clips, file or path names, network addresses (URLs), etc.

[0026] The graphical representations **202** associated with cards **200** may have different levels of specificity or granularity. For instance, a graphical representation **202a** may correspond generally to a television series, e.g., “3rd Rock from

the Sun,” while another graphical representation **202b** may correspond to a television programming source such as a television station, e.g., “TBS,” or network, e.g., “CBS.” In other embodiments, a graphical representation **202** may correspond to a specific episode of a television series (e.g., a series premier), or even a product (purchase opportunity) associated with the television program. In still other embodiments, a generic graphical representation **202** may be provided, which may be overlaid by the channel number **204**, text description **212**, or other information, where a more specific card **200** is not available.

[0027] Cards **200** may be generated locally within an ITV system **100** or may be received via the broadband network using HTTP (hypertext transfer protocol), FTP (file transfer protocol), ATVEF (advanced television enhancement forum) triggers or other well-known protocols or techniques. In one embodiment, a card **200** may be received with data encoded in the vertical blanking interval (VBI) of a television signal. Additionally, information associated with cards **200** (e.g., channel number **204**, starting time **208**, running time **210**) may be dynamically updated with information received in ATVEF triggers.

[0028] Referring to FIG. 3, a plurality of cards **200** may be arranged or grouped together in a package or sequence **300**. The sequence **300** may be circular (as depicted), linear, or configured in other ways. The sequence **300** may be arranged in numerical order by channel number **204**, in alphabetical order by the text description **212**, or in other preset or user-defined ways.

[0029] In the illustrated embodiment, one card **200a** in the sequence **300** is active or in “focus.” As shown, the active card **200a** may be displayed within a focus area **302** of a GUI **110** displayed on the TV **102**. For brevity, the phrase “displaying a card” refers herein to displaying, or presenting as output to a display device, a graphical representation **202** associated with the card **200**. Other information associated with the card, e.g., the channel number **204** or text description **212**, may or may not be displayed.

[0030] A focus area **302** is a single location of the GUI **110** at which the cards **200** are successively displayed (i.e., displayed one at a time in any direction along a sequence). The focus area **302** may be located at a central or visually dominant location of the GUI **110**, although the invention is not limited in this respect. As used herein, the term “focused navigation” refers to a technique of displaying a sequence (e.g., sequence **300**) of cards **200** within a focus area **302**.

[0031] In response to a single user action, the cards **200** in a sequence **300** are successively displayed within the focus area **302**. Where the sequence **300** is circular, the successive display of cards **200** may continue indefinitely until halted by the user by a subsequent action, as described more fully below.

[0032] The single user action to initiate navigation may be pressing (or pressing and holding down) a button on the remote control **108**. For example, the user may press the “Up” button **116** to initiate the successive display in a first direction within the sequence **300** (indicated by line **304**), and press the “Down” button **118** to initiate navigation in the opposite direction (indicated by line **306**). Alternatively, the user may speak a command into a microphone (either within the STB **106** or remote control **108**) to initiate navigation. Alternatively, the STB **106** or remote control **108** may incorporate one or more sensors that allow a user to navigate the cards **200** using bodily gestures. Such or similar sensors may further

allow a user to invoke the GUI 110 using bodily gestures. Alternatively, the STB 106 or remote control 108 may incorporate one or more sensors that receive and interpret electromagnetic signals generated by the body of a user in order to navigate the cards 200. Alternatively, the ITV system 100 may be configured such that navigation of cards 200 may be accomplished by touching or otherwise physically contacting the display screen 104. Of course, the user action may be performed in a variety of other ways within the scope of the invention.

[0033] In one embodiment, the sequence 300 of cards 200 is successively displayed at a rate selected by the user. For instance, initially pressing the “Up” button 116 may cause the sequence 300 to be displayed at a rate of two cards 200 per second. As the user continues to hold the “Up” button 116, the rate may increase gradually or in steps to any practical rate within the limit of a typical user’s ability to recognize individual cards 200 when they are displayed. Many users are able to recognize individual cards 200 at a rate of seven or more cards 200 per second (420 per minute), facilitating rapid navigation of available options.

[0034] The cards 200, when displayed within the focus area 302, may be sufficiently large to permit user recognition from a comfortable viewing distance for the particular display screen 104. Thus, unlike PC icons, which typically occupy as little as $\frac{1}{200}$ of the display area of the display screen 104, the displayed cards 200 (and the card 200 in the focus area 302 in particular) may occupy between $\frac{1}{10}$ and $\frac{1}{4}$ of the total display area.

[0035] When the user sees displayed a card 200 of a channel or option that she desires to select or view, the user may take some additional action and the successive display of cards 200 is halted. For example, where navigation was initiated by pressing and holding down the “Up” button 116, the user may release the “Up” button 116 to discontinue navigation. In an alternative embodiment, where the successive display was initiated simply by pressing a button, the user may press the same or a different button to halt the successive display. Of course, the user may discontinue navigation in a variety of other ways within the scope of the invention.

[0036] If the user’s reaction time is fast enough, the card 200 representing the desired channel remains displayed in the focus area 302 once navigation is discontinued. However, the user’s reaction time may not be fast enough and one or more cards 200 may be subsequently displayed. In such a case, the user may manually backtrack to the desired card 200 by repeatedly activating a suitable control on the remote control 108. For example, briefly pressing the “Up” or “Down” buttons 116, 118 may result in the previous or next card 200, respectively, being displayed. Alternatively, as described in greater detail below, the ITV system 100 may attempt to determine the delay between the user recognizing the desired card 200 and taking the subsequent action and compensate for that delay by reverting to a previously-displayed card 200.

[0037] The user may select the channel or option associated with the displayed card 200 by taking a selection action. For instance, the user may press the “Select” button 124 on the remote control. Alternatively, the selection action may simply be waiting a set amount of time without activating any controls on the remote control 108.

[0038] The effect of activating the card 200 will vary depending on the type of card 200. For instance, in the case of a card 200 representing a live television program, the GUI 110 may be replaced by a full-size version of the program.

Alternatively, activating a card 200 corresponding to a purchase opportunity may result in the display of a web browser directed to a particular website.

[0039] As shown in FIG. 4, one or more previous and next cards 200 within the sequence 300 may be displayed along an axis of the GUI 110 to provide the user with a more complete navigational context within the sequence 300. For example, at least a subset of the sequence 300 of cards 200 may be displayed along a vertical axis, with the active card 200a being displayed in the focus area 302. In alternative embodiments, the cards 200 may be displayed along horizontal or diagonal axes, or in other suitable ways.

[0040] Typically, one or more cards 200 in a sequence 300 are not displayed. These off-screen or hidden cards may be dynamically changed, replaced, or updated during navigation, e.g., a card 200 representing an advertisement may change from one sponsor to another.

[0041] When a user activates one of the navigation buttons of the remote control 108 (e.g., the “Up” or “Down” buttons 116, 118), the displayed cards 200 in the sequence 300 may appear to shift or cycle downward or upward, respectively, with a new card (e.g., card 200c or 202f) entering the focus area 302. Alternatively, the “Left” or “Right” button 120, 122 may be used for the same purpose.

[0042] As depicted, the card 200a in the focus area 302 may be visually emphasized in various ways. For example, the card 200a may be enlarged relative to the other displayed cards 200. Alternatively, the card 200a may be animated, marked, illuminated, highlighted, or otherwise set apart from the other cards 200.

[0043] In certain embodiments, if the user allows a card 200 representing a live television program to remain in the focus area 302 for a certain amount of time (e.g., 2 seconds), the card 200a may be overlaid by a video window 402 showing the live television program. Furthermore, if the user continues to linger on the card 200a (or if the user presses the “Select” button 124), the video window 402 may be enlarged 402 to fill the entire display screen 104. Other types of cards 200 may exhibit different types of behaviors when the card 200 remains in the focus area 302 for an established period of time.

[0044] Where the cards 200 represent live television programs, a card 200 corresponding to the currently-tuned channel (at the current date and time) may be selected by default for display in the focus area 302 each time the GUI 110 is shown. This may occur, for instance, when the user is watching TV and presses a button (such as the “Select” button 124) in order to display the GUI 110. Additionally, an indication of the currently-displayed card 200 in the focus area 302 may be stored in non-volatile memory or otherwise maintained such that if a reset condition occurs (e.g., the STB 106 is rebooted or reset after a power loss, etc.) the last-displayed card 200 may be restored to the focus area 302.

[0045] As shown in FIG. 5, cards 200 may include one or more alternative graphical representations 502, which may be displayed when the card 200 enters the focus area 302. As depicted, cards 200c-f displayed outside of the focus area 302 are shown using a first graphical representation 202c-f. However, when the card 200a enters the focus area 302, the alternative graphical representation 502 is shown. Additionally, cards 200 outside of the focus area 302 may be displayed in a reduced-size format with text descriptions 212.

[0046] Referring to FIG. 6, a plurality of cards 200 may be arranged or grouped together in a package or sequence 600. In

the illustrated embodiment, the cards **200_{n-r}** in the sequence **600** represent a single television network (e.g., CBS), as indicated by the graphical representation **202b**. The cards **200_{n-r}** in the sequence **600** further represent the television programs, as indicated by the text descriptions **212_{n-r}**, carried by the represented television network. In an alternative embodiment, the graphical representation **202b** depicting the television network represented by cards **200** may be replaced by or supplemented with a graphical representation **202** of the represented television programs.

[0047] The sequence **600** may be circular (as depicted), linear, or configured in other ways. In the illustrated embodiment, the sequence **600** is arranged in chronological order by time slot **214**. Although, as illustrated, the time slots **214** associated with the sequence **600** range from 3:30 pm to 9:00 pm on a single day (e.g., Jan. 20, 2002), such a chronological range can be expanded or contracted in accordance with preset or user-defined criteria and to the greatest extent practicable.

[0048] In the illustrated embodiment, one card **200_n** in the sequence **600** is active or in “focus.” In an embodiment, the card **200** associated with the time slot **214** corresponding to the current time (i.e., the card **200** representing live programming as the user addresses the sequence **600**) is, as a default condition, in focus. As shown, the active card **200_n** may be displayed within a focus area **302** of a GUI **110** displayed on the TV **102**. Other information associated with the card (e.g., the channel number **204** or text description **212**) may or may not be displayed.

[0049] In response to one or more user actions, the cards **200** in the sequence **600** are successively displayed within the focus area **302**. Where the sequence **600** is circular, the successive display of cards **200** may continue indefinitely until halted by a subsequent action by the user, as described more fully herein.

[0050] The user action to initiate navigation may be pressing and releasing (or pressing and holding down) a button on the remote control **108**. For example, the user may press the “Forward” button **126** repeatedly to effectuate a corresponding card-by-card (i.e., program-by-program) navigation of sequence **600** in a first direction (indicated by arrow **604**). In the illustrated embodiment of FIG. 6, pressing the “Forward” button **126** once will, as indicated by arrow **608**, supplant within the focus area **302** the card **200_n** with card **200_r** representing a later time slot **214_r**. The user may likewise press the “Backward” button **128** repeatedly to effectuate a corresponding card-by-card navigation of sequence **600** in a second direction (indicated by arrow **606**). In the illustrated embodiment of FIG. 6, pressing the “Backward” button **128** once will, as indicated by arrow **610**, supplant within the focus area **302** the card **200_n** with card **200_o** representing an earlier time slot **214_o**.

[0051] In an embodiment, navigation of sequence **600** may be by preset or user-defined time slot increments (e.g., 30 minutes, 60 minutes, etc.), rather than the program-by-program navigation discussed above. In addition, any one visual feature or combination of visual features (e.g., text description **212**, graphical representation **202**, time slot **214**) of cards **200** may change color or otherwise visually convey a different time slot state in response to navigation among cards **200**. For example, the text associated with cards **200** representing earlier time slots may be in red, text of cards **200** representing current time slots may be in green, and text of cards **200** representing later time slots may be in blue. Of course,

audible state indicators may also be used to provide time slot state information in response to navigation among cards **200**.

[0052] In an alternative embodiment, the user may press the “Forward” button **126** to initiate a continual successive display in the first direction within the sequence **600** (indicated by arrow **604**), and press the “Backward” button **128** to initiate a continual successive display in the opposite direction (indicated by arrow **606**). Alternatively, the user may speak a command into a microphone (either within the STB **106** or remote control **108**) to initiate navigation. Of course, the user may initiate navigation in a variety of other ways within the scope of the invention.

[0053] In one embodiment, the sequence **600** of cards **200** is successively displayed at a rate selected by the user in the manner described above in connection with sequence **300**.

[0054] When the user sees displayed a card **200** representing a time slot **214** and/or programming that she desires to select or view, the user may take some additional action to halt the successive display of cards **200**. For example, where navigation was initiated by pressing and holding down the “Forward” button **126**, the user may release the “Forward” button **126** to discontinue navigation. In an alternative embodiment, where the successive display was initiated simply by pressing a button, the user may press the same or a different button to halt the successive display. Of course, the user may discontinue navigation in a variety of other ways within the scope of the invention.

[0055] If the user’s reaction time is fast enough, the card **200** representing the desired channel remains displayed in the focus area **302** once navigation is discontinued. However, the user’s reaction time may not be fast enough and one or more cards **200** may be subsequently displayed. In such a case, the user may manually backtrack to the desired card **200** by repeatedly activating a suitable control on the remote control **108**. For example, briefly pressing the “Forward” or “Backward” buttons **126**, **128** may result in the previous or next card **200**, respectively, being displayed. Alternatively, as described in greater detail below, the ITV system **100** may determine the delay between the user recognizing the desired card **200** and taking the subsequent action, whereupon the ITV system **100** may compensate for that delay by reverting to a previously-displayed card **200**.

[0056] The user may select or activate the programming associated with the displayed card **200** by taking a selection action. For instance, the user may press the “Select” button **124** on the remote control. Alternatively, the selection action may simply be waiting a set amount of time without activating any controls on the remote control **108**.

[0057] The effect of activating the card **200** will vary depending on the time slot associated with the activated card **200**. For instance, if at 7:45 pm on Jan. 20, 2002 card **200_n** (representing, at such time, a live television program) is selected, the GUI **110** may be replaced by a full-size version of the program described by text description **212_n**. Alternatively, if at 7:45 pm on Jan. 20, 2002 card **200_r** (representing, at such time, a television program to be broadcast in a later time slot by the represented network) is selected, the user may, via the GUI **110** or otherwise, be offered the opportunity to record, by a personal video recorder or other recording means, the program described by text description **212_r**. Alternatively, if at 7:45 pm on Jan. 20, 2002 card **200_o** (representing, at such time, a television program broadcast in an earlier time by the represented network) is selected, the user may, via the GUI **110** or otherwise, be offered the opportunity to view

a recorded or otherwise stored version of the program described by text description 212o.

[0058] As shown in FIG. 7, multiple sequences 700a-c of cards 200 may be displayed simultaneously within the GUI 110. For instance, one or more cards 200n, 200o, 200r from a sequence 700a representing both a first television network and the television programs carried by the first television network may be displayed as described in reference to FIG. 6. In addition, one or more cards 200s-u from a sequence 700b representing both a second television network and the television programs carried by the second television network may be displayed in a corresponding region (e.g., above the focus area 302) of the GUI 110. In addition, one or more cards 200v-x from a sequence 700c representing both a third television network and the television programs carried by the third television network may be displayed in a corresponding region (e.g., below the focus area 302) of the GUI 110. Each of the sequences 700a-c and their respective cards 200 may function, be structured and/or interrelate in a manner identical to that of sequence 600 and its cards 200 described above. As shown in FIG. 7, a card 200 (in the illustrated example, card 200n) displayed in the focus area 302 may expand, in terms of spatial dimension and/or displayed information, to show, in addition to the text description 212, its associated channel number 204 and time slot 214 or any of the other card attributes previously discussed. Of course, more or fewer sequences 700 may be simultaneously displayed as is practicable. Additionally, the character of the graphical representations 202 associated with simultaneously-displayed cards 200 need not be homogeneous. For example, the graphical representation 202 of a card 200 displayed in the focus area 302 may depict a network, while the graphical representations 202 of a card or cards 200 displayed outside of the focus area 302 may depict a television program (and vice versa).

[0059] As shown in the embodiment illustrated in FIG. 7A, in response to one or more user actions, the cards 200o, 200n, 200r in the sequence 700a can be successively displayed within the focus area 302 in a manner identical to that of sequence 600 and its cards 200 described above. The cards 200s-u in the sequence 700b and cards 200v-x in the sequence 700c can be simultaneously successively displayed in order to better inform the user of available viewing options.

[0060] For example, at 7:45 pm (as may be indicated by a clock 712 displayed on display screen 104) on Jan. 20, 2002 each of cards 200n, 200t, 200w represent live television programming respectively carried by the represented television networks. Accordingly, at the exemplary 7:45 pm time, card 200n, for example, is displayed in the focus area 302, along with cards 200t, 200w which are displayed outside of the focus area 302, in order to show the user the available television programming in a 7:30-8:00 pm time slot. In an embodiment, the GUI 110 may include an animated time slot indicator 714 that, in the illustrated example, outlines in boldface the time slot associated with the displayed cards, as well as outlining in phantom the preceding and succeeding contiguous time slots. Of course, other formats, such as a simulated analog clock, may be used for indicator 714 in order to provide programming schedule context to the user.

[0061] The user may press, for example, the "Forward" button 126 (as indicated by arrow 708) to simultaneously advance sequences 700a-c ahead 30 minutes, for example, to an 8:00-8:30 pm time slot. Such navigation enables the user to view available future programming represented by, in the example of FIGS. 7 and 7A, cards 200n, 200u, 200x repre-

senting television programming respectively carried by the represented television networks in the 8:00-8:30 pm time slot. The user may likewise press, for example, the "Backward" button 128 (as indicated by arrow 710) to simultaneously advance sequences 700a-c back 30 minutes, for example, to a 7:00-7:30 pm time slot. Such navigation enables the user to view potentially-available previous programming represented by, in the example of FIGS. 7 and 7A, cards 200o, 200s, 200v representing television programming respectively carried by the represented television networks in the 7:00-7:30 pm time slot.

[0062] As shown in the embodiment illustrated in FIG. 7B, in response to one or more user actions, cards 200 of the sequences 700a-c can be successively displayed within the focus area 302. Accordingly, the sequences 700a-c may be regarded as being navigable in a sequence 700d. The cards 200 of the sequences 700a-c in any past, present or future time slot can be navigated in order to allow the user to choose from the available viewing options.

[0063] For example, at 7:45 pm (as may be indicated by a clock 712 displayed on display screen 104) on Jan. 20, 2002 each of cards 200n, 200t, 200w represent live television programming respectively carried by the represented television networks. Accordingly, at the exemplary 7:45 pm time, card 200n is displayed in the focus area 302, along with cards 200t, 200w which are displayed outside of the focus area 302, in order to show the user the available television programming in a 7:30-8:00 pm time slot. As indicated by arrow 720, the user may press, for example, the "Up" button 116 to move card 200w into the focus area 302, thereby moving card 200n into a region above, for example, the focus area 302. Such navigation enables the user to select card 200w. As indicated by arrow 718, the user may likewise press, for example, the "Down" button 118 to move card 200t into the focus area 302, thereby moving card 200n into a region below, for example, the focus area 302. Such navigation enables the user to select card 200t.

[0064] As is similarly the case with sequence 600, if a card 200 representing a live television program is selected from any of sequences 700a-c, the GUI 110 may be replaced by a full-size version of the program described by the corresponding text description 212. Alternatively, if a card 200 representing a television program to be broadcast at a future time is selected from any of sequences 700a-c, the user may, via the GUI 110 or otherwise, be offered the opportunity to record, by a personal video recorder or other recording means, the program described by the corresponding text description 212. Alternatively, if a card 200 representing a television program broadcast at an earlier time is selected from any of sequences 700a-c, the user may, via the GUI 110 or otherwise, be offered the opportunity to view a recorded or otherwise stored version of the program described by the corresponding text description 212.

[0065] Referring to FIG. 8, a plurality of cards 200 may be arranged or grouped together in a package or sequence 800. In the illustrated embodiment, the cards 200y, 200z, 200aa, 200bb, 200cc in the sequence 800 represent a single television program (e.g., "JAG"), as indicated by the text description 212p, and the television network/station, as indicated by the graphical representations 202b, 202p carrying the television program. In an alternative embodiment, the graphical representation 202b, 202p depicting the television network/station represented by cards 200 may be replaced by or supplemented with a graphical representation 202 of the rep-

resented television program. The sequence **800** may be generated, for example, through a search capability associated with ITV system **100** in response to a user-initiated search for a selection of instances in which the particular television program is broadcast. Such a selection of which sequence **800** is comprised may include solely or any combination of previously-, currently-, or to-be-broadcast episodes of the television program.

[0066] In response to one or more user actions, the cards **200** in the sequence **800** are successively displayed within the focus area **302**. Where the sequence **800** is circular, the successive display of cards **200** may continue indefinitely until halted by a subsequent action by the user, as described more fully herein.

[0067] The user action to initiate navigation may be pressing and releasing (or pressing and holding down) a button on the remote control **108**. For example, the user may press the “Forward” button **126** repeatedly to effectuate a corresponding card-by-card (i.e., episode-by-episode) navigation of sequence **800** in a first direction (indicated by arrow **804**). In the illustrated embodiment of FIG. 8, pressing the “Forward” button **126** once will, as indicated by arrow **808**, supplant within the focus area **302** the card **200y** with card **200z** representing a later time slot **214z**, which may represent the next instance of a future broadcast of the television program. The user may likewise press the “Backward” button **128** repeatedly to effectuate a corresponding card-by-card navigation of sequence **800** in a second direction (indicated by arrow **806**). In the illustrated embodiment of FIG. 8, pressing the “Backward” button **128** once will, as indicated by arrow **810**, supplant within the focus area **302** the card **200y** with card **200aa** representing an earlier time slot **214a**, which may represent the most recent instance of a previous broadcast of the television program. Of course, as is the case with the sequences discussed above with reference to FIGS. 7-7B, sequence **800** may be simultaneously displayed with other sequences of cards **200** within GUI **110**.

[0068] As is similarly the case with sequence **600**, if a card **200** representing a live television program is selected from sequence **800**, the GUI **110** may be replaced by a full-size version of the program described by the corresponding text description **212**. Alternatively, if a card **200** representing a television program to be broadcast at a future time is selected from sequence **800**, the user may, via the GUI **110** or otherwise, be offered the opportunity to record, by a personal video recorder or other recording means, the program described by the corresponding text description **212**. Alternatively, if a card **200** representing a television program broadcast at an earlier time is selected from sequence **800**, the user may, via the GUI **110** or otherwise, be offered the opportunity to view a recorded or otherwise stored version of the program described by the corresponding text description **212**.

[0069] As shown in FIG. 9, multiple sequences **300a-b** including different types of cards **200** may be displayed simultaneously. For instance, one or more cards **200** from a sequence **300a** representing television programs, networks and/or time slots may be displayed as described herein. In addition, one or more cards **200** from a sequence **300b** representing interactive channels, applications, or digital media, may also be displayed.

[0070] As illustrated, the second sequence **300b** may be displayed horizontally, perpendicular to the first sequence **300a**, such that the sequences **300a-b** intersect at (and define) the focus area **302**. Any number of sequences may be dis-

played on the GUI **110** simultaneously. Of course, the selection of vertical and horizontal for the sequences **300a-b** is merely exemplary and not required.

[0071] In the depicted embodiment, the “Up” and “Down” buttons **116**, **118** may be used to shift or cycle the vertically-displayed sequence **300a** within the GUI **110** in order to bring one of the corresponding cards **200a-e** into the focus area **302**. Likewise, the “Left” and “Right” buttons **120**, **122** may be used to shift or cycle the horizontally-displayed sequence **300b** to bring one of the corresponding cards **200g-k** into the focus area **302**.

[0072] In one implementation, bringing a card **200** from one sequence **300** into the focus area **302** will determine or change which other sequence **300** is displayed. For example, bringing the card **200b** (TV representation) from the horizontal sequence **300b** into focus may result in the vertical sequence **300a** (television programs) being displayed. Alternatively, bringing the card **200g** (envelope representation) into focus may result in a vertical sequence **300** (not shown) corresponding to e-mail messages or contacts. Likewise, bringing the card **200i** (videophone representation) into focus may result in a vertical sequence **300** of a videoconferencing buddy list, while the card **200j** (VCR representation) may display a vertical sequence **300** of television programs recorded by a PVR. In alternative embodiments, a selection from a vertical sequence **300** may affect which horizontal sequence **300** is displayed.

[0073] As shown in FIG. 10, the intersection of two displayed sequences **300a-b** may generate quadrants **1000** that may be used for various purposes. In one embodiment, the quadrants **1000** are context-sensitive regions that display supplemental information, advertising, or the like, depending on the card **200** in the focus area **302**. In other embodiments, one or more quadrants **1000** may display information targeted to the user based on user profile information within the ITV system **100**.

[0074] In the depicted embodiment, the lower right quadrant **1000a** may contain detailed information about the card **200** being displayed in the focus area **302**. In the case of a card **200** representing a television program, the quadrant **1000a** may display information taken from the channel number **204**, channel name or identifier **206**, starting time **208**, running time **210**, and/or text description **212** associated with the card **200**.

[0075] The upper right quadrant **1000b** may include context-sensitive, context-insensitive, or user-targeted information. For example, in an episode of “3rd Rock from the Sun” featuring Dick Solomon driving a new BMW, a corresponding advertisement may be shown. The advertisement may be displayed in response to receipt of an ATVEF trigger, although other mechanisms may be used within the scope of the invention.

[0076] The upper left quadrant **1000c** may be used for branding purposes. For instance, as shown in FIG. 10, the quadrant **1000c** may show a logo for a cable or satellite provider associated with the ITV system **100**. In certain implementations, the quadrant **1000c** may be context-sensitive, displaying branding corresponding to the particular vertical and/or horizontal sequences **300a-b** or cards **200** being displayed.

[0077] Finally, the lower left quadrant **1000d** may be used to display system notes and instructional text. For example, where the user is navigating a sequence **300a** of cards **200**

corresponding to television programs, instructional text may be provided that prompts the user to select a television program.

[0078] The size of the quadrants **1000** may vary depending, for instance, on the location of the intersection of the displayed sequences **300a-b**. If the intersection is near the center of the GUI **110**, the quadrants may be equal in size; otherwise, the relative sizes of the quadrants **1000** may vary.

[0079] In alternative embodiments, a single vertical or horizontal sequence **300a-b** may result in the creation of hemispheres (not shown) rather than quadrants **1000**. In still other embodiments, multiple vertical or horizontal sequences **300a-b** may result in the creation of any number of context-sensitive regions.

[0080] As illustrated in FIG. **11**, different types of cards **200** may be included within a single sequence **300**. For example, cards **200c-f** may correspond to television programs, while card **200m** represents a purchase opportunity. In the depicted embodiment, card **200m** includes a graphical representation **202m** (advertisement), as well as a link or network address **1122**, such as a uniform resource locator (URL), to a commercial website.

[0081] If the card **200m** remains in the focus area **302** for a sufficiently long period, or if the user presses the "Select" button **124**, the displayed sequence **300** may be replaced by a web browser **1124**, which is automatically directed to the network address **1122** associated with the card **200m**. Thereafter, the user may elect to proceed with the purchase opportunity or return to the displayed sequence **300** of cards **200**.

[0082] Referring to FIG. **12**, there are shown three timing diagrams **902**, **904**, **906** illustrating the successive display of cards **200** according to embodiments of the invention. Each vertical line within the timing diagrams represents a moment in time at which a particular card **200** is displayed. In diagram **902**, after a single user action, cards **200** are successively displayed at moments **906**, **908**, **910**, and so on. When the user takes some additional action to discontinue navigation, the successive display of cards **200** may be halted at moment **912**.

[0083] In certain instances, the ITV system **100** may automatically compensate for the user's delayed response by reverting to a previously displayed card **200** once the user halts the successive display. For example, if a card **200** representing a desired channel is displayed within the GUI **110** at moment **912**, but the user takes the additional action to discontinue navigation at moment **914**, the ITV system **100** may be configured to automatically revert to the card **200** displayed a suitable amount of time **916** before the action was taken. The amount of time may be preset or user-defined, or may be calculated based on historical user reaction times.

[0084] The rate at which the cards **200** are successively displayed may be increased in response to the user taking a suitable action. For example, as shown in timing diagram **904**, the rate at which cards **200** are successively displayed may gradually increase from a minimum rate **918** to a maximum rate **920** (preferably at or below the user's image recognition limit). Alternatively, as shown in timing diagram **906**, the display rate may increase from a minimum rate **922** to an intermediate rate **924** to a maximum rate **926** according to a stepwise function. The user action to increase the display rate may take many forms, such as holding down a button on the remote control **108** for a set amount of time. In such case, the rate may be increased based on how long the button is held down. Alternatively, the user may increase the display rate by

repeatedly pressing a button on the remote control **108**, in which case the rate may be increased each time the button is pressed.

[0085] FIG. **13** is a schematic block diagram of an STB **106** according to an embodiment of the invention. The illustrated components may be logical or physical and may be implemented using any suitable combination of hardware, software, and/or firmware.

[0086] In one configuration, the STB **106** includes a network interface **1002** for communicating with a broadband network, such as a cable television network or a DBS (Direct Broadcast Satellite) network. The network interface **1002** may conform to the DOCSIS (Data Over Cable Service Interface Specification) or DAVIC (Digital Audio-Visual Council) cable modem standards. Additionally, the network interface **1002** may include standard circuitry for receiving MPEG (Moving Picture Experts Group) streams including multiplexed television programs and data from the broadband network. One or more sequences **300**, **600**, **700**, **800** of cards **200** may be received by the interface **1002** from a server accessible via the broadband network or the Internet.

[0087] The STB **106** further includes a memory **1004**, such as a random access memory (RAM) and/or read-only memory (ROM). The memory **1004** may store an operating system (OS) for the STB **106** (e.g., Windows CE® or Linux®), application program code, and various types of data. In one embodiment, the memory **1004** stores one or more sequences **300**, **600**, **700**, **800** of cards **200**. In other embodiments, the sequences **300**, **600**, **700**, **800** may be stored within a mass storage device **1006**, such as a hard disk drive, optical storage device, or the like.

[0088] An input interface **1008** may be provided for receiving commands from an input device, such as a remote control **108**. In one embodiment, the input interface **1008** may include or be associated with the wireless receiver **114** described in connection with FIG. **1**. The input interface **1008** may detect a single user action for initiating navigation, such as the user pressing the "Up" or "Down" buttons **116**, **118** on the remote control **108**.

[0089] The STB **106** may further include a display interface **1010** for generating a GUI **110** on an attached TV **102** or other display device. In addition, the display interface **1010** may be responsible for successively displaying cards **200** from one or more stored sequences **300**, **600**, **700**, **800** in a focus area **302** of the GUI **110** in response to the single user action being detected by the input interface **1008**, as previously described. Likewise, the display interface **1010** may be responsible for halting the successive display in response to detection of a subsequent user action.

[0090] A tuner **1012** may be included for demodulating and demultiplexing selected MPEG streams received by the STB **106** from the broadband network. The tuner **1012** may be used to tune to a particular television program in response to a user selection of a card **200**, e.g., in response to the user pressing the "Select" button **124** or when the user "lingers" on a card **200** in the focus area **302**.

[0091] A CPU **1014** controls the operation of the STB **106**, including the other components described above, which may be in electrical communication with the CPU **1014** via a bus **1016**. The CPU **1014** may be embodied as a microprocessor, a microcontroller, a digital signal processor (DSP) or other device known in the art. For instance, the CPU **1014** may be embodied as an Intel® x86 processor. The CPU **1014** may

perform logical and arithmetic operations based on program code stored within the memory 1004 or the mass storage device 1006.

[0092] Although not shown in FIG. 13, the STB 106 may include other components that allow the STB 106 to communicate with and/or control, via either wireless or other means, multiple televisions, personal computers, and other media storage and presentation devices within a network or location.

[0093] Of course, FIG. 13 illustrates only one possible configuration of an STB 106. Those skilled in the art will recognize that various other architectures and components may be provided within the scope of the invention. In addition, various standard components are not illustrated in order to avoid obscuring aspects of the invention.

[0094] Referring to FIG. 14, there is shown a flowchart of a method 1100 for focused navigation of a plurality of options within a GUI 110. The method 1100 begins by storing 1102 at least one of sequences 300, 600, 700, 800 of cards 200 representing channels or other available options within an ITV system 100.

[0095] In one configuration, the method 1100 waits 1104 for user input. When a single user action is detected 1106, as previously discussed, the cards 200 from the sequence 300, 600, 700, 800 are successively displayed 1108 in a focus area 302 of the GUI 110. This successive display continues until a subsequent user action is detected 1110, at which point the successive display is discontinued and a single card 200 corresponding to a selected option is displayed 1112 within the focus area 302.

[0096] Thereafter, depending on the particular type of card 200, various actions may be taken if the user actively selects the card 200 (e.g., presses the "Select" button 124 on the remote control 108) or waits beyond an established time period to either select the card 200, continue navigation, or take some other action. For example, a card 200 in the focus area 302 may be replaced by a video window 402 showing a live television program after a period of inaction (lingering) by the user.

[0097] All of the above U.S. patents, U.S. patent application publications, U.S. patent applications, foreign patents, foreign patent applications and non-patent publications referred to in this specification and/or listed in the Application Data Sheet, are incorporated herein by reference, in their entirety.

[0098] While specific embodiments and applications of the present invention have been illustrated and described, it is to be understood that the invention is not limited to the precise configuration and components disclosed herein. Various modifications, changes, and variations apparent to those skilled in the art may be made in the arrangement, operation, and details of the methods and systems of the present invention disclosed herein without departing from the spirit and scope of the invention.

What is claimed is:

1. A method for navigating options within a user interface presented on a display device, comprising:
 - displaying a plurality of graphical representations of options in a first sequence along a first axis of the user interface;
 - enabling scrolling of the first sequence of graphical representations through a spatially-fixed focus area of the user interface;

in response to a graphical representation being scrolled into the focus area, enlarging the graphical representation relative to the other graphical representations displayed along the first axis;

displaying a second sequence of graphical representations of options along a second axis of the user interface, the second axis being perpendicular to the first axis; and enabling scrolling of the second sequence of graphical representations along the second axis, wherein no graphical representation of an option from the first sequence is also included in the second sequence.

2. The method of claim 1, further comprising replacing the second sequence along the second axis with a third sequence along the second axis in response to a different graphical representation of an option from the first sequence being scrolled into the focus area.

3. The method of claim 1, wherein the graphical representations of options in the first sequence respectively represent different application programs.

4. The method of claim 1, wherein the graphical representations of options in the first sequence respectively represent different types of media.

5. The method of claim 1, wherein the graphical representations of options in the second sequence respectively represent different television programming sources.

6. The method of claim 1, wherein the graphical representations of options in the second sequence respectively represent different television programs.

7. The method of claim 1, wherein scrolling of the first sequence is initiated by first user action and proceeds until being terminated by a second user action.

8. The method of claim 1, wherein the graphical representations of options from the second sequence respectively represent television programming sources in a particular broadcast time slot, the method further comprising replacing the second sequence with a third sequence in response to a single user command, each graphical representation of an option of the third sequence representing television programming sources in a progressively later broadcast time slot.

9. The method of claim 1, wherein the graphical representations of options of the first sequence represent selectable categories of options and wherein the graphical representations of options of the second sequence represent options from a selected category.

10. The method of claim 1, wherein the first and second sequences intersect to form quadrants within the user interface, the method further comprising displaying, in at least one of the quadrants formed by the intersecting sequences, supplemental information related to the graphical representation within the focus area.

11. A system for navigating a options within a user interface presented on a display device, comprising:

a user input detector configured to detect input of a user; and

a processor, coupled to the user input detector, configured to scroll a first sequence of graphical representations of options along a first axis through a spatially-fixed focus area of the user interface in response to a first user input, wherein the processor is further configured to enlarge the graphical representation in the focus area relative to the other graphical representations in the first sequence, and wherein the processor is further configured to scroll a second sequence of graphical representations of options along a second, perpendicular axis through the

focus area in response to a second user input, the first and second sequences having no graphical representations in common.

12. The system of claim 11, wherein the processor is further configured to replace the second sequence of graphical representations of options along the second axis with a third sequence of graphical representations of options along the second axis in response to a different graphical representation of an option from the first sequence being scrolled by the user into the focus area.

13. The system of claim 11, wherein the graphical representations of options in the first sequence respectively represent different application programs.

14. The system of claim 11, wherein the graphical representations of options in the first sequence respectively represent different types of media.

15. The system of claim 11, wherein the graphical representations of options in the second sequence respectively represent different television programming sources.

16. The system of claim 11, wherein the graphical representations of options in the second sequence respectively represent different television programs.

17. The system of claim 11, wherein the graphical representations of options from the second sequence respectively represent television programming sources in a particular broadcast time slot, and wherein the processor is further configured to replace the second sequence with a third sequence in response to a single user command, each graphical representation of an option of the third sequence representing television programming sources in a progressively later broadcast time slot.

18. The system of claim 11, wherein the graphical representations of options of the first sequence represent selectable categories of options and wherein the graphical representations of options of the second sequence represent options from a selected category.

19. The system of claim 11, wherein the first and second sequences intersect to form quadrants within the user interface, and wherein the processor is further configured to display, in at least one of the quadrants formed by the intersecting sequences, supplemental information related to the graphical representation within the focus area.

20. An apparatus for navigating a plurality of options within a user interface, comprising:

means for displaying a plurality of graphical representations of options in a first sequence along a first axis of the user interface;

means for scrolling of the first sequence of graphical representations through a spatially-fixed focus area of the user interface;

means for enlarging a graphical representation being scrolled into the focus area relative to the other graphical representations displayed along the first axis;

means for displaying a second sequence of graphical representations of options along a second axis of the user interface, the second axis being perpendicular to the first axis; and

means for scrolling of the second sequence of graphical representations along the second axis, wherein no graphical representation of an option from the first sequence is also included in the second sequence.

21. A computer-readable storage medium comprising program code for performing a method for navigating a plurality of options within a user interface, the method comprising:

displaying a plurality of graphical representations of options in a first sequence along a first axis of the user interface;

enabling scrolling of the first sequence of graphical representations through a spatially-fixed focus area of the user interface;

in response to a graphical representation being scrolled into the focus area, enlarging the graphical representation relative to the other graphical representations displayed along the first axis;

displaying a second sequence of graphical representations of options along a second axis of the user interface, the second axis being perpendicular to the first axis; and

enabling scrolling of the second sequence of graphical representations along the second axis, wherein no graphical representation of an option from the first sequence is also included in the second sequence.

* * * * *