



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B05D 5/12, H01B 1/00	A1	(11) International Publication Number: WO 97/33701 (43) International Publication Date: 18 September 1997 (18.09.97)
(21) International Application Number: PCT/US97/04006 (22) International Filing Date: 14 March 1997 (14.03.97) (30) Priority Data: 08/616,249 15 March 1996 (15.03.96) US (71) Applicant: THE TEXWIPE COMPANY, L.L.C. [US/US]; 650 East Crescent Avenue, Upper Saddle River, NJ 07458 (US). (72) Inventors: BHATTACHARJEE, Himansu; 56 Randolph Av- enue, Randolph, NJ 07869 (US). PALEY, Edward; 38 Westerly Road, Saddle River, NJ 07458 (US). (74) Agents: NEFF, Gregor et al.; Curtis, Morris & Safford, P.C., 530 Fifth Avenue, New York, NY 10036 (US).		(81) Designated States: AL, AM, AT, AU, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>With amended claims.</i>
(54) Title: ANTI-STATIC CLEANROOM PRODUCTS AND METHODS OF MAKING SAME		
(57) Abstract <p>Anti-static cleanroom products having a coating of conductive polymeric particulates which decreases the surface resistivity of the products. Preferably, the particulates are pyrrole polymers. The anti-static properties are achieved by depositing conductive polymer particles onto the non-conductive substrate surface. The anti-static products include cleanroom wipers, stationery products (notebooks and writing instruments), garments and swabs (polyurethane foam tipped). The cleanroom stationery products include notebooks comprising polyethylene impregnated with silica. The invention also includes anti-static plastic gloves.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

TITLE OF THE INVENTION

Anti-static Cleanroom Products and Methods of Making Same

5

BACKGROUND OF THE INVENTION**Field of the Invention**

This invention relates generally to the
10 prevention of particulate contamination and static-
discharge in cleanrooms. More specifically, this
invention relates to anti-static products used in
"cleanrooms", semiconductor fabrication plants,
pharmaceutical manufacturing facilities, and other
15 applications and environments where extreme cleanliness
must be maintained, and to methods for making such
products.

Description of the Related Art

Cleanrooms are being used more often in a
20 greater variety of areas. The requirements for
maintaining cleanliness in semiconductor fabrication
cleanrooms, pharmaceutical manufacturing facilities and
similar facilities, for example, are stringent. Products
brought into and used in cleanroom environments must be
25 carefully designed and manufactured to avoid the risk of
contamination. In semiconductor fabrication cleanrooms,
for example, surfaces frequently must be wiped with
exceptionally clean wipers and cleaning solution in order
to prevent contamination. Other examples of cleanroom
30 products include clothing, gloves and stationery products
(i.e., notebooks and writing instruments).

It is well known that particulates can be
brought into the cleanroom environment by workers
themselves and by the materials which they use. In this
35 regard, items which are subject to abrasion or wear are a
cause of special concern since such abrasion and wear can
result in particle formation. Cleanrooms are

characterized by a special emphasis on the prevention of particulate generation and the removal thereof prior to deposition on cleanroom surfaces and products.

The term "applicator" or "wiper", as used in this specification, is intended to mean a cleaning fabric suitable for use in cleaning surfaces in cleanrooms and the like. Such applicators or wipers are distinguished from tissues and similar materials in that they are extremely clean and have a relatively high degree of wet strength and structural integrity. Accordingly, these products do not disintegrate when used to wipe surfaces, even when dampened or saturated with cleaning liquids.

Cleanroom products used in sensitive areas, such as semiconductor fabrication cleanrooms and pharmaceutical manufacturing facilities, are carefully selected for characteristics such as particle emission levels, levels of ionic contaminants, adsorptiveness, resistance to attack or degradation by wear or exposure to cleaning materials, and lack of attack by or degradation by biocides.

The contamination which is to be controlled is often called "microcontamination" because it consists of small physical contaminants, such as particulate matter of a size between that of bacteria and viruses, and chemical contaminants in very low concentrations, typically measured in parts per million or parts per billion.

The contaminants usually are of three types including (1) particles, (2) ions and (3) "extractables", which are impurities leached from the fibers of the wiper, for example.

Loose particles 100 micrometers and smaller in size are an anathema to obtaining high production yields and reliable semiconductor devices. Therefore, wipers, cleaning materials and other products used in cleanrooms should emit as small a number of loose particles as possible. Similarly, ions and "extractables" are to be

minimized since each interferes with the exacting process of semiconductor manufacturing.

Such requirements have been met by the provision of specially fabricated products designed to
5 emit very few loose particles or ions, while maintaining structural integrity when used. For example, cleanroom wipers that are wetted with cleaning solution and used to wipe the surfaces to be cleaned.

Various cleanroom products have been developed
10 for use in cleanroom environments. See, for example, U.S. Patent No. 4,888,229 to Paley et al.; U.S. Patent No. 5,229,181 to Daiber et al.; and U.S. Patent No. 5,271,995 to Paley. The disclosures of those patents hereby are incorporated herein by reference.

15 However, in some cleanroom environments, not only is it necessary to maintain a "clean" environment, it is often also necessary to prevent static discharge. The problem of static electricity has become an ever increasing problem where, for example, sensitive
20 electronic equipment is being manufactured. Basically, static is created when two similar materials are rubbed together and then separated. One object tends to give up electrons whereas the other tends to accumulate them, thereby leaving the former with a positive static charge
25 and the latter with a negative charge. When oppositely charged objects contact each other, a static shock is created which corrects the imbalance.

Control of static electricity can be critical in many industrial or commercial settings where an
30 undesired electrostatic discharge (ESD) or spark can result in serious damage. For example, in explosive environments such as in grain elevators or in flammable environments such as an oil drilling rig or refinery, a spark can be extremely dangerous. In addition, static
35 discharge can damage sensitive integrated circuits. Therefore, such circuits must be safeguarded during their manufacture.

One particularly significant problem is the fact that the average person will not sense a discharge of less than 3500 volts. Since many electronic devices can be damaged by potentials far lower than 3500 volts, 5 such devices can be damaged unknowingly and incorporated into the final product. As a result, the final product will be defective, without anyone knowing it.

Insulating materials can often be a source of static discharge, particularly those having a relatively 10 high value of surface resistance on the order of 10^{16} Ω (Ohms). Such insulated materials should be modified to reduce the risk of static discharge. In the past, this has been accomplished by increasing the electrical conductivity of the products. Such an increase in 15 conductivity allows the product to dissipate the static electrical buildup.

Some prior anti-static cleanroom wipers have been made by incorporating fibers having a higher degree of electrical conductivity. Certain types of carbon and 20 metal fibers are inherently conductive, and therefore the incorporation of such fibers increases the conductivity of the textile material so that the previously static materials can be rendered static dissipative. U.S. Patent No. 5,324,579 to Sassa et al. discloses a non- 25 woven textile material made useful for dissipating static electric charges by incorporating an electrically conductive fiber.

However, the use of such fibers has many disadvantages. For example, the conductive fibers only 30 allow for increasing conductivity in the direction of the fiber. Accordingly, the resultant product would have different conductivities in different areas and in different directions. Furthermore, conductive fibers may be relatively brittle when compared to the majority of 35 fibers used in a wiper product and therefore have a tendency to break when flexed. Such breakage not only results in a reduction in the static dissipative

capability of the material, but also provides a source of contamination to the cleanroom environment.

OBJECTS OF THE INVENTION

It is an object of the present invention to
5 solve or alleviate the foregoing problems.

Accordingly, it is an object of the invention to produce cleanroom products, particularly cleanroom wipers, that can dissipate electrostatic discharge while maintaining suitability for use in cleanroom
10 environments.

In particular, it is an object to provide cleanroom products such as wipers which have relatively uniform anti-static properties, without degradation of the cleanroom quality of the products.

15 It is a further object of the present invention to provide such cleanroom products and manufacturing methods which are relatively simple and inexpensive to make and use.

The foregoing and other objects and advantages
20 of the invention will be set forth in or apparent from the following description and drawings.

SUMMARY OF THE INVENTION

25 In accordance with the invention, cleanroom products are provided with a coating of conductive polymeric particulates. The particulates decrease the surface resistivity of the products to give them anti-static characteristics, without degrading the cleanroom
30 properties of the products.

Preferably, the particulates are pyrrole polymers. The anti-static properties are achieved by depositing conductive polymer particles onto the non-conductive substrate surface. Preferably the coating
35 consists of particles spaced relatively widely from one another, covering less than 75% of the area of the surface to which they adhere.

The anti-static cleanroom products include wipers, stationery products (notebooks and pens), garments, and swabs (i.e., polyurethane foam tipped swabs). The cleanroom stationery products also include
5 notebooks comprising polyethylene impregnated with silica. The garments include anti-static plastic gloves.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 depicts a scanning electron micrograph ("SEM") of untreated nylon fibers.

10 Fig. 2 depicts a SEM of nylon fibers coated with pyrrole polymer particulates.

Fig. 3 depicts a SEM of untreated polyester fibers.

15 Fig. 4 depicts a SEM of polyester fibers coated with pyrrole polymer particulates.

DESCRIPTION OF PREFERRED EMBODIMENTS

The presently disclosed anti-static cleanroom products provide for the dissipation of static electric charge without degrading their cleanroom qualities. This
20 is achieved by applying conductive polymer particulates onto the insulative surface of the product.

Surprisingly, the conductive particulate polymeric coatings, even though in particulate form, do not degrade the cleanroom properties. It has been discovered that
25 such particulates can be formed on the cleanroom product and are not easily removed. Accordingly, such coatings do not provide a significant source of "loose particle" contamination. Additionally, it has been found that the particulate coating, even though not covering the entire
30 product with either a uniform or coherent film, provides for increased dissipative qualities. A continuous and coherent coating of the particulates is not required and is, in fact, avoided using the present invention.

35 Furthermore, it has been found that the coating results in relatively uniform surface resistivities in multiple directions.

The anti-static properties for the wiper are achieved by depositing conductive polymer particles onto the non-conductive fibers that make up the wiper. The polymer particles decrease the resistivity of the wiper
5 from approximately $10^{14} \Omega$ to approximately $10^8 \Omega$ ohms per square cm. Preferably, the resistivity of the final product is from 10^5 to $10^{11} \Omega$. If the resistivity is greater than $10^{12} \Omega$ there will be no charge dissipation. However, if the resistivity is too low (i.e., the wiper
10 is too conductive) harmful sparks can result between a surface and the wiper. Therefore, it is important that the resistivity of the resultant wiper is between about 10^5 to $10^{11} \Omega$.

The wiper product is made, for example, by
15 contacting an untreated wiper with an aqueous solution containing polymerizable monomers, an oxidizing agent and a counter ion. Suitable monomers include aniline and pyrrole. The monomer is preferably pyrrole. Suitable oxidizing agents include ferric chloride and potassium
20 persulfate. Suitable counter ions include 2,6-Napthalenedisulfonic acid, disodium salt and benzenesulfonic acid, sodium salt.

According to one embodiment of the invention, an ESD dissipative wiper is prepared by adding a counter
25 ion and an oxidizing agent in an aqueous solution at room temperature and mixing. Subsequently, a monomer solution is added to the mixture and mixed. After sufficient mixing, uncoated cleanroom wipers are added to the solution and mixed. The wipers are subsequently removed,
30 rinsed and dried to result in anti-static cleanroom wipers.

The time for treatment can range from about 0.5 hour to about 2 hours, preferably about 1 hour to about 1.75 hours. The time of treatment can be varied to an
35 even greater extent, for example, by varying the concentration of reactants in solution, the amount of

wipers added to the solution, the temperature of reaction and the amount of agitation.

The temperature of treatment is preferably room temperature, although it can be varied if necessary. The concentration of the oxidizing agent, counter ion, monomer and uncoated product in the mixing solution can also be varied and adjusted by one skilled in the art without undue experimentation to result is a varying degree of resultant conductivity for the product.

The resultant cleanroom product has irregular and non-uniform polymeric particles deposited onto the surface. The polymeric particles are deposited onto the substrate to form an irregular coating. Preferably, the particulate coating covers less than 75% of the substrate surface, more preferably less than 50%, even more preferably less than 25% and most preferably less than 10%. The embodiments of the invention include applying such coatings of conductive polymer particulates to cleanroom wipers, gloves and garments. Additionally, the invention includes applying such particulates to plastic gloves.

What is particularly surprising in the cleanroom wiper and the other cleanroom applications is that the effect of these particles is sufficient to decrease the resistivity of the product enough to provide the anti-static properties. This is the case even though the particulate coating is non-uniform. Also surprising is the discovery that the particulates adhere strongly to the substrates so they do not detrimentally reduce the "cleanroom" properties of the products by becoming dislodged upon exposure to cleaning solvents and/or during use. The particles are not dislodged in any significant amount, even by washing the wiper.

Preferably, the particle counts of the resultant anti-static cleanroom product is less than 30 million per square meter, more preferably less than 20 million, even more preferably less than 15 million and

most preferably less than 10 million. Preferably, the non-volatile residue in deionized water is less than 0.50 g/meter², more preferably less than 0.25 g/meter², even more preferably less than 0.15 g/meter² and most preferably less than 0.10 g/meter². Preferably the ion concentration is less than 20 ppm, more preferably less than 10 ppm, even more preferably less than 5 ppm, and most preferably less than 1 ppm.

Some of the wiper fabrics which have been successfully used in such cleanroom applications and may be rendered anti-static include knitted, woven and non-woven fabrics such as the following:

1. 100% polyester or nylon, preferably knitted from continuous filament yarn. Typical products are sold under the trademarks "AlphaWipe"; "AlphaSorb"; and "Alpha10"; or "MiracleWipe" by the Texwipe Company, Upper Saddle River, New Jersey. Woven polyester or nylon fabrics also can be used.

Some of such fabrics are sealed along the edges, in the manner described in U.S. Patent No. 4,888,229.

2. 100% spun bond polypropylene. The fibers of these fabrics are arranged randomly and are bound together by heat or chemical action. A typical product using this construction is sold under the trademark "PolySat" by the Texwipe Company.

3. 55% cellulose and 45% polyester fiber or 100% polyester bound together by hydroentanglement. A typical product is the Texwipe "TechniCloth" product.

4. 100% polyurethane foam.

5. Other fabrics made of rayon, acrylic, abaca, (e.g., "M-Wipe" wipers sold by Texwipe), hemp, cotton, etc.

EXAMPLES

The following examples are illustrative of some of the products and methods of making the same falling within the scope of the present invention. They are, of

course, not to be considered in any way limitative of the invention. Numerous changes and modification can be made with respect to the invention including the selection of the fiber materials, solvents, monomers, oxidizing
5 agents, doping agents, ranges of proportions, time and temperature during operation and the like.

Example 1

300 mL of deionized water was placed in a 1.5 L beaker. The beaker placed on the platform of an orbital
10 shaker running at a speed of 150 rpm. 2.0 g of benzenesulfonic acid, sodium salt and 2.8 g of ferric chloride were slowly added into the beaker after both ingredients were predissolved separately in 50 mL water. Immediately after the additions, 0.5 g of neat pyrrole
15 (non-diluted) was added dropwise into the beaker. While the shaker was still running, 12.2 g of polyester wiper material was added to the beaker. The total weight represented two 9" x 9" sealed-edge double-knit wipers constructed from 100 percent continuous filament textured
20 polyester.

The reaction was run for two hours at room temperature. Initially the color of the white wipers changed to light yellow and then gradually changed to grayish black. At this stage, the wipers were taken out
25 from the beaker and placed in a separate clean beaker. The wipers were then rinsed several times with deionized water containing a surfactant (Triton-X®) and left to dry overnight in a laminar flow cleanroom workstation.

The resultant dried products were tested for
30 resistivity. The surface resistivity of the coated dry wipers was reduced from an original 10^{+14} Ω to 10^{+5} Ω in all directions when measured by a surface resistivity meter obtained from Static Control Services. The tremendous reduction in resistivity suggested that the
35 wipers acquired excellent electrostatic discharge (ESD) dissipative properties.

Example 2

To determine the contamination characteristics of the electrostatic discharge (ESD) dissipative wipers, additional wipers were produced using procedures similar to Example 1 with the following changes:

The steps in Example 1 were repeated except that the reaction was conducted in a clean stainless steel tray (size 11 3/4" x 9 1/2" x 3 3/4"). The contamination characteristics such as particles, non-volatile residues, and ions, of the original wipers were determined by usual laboratory test procedures prior to coating. After the coating treatment, the same parameters were evaluated in order to determine the extent of any increase in contamination that may have occurred as a result of the process.

Accordingly, 800 mL of deionized water was placed in the steel tray. The tray was placed on the platform of the orbital shaker and the shaker was allowed to run at 150 rpm. Four grams of benzenesulfonic acid, sodium salt (predissolved in 100 mL water), five grams of ferric chloride (predissolved in 100 mL water), and, lastly, 1 mL of neat pyrrole were consecutively added into the tray containing the water. The pyrrole was added dropwise. Immediately after these additions, six pieces of 9" x 9" polyester wipers and two pieces of 4" x 4" nylon wipers (total weight 37 g), were gently draped on the surface of the solution. The shaker was run for 30 minutes, at which time both of the nylon wipers turned grayish black whereas the polyester wipers turned light gray.

The nylon wipers were taken out and placed in a beaker and rinsed several times with deionized water and surfactant solution (Triton-X®). Meanwhile, the polyester wipers were allowed to run for additional time for a total of 2 hours, at which point, they turned grayish black. The polyester wipers were rinsed in the same manner as the nylon wipers. Both sets of wipers

were dried overnight at room temperature by hanging them in a cleanroom workstation. The resistivities of the dry wipers were measured using the same procedure set forth in Example 1. Both types of wipers had excellent ESD
5 dissipative properties. The coated nylon wipers had a resistivity of $10^{+6} \Omega$ and the polyester wipers had resistivities from $10^{+8} \Omega$ to $10^{+9} \Omega$. Before the application of the coatings all of the wipers had resistivities ranging from $10^{+13} \Omega$ to $10^{+14} \Omega$
10 (insulative).

Both wiper materials were tested for the particle release counts by using a HIAC/ROYCO Liquid Particle Counter and by using the RP-4 test procedure as recommended by the Institute of Environmental Sciences.
15 The particle counts of the treated wipers were under 10 million per square meter and, hence, are suitable for cleanroom wiping applications. Non-Volatile Residue (NVR) was also determined in deionized water for both types of wipers and the numbers recorded were found to be
20 within the range for cleanroom applications (0.10 to 0.15 g/meter²). Ions such as sodium and chloride were also determined by Atomic Absorption (AA) Spectroscopy and by Ion Specific Electrode (ISE), respectively. The sodium concentration was in the range of 1 ppm and the
25 concentration of chloride was 26.5 ppm (high). The coated wipers were also tested by being placed in an aqueous solution or in isopropyl alcohol solution for several days to determine the strength of the particulate adhesion. It was found that the particulates adhered to
30 the substrate even after several days of exposure.

Example 2 provided three important findings. First, nylon material coats more rapidly than polyester in this process (in terms of time needed for the application of the coating). Second, ferric chloride
35 should be avoided as the oxidizing agent if chloride concentration is a concern since it causes the higher chloride contamination in the product. Third, the

resultant particulate coating adheres strongly to the fibers.

Example 3

The procedure of Example 2 was repeated except
5 the contents of the steel tray as shown in Example 2 were
changed as follows:

- a. 900 mL deionized water
- b. 0.5 g of 2,6-Napthalenedisulfonic acid,
10 disodium salt as the doping agent
predissolved in 50 mL water
- c. 0.5 g of Potassium persulfate as the
oxidizing
15 agent predissolved in 50 mL water
- d. 1 mL of neat pyrrole added dropwise
- e. and 4 pieces of 9" x 9" nylon wipers.

20 The reaction was run at room temperature. The
entire content of the tray was allowed to shake on an
orbital shaker for 30 minutes. The resultant products
were grayish black wipers. The wipers were taken out and
rinsed several times with deionized water containing
25 surfactants and allowed to dry. The dried wipers were
tested and found to be as clean as those prepared in
Example 2, including a substantial reduction in chloride
content. The resistivity was tested and determined to be
in the range of $10^{+6} \Omega$. The chloride content in these
30 wipers was low and quantified by Capillary Ion Analysis
(CIA) technique to be lower than 1 ppm. Accordingly,
ferric chloride was replaced with potassium persulfate as
the oxidizing agent for all the subsequent runs.

Example 4

35 Samples of the products made in Example 3 were
inspected in the Scanning Electron Microscope (SEM) to
evaluate the degree of enhancement of particulate burden

before and after coatings. The fibers in the uncoated nylon wipers appeared very clean (see Figure 1). However, the coated nylon fibers showed extremely random irregular polymer particulates distributed over the surface of each fiber and in between fibers (see Figures 2). It was remarkably surprising that a uniform dissipative property was obtained throughout the entire length of each wiper considering the fact that the coatings are actually random and non-continuous. A similar non-uniform distribution of particles was also seen in the case of the polyester fibers (Figure 4). The uncoated polyester fibers also appeared very clean (Figure 3). Interestingly, the overall macroscopic appearance of the coated surface was very uniform. Accordingly, aesthetics were nicely maintained in the process in spite of an extremely random microscopic distribution of the coating particulates.

Another surprising observation was the fact that although the particulate distribution on the fibers was very non-uniform, the overall coatings were tested and determined to be quite substantive (i.e., adhered strongly to the surface of the fibers). The substantive nature of the coating is a primary factor in these products being suitable for use in cleanroom applications. No particle shedding was observed during actual wiping applications.

Example 5

In this example, thiophen was used for the coating. 950 mL of deionized water was added to a clean steel tray. In two separate beakers, 0.75 g of 2,6-Naphthalenedisulfonic acid, disodium salt and 0.60 g of potassium persulfate were each dissolved separately in 5 mL deionized water. Both of these ingredients were subsequently slowly added to the water. While the entire solution was being stirred in an orbital shaker, 30 drops of monomeric thiophen was added slowly. Four 9" x 9" pieces of nylon wipers were placed in the solution and

the entire contents stirred for more than 4 hours at room temperature. Even after such an extended period of operation, the color of the wipers did not change at all. The wipers were taken out, washed thoroughly and tested
5 for ESD dissipative properties. No change in ESD dissipative property was noticed in the treated fabrics. The resistivity reading was in the range of $10^{+14} \Omega$. The result appears to indicate that thiophen is an
10 ineffective monomer for this particular process under these operating conditions.

Example 6

ESD dissipative nylon wipers were prepared by adding the following ingredients together and running the reaction for 25 minutes at room temperature.

- 15 a. 600 mL deionized water in a clean steel tray
- b. 1 g aniline hydrochloride
- c. 2 mL concentrated hydrochloric acid
- d. 2.5 g 2,6-Naphthalenedisulfonic acid,
20 disodium salt, predissolved in 5 ml water
- e. 1.5 g potassium persulfate predissolved in 5 ml water; and
- 25 f. 4 pieces of 9" x 9" nylon wipers

After 25 minutes of orbital shaking, the color of the wipers changed to dark green. The wipers were removed from the tray and rinsed well with deionized water containing drops of a surfactant (Triton-X®).

30 The resistivity of the coated wipers was in the range of $10^{+8} \Omega$ to $10^{+9} \Omega$. Accordingly, aniline monomers are suitable for use in the process.

Example 7

A method for producing ESD dissipative wipers
35 on a larger scale was developed using the experimentation as exemplified in Examples 1 through 6. Experimental runs were carried out using the following procedures:

First, a paddle tank (capacity of 140 gallons) was cleaned with sodium hydroxide solution. The tank was rinsed thoroughly with water.

Using a computer automation program, the following steps were conducted.

The tank was first filled with 140 gallons of water, the temperature being maintained at 70° F. 270 g of 2,6-Naphthalenedisulfonic acid, disodium salt was first predissolved in one gallon of water taken out from the tank and subsequently added back into the tank. In another vessel, 270 g of potassium persulfate was predissolved in one gallon of water (also taken out from the tank) and subsequently poured back into the paddle tank. Both of the chemicals were allowed to mix well for 2 minutes. 550 mL of neat pyrrole solution was then added directly to the tank and mixing continued for another 2 minutes.

Right after the completion of the addition and mixing of all the chemicals, 30 pounds total of nylon and polyester materials in the form of precut 9" x 9" wipers were added to the tank. The mixing was then allowed to run at room temperature for 2 hours with the direction of the mixing in the tank being changed every 2 minutes. The directional change allowed for thorough mixing of the solution and the fabrics.

At the end of the treatment, all of the fabrics appeared dark grayish black. The liquid was allowed to run out and the fabrics were rinsed three times with a fresh supply of water. After rinsing, the wipers were removed using a basket and the excess water was extracted out by use of a centrifuge. The wipers were then dried in a dryer at 100°F.

The surface resistivity of the coated nylon wipers changed from $10^{+14} \Omega$ to $10^{+5} \Omega$, whereas resistivity obtained on the surface of the coated polyester wipers was in the range of $10^{+8} \Omega$ to $10^{+10} \Omega$. From an aesthetic point of view, the surfaces of all the wipers appeared to

be uniformly black. This example demonstrates the commercial production of ESD safe wipers by using the topical polymerization process.

Example 8

5 To determine the optimum time necessary for the production of ESD dissipative wipers, the above Example 7 was repeated using the same chemicals, water and materials in the same proportions. However, wipers, both nylon and polyester, were removed at different intervals
10 of time and examined to determine the extent of reduction in surface resistivities. In each case, two wipers, one polyester and one nylon, were taken out, washed in water and dried. In the case of the nylon wipers, the following results were obtained:

15	<u>Time of Treatment</u>	<u>Surface Resistivity Ω</u>	<u>Remark</u>
	1 Hour	10^{+14}	Insulative
	1 Hour 15 Minutes	10^{+14}	Insulative
	1 Hour 25 Minutes	10^{+11}	ESD Dissipative
	1 Hour 35 Minutes	10^{+8}	ESD Dissipative

20

The polyester wipers were found to be in the range of $10^{+9} \Omega$ to $10^{+10} \Omega$ after one hour 35 minutes of treatment time. Samples of polyester wipers taken out 10 minutes earlier, were found to be in the range of $10^{+12} \Omega$,
25 hence still insulative. This confirms the earlier finding that polyester wipers take longer to coat than nylon wipers.

This example demonstrates that under a set of operating conditions, the time of treatment can be varied
30 in order to achieve the desired dissipative range. The example also shows it is possible to provide products which are either very close to ESD dissipative (i.e., resistivities $< 10^{+11} \Omega$) or very close to being totally conductive (i.e., having resistivities $< 10^{+4} \Omega$).

Cleanroom garments can be made using fabrics similar to those used for making the cleanroom wipers. It is believed that the invention is also useful in creating anti-static plastic gloves, cleanroom stationery
5 products, cleanroom swabs and other cleanroom products.

The above description of the invention is intended to be illustrative and not limiting. Various changes or modifications in the embodiments described may occur to those skilled in the art. These can be made
10 without departing from the spirit or scope of the invention.

CLAIMS:

1. An anti-static cleanroom product comprising a cleanroom substrate material having a conductive particulate coating on a surface of the substrate.
5
2. The anti-static cleanroom product as recited in claim 1, wherein said conductive polymeric particulate coating comprises conductive polymeric particulates.
- 10 3. The anti-static cleanroom product as recited in claim 2, wherein said conductive polymeric particulates have an average size ranging from 0.01 microns to 10 microns.
- 15 4. The anti-static cleanroom product as recited in claim 2, wherein said conductive polymeric particulate coating adheres to said surface when said surface is flexed.
- 20 5. The anti-static cleanroom product as recited in claim 2, wherein said conductive polymeric particulate coating covers less than 50% of said surface.
6. An anti-static cleanroom product as recited in claim 2, wherein said conductive polymeric particulate coating comprises pyrrole or aniline.
- 25 7. The anti-static cleanroom product as recited in claim 1, wherein said cleanroom substrate material comprises cleanroom polymeric fibers.
8. The anti-static cleanroom product as recited in claim 7, wherein said fibers form a wiper product.
- 30 9. The anti-static cleanroom product as recited in claim 8, wherein said wiper product is knitted.
10. The anti-static cleanroom product as recited in claim 8, wherein said wiper product is woven.
- 35 11. The anti-static cleanroom product as recited in claim 8, wherein said fibers are arranged randomly to form said wiper.

12. The anti-static cleanroom product as recited in claim 7, wherein said fibers form a garment.

13. The anti-static cleanroom product as recited in claim 1, wherein said anti-static cleanroom
5 product has a surface resistivity between about 10^5 to 10^{11} Ω .

14. The anti-static cleanroom product as recited in claim 7, wherein said fibers comprise nylon or polyester.

10 15. The anti-static cleanroom product as recited in claim 1, wherein said cleanroom substrate material is a stationery product.

16. The anti-static cleanroom product as recited in claim 15, wherein said stationery product is a
15 writing utensil.

17. The anti-static cleanroom product as recited in claim 15, wherein said stationery product is a notebook.

18. The anti-static cleanroom product as
20 recited in claim 15, wherein said notebook comprises polyethylene impregnated with silica.

19. The anti-static cleanroom product as recited in claim 1, wherein said cleanroom substrate material is a plastic glove.

25 20. The anti-static cleanroom product as recited in claim 1, wherein said cleanroom product substrate material is a swab.

21. The anti-static cleanroom product as recited in claim 20, wherein said swab comprises a
30 polyurethane foam tip.

22. The anti-static cleanroom product as recited in claim 1, wherein the product has a particle count less than 30 million per square meter.

23. The anti-static product as recited in
35 claim 1, wherein the product has a non-volatile residue count less than 0.5 g/m^2 .

24. The anti-static product as recited in claim 1, wherein the product has an ion concentration less than 20 parts per million.

25. A method of making an anti-static
5 cleanroom product comprising the steps of:

(a) contacting a cleanroom product
substrate material with a solution
containing:

10 (i) a monomer capable of forming a

conductive polymer,

(ii) conductive polymer particles or

15 (iii) mixtures thereof;

thereby coating said substrate;

and

(b) removing said substrate from said
solution to result in a coated anti-
static cleanroom product.

20 26. A method as recited in claim 25, wherein
said contacting is a batch process.

27. A method as recited in claim 25, wherein
said contacting is a continuous process.

25 28. The method as recited in claim 25, wherein
said contacting is for a period of time ranging from
about 0.5 to about 2 hours.

29. The method as recited in claim 25, wherein
said solution further comprises an oxidizing agent.

30 30. The method as recited in claim 25, wherein
said solution further comprises a counter ion.

31. The method as recited in claim 25, wherein
said substrate material comprises a polymer selected from
the group consisting of polyester materials and nylon
materials.

35 32. The method is recited in claim 25, wherein
said solution is aqueous.

AMENDED CLAIMS

[received by the International Bureau on 25 August 1997 (25.08.97);
original claims 1-32 replaced by amended
claims 1-20 (3 pages)]

1. An anti-static cleanroom product comprising a cleanroom substrate material having a conductive particulate coating on a surface of the substrate.
2. The anti-static cleanroom product as recited in claim 1, wherein said conductive polymeric particulate coating comprises conductive polymeric particulates.
3. The anti-static cleanroom product as recited in claim 2, wherein said conductive polymeric particulates have an average size ranging from 0.01 microns to 10 microns.
4. The anti-static cleanroom product as recited in claim 2, wherein said conductive polymeric particulate coating covers less than 50% of said surface.
5. The anti-static cleanroom product as recited in claim 2, wherein said conductive polymeric particulate coating comprises pyrrole or aniline.
6. The anti-static cleanroom product as recited in claim 1, wherein said cleanroom substrate material comprises cleanroom polymeric fibers.
7. The anti-static cleanroom product as recited in claim 6, wherein said fibers form a wiper product.
8. The anti-static cleanroom product as recited in claim 6, wherein said fibers form a garment.
9. The anti-static cleanroom product as recited in claim 1, wherein said anti-static cleanroom product has a surface resistivity between about 10^5 to 10^{11} Ω .
10. The anti-static cleanroom product as recited in claim 6, wherein said fibers comprise nylon or polyester.
11. The anti-static cleanroom product as recited in claim 1, wherein said cleanroom substrate material is a stationery product.

12. The anti-static cleanroom product as recited in claim 11, wherein said stationery product is a writing utensil.
13. The anti-static cleanroom product as
5 recited in claim 11, wherein said stationery product is a notebook.
14. The anti-static cleanroom product as recited in claim 1, wherein said cleanroom substrate material is a plastic glove.
- 10 15. The anti-static cleanroom product as recited in claim 1, wherein said cleanroom substrate material is a swab.
16. The anti-static cleanroom product as recited in claim 1, wherein the product has a particle
15 count less than 30 million per square meter.
17. The anti-static product as recited in claim 1, wherein the product has a non-volatile residue count less than 0.5 g/m².
18. The anti-static product as recited in
20 claim 1, wherein the product has an ion concentration less than 20 parts per million.
19. A method of making an anti-static cleanroom product comprising the steps of:
- 25 (a) contacting a cleanroom product substrate material with a solution containing:
- (i) a monomer capable of forming a conductive polymer,
- (ii) conductive polymer
30 particles or
- (iii) mixtures thereof;
- thereby coating said substrate; and
- (b) removing said substrate from said solution to result in a coated anti-static cleanroom
35 product.
20. The method as recited in claim 19, wherein said substrate material comprises a polymer selected from

the group consisting of polyester materials and nylon materials.

1/2

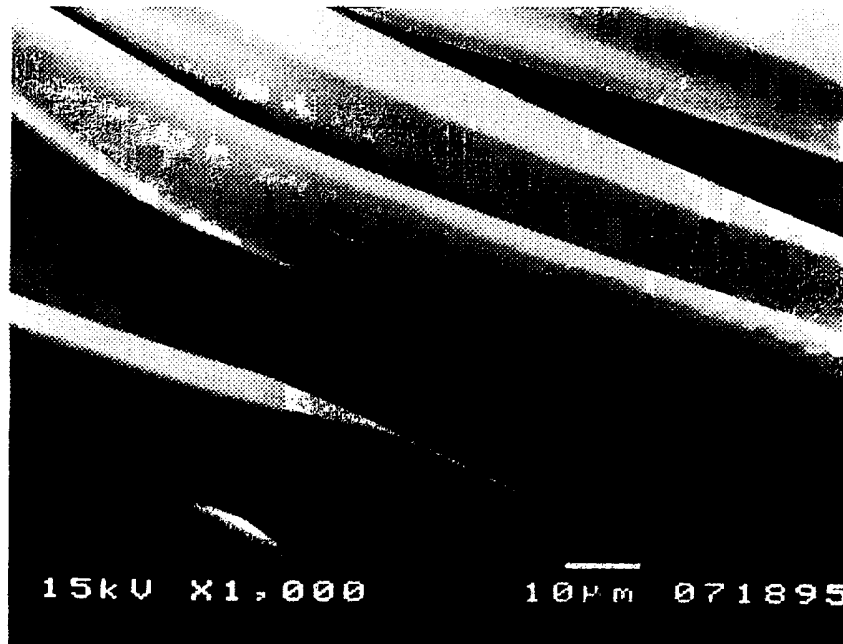


FIG. 1

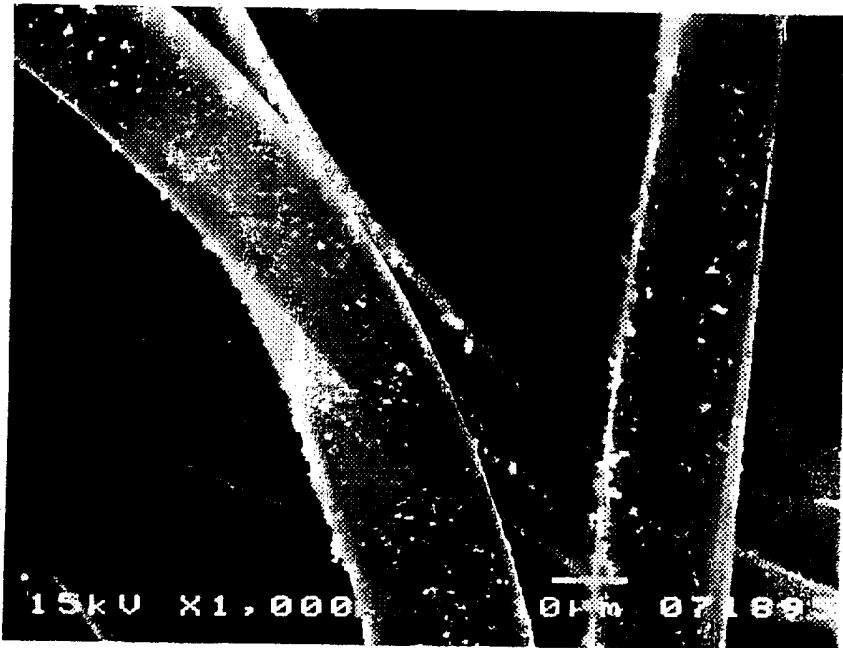


FIG. 2

SUBSTITUTE SHEET (RULE 26)

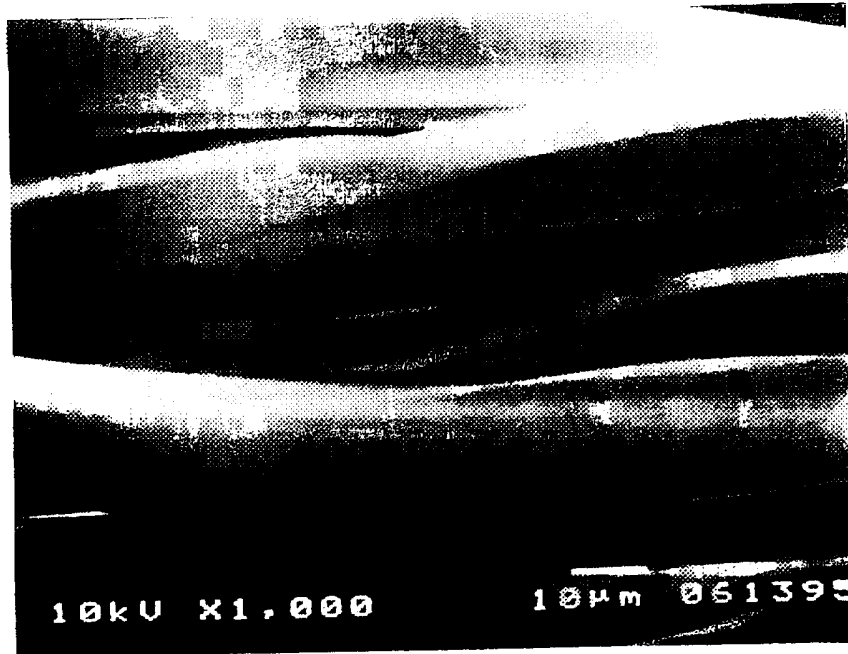


FIG. 3




FIG. 4

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/04006

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) : B05D 5/12; H01B 1/00 US CL : 428/357; 442/110; 427/212, 256; 134/6 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 428/357; 442/110; 427/212, 256; 134/6 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched none Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) none		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 5,407,699 A (MYERS) 18 April 1995, see the entire document.	1-6 ----- 25-32
X --- Y	US 5,494,609 A (KULKARNI ET AL) 27 February 1996, see the entire document.	1-3, 5, 6 ----- 4, 7-11, 13, 14, 20, 22-28, and 30-32
Y	US 4,888,229 A (PALEY ET AL) 19 December 1989, see the entire document.	4, 7-11, 13, 14, 20, 22-28, and 30-32
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* *A* *E* *I* *O* *P*	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance earlier document published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed	*T* *X* *Y* *G* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art document member of the same patent family
Date of the actual completion of the international search 07 MAY 1997	Date of mailing of the international search report 24 JUN 1997	
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer  KATHLEEN L. CHOI Telephone No. (703) 308-2432	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/04006

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,460,655 A (PISACANE ET AL) 24 October 1995, see the entire document.	4, 7-11, 13, 14, 20, 22-28, and 30-32