




US 20050289370A1


(19) **United States**(12) **Patent Application Publication**
Frank(10) **Pub. No.: US 2005/0289370 A1**(43) **Pub. Date: Dec. 29, 2005**(54) **BUS CONTROL MODULE FOR IMPROVING
LEGACY SUPPORT**continuation of application No. 09/551,299, filed on
Apr. 18, 2000, now abandoned.(75) Inventor: **Andrew Frank**, Woodland Hills, CA
(US)**Publication Classification**(51) **Int. Cl.⁷** **G06F 1/26**(52) **U.S. Cl.** **713/300**

Correspondence Address:

**SCHWEGMAN, LUNDBERG, WOESSNER &
KLUTH****1600 TCF TOWER****121 SOUTH EIGHT STREET****MINNEAPOLIS, MN 55402 (US)**(57) **ABSTRACT**

Systems, devices and methods are provided for expanding an interface to a computer. According to one aspect, a device is provided, including a backplane and at least one expansion card. The backplane includes at least one expansion slot and an upstream connector for connecting with the computer. The expansion card is adapted for coupling with the expansion slot. The expansion card includes at least one port to provide an interface with the computer. According to one aspect, an apparatus is provided, including a control module, a hub coupled to the control module and adapted for providing USB/USB+ outputs, and an external functions unit coupled to the hub and adapted for providing outputs.

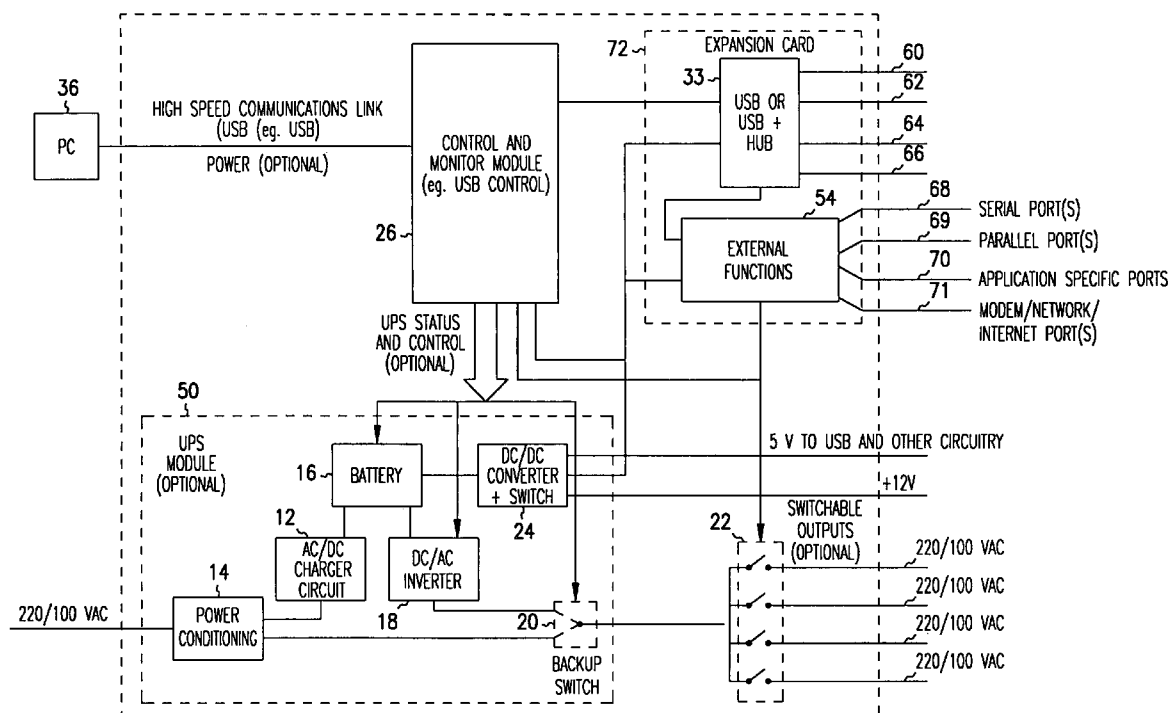(73) Assignee: **Digi International Inc.**(21) Appl. No.: **11/146,935**(22) Filed: **Jun. 7, 2005****Related U.S. Application Data**(63) Continuation of application No. 09/837,626, filed on
Apr. 18, 2001, now Pat. No. 6,904,530, which is a

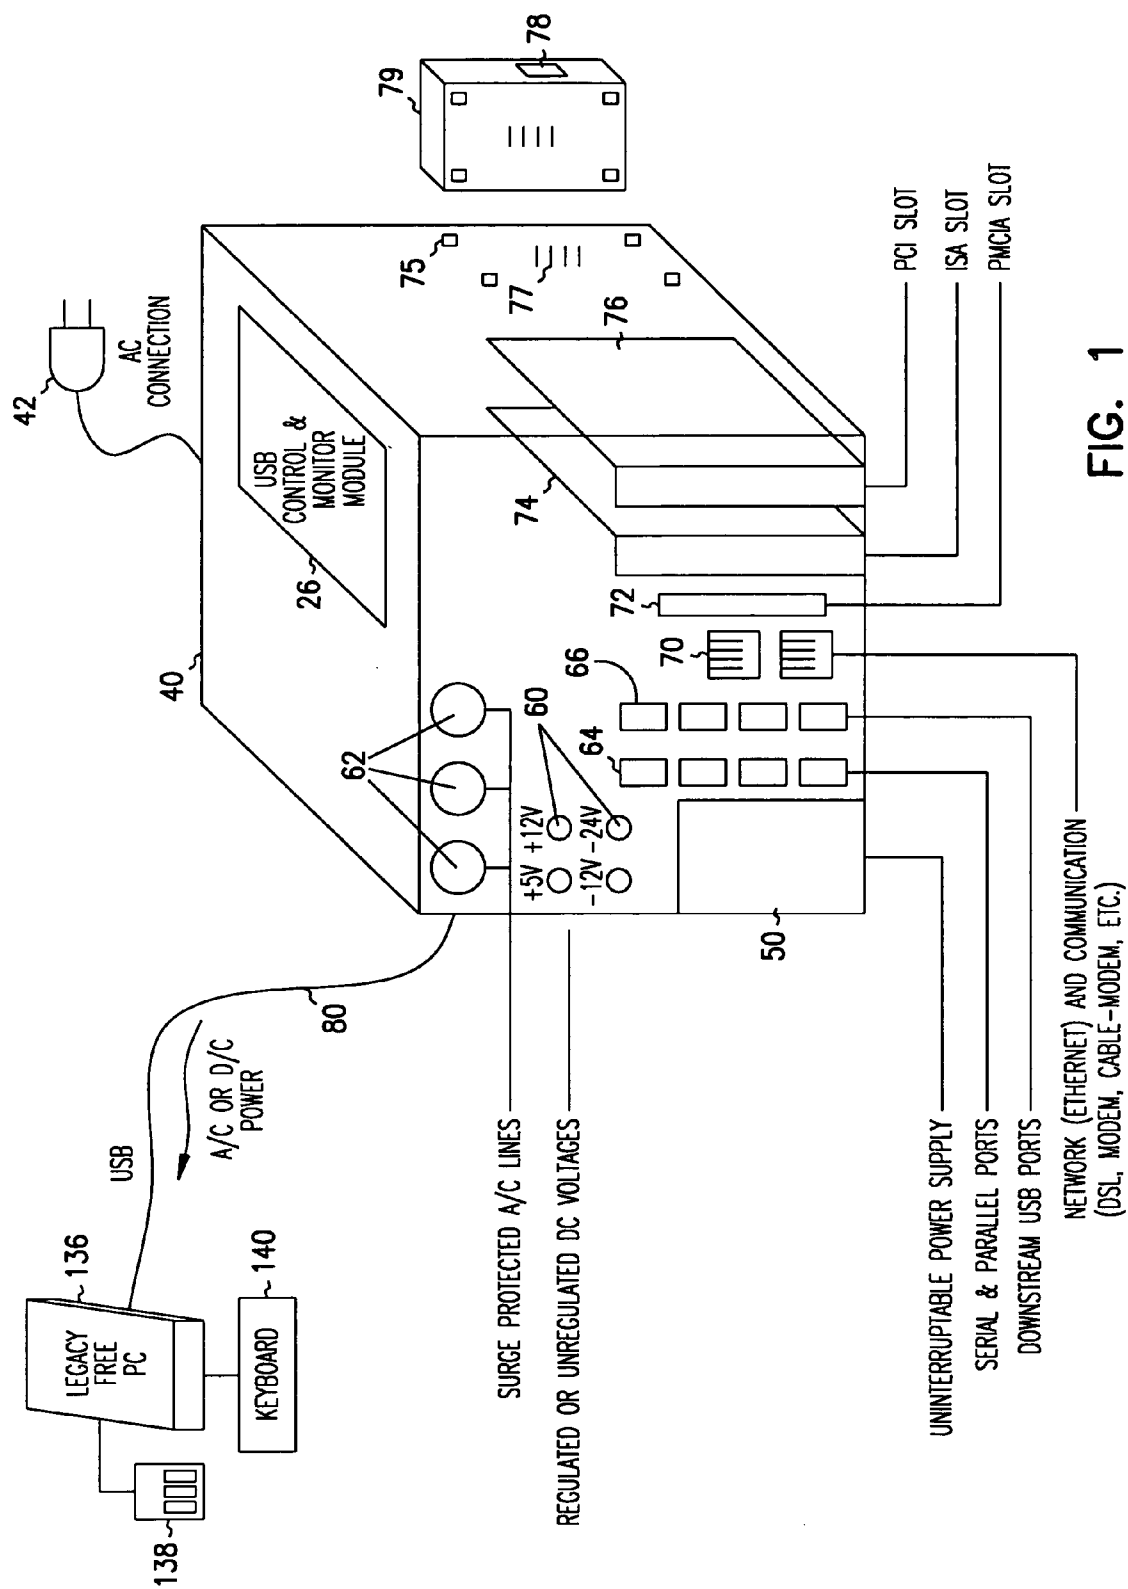

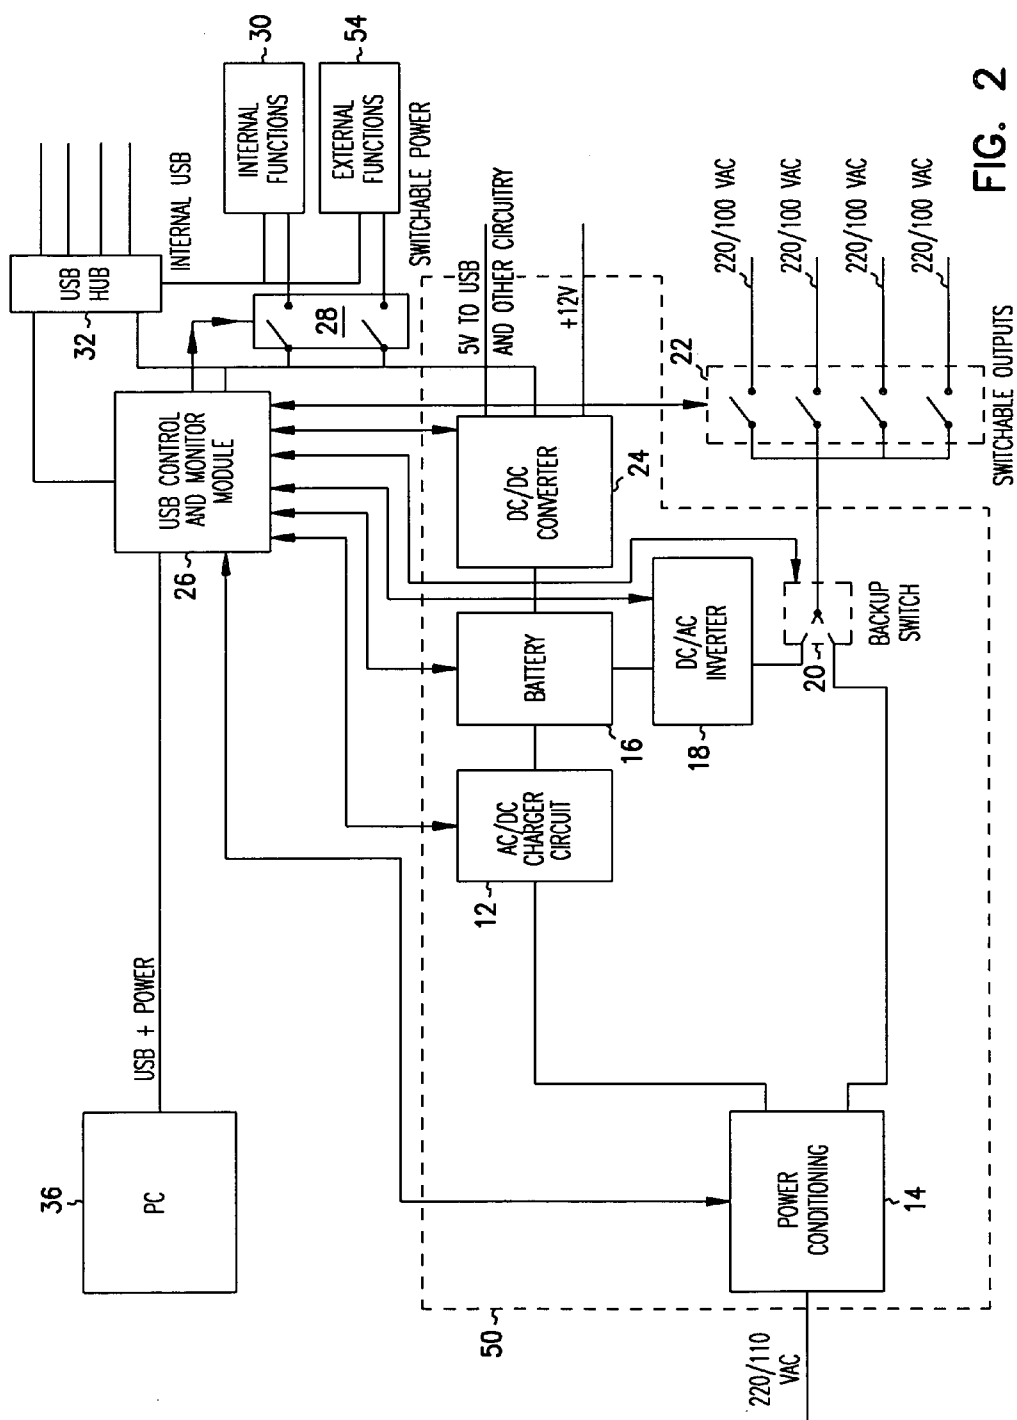


FIG. 2

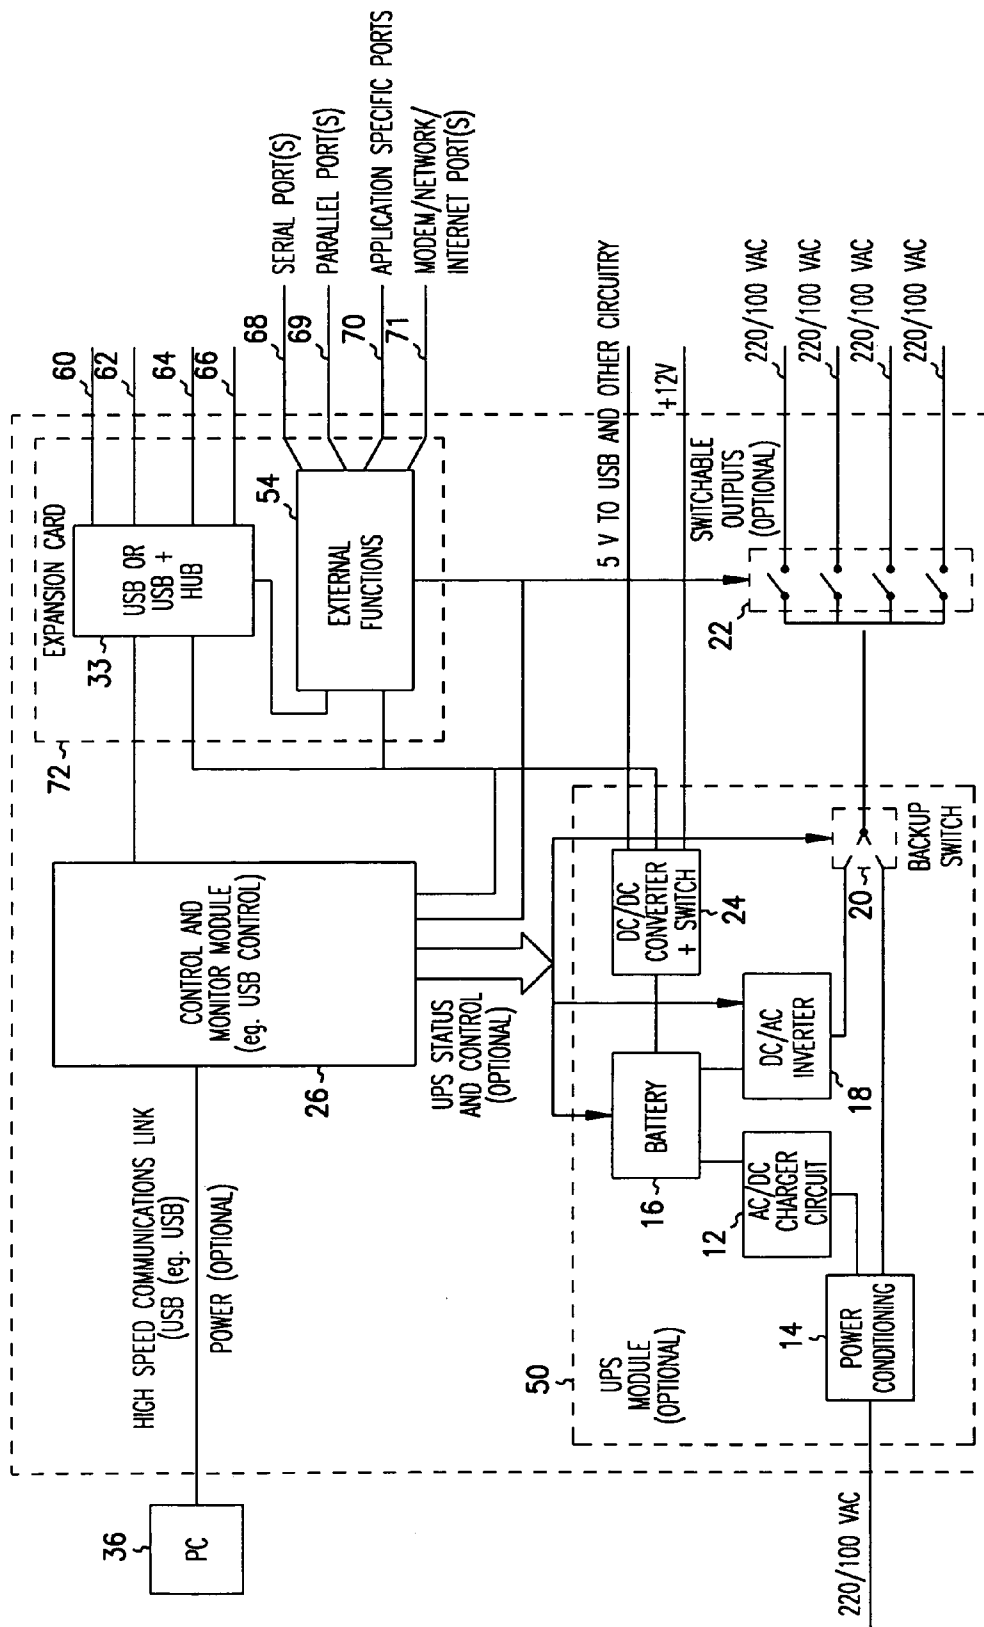


FIG. 3

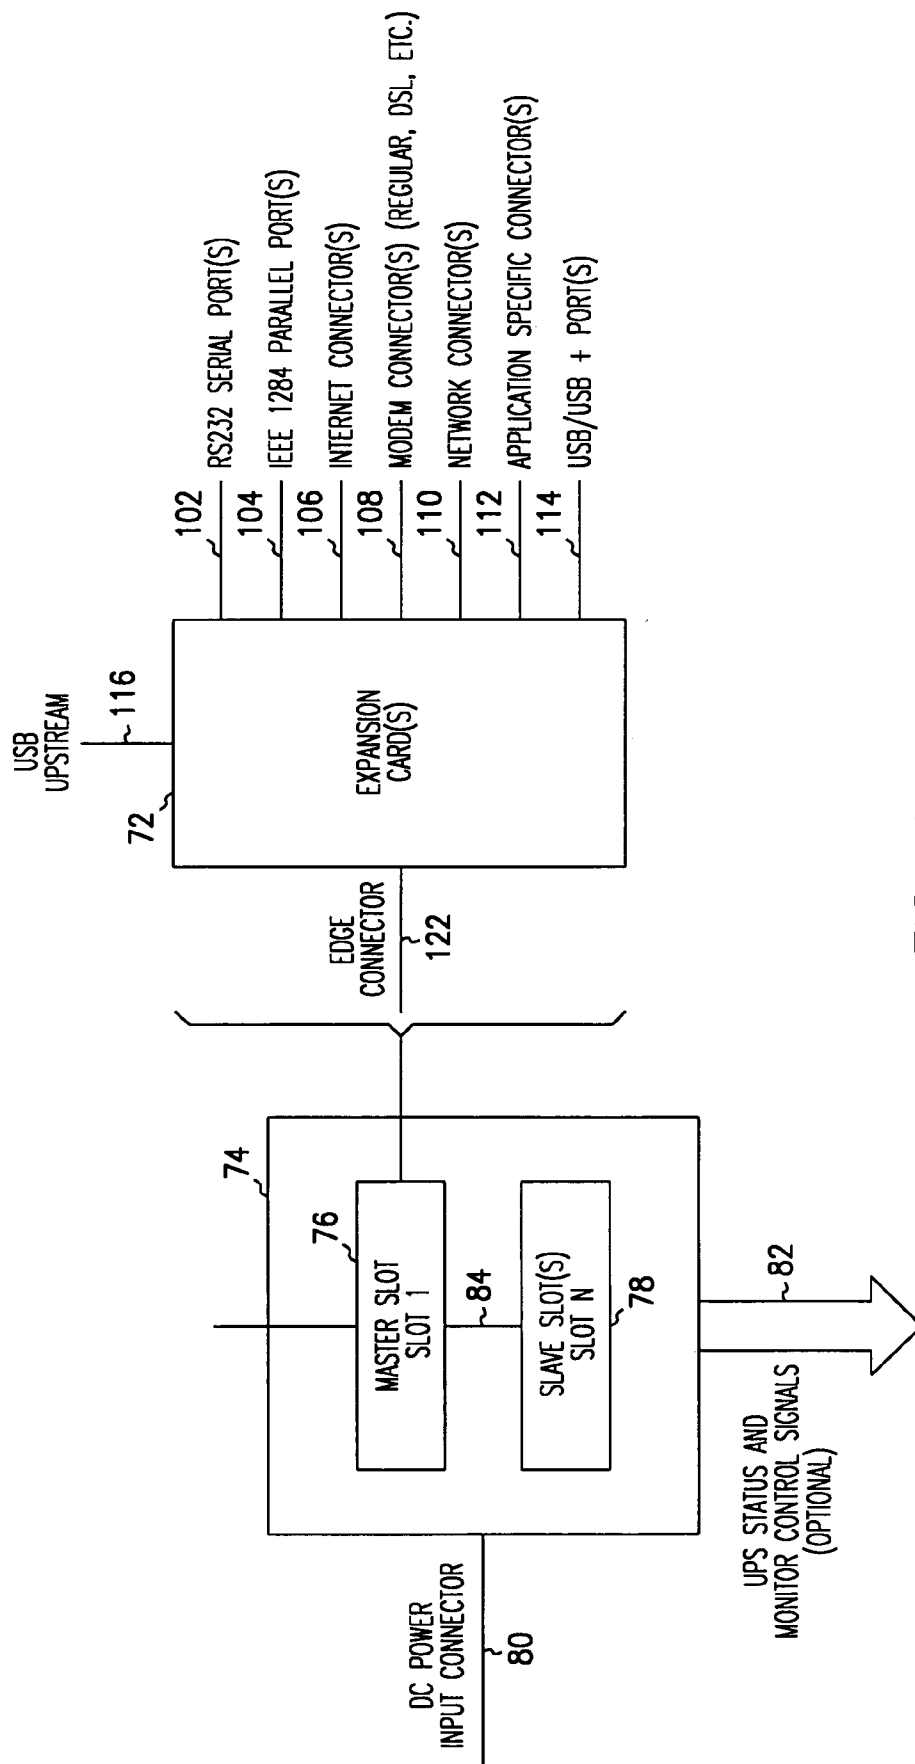


FIG. 4

BUS CONTROL MODULE FOR IMPROVING LEGACY SUPPORT

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. Pat. Application Ser. No. 09/551,299, filed on Apr. 18, 2000, the specification of which is incorporated herein by reference.

BACKGROUND

[0002] (1) Field of the Invention

[0003] The invention relates to systems and methods for providing expansion capabilities outside of a personal computer.

[0004] (2) Background

[0005] Some prior art systems employ an uninterruptible power supply (UPS) in which an alternating current to direct current (AC to DC) converter receives an AC signal, from for example, a wall socket, and converts the signal to DC which is used to charge a battery within the UPS. A DC signal is reconverted to AC and supplied back out to connected devices. In the event of a power outage, the UPS permits an orderly shut down of the system by supplying power previously stored in the battery. Typically, external devices expect to receive 220 or 110 volts AC from a standard electrical outlet. The battery power is converted from DC to the expected 110 or 220 volts AC. Such devices typically each have their own internal AC to DC converter. Using that converter, the power supplied is again converted to DC for use in the device.

[0006] The traditional personal computer (PC) or workstation market is based on expansion capability of the unit. This has typically included such bussing structures as ISA, EISA and PCI, as well as PCMCIA cards, all of which fall under the broad category of legacy expansion methods. Price pressures and size reduction demands have necessitated providing for relatively small number of external connectivities. The recent trend has been to move the PC in the direction of a sealed box. This trend tends to increase the relative difficulty of power management of the overall system, as well as legacy support.

BRIEF SUMMARY OF THE INVENTION

[0007] According to one aspect, a device is provided, including a backplane and at least one expansion card. The backplane includes at least one expansion slot and an upstream USB connector for connecting with the computer. The expansion card is adapted for coupling with the expansion slot. The expansion card includes at least one port to provide an interface with the computer.

[0008] According to one aspect, an apparatus is provided, including a control module, a hub coupled to the control module and adapted for providing USB/USB+ outputs, and an external functions unit coupled to the hub and adapted for providing outputs.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is a schematic diagram of a system of one embodiment of the invention.

[0010] FIG. 2 is a block diagram of a system of one embodiment of the invention.

[0011] FIG. 3 is a block diagram of a system of another embodiment of the invention.

[0012] FIG. 4 is a block diagram of a mechanical implementation that includes a backplane with two expansion slots for expansion cards.

DETAILED DESCRIPTION

[0013] FIG. 1 is a schematic diagram of a system of one embodiment of the invention. A legacy free PC 136 has coupled thereto a mouse 138 and a keyboard 140. The legacy free PC provides at least one external connectivity (in this embodiment, USB). Accordingly, the legacy free PC 136 is coupled to a combined uninterruptible power supply and bus control module contained within the housing 40. The USB connection 80 provides both the USB signaling as well as power to the legacy free PC 136. In addition to the uninterruptible power supply 50 and the USB control and monitor module 26, support for alternative connectivities and various legacy expansion systems may be provided within the housing 40. For example, the housing may be equipped with various serial or parallel ports 64, additional downstream USB ports 66, as well as network and communications ports, such as Ethernet ports, DSL modem or cable modem ports 70. Additionally, the housing may be equipped with a PCMCIA slot 72, an ISA slot 74, a PCI slot 76, or any other legacy support slot. Various regulated or unregulated DC voltages can be supplied to external nodes 60. Additionally, surge protected AC lines 62 may be provided to which external devices may be coupled. A standard power cord 42 may provide AC connection via a standard wall socket.

[0014] It is also within the scope and contemplation of the invention for various legacy support modules 79, such as support for PCI or ISA to be fabricated to modularly attach to the housing 40. In such embodiments, housing 40 provides coupling points 75 for engagement by the snap-on modules 79. Mechanical and electrical connections 77 on the housing 40 retain each module firmly in place while providing power and communication between the module and the main unit. Power and communication may be provided through a USB link in one embodiment of the invention. The housing 40 may also provide connection ports for non-legacy I/O, such as USB or 1394 buses. In this manner, an extra port 81 may be modularly added to the unit.

[0015] FIG. 2 is a block diagram of a system of one embodiment of the invention. PC 36 is coupled to a USB controller monitor module 26 through which PC 36 is supplied external connectivity and power. PC 36 may be, but need not be, a legacy free PC. In this figure, unless otherwise specified, power distribution lines are represented by thick lines, while thin lines represent control or signal lines. An incoming power signal, typically 220 or 110 volts AC, is supplied to the power conditioning circuit 14. The power conditioning circuit 14 may provide surge protection. In some embodiments, the power conditioning circuit 14 may also provide power phase correction. The output is supplied to AC/DC charger circuit 12 which converts the AC power signal into DC and uses the DC to charge battery 16. The output of the power conditioning circuit 14 is also supplied to a backup switch 20 that is provided between power

conditioning circuit **14** and a set of switchable power output nodes. Backup switch **20** selects which of the power conditioning circuit **14** and the battery **16** supply power to the output nodes. In the event of a power failure, battery **16** supplies power through DC/AC inverter **18**. DC/AC inverter **18** converts the battery power supplied to the output nodes **110/220 VAC**.

[0016] In any case, the battery **16** supplies power to a DC/DC converter **24** which generates desired DC voltages, such as +5 volts, for use by USB and other circuitry. Moreover, by supplying devices with DC rather than AC additional conversion steps are avoided. Since current external devices expect AC, integration of the USB hub and functions with the control module and UPS permits those devices to be supplied DC directly reducing system costs.

[0017] It is also within the scope and contemplation of the invention to supply the PC **36** with DC power via the control and monitor module **26**. Alternatively, the power supplied to the PC may be the traditional 220 or 110 volts AC. The USB and monitor module **26** monitors each subunit of UPS **50**. Additionally, the control and monitor module **26** controls a plurality of switches **22** which provide external power. Thus, in low power modes, the control and monitor module can select to leave one, all, none, or any combination of the externally powered devices powered. Control and monitor module also controls and monitors the power supplied to internal functions **30** and external modems **54**, as well as USB hub **32**. By providing additional independently controllable switches **28**, internal functions **30** may be powered or left unpowered depending on the desired power state of the system.

[0018] Firmware within the control and monitor module can provide legacy conversion from various legacy protocols to USB so that data received using such legacy protocols can be forwarded to the PC over the USB link for processing.

[0019] By moving the legacy support to an external module outside of the PC, cost and size of the PC is diminished. Additionally, by providing control of each subunit and each external connection through a central control and monitor module, control of the overall power consumption of the system is facilitated. Moreover, while legacy support can be moved outside the PC, the UPS and control unit also serves as an ideal connection point for non-legacy devices.

[0020] FIG. 3 is a block diagram of a system of another embodiment of the invention. In this embodiment, the hub **33** is a USB/USB+ hub with USB/USB+ outputs **60, 62, 64** and **66**. According to one embodiment, the external functions provide serial port(s) **68** and application specific port(s). According to one embodiment, the serial port(s) **68** include powered and non-powered RS232. According to other embodiments, the external functions include parallel port(s) **69**, and modem, network and/or Internet port(s) **71**. The USB/USB+ hub **33** and the external functions unit **54** are represented within an expansion card **72**, which is described in more detail below with respect to FIG. 4.

[0021] FIG. 4 is a block diagram of a mechanical implementation that includes a backplane **74** with expansion slots **76** and **78** for expansion cards **72**. The backplane **74** contains a DC power input connector **80**, and a UPS control/status/I/O connector **82**. According to one embodiment, the back-

plane **74** includes two or more expansion slots for the expansion cards **72**. One of the expansion slots is the Master slot **76** while the remaining one or more expansion slots are Slave slot(s) **78**. The Master slot **76** is connected to the Slave slot(s) **78** via a communication link **84** such as a USB signal pair. An expansion card **72** is inserted into the Master slot **76**, and other card(s) **72** are able to be inserted into the Slave slot(s) **78**. According to one embodiment, the expansion cards **72** are "plug-n-play" cards. The Master slot **76** is always populated. If both the Master and Slave slot(s) **76** and **78** are populated, multiple cards **72** are able to communicate via the communication link **84**.

[0022] Each slot **76** and **78** has a slot identification signal that allows expansion card firmware to determine if the expansion card **72** is a Master **76** or a Slave **78** card. There is no need for any hardware modification to set up a Master or a Slave device. The Master card's upstream USB connection **84** comes from an external device while the Slave card's USB upstream connection comes from the Master card, both through the backplane **74**. According to one embodiment, the Master slot **76** contains one upstream (from an external device) and one down (to the Slave slot) USB connection (from the Master slot). The Master slot also contains UPS status and control signals.

[0023] According to one embodiment, the expansion card **72** is a USB card that is capable of being plugged into one of the expansion slots **76** or **78** of the backplane **74**. According to one embodiment, the expansion card **72** provides combinations of one or more of the following: legacy RS232 serial port(s) **102**; legacy IEEE 1284 parallel port(s) **104**; Internet connector(s) **106**; modem connector(s) **108** for a regular modem or DSL modem; network connector(s) **110**; or application specific connector(s) **112**; and USB/USB+ expansion ports.

[0024] The expansion card **72** is powered from the backplane board **74**. As such, it draws no power from the upstream USB port, and reports itself as a self-powered device to the operating system. The USB Upstream port **116** provides a data connection to the host computer. According to one embodiment, it draws no power from the USB cable. The USB Upstream port is not connected directly to the upstream port of the internal USB function. It is routed to the backplane board instead where it is routed back to the upstream port of the internal USB function in the Master slot and not connected anywhere in the Slave slot(s). This allows the same cards to be used in both the Master and the Slave slots. The USB/USB+ Downstream port(s) **114** provide a data connection or both a data and a power connection to an external USB device. RS232 serial port(s) **102** and IEEE 1284 parallel port(s) **104** provide legacy connectivity for the host computer.

[0025] An edge connector **122** connects the expansion card **72** to the backplane board **74**. The backplane board **74** carries the power and power return lines for both Master and Slave slots. Furthermore, according to one embodiment, the backplane board **74** carries the status and control lines of the UPS for the Master slots, the USB signals between the USB connector and the Master slot, the USB signals between the Master and Slave slots, and the slot identifier signal for the Master and Slave slots.

[0026] According to other embodiments, the expansion card **72** supplies a number of additional I/O signals that are

read using an “out-of-band” mechanism separate from the UART (Universal Asynchronous Receiver/Transmitter) ports provided on the card. This mechanism is supplied by a number of “virtual” COM ports which enable application software to monitor and control the additional I/O functions. In general, application software may treat a “virtual” COM port in the same way as a real COM port using standard API (Application Programming Interface) functions.

[0027] Although specific embodiments have been illustrated and described herein, it will be appreciated by those of ordinary skill in the art that any arrangement which is calculated to achieve the same purpose may be substituted for the specific embodiment shown. This application is intended to cover any adaptations or variations of the present

invention. Therefore, it is intended that this invention be limited only by the claims and the equivalents thereof.

1. A device, comprising:

a backplane with at least one expansion slot and with an upstream connector for connecting with a computer; and

at least one expansion card for coupling with the expansion slot, the expansion card including at least one port to provide an interface with the computer.

2-51. (canceled)

* * * * *