



- (51) **International Patent Classification:**
F16F 9/04 (2006.01) *F16F 9/05* (2006.01)
- (21) **International Application Number:**
PCT/US2013/050356
- (22) **International Filing Date:**
12 July 2013 (12.07.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/670,782 12 July 2012 (12.07.2012) US
61/672,066 16 July 2012 (16.07.2012) US
- (71) **Applicant:** FIRESTONE INDUSTRIAL PRODUCTS COMPANY, LLC [US/US]; 250 West 96th Street, Indianapolis, IN 46260 (US).
- (72) **Inventors:** STREET, Stephen, C.; 13224 Brookshire Parkway, Carmel, IN 46033 (US). MOULIK, Pradipta, N.; 13547 Ashbury Drive, Carmel, IN 46032 (US).
- (74) **Agents:** DUGAN, Matthew, P. et al.; Fay Sharpe LLP, The Halle Building, 5th Floor, 1228 Euclid Avenue, Cleveland, OH 44115-1843 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) **Title:** LATERAL SUPPORT ELEMENT, GAS SPRING ASSEMBLY AND METHOD

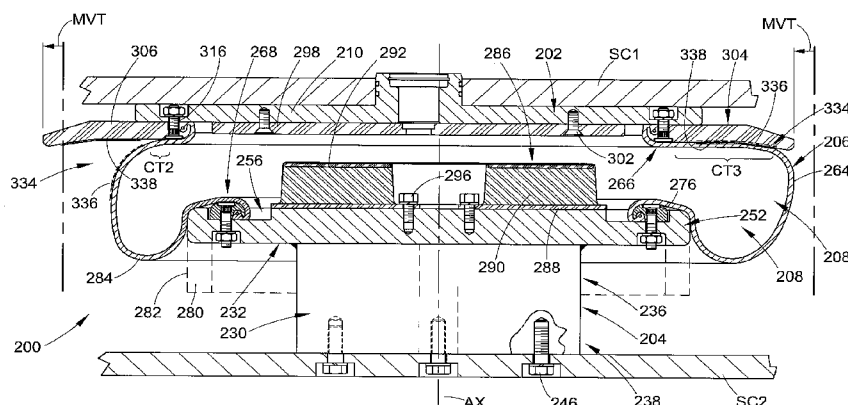


FIG. 4

(57) **Abstract:** A lateral support element (304) include an element wall with a first surface facing away from an associated flexible wall (264) and a second surface facing toward the associated flexible wall. The lateral support element is disposed along the associated flexible wall such that an interface (334) is formed between an outer surface of the associated flexible wall and the second surface of the lateral support element. The interface is operative to generate a lateral spring-rate profile in an associated gas spring assembly that varies according to lateral displacement of the associated flexible wall and the lateral support element relative to one another. The interface can include a quantity of friction-reducing material and/or can be at least partially formed by a cross-sectional profile of the lateral support element that includes a convex profile segment. Gas spring assemblies and methods of assembly are also included.



LATERAL SUPPORT ELEMENT, GAS SPRING ASSEMBLY AND METHOD

BACKGROUND

[0001] The subject matter of the present disclosure broadly relates to the art of spring devices and, more particularly, to interfaces between a flexible wall and a lateral support element of a gas spring assembly. Gas spring assemblies including such interfaces as well as suspension systems for vehicles that include one or more of such gas spring assemblies and methods of assembly are also included.

[0002] The subject matter of the present disclosure is capable of broad application and use in connection with a variety of applications and/or environments. However, the subject matter finds particular application and use in conjunction with rail vehicles, and will be described herein with particular reference thereto. However, it is to be appreciated that the subject matter of the present disclosure is amenable to use in connection with other applications and environments.

[0003] A suspension system, such as may be used in connection with motorized rail vehicles and/or rolling-stock rail vehicles, for example, can include one or more spring elements for accommodating forces and loads associated with the operation and use of the corresponding device (e.g., a rail vehicle) to which the suspension system is operatively connected. In such applications, it is often considered desirable to utilize spring elements that operate at a lower spring rate, as a reduced spring rate can favorably influence certain performance characteristics, such as vehicle ride quality and comfort, for example. That is, it is well understood in the art that the use of a spring element having a higher spring rate (i.e. a stiffer spring) will transmit a greater magnitude of inputs (e.g., road inputs) to the sprung mass and that, in some applications, this could undesirably affect the sprung mass, such as, for example, by resulting in a rougher, less-comfortable ride of a vehicle. Whereas, the use of spring elements having lower spring rates (i.e., a softer or more-compliant spring) will transmit a lesser amount of the inputs to the sprung mass.

[0004] Generally, vehicle performance characteristics, such as ride quality and comfort, are commonly identified as being related to factors, such as spring rate, that are acting in an approximately axial direction in relation to the gas spring assemblies. It has been recognized, however, that relative movement in the lateral direction (i.e., a

direction transverse to the axes of the gas spring assemblies) can also influence vehicle performance characteristics, such as ride quality and comfort, for example. In some cases, such lateral movement can include movement of the opposing end members of a gas spring assembly relative to one another in a direction transverse (e.g., perpendicular) to the axis of the gas spring assembly that is formed between the opposing end members.

[0005] In some cases, known gas spring assemblies can include a flexible wall and a lateral support element that engages the flexible wall to influence the lateral stiffness rate of the gas spring assemblies. In some cases, known lateral support element designs result in a lower lateral stiffness rate that can permit excessive lateral deflection of the end members relative to one another. While such performance conditions may, in some cases, result in favorable ride quality and comfort, performance characteristics such as vehicle handling and control can be undesirably affected. In other cases, known lateral support element designs result in a higher lateral stiffness rate that can provide favorable vehicle handling and control. However, such high lateral stiffness rates can also generate undesired performance characteristics, such as lower ride quality and/or comfort.

[0006] Notwithstanding the widespread usage and overall success of the wide variety of gas spring assemblies including a lateral support element that are known in the art, it is believed that a need exists to meet these competing goals while still retaining comparable or improved ease of manufacture, ease of assembly, ease of installation and/or reduced cost of manufacture.

BRIEF SUMMARY

[0007] One example of a lateral support element in accordance with the subject matter of the present disclosure that is dimensioned for use with an associated flexible wall of an associated gas spring assembly can include an element wall with a first surface facing away from an associated flexible wall and a second surface facing toward the associated flexible wall. The lateral support element can be disposed along the associated flexible wall such that an interface is formed between an outer surface of the associated flexible wall and the second surface of the lateral support element. The

interface can be operative to generate a lateral spring-rate profile in an associated gas spring assembly that varies according to lateral displacement of the associated flexible wall and the lateral support element relative to one another. The interface can include a quantity of friction-reducing material operatively disposed between the flexible wall and the lateral support element.

[0008] Another example of a lateral support element in accordance with the subject matter of the present disclosure that is dimensioned for use with an associated flexible wall of an associated gas spring assembly can include an element wall with a first surface facing away from an associated flexible wall and a second surface facing toward the associated flexible wall. The lateral support element can be disposed along the associated flexible wall such that an interface is formed between an outer surface of the associated flexible wall and the second surface of the lateral support element. The interface can be operative to generate a lateral spring-rate profile in an associated gas spring assembly that varies according to lateral displacement of the associated flexible wall and the lateral support element relative to one another. The interface can be at least partially formed by a cross-sectional profile of the lateral support element that includes a convex profile segment.

[0009] One example of a gas spring assembly in accordance with the subject matter of the present disclosure can include a flexible wall having a longitudinal axis and extending peripherally about the longitudinal axis between a first end and a second end spaced longitudinally from the first end. The flexible wall can include an inner surface and an outer surface with the inner surface at least partially defining a spring chamber. A lateral support element can include an element wall with a first surface facing away from the flexible wall and a second surface facing toward the flexible wall. The lateral support element can be disposed along the first end of the flexible wall such that an interface is formed between the outer surface of the flexible wall and the second surface of the lateral support element. The interface can be operative to generate a lateral spring-rate profile that varies according to lateral displacement of the flexible wall and the lateral support element relative to one another. The gas spring assembly can be displaced from a neutral position to a laterally-offset position with the lateral spring-rate decreasing over at least a portion of the displacement from the neutral position to the

laterally-offset position. In some cases, the gas spring assembly can include a quantity of friction-reducing material operatively disposed along the interface between the flexible wall and the lateral support element. Additionally, or in the alternative, the lateral support element of the gas spring assembly can, in some cases, have a cross-sectional profile that includes a convex profile segment.

[0010] One example of a method of assembling a gas spring assembly in accordance with the subject matter of the present disclosure can include providing a flexible wall having a longitudinal axis and extending peripherally about the longitudinal axis between first and second ends to at least partially form a spring chamber. The method can also include providing a lateral support element and positioning the lateral support element on, along or otherwise adjacent the flexible wall. The method can further include forming an interface between the flexible wall and the lateral support element. The method can also include providing a first end member and securing a first end of the flexible wall on or along the first end member. The method can also include providing a second end member and securing the second end member on or along an end of the flexible wall to at least partially form a spring chamber.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 is a schematic representation of one example of a rail vehicle including a suspension system in accordance with the subject matter of the present disclosure.

[0012] FIG. 2 is a schematic representation of one example of a pneumatic gas system operatively associated with the suspension system in FIG. 1.

[0013] FIG. 3 is a side view, in partial cross-section, of one example of a gas spring assembly including one example of an interface between a flexible wall and a lateral support element in accordance with the subject matter of the present disclosure.

[0014] FIG. 4 illustrates the gas spring assembly in FIG. 3 in a laterally displaced condition.

[0015] FIG. 5 is an enlarged view of the portion of the gas spring assembly, lateral support element and interface in FIGS. 3 and 4 that is identified as Detail 5 in FIG. 3.

[0016] FIG. 6 is an enlarged view of the portion of the gas spring assembly in FIGS. 3 and 4 that is identified as Detail 5 in FIG. 3 illustrating another example of an interface between a flexible wall and lateral support element in accordance with the subject matter of the present disclosure.

[0017] FIG. 7 is a side view, in partial cross-section, of still another example of a gas spring assembly including an example of an interface between a flexible wall and lateral support element in accordance with the subject matter of the present disclosure.

[0018] FIG. 8 illustrates the gas spring assembly in FIG. 7 in a laterally displaced condition.

[0019] FIG. 9 is an enlarged view of the portion of the gas spring assembly, lateral support element and interface in FIGS. 7 and 8 that is identified as Detail 9 in FIG. 7.

[0020] FIG. 10 is a graphical representation of a lateral force versus lateral displacement curve associated with the use of an interface and lateral support element in accordance with the subject matter of the present disclosure.

[0021] FIG. 11 is a graphical representation of one example of a method of manufacturing a gas spring assembly in accordance with the subject matter of the present disclosure.

DETAILED DESCRIPTION

[0022] Turning now to the drawings, it is to be understood that the showings are for purposes of illustrating examples of the subject matter of the present disclosure and are not intended to be limiting. Additionally, it will be appreciated that the drawings are not to scale and that portions of certain features and/or elements may be exaggerated for purposes of clarity and/or ease of understanding.

[0023] FIG. 1 illustrates one example of a vehicle including a suspension system in accordance with the subject matter of the present disclosure, such as a vehicle **100** that is adapted for movement or otherwise displaceable along a track **TRK** that is at least partially formed by rails **RLS** of an indefinite length. It will be appreciated that the subject matter of the present disclosure is broadly applicable for use in a wide variety of applications, and that rail vehicle **100** merely represents one example of a suitable application. Rail vehicle **100** is shown being representative of rolling stock (e.g., a

railcar) rather than an engine or traction-drive vehicle. However, this representative use is merely exemplary and not intended to be limiting.

[0024] Rail vehicle **100** includes a vehicle body **102** supported on one or more frame and wheel assemblies **104**, two of which are shown in FIG. 1. In some cases, frame and wheel assemblies **104** may be referred to in the art as “trucks,” “rail bogies” or simply “bogies,” and such terms may be used herein in an interchangeable manner. Bogies **104** are shown as being disposed toward opposing ends **106** and **108** of rail vehicle **100**.

[0025] Bogies **104** are shown in FIG. 1 as including a frame **110** as well as one or more wheel sets **112** that are typically formed by an axle **114** and a pair of spaced-apart wheels **116**. Normally, bogies **104** include at least two wheel sets, such as is shown in FIG. 1, for example, that are operatively connected to the frame in manner suitable to permit the wheels to roll along rails **RLS** of track **TRK**. In many cases, a primary suspension arrangement (not shown) is operatively connected between the wheels sets and the frame to permit relative movement therebetween. Bogies **104** are also shown as including a secondary suspension system **118** that includes at least one gas spring assembly. In the exemplary arrangement shown in FIGS. 1 and 2, bogies **104** include two gas spring assemblies **120** that are operatively connected between frame **110** and vehicle body **102** to permit relative movement therebetween.

[0026] Rail vehicles, such as rail vehicle **100**, for example, typically include a braking system with one or more brakes operatively associated with each wheel set. In the exemplary arrangement in FIG. 1, two brakes **122** are shown as being operatively associated with each of wheel sets **112** with one brake disposed adjacent each of wheels **116**. It will be appreciated, however, that other arrangements could alternately be used.

[0027] Additionally, rail vehicles, such as rail vehicle **100**, for example, typically include at least one pneumatic system that is operatively associated therewith. In many cases, components of the one or more pneumatic systems can be distributed along the length of a train that is formed from a plurality of rail vehicles, such as one or more traction-drive engines and one or more rolling stock vehicles, for example. In such cases, each individual rail vehicle will include one or more portions of the pneumatic

system. Usually, these one or more portions are serially connected together to form an overall pneumatic system of a train.

[0028] Typical pneumatic systems include two or more separately controllable portions, such as a pneumatic braking system that is operatively associated with the vehicle brakes (e.g., brakes **122**) and a pneumatic supply system that is operatively associated with the other pneumatically-actuated devices of the rail vehicle, such as the secondary suspension system, for example. As such, rail vehicles typically include a dedicated conduit for each of these two systems. Such conduits normally extend lengthwise along the vehicle body and are often individually referred to as a brake pipe and a supply pipe.

[0029] FIG. 2 illustrates one example of a pneumatic system **124** that is operatively associated with rail vehicle **100** and includes a braking system (not numbered) with a brake pipe **126** in fluid communication with at least brakes **122** (FIG. 1) and a pneumatic supply system (not numbered) with a supply pipe **128** in fluid communication with at least gas spring assemblies **120** of secondary suspension system **118**. It will be recognized and appreciated that pneumatic system **124** will include a wide variety of other components and devices. For example, the braking system can include one or more isolation valves **130** that can be fluidically connected along brake pipe **126**. As other examples, the pneumatic supply system can include one or more isolation valves **132**, one or more filters **134** and/or one or more non-return valves **136** (which may be alternately referred to as one-way or check valves). The pneumatic supply system can also include one or more reservoirs or other pressurized gas storage devices. In the arrangement shown in FIG. 2, for example, the pneumatic supply system includes a reservoir **138** that is operative to store a quantity of pressurized gas for use in supplying gas spring assemblies **120** of the secondary suspension system, and a reservoir **140** that is operative to store a quantity of pressurized gas for use as the auxiliary reservoir of the braking system.

[0030] Generally, certain components of the braking system, such as brakes **122**, for example, as well as certain components of the pneumatic supply system are supported on or otherwise operatively associated with one of bogies **104** of rail vehicle **100**. For example, supply lines **142** can fluidically interconnect bogies **104** with the pneumatic

supply system. Supply lines **142** are shown as being fluidically connected with one or more leveling valves **144** that are operatively connected with gas spring assemblies **120**, such as by way of gas lines **146**, and are selectively operable to transfer pressurized gas into and out of the gas spring assemblies. In some cases, a pressurized gas storage device or reservoir **148** can, optionally, be fluidically connected along gas line **146** between leveling valve **144** and gas spring assembly **120**. Additionally, a cross-flow line **150** can, optionally, be connected in fluid communication between two or more of gas lines **146**. In some cases, a control valve **152**, such as a duplex check valve, for example, can be fluidically connected along cross-flow line **150**, such as is shown in FIG. 2, for example.

[0031] One example of a gas spring assembly in accordance with the subject matter of the present disclosure, such as may be suitable for use as one or more of gas spring assemblies **120** in FIGS. 1 and 2, for example, is shown as gas spring assembly **200** in FIGS. 3-5. The gas spring assembly has a longitudinal axis **AX** and includes an end member **202**, an end member **204** spaced longitudinally from end member **202** and a flexible spring member or sleeve **206** that extends peripherally about the longitudinal axis and is secured between the end members to at least partially define a spring chamber **208**.

[0032] Gas spring assembly **200** can be disposed between associated sprung and unsprung masses of an associated vehicle in any suitable manner. For example, one end member can be operatively connected to an associated sprung mass with the other end member disposed toward and operatively connected to the associated unsprung mass. In the embodiment shown in FIGS. 3 and 4, for example, end member **202** is secured on or along a structural component **SC1**, such as an associated vehicle body **102** in FIG. 1, for example, and can be secured thereon in any suitable manner. As another example, end member **204** is secured on or along a structural component **SC2**, such as an associated rail bogie **104** in FIG. 1, for example, and can be secured thereon in any suitable manner.

[0033] In the exemplary arrangement in FIGS. 3 and 4, end member **202** is shown as taking the form of a top plate having a plate wall **210** that has opposing surfaces **212** and **214** such that a plate height (not identified) is at least partially defined

therebetween. Plate wall **210** is shown as being generally planar and extending outwardly to an outer periphery **216**. In some cases, plate wall **210** can have a generally circular shape such that an outer peripheral surface **218** extending in a heightwise direction can have a generally cylindrical shape. A passage surface **220** at least partially defines a gas transfer passage **222** extending through the end member such that pressurized gas can be transferred into and out of spring chamber **208**, such as by way of pneumatic system **124** (FIG. 2) for example. In some cases, the end member can include a projection or boss **224** that extends from along plate wall **210** in a longitudinal direction. In the exemplary arrangement shown in FIGS. 3 and 4, projection **224** extends axially outwardly away from spring chamber **208**.

[0034] As mentioned above, one or more securement devices (not shown) can be used to secure or otherwise interconnect the end members of the gas spring assembly with corresponding structural components. In some cases, projection **224** can include an outer surface **226** that is dimensioned for receipt within a passage or mounting hole **MHL** that extends through structural component **SC1**. Additionally, one or more sealing elements **228** can, optionally, be included that are disposed between or otherwise at least partially form a substantially fluid-tight connection between the end member and the structural component, such as between projection **224** and mounting hole **MHL**, for example. In some cases, structural component **SC1** can, optionally, at least partially define an external reservoir suitable for storing a quantity of pressurized gas.

[0035] End member **204** is shown as taking the form of an assembly that includes a support base or pedestal **230** and a base plate **232** that is secured on or along the pedestal in a suitable manner, such as by way of a flowed-material joint **234**, for example. Pedestal **230** extends axially between opposing ends **236** and **238**, and includes an outer surface **240** that extends peripherally about axis **AX** and an end surface **242** that is disposed along end **238** and is dimensioned or otherwise configured for operative engagement with an associated structural component, such as structural component **SC2**, for example. It will be appreciated that end member **204** can be secured on or along the associated structural component in any suitable manner. As one example, pedestal **230** can include a plurality of securement features **244**, such as threaded passages that extend inwardly into the pedestal from along end surface **242**,

for example. In some cases, a corresponding number of one or more holes or passages **HLS** can extend through structural component **SC2** that are dimensioned for receipt of a securement device **246**, such as a threaded fastener, for example. It will be appreciated, however, that other configurations and/or arrangements could alternately be used.

[0036] Base plate **232** can have a plate wall (not numbered) that has opposing surfaces **248** and **250** such that a plate height (not identified) is at least partially defined therebetween. Base plate **232** is shown as being generally planar and extending outwardly to an outer periphery **252**. In some cases, base plate **232** can have a generally circular shape such that an outer peripheral surface **254** extending in a heightwise direction can have a generally cylindrical shape. Additionally, in some cases, base plate **232** can, optionally, include an endless annular recess or groove **256** that extends axially inwardly into the base plate from along surface **248** thereof. It will be appreciated that such a groove, if provided, can be of any suitable size, shape, configuration and/or arrangement. For example, groove **256** is shown as being at least partially defined by a bottom surface **258**, an inner side surface **260** and an outer side surface **262**. In a preferred arrangement, groove **256** can be dimensioned to at least partially receive a portion of flexible spring member **206** and one or more retaining elements, such as may be used to secure the flexible spring member on or along the base plate, for example.

[0037] Flexible spring member **206** can be of any suitable size, shape, construction and/or configuration. As one example, flexible spring member **206** can include a flexible wall **264** that is at least partially formed from one or more layers or plies (not identified) of elastomeric material (e.g., natural rubber, synthetic rubber and/or thermoplastic elastomer) and can optionally include one or more plies or layers of filament reinforcing material (not shown). Flexible wall **264** is shown extending in a longitudinal direction between opposing ends **266** and **268**. In some cases, flexible wall **264** can, optionally, include a mounting bead disposed along either one or both of ends **266** and **268**. In the arrangement shown in FIGS. 3 and 4, mounting beads **270** and **272** are shown as being respectively disposed along ends **266** and **268**. In some cases, the mounting beads

can, optionally, include a reinforcing element, such as an endless, annular bead core **274**, for example.

[0038] It will be appreciated, that the ends of flexible spring member **206** can be secured on, along or otherwise interconnected between end members **202** and **204** in any suitable manner. As one example, gas spring assembly **200** can include one or more bead retaining elements that engage at least a portion of the flexible spring member and maintain the flexible spring member in substantially fluid-tight engagement with the corresponding end member (e.g., end member **204**). In the arrangement shown in FIGS. 3 and 4, end **268** of flexible wall **264** is disposed in abutting engagement with bottom surface **258** of groove **256** in base plate **232**. A bead retaining element **276**, such as in the form of an endless, annular ring, for example, captures at least a portion of mounting bead **272** and is shown as being secured on or along base plate **232** by way of a plurality of securement devices **278**, such as, for example, threaded fastener (not numbered) and threaded nut (not numbered) combinations that extend through at least approximately aligned holes or slots (not numbered) in the base plate and in the bead retaining element.

[0039] Typically, at least a portion of flexible spring member **206** will extend radially outward beyond outer periphery **252** of base plate **232**. In some cases, end member **204** can include an outer support wall **280** (FIG. 4) that can, optionally, extend peripherally around or otherwise along base plate **232**, such as from along the plate wall of the base plate and in a direction toward end **240** of pedestal **230**. In such cases, flexible spring member **206** can extend along an outer surface **282** (FIG. 4) of outer support wall **280** such that a rolling lobe **284** is formed along the flexible spring member. Outer surface **282** is shown in FIG. 4 as having a generally cylindrical shape, and rolling lobe **284** can be displaceable along the outer surface as the gas spring assembly is axially displaced between extended and compressed conditions, such as may occur during dynamic use in operation. It will be appreciated that other shapes and/or configurations of outer support wall **280** and/or outer surface **282** can alternately be used, such as may be useful to provide desired performance characteristics, for example.

[0040] As is well known in the art, it is generally desirable to avoid or at least minimize contact between end members of a gas spring assembly, such as may occur due to variations in load conditions and/or upon deflation of the gas spring assembly, for example. As such, gas spring assembly **200** is shown in FIGS. 3 and 4 as including a jounce bumper **286** (FIG. 4) that is disposed within spring chamber **208** and supported on end member **204**. As identified in FIG. 4, jounce bumper **286** is shown as including a mounting plate **288** that is disposed in abutting engagement with end member **204**, a bumper body **290** supported on the mounting plate, and a wear plate **292** that is supported on at least partially embedded within bumper body **290**.

[0041] It will be appreciated that jounce bumper **286** can be secured on or along an end member in any suitable manner. As identified in FIG. 4, for example, base plate **232** of end member **204** is shown as including one or more securement features **294**, such as may take the form of a plurality of threaded holes, for example. In such case, a corresponding number of one or more securement devices **296**, such as one or more threaded fasteners, for example, can extend through one of a corresponding number of holes, openings or other features of the jounce bumper or a component thereof (e.g., mounting plate **288**) to secure the jounce bumper on or along the end member.

[0042] Gas spring assembly **200** can also, optionally, include a complimentary component that may be dimensioned to or otherwise suitable for abuttingly engaging the jounce bumper or a component thereof (e.g., wear plate **292**). In the arrangement shown in FIGS. 3 and 4, gas spring assembly **200** includes a bearing plate **298** that is disposed in abutting engagement along surface **214** of plate wall **210** and is secured on or along end member **202**. It will be appreciated that the bearing plate can be attached to the end member in any suitable manner. For example, plate wall **210** of end member **202** can include one or more securement features **300**, such as threaded holes, for example, that as may be suitable for receiving a complimentary securement device **302**, such as a threaded fastener, for example, to secure the bearing plate on or along the end member.

[0043] As discussed above, it will be appreciated, that the ends of flexible spring member **206** can be secured on, along or otherwise interconnected between end members **202** and **204** in any suitable manner. As mentioned above, for example, gas

spring assembly **200** can include one or more bead retaining elements that engage at least a portion of the flexible spring member and maintain the flexible spring member in substantially fluid-tight engagement with the corresponding end member (e.g., end member **202**). In some cases, a bead retaining element, such as bead retaining element **276**, for example, could be used. Alternately, one or more bead retaining features can be formed on or along another component of the gas spring assembly. For example, in the arrangement shown in FIGS. 3-5, gas spring assembly **200** includes a lateral support element **304** in accordance with the subject matter of the present disclosure that is configured to engage a portion of flexible spring member **206** during lateral movement of end member **202** relative to end member **204**. Additionally, lateral support element **304** can, optionally, be adapted or otherwise configured to secured or otherwise support an end of a flexible wall, such as end **266**, for example, on or along an end member, such as end member **202**, for example.

[0044] As identified in FIG. 5, lateral support element **304** includes an element wall **306** in the form of an endless, annular ring that extends radially between an inward or mounting portion **308** and an outward or support portion **310**. As illustrated in the cross-sectional profile shown in FIG. 5, element wall **306** includes a bead-retaining wall portion **312** that extends in a radially-inward direction from along mounting portion **308**. In some cases, bead-retaining wall portion **312** can have a somewhat hook-shaped cross-sectional profile and can, in some cases, form an innermost radial extent of the lateral support element. In a preferred arrangement, bead-retaining wall portion **312** can retain end **266** of flexible wall **264** in abutting engagement with surface **214** of plate wall **210**.

[0045] Additionally, it will be appreciated that lateral support element **304** can be secured on or along end member **202** in any suitable manner. As one example, lateral support element **304** can include a plurality of holes or openings **314** extending therethrough that are disposed in spaced relation to one another about element wall **306**, such as in peripherally-spaced relation to one another along mounting portion **308** thereof, for example. In such case, plate wall **210** of end member **202** can include a corresponding plurality of holes or openings **HLS** (FIG. 4) that, together with holes **314**, are dimensioned to receive one of a plurality of securement devices **316**, such as

threaded fastener and threaded nut assemblies, for example. In this manner, lateral support element **304** can be secured on end member **202**, and flexible spring member **206** can be operatively secured to the end member such that a substantially fluid-tight seal can be formed therebetween.

[0046] With further reference to FIG. 5, element wall **306** of lateral support element **304** is shown as including a mounting surface **318** that is dimensioned or otherwise configured to abuttingly engage an associated component or structural feature, such as plate wall **210** of end member **202**, for example. Element wall **306** also includes an outer surface **320** along support portion **310** that can have any suitable shape and/or configuration, such as a frustoconical shape, for example. Element wall **306** can include an outer peripheral wall portion **322** that, in some cases, can at least partially define an outermost peripheral extent of lateral support element **304**. The element wall (e.g., element wall **306**) of a lateral support element, such as lateral support element **304**, for example, can further include a support surface having a cross-sectional profile suitable for operatively engaging and at least partially supporting, either directly or indirectly, the flexible wall of the gas spring assembly during lateral (i.e., transverse) movement of the end members relative to one another.

[0047] As identified in FIG. 5, element wall **306** of lateral support element **304** includes a support surface **324** that is shown as facing in a direction generally opposite mounting surface **318** and/or outer surface **320**. In a preferred arrangement, element wall **306** is positioned such that at least a portion of support surface **324** can abuttingly engage a portion of flexible spring member **206** during lateral (i.e., transverse) movement of end member **202** relative to end member **204**. It will be appreciated that lateral support elements having support surfaces with cross-sectional profiles of a variety of shapes, sizes and configurations have been developed and are commonly used, such as may be suitable for contributing to certain lateral performance characteristics of a gas spring assembly, for example. As such, it will be appreciated that a support surface having a cross-sectional profile of any suitable size, shape and/or configuration could be used.

[0048] In the arrangement shown in FIGS. 3-5, support surface **324** is shown as including a surface profile portion **326** that extends transverse to axis **AX** and in

approximate alignment with mounting surface such that an annularly-extending, approximately planar area is formed along a radially-inward portion of support surface **324**. Support surface **324** is also shown as including a surface profile portion **328** that extends radially outward from along surface profile portion **326** at an angle (not numbered) relative to surface profile portion **326** such that a frustoconically-shaped area is formed along a radially-outward portion of the support surface. In some cases, the approximately planar, annular area that is at least partially defined by surface profile portion **326** can correspond to a relatively constant lateral stiffness of the gas spring assembly, such as may occur during relative lateral deflection of the end members in which at least a portion of flexible spring member **206** contacts or otherwise abuttingly engages a portion of the approximately planar area. And, in some cases, a forward or positive taper area can be at least partially defined by surface profile portion **328** and can, in some cases, provide for increased lateral stiffness of the gas spring assembly, such as may occur during lateral deflection of the end members relative to one another under which at least a portion of flexible spring member **206** contacts or otherwise abuttingly engages a portion of the forward or positive taper area.

[0049] It will be appreciated that end members **202** and **204** are shown in FIG. 3 in an approximately coaxial or aligned condition, and are shown in FIG. 4 as being moved in a lateral direction into an offset or laterally-shifted condition, such as is represented in FIG. 4 by reference arrows **MVT**. Flexible spring member **206** is shown as having an inside surface **330** that at least partially defines spring chamber **208** and an outside surface **332**. It will be appreciated that under typical conditions of use, at least a portion of outside surface **332** of flexible spring member **206** may be disposed on or along at least a portion of support surface **324** of lateral support element **304**. For example, under conditions in which end members **202** and **204** are disposed toward a centered, coaxial or otherwise at least approximately aligned condition, such as is shown in FIG. 3, for example, an approximately uniform annular area of support surface **324** can abuttingly engage a corresponding area of outside surface **332** of flexible spring member **206**. Such an approximately uniform annular area is shown in FIG. 3 in the form of approximately equal cross-sectional areas of contact **CT1** on diametrically opposing sides of the support surface.

[0050] As end members **202** and **204** are laterally displaced relative to one another toward an offset or laterally-shifted condition, flexible spring member **206** will separate from support surface **324** along or otherwise around a first circumferential portion of lateral support element **304**, such as is shown and represented in FIG. 4 by cross-sectional area of contact **CT2**. Additionally, as end members **202** and **204** are laterally displaced relative to one another toward an offset or laterally-shifted condition, flexible spring member **206** will come into increased contact with support surface **324** along or otherwise around a second, different circumferential portion of lateral support wall **304**, such as is shown and identified in FIG. 4 by cross-sectional area of contact **CT3**, which is illustrated as being greater than cross-sectional area of contact **CT2**. In many cases, the first and second circumferential portions of support surface **324** and/or lateral support wall **304** will be disposed generally opposite one another.

[0051] With further reference to FIGS. 3-5, a gas spring assembly in accordance with the subject matter of the present disclosure, such as gas spring assembly **200**, for example, can also include an interface between the outside surface of the flexible wall of the gas spring assembly (e.g., outside surface **332** of flexible wall **264** of flexible spring member **206**) and a surface of the lateral support element of the gas spring assembly (e.g., support surface **324** of lateral support element **304**) that has reduced-frictional properties and/or characteristics (i.e., a reduced-friction interface) in comparison with conventional constructions. In some cases, one or more elements, components and/or materials could be disposed on, along or otherwise between the flexible spring member and a surface of the lateral support element. For example, gas spring assembly **200** can include an interface **334** that extends annularly about axis **AX** between support surface **324** of lateral support element **304** and outside surface **332** of flexible wall **264**, and that is at least partially formed by a quantity of material that is deposited or otherwise applied along the outer surface of the flexible wall, such as is represented in FIGS. 3-5 by dashed line **336**. Additionally, or in the alternative, interface **334** can be at least partially formed by a quantity of material could be deposited or otherwise applied along at least a portion of support surface **324** of lateral support element **304**, such as is represented in FIGS. 3-5 by solid line **338**.

[0052] It will be appreciated that the quantity of material represented by lines **336** and **338** can be in any suitable form and/or of any suitable consistency, and can include compounds and/or compositions of any suitable type and/or kind. For example (and without being limiting), in some cases, quantity of material **336** and/or **338** could take the form of a liquid, semi-solid or solid lubricant or other friction-reducing compound, such as a grease, for example. In such case, the material(s) could be in form of a layer that extends approximately uniformly about axis **AX**, such as in a continuous, annular manner or in a discontinuous or otherwise segmented configuration. Additionally, or in the alternative, quantity of material **336** and/or **338** could take the form of a surface treatment of at least a portion of the element wall and/or the outer surface of the flexible wall. In some cases, the surface treatment can include coating of a low-friction material that is affixed to at least a portion of the support surface and/or the outer surface of the flexible wall. Such a manner of forming a friction-reduced interface (e.g., interface **334**) may, in some cases, minimize or at least reduce issues that may arise in connection with the migration of and/or adhesion of foreign materials to layers of liquid, semi-solid and, in some cases, solid lubricants. Examples of friction-reducing materials can include polymeric coatings, such as PTFE based resins, and/or nearly frictionless carbon (NFC) coatings, for example. In some cases, the quantity of material (e.g., quantity of material **336** and/or **338**) can be formed from any material or combination of materials capable of generating or otherwise forming a comparatively reduced coefficient of friction between the material of the flexible wall (e.g., flexible wall **264**) and the material of the element wall (e.g., element wall **344**) relative to an un-treated interface therebetween.

[0053] An alternate embodiment of an interface **340** in accordance with the subject matter of the present disclosure is illustrated in FIG. 6 in which lateral support element **304** of FIGS. 3-5 has been replaced with a lateral support element **342**, which has an alternate construction to that of lateral support element **304**. It will be appreciated that, though not shown in FIG. 6, quantities of material **336** and/or **338** can, optionally, be used together with lateral support element **342** to form an interface having reduced-frictional properties and/or characteristics (i.e., a reduced-friction interface) in comparison with conventional constructions. As shown in FIG. 6, however, interface

340 is shown as being formed between lateral support element **342** and flexible wall **206** of gas spring assembly **200**.

[0054] As illustrated in the cross-sectional profile in FIG. 6, lateral support element **342** includes an element wall **344** in the form of an endless, annular ring that extends radially between an inward or mounting portion **346** and an outward or support portion **348**. Element wall **344** also includes a bead-retaining wall portion **350** that extends in a radially-inward direction from along mounting portion **346**. In some cases, bead-retaining wall portion **350** can have a somewhat hook-shaped cross-sectional profile and can, in some cases, form an innermost radial extent of the lateral support element. In a preferred arrangement, bead-retaining wall portion **350** can retain at least a portion of end **266** of flexible wall **264** (e.g., mounting bead **270**) in abutting engagement with surface **214** of plate wall **210**.

[0055] Additionally, it will be appreciated that lateral support element **342** can be secured on or along end member **202** in any suitable manner. As one example, lateral support element **342** can include a plurality of holes or openings **352** (only one of which is shown in FIG. 6) extending therethrough that are disposed in spaced relation to one another about element wall **344**, such as in peripherally-spaced relation to one another along mounting portion **346** thereof, for example. In such case, plate wall **210** of end member **202** can include a corresponding plurality of holes or openings **HLS** (FIG. 4) that, together with holes **352**, are dimensioned to receive securement devices **316**, such as threaded fastener and threaded nut assemblies, for example. In this manner, lateral support element **342** can be secured on end member **202**, and flexible spring member **206** can be operatively secured to the end member such that a substantially fluid-tight seal can be formed therebetween.

[0056] With further reference to FIG. 6, element wall **344** of lateral support element **342** is shown as including a mounting surface **354** that is dimensioned or otherwise configured to abuttingly engage an associated component or structural feature, such as plate wall **210** of end member **202**, for example. Element wall **344** also includes an outer surface **356** along support portion **348** that can have any suitable shape and/or configuration, such as a frustoconical shape, for example. Element wall **344** can include an outer peripheral wall portion **358** that, in some cases, can at least partially

define an outermost peripheral extent of lateral support element **342**. The element wall (e.g., element wall **344**) of a lateral support element, such as lateral support element **342**, for example, can further include a support surface having a cross-sectional profile suitable for operatively engaging and at least partially supporting, either directly or indirectly, the flexible spring member of the gas spring assembly during lateral (i.e., transverse) movement of the end members relative to one another.

[0057] It will be appreciated that a lateral support element in accordance with the subject matter of the present disclosure (e.g., lateral support element **304** and/or **342**) can include any suitable combination of one or more components and/or elements, which can be formed from any suitable material or combination of materials. As one example, the element wall of the lateral support element could be primarily formed from a reduced-friction material, such as a rigid or semi-rigid thermoplastic material (e.g., polyethylene, polypropylene and/or polyamide). In some cases, the lateral support element can, optionally, include one or more reinforcing elements or structures, such as could be disposed on, along or at least partially embedded within the element wall thereof, such as may be useful for providing increased axial rigidity and/or structural integrity of the lateral support element which may be beneficial for minimizing or at least reducing axial deflection of the element wall during use in operation. One example of a reinforcing element or structure **360** is shown in FIG. 6 as being substantially entirely embedded within element wall **344**, can be formed as a comparatively thin-walled component that is formed from a comparatively rigid material, such as a reinforced thermoplastic (e.g., glass-filled polyamide) or a metal material (e.g., steel), for example.

[0058] As another example, the element wall of the lateral support element could be primarily formed from a substantially rigid material, such as a metal material (e.g., steel or aluminum) or a reinforced or high-strength thermoplastic (e.g., glass-filled polyamide). Alternately, a somewhat less rigid material could be used together with a reinforcing element or structure, such as reinforcing structure **360**, for example. Additionally, a lateral support element in accordance with the subject matter of the present disclosure can, optionally, include one or more friction-reducing wall section that are at least partially embedded or otherwise disposed along one or more surfaces of the element wall. As illustrated in FIG. 6, element wall **344** of lateral support element **342**

can, optionally, include a reduced-friction wall section **362**, such as in the form of an annular insert, for example, that is at least partially embedded within element wall **344**. In the arrangement shown, reduced-friction wall section **362** includes opposing sides **364** and **366** that extend radially between opposing edges **368** and **370**. It will be appreciated, however, that other configurations and/or arrangements could alternately be used. Reduced-friction wall section **362** can be supported or otherwise retained on or along element wall **344** in any suitable manner, such as by way of one or more mechanical fasteners (e.g., threaded fasteners), one or more flowed-material joints (e.g., adhesive and/or welded connections) and/or by co-molding or over-molding the element wall and the reduced-friction wall section together, for example.

[0059] Additionally, it will be appreciated that reduced-friction wall section **362** can be formed from any suitable material or combination of materials having a comparatively reduced coefficient of friction relative to the material of element wall **344**. Examples of such materials can include polymeric materials, such as ultra-high molecular weight polyethylene and PTFE-based resins, for example, and nearly frictionless carbon (NFC) coatings disposed along a substrate or base material (e.g., a metal or ceramic material), for example. It will be appreciated, however, that other materials and/or combinations of materials can be used without departing from the subject matter of the present disclosure.

[0060] As identified in FIG. 6, element wall **344** of lateral support element **342** includes a support surface **372** that is shown as facing in a direction generally opposite mounting surface **354** and/or outer surface **356**. In a preferred arrangement, element wall **344** is positioned such that at least a portion of support surface **372** can abuttingly engage a portion of flexible spring member **206** during lateral (i.e., transverse) movement of end member **202** relative to end member **204**. It will be appreciated that lateral support elements having support surfaces with cross-sectional profiles of a variety of shapes, sizes and configurations have been developed and are commonly used, such as may be suitable for contributing to certain lateral performance characteristics of a gas spring assembly, for example. As such, it will be appreciated that a support surface having a cross-sectional profile of any suitable size, shape and/or configuration could be used.

[0061] In the arrangement shown in FIG. 6, support surface **372** is shown as including a surface profile portion **374** that extends transverse to axis **AX** and in approximate alignment with mounting surface such that an annularly-extending, approximately planar area is formed along a radially-inward portion of support surface **372**. Support surface **372** is also shown as including a surface profile portion **376** that extends radially outwardly from along surface profile portion **374** at an angle (not numbered) relative to surface profile portion **364** such that a frustoconically-shaped area is formed along a radially-outward portion of the support surface. In some cases, the approximately planar, annular area that is at least partially defined by surface profile portion **374** can correspond to a relatively constant lateral stiffness of the gas spring assembly, such as may occur during relative lateral deflection of the end members in which at least a portion of flexible wall **206** contacts or otherwise abuttingly engages a portion of the approximately planar area. And, in some cases, a forward or positive taper area can be at least partially defined by surface profile portion **376** and can, in some cases, provide for increased lateral stiffness of the gas spring assembly, such as may occur during lateral deflection of the end members relative to one another under which at least a portion of flexible wall **206** contacts or otherwise abuttingly engages a portion of the forward or positive taper area.

[0062] It will be recognized from FIG. 6 that surface profile portion **374** can, in some cases, be at least partially from side or surface **364** of reduced-friction wall section **362**. Additionally, or in the alternative, it will be recognized that surface profile portion **376** can, in some cases, be at least partially formed from side or surface **364** of reduced-friction wall section **362**. It will be appreciated, however, that other configurations and/or arrangements could alternately be used.

[0063] Generally, a gas spring assembly in accordance with the subject matter of the present disclosure can include a friction-reducing member, either as a part of the lateral support element (i.e., bead skirt) or between the lateral support element and the flexible spring member, to provide a surface on which the flexible wall can slide without significant wear. In some cases, the angle of the bearing surface of the lateral support element may be reduced relative to the plane of the end member (e.g., bead plate) to further reduce friction. As a result, a gas spring assembly in accordance with the

subject matter of the present disclosure can allow a certain amount of lateral movement while reducing friction and wear on the flexible spring member, which may, in some cases, minimize or at least reduce the possibility of performance degradation of the flexible wall in addition to reducing the lateral spring rate of the gas spring assembly. As discussed above, the friction-reducing member can be an integral part of the bottom, sleeve-facing surface of the lateral support element, such that the friction-reducing member may be formed with the bead skirt as a single unit. Alternatively, as discussed above, the friction-reducing member may be a component formed separate from the bead skirt and position between the sleeve-facing surface of the bead skirt and the flexible spring member. The friction-reducing member may be formed from any low friction material, such as sintered/porous metal inundated with lubricant, thermoplastics (e.g., UHMW polyethylene, PTFE based resins, Teflon®, and nearly frictionless carbon (NFC) coatings and/or films, such as may be applied on or along substrates formed from steel, aluminum and/or titanium alloys, glass, ceramics and/or hard, high-temperature plastics, for example.

[0064] Another example of a gas spring assembly in accordance with the subject matter of the present disclosure, such as may be suitable for use as one or more of gas spring assemblies **120** in FIGS. 1 and 2, for example, is shown as gas spring assembly **400** in FIGS. 7-9. The gas spring assembly has a longitudinal axis **AX** and includes an end member **402**, an end member **404** spaced longitudinally from end member **402** and a flexible spring member or sleeve **406** that extends peripherally about the longitudinal axis and is secured between the end members to at least partially define a spring chamber **408**.

[0065] Gas spring assembly **400** can be disposed between associated sprung and unsprung masses of an associated vehicle in any suitable manner. For example, one end member can be operatively connected to an associated sprung mass with the other end member disposed toward and operatively connected to the associated unsprung mass. In the embodiment shown in FIGS. 7 and 8, for example, end member **402** is secured on or along structural component **SC1**, such as an associated vehicle body **102** in FIG. 1, for example, and can be secured thereon in any suitable manner. As another example, end member **404** is secured on or along structural component **SC2**, such as

an associated rail bogie **104** in FIG. 1, for example, and can be secured thereon in any suitable manner.

[0066] In the exemplary arrangement in FIGS. 7 and 8, end member **402** is shown as taking the form of a top plate having a plate wall **410** that has opposing surfaces **412** and **414** such that a plate height (not identified) is at least partially defined therebetween. Plate wall **410** is shown as being generally planar and extending outwardly to an outer periphery **416**. In some cases, plate wall **410** can have a generally circular shape such that an outer peripheral surface **418** extending in a heightwise direction can have a generally cylindrical shape. A passage surface **420** at least partially defines a gas transfer passage **422** extending through the end member such that pressurized gas can be transferred into and out of spring chamber **408**, such as by way of pneumatic system **124** (FIG. 2) for example. In some cases, the end member can include a projection or boss **424** that extends from along plate wall **410** in a longitudinal direction. In the exemplary arrangement shown in FIGS. 7 and 8, projection **424** extends axially outwardly away from spring chamber **408**.

[0067] As mentioned above, one or more securement devices (not shown) can be used to secure or otherwise interconnect the end members of the gas spring assembly with corresponding structural components. In some cases, projection **424** can include an outer surface **426** that is dimensioned for receipt within a passage or mounting hole **MHL** that extends through structural component **SC1**. Additionally, one or more sealing elements **428** can, optionally, be included that are disposed between or otherwise at least partially form a substantially fluid-tight connection between the end member and the structural component, such as between projection **424** and mounting hole **MHL**, for example. In some cases, structural component **SC1** can, optionally, at least partially define an external reservoir suitable for storing a quantity of pressurized gas.

[0068] End member **404** is shown as taking the form of an assembly that includes a support base or pedestal **430** and a base plate **432** that is secured on or along the pedestal in a suitable manner, such as by way of a flowed-material joint **434**, for example. Pedestal **430** extends axially between opposing ends **436** and **438**, and includes an outer surface **440** that extends peripherally about axis **AX** and an end surface **442** that is disposed along end **438** and is dimensioned or otherwise configured

for operative engagement with an associated structural component, such as structural component **SC2**, for example. It will be appreciated that end member **404** can be secured on or along the associated structural component in any suitable manner. As one example, pedestal **430** can include a plurality of securement features **444**, such as threaded passages that extend inwardly into the pedestal from along end surface **442**, for example. In some cases, a corresponding number of one or more holes or passages **HLS** can extend through structural component **SC2** that are dimensioned for receipt of a securement device **446**, such as a threaded fastener, for example. It will be appreciated, however, that other configurations and/or arrangements could alternately be used.

[0069] Base plate **432** can have a plate wall (not numbered) that has opposing surfaces **448** and **450** such that a plate height (not identified) is at least partially defined therebetween. Base plate **432** is shown as being generally planar and extending outwardly to an outer periphery **452**. In some cases, base plate **432** can have a generally circular shape such that an outer peripheral surface **454** extending in a heightwise direction can have a generally cylindrical shape. Additionally, in some cases, base plate **432** can, optionally, include an endless annular recess or groove **456** that extends axially inwardly into the base plate from along surface **448** thereof. It will be appreciated that such a groove, if provided, can be of any suitable size, shape, configuration and/or arrangement. For example, groove **456** is shown as being at least partially defined by a bottom surface **458**, an inner side surface **460** and an outer side surface **462**. In a preferred arrangement, groove **456** can be dimensioned to at least partially receive a portion of flexible spring member **406** and one or more retaining elements, such as may be used to secure the flexible spring member on or along the base plate, for example.

[0070] Flexible spring member **406** can be of any suitable size, shape, construction and/or configuration. As one example, flexible spring member **406** can include a flexible wall **464** that is at least partially formed from one or more layers or plies (not identified) of elastomeric material (e.g., natural rubber, synthetic rubber and/or thermoplastic elastomer) and can optionally include one or more plies or layers of filament reinforcing material (not shown). Flexible wall **464** is shown extending in a longitudinal direction

between opposing ends **466** and **468**. In some cases, flexible wall **464** can, optionally, include a mounting bead disposed along either one or both of ends **466** and **468**. In the arrangement shown in FIGS. 7 and 8, mounting beads **470** and **472** are shown as being respectively disposed along ends **466** and **468**. In some cases, the mounting beads can, optionally, include a reinforcing element, such as an endless, annular bead core **474**, for example.

[0071] It will be appreciated, that the ends of flexible spring member **406** can be secured on, along or otherwise interconnected between end members **402** and **404** in any suitable manner. As one example, gas spring assembly **400** can include one or more bead retaining elements that engage at least a portion of the flexible spring member and maintain the flexible spring member in substantially fluid-tight engagement with the corresponding end member (e.g., end member **404**). In the arrangement shown in FIGS. 7 and 8, end **468** of flexible wall **464** is disposed in abutting engagement with bottom surface **458** of groove **456** in base plate **432**. A bead retaining element **476**, such as in the form of an endless, annular ring, for example, captures at least a portion of mounting bead **472** and is shown as being secured on or along base plate **432** by way of a plurality of securement devices **478**, such as, for example, threaded fastener (not numbered) and threaded nut (not numbered) combinations that extend through at least approximately aligned holes or slots (not numbered) in the base plate and in the bead retaining element.

[0072] Typically, at least a portion of flexible spring member **406** will extend radially outward beyond outer periphery **452** of base plate **432**. In some cases, end member **404** can include an outer support wall **480** (FIG. 8) that can, optionally, extend peripherally around or otherwise along base plate **432**, such as from along the plate wall of the base plate and in a direction toward end **440** of pedestal **430**. In such cases, flexible spring member **406** can extend along an outer surface **482** (FIG. 8) of outer support wall **480** such that a rolling lobe **484** is formed along the flexible spring member. Outer surface **482** is shown in FIG. 8 as having a generally cylindrical shape, and rolling lobe **484** can be displaceable along the outer surface as the gas spring assembly is axially displaced between extended and compressed conditions, such as may occur during dynamic use in operation. It will be appreciated that other shapes and/or

configurations of outer support wall **480** and/or outer surface **482** can alternately be used, such as may be useful to provide desired performance characteristics, for example.

[0073] As is well known in the art, it is generally desirable to avoid or at least minimize contact between end members of a gas spring assembly, such as may occur due to variations in load conditions and/or upon deflation of the gas spring assembly, for example. As such, gas spring assembly **400** is shown in FIGS. 7 and 8 as including a jounce bumper **486** (FIG. 8) that is disposed within spring chamber **408** and supported on end member **404**. As identified in FIG. 8, jounce bumper **486** is shown as including a mounting plate **488** that is disposed in abutting engagement with end member **404**, a bumper body **490** supported on the mounting plate, and a wear plate **492** that is supported on at least partially embedded within bumper body **490**.

[0074] It will be appreciated that jounce bumper **486** can be secured on or along an end member in any suitable manner. As identified in FIG. 8, for example, base plate **432** of end member **404** is shown as including one or more securement features **494**, such as may take the form of a plurality of threaded holes, for example. In such case, a corresponding number of one or more securement devices **496**, such as one or more threaded fasteners, for example, can extend through one of a corresponding number of holes, openings or other features of the jounce bumper or a component thereof (e.g., mounting plate **488**) to secure the jounce bumper on or along the end member.

[0075] Gas spring assembly **400** can also, optionally, include a complimentary component that may be dimensioned to or otherwise suitable for abuttingly engaging the jounce bumper or a component thereof (e.g., wear plate **492**). In the arrangement shown in FIGS. 7 and 8, gas spring assembly **400** includes a bearing plate **498** that is disposed in abutting engagement along surface **414** of plate wall **410** and is secured on or along end member **402**. It will be appreciated that the bearing plate can be attached to the end member in any suitable manner. For example, plate wall **410** of end member **402** can include one or more securement features **500**, such as threaded holes, for example, that as may be suitable for receiving a complimentary securement device **502**, such as a threaded fastener, for example, to secure the bearing plate on or along the end member.

[0076] As discussed above, it will be appreciated, that the ends of flexible spring member **406** can be secured on, along or otherwise interconnected between end members **402** and **404** in any suitable manner. As mentioned above, for example, gas spring assembly **400** can include one or more bead retaining elements that engage at least a portion of the flexible spring member and maintain the flexible spring member in substantially fluid-tight engagement with the corresponding end member (e.g., end member **402**). In some cases, a bead retaining element, such as bead retaining element **476**, for example, could be used. Alternately, one or more bead retaining features can be formed on or along another component of the gas spring assembly. For example, in the arrangement shown in FIGS. 7 and 8, gas spring assembly **400** includes a lateral support element **504** in accordance with the subject matter of the present disclosure that is configured to engage a portion of flexible spring member **406** during lateral movement of end member **402** relative to end member **404**. Additionally, lateral support element **504** can, optionally, be adapted or otherwise configured to secure or otherwise support an end of a flexible wall, such as end **466**, for example, on or along an end member, such as end member **402**, for example.

[0077] As identified in FIG. 9, lateral support element **504** includes an element wall **506** in the form of an endless, annular ring that extends radially between an inward or mounting portion **508** and an outward or support portion **510**. As illustrated in the cross-sectional profile shown in FIG. 9, element wall **506** includes a bead-retaining wall portion **512** that extends in a radially-inward direction from along mounting portion **508**. Bead-retaining wall portion **512** can have a somewhat hook-shaped cross-sectional profile and can, in some cases, form an innermost radial extent of the lateral support element. In a preferred arrangement, bead-retaining wall portion **512** can retain end **466** of flexible wall **464** in abutting engagement with surface **414** of plate wall **410**.

[0078] Additionally, it will be appreciated that lateral support element **504** can be secured on or along end member **402** in any suitable manner. As one example, lateral support element **504** can include a plurality of holes or openings **514** extending therethrough that are disposed in spaced relation to one another about element wall **506**, such as in peripherally-spaced relation to one another along mounting portion **508** thereof, for example. In such case, plate wall **410** of end member **402** can include a

corresponding plurality of holes or openings **HLS** (FIG. 8) that, together with holes **514**, are dimensioned to receive one of a plurality of securement devices **516**, such as threaded fastener and threaded nut assemblies, for example. In this manner, lateral support element **504** can be secured on end member **402**, and flexible spring member **406** can be operatively secured to the end member such that a substantially fluid-tight seal can be formed therebetween.

[0079] With further reference to FIG. 9, element wall **506** of lateral support element **504** is shown as including a mounting surface **518** that is dimensioned or otherwise configured to abuttingly engage an associated component or structural feature, such as plate wall **410** of end member **402**, for example. Element wall **506** also includes an outer surface **520** along support portion **510** that can have any suitable shape and/or configuration, such as a frustoconical shape, for example. Element wall **506** can include an outer peripheral wall portion **522** that, in some cases, can at least partially define an outermost peripheral extend to lateral support element **504**. A lateral support element in accordance with the subject matter of the present disclosure also includes a support surface having a cross-sectional profile suitable for improving stability and/or control of the gas spring assembly during lateral (i.e., transverse) movement of the end members relative to one another.

[0080] As identified in FIG. 9, element wall **506** of lateral support element **504** includes a support surface **524** that is positioned to abuttingly engage a portion of flexible spring member **406** during lateral (i.e., transverse) movement of end member **402** relative to end member **404** and thereby at least partially form another example of an interface **525** in accordance with the subject matter of the present disclosure. It will be appreciated that end members **402** and **404** are shown in FIG. 7 in an approximately coaxial or aligned condition, and are shown in FIG. 8 as being moved in a lateral direction into an offset or laterally-shifted condition, such as is represented in FIG. 8 by reference arrows **MVT**. It will be appreciated that, in a preferred embodiment, flexible spring member **406** is separated or otherwise spaced apart from at least a portion of support surface **524** of lateral support element **504** when end members **402** and **404** are disposed toward a neutral, centered, coaxial or otherwise at least approximately aligned condition, such as is shown and identified in FIG. 7 by arrows **SP1**, for example. As

end members **402** and **404** are laterally displaced relative to one another toward an offset or laterally-shifted condition, flexible wall **406** will further separate from support surface **524** along or otherwise around a first circumferential portion of lateral support element **504**, such as is shown and identified in FIG. 8 by arrow **SP2**. Additionally, as end members **402** and **404** are laterally displaced relative to one another toward an offset or laterally-shifted condition, flexible wall **406** will come into increased contact with support surface **524** along or otherwise around a second, different circumferential portion of lateral support wall **504**, such as is shown and identified in FIG. 8 by arrow **NSP**. In many cases, the first and second circumferential portions of support surface **524** and/or lateral support wall **504** will be disposed generally opposite one another.

[0081] With further reference to FIG. 9, support surface **524** includes a cross-sectional profile having two or more sections or portions that extend peripherally about element wall **506** of lateral support element **504**. Support surface **524** at least partially defines an annular groove or cavity **526** that extends into element wall **506**, such as is illustrated by reference line **RLN** that extends in a direction generally transverse (e.g., perpendicular) to axis **AX** and/or in approximate alignment with mounting surface **518**.

[0082] In the arrangement shown in FIGS. 7-9, the cross-sectional profile of support surface **524** can, optionally, include a first profile section **528** that extends from a first profile point **530** toward a second profile point **532** and forms a reverse or negative taper area that extends annularly around element wall **506**. In a preferred arrangement, first profile section **528** can have an approximately linear shape and can extend from point **530** toward point **532** at an angle **AG1** relative to reference line **RLN**. In such case, the reverse or negative taper area formed along element wall **506** can have an approximately frustoconical shape. Generally, the reverse or negative taper area that is at least partially defined by first profile section **528** can, in some cases, provide for reduced lateral stiffness of the gas spring assembly, such as may occur during lateral deflection of the end members relative to one another under which at least a portion of flexible wall **406** contacts or otherwise abuttingly engages a portion of the reverse or negative taper area.

[0083] The cross-sectional profile of support surface **524** can also, optionally, include a second profile section **534** that extends from approximately second profile point **532**

toward a third profile point **536** and forms a sustaining load area that extends annularly around element wall **506**. In a preferred arrangement, second profile section **534** can have a radial or otherwise curvilinear shape. In such case, the sustaining load area formed along element wall **506** can have a curved, annular shape. Generally, the sustaining load area that is at least partially defined by second profile section **534** can, in some cases, provide for a relatively constant lateral stiffness of the gas spring assembly as relative lateral deflection of the end members occurs such that at least a portion of flexible wall **406** contacts or otherwise abuttingly engages a portion of the sustaining load area. It will be appreciated, that the lateral stiffness of the gas spring assembly during contact along second profile section **534** may vary within a range that is substantially reduced from the variations in lateral stiffness associated with the negative taper area. As one example, a variation of less than 20 percent of the total variation of the negative taper area could be provided by the sustaining load area.

[0084] The cross-sectional profile of support surface **524** can also, optionally include a third profile section **538** that extends from approximately third profile point **536** toward a fourth profile point **540** and forms a returning curvature area that extends annularly around element wall **506**. In a preferred arrangement, third profile section **538** can have a radial or otherwise curvilinear shape. In such case, the returning curvature area formed along element wall **506** can have a curved, annular shape. Generally, the returning curvature area that is at least partially defined by third profile section **538** can, in some cases, provide for an increasing lateral stiffness of the gas spring assembly as relative lateral deflection of the end members occurs, such as when at least a portion of flexible wall **506** contacts or otherwise abuttingly engages a portion of the returning curvature area.

[0085] While both profile sections are described as including a radial or otherwise curvilinear shape, it will be appreciated that second profile section **534** and third profile section **538** differ in at least two respects. As one example, second profile section **534** is shown as extending between profile points **532** and **536** that are disposed in approximate alignment with one another with respect to reference line **RLN**. Additionally, second profile section **534** has a distal extent that is spaced a first distance from profile points **532** and **536**, as is represented in FIG. 9 by reference dimension **D1**.

Whereas, third profile section **538** is shown as extending between profile points **536** and **540** that are disposed in axially spaced relation to one another, as is represented in FIG. 9 by reference dimension **D2**.

[0086] It has been determined that variations in relative positions along support surface **524** in the axial direction can generally correspond to variations in lateral stiffness. As such, the minimal overall variation in axial position along second profile section **534**, as represented by dimension **D1**, can roughly correspond to a minimal or nearly constant lateral stiffness along the second profile section. Accordingly, the greater overall variation in axial position along third profile section **538**, as represented by dimension **D2**, can roughly correspond to a significant increase in lateral stiffness along the third profile section in the direction from third point **536** toward fourth point **540**.

[0087] As a second example, second profile section **534** is shown as including a center of curvature **CV1** that is disposed along a side **542** of lateral support element **504** from along which cavity **526** extends into element wall **506**. Whereas, third profile section **538** is shown as including a center of curvature **CV2** that is disposed along an opposing side **544** of lateral support element **504**, such as may be adjacent mounting surface **518**, for example. As such, the rate of change of profile sections **534** and **538** differ as the flexible wall is displaced laterally therealong in a direction from first profile point **530** toward fourth profile point **540**. Additionally, it will be appreciated that the radial or otherwise curved shape of profile sections **534** and **538** can take the form of suitable geometric configuration, whether regular or irregular, and can vary along the respective lengths thereof.

[0088] In some cases, the cross-sectional profile of support surface **524** can also, optionally, include a fourth profile section **546** extends from approximately fourth profile point **540** toward an outermost peripheral point **548**. In some cases, a transition section **550** can extend from approximately fourth profile point **540** to a fifth profile point **552** with fourth profile section **546** extending from approximately fifth profile point **552** toward outermost peripheral point **548**. In a preferred arrangement, fourth profile section **546**, if included, can have an approximately linear shape and can extend at an angle **AG2** relative to reference line **RLN**. In such case, a forward or positive taper area can be

formed along element wall **506** that can have an approximately frustoconical shape. Generally, the forward or positive taper area that is at least partially defined by fourth profile section **546** can, in some cases, provide for further increased lateral stiffness of the gas spring assembly, such as may occur during lateral deflection of the end members relative to one another under which at least a portion of flexible wall **406** contacts or otherwise abuttingly engages a portion of the forward or positive taper area.

[0089] FIG. 10 is a graphical representation of a lateral force versus lateral displacement curve for a conventional lateral support element, which is represented in FIG. 10 by solid line **L1**, and an anticipated lateral force versus lateral displacement curve for an interface and/or a lateral support element in accordance with the subject matter of the present disclosure, such as one of interfaces **334**, **340** and/or **525** and/or one of lateral support elements **304**, **342** and/or **504**, for example, which is represented in FIG. 10 by dashed line **L2**. As can be observed from the graphical representation, at a given lateral displacement, which is represented in FIG. 10 by displacement line **DN**, a conventional lateral support element can have a lateral stiffness or force that corresponds to reference dimension **F1**. Whereas, an interface and/or lateral support element in accordance with the subject matter of the present disclosure, such as one of interfaces **334**, **340** and/or **525** and/or one of lateral support elements **304**, **342** and/or **504**, for example, may have an anticipated lateral stiffness or force that corresponds to a reference dimension **F2**. As such, for a given lateral displacement within a normal range of displacement, which is represented in FIG. 10 by reference dimension **DNR**, an interface and/or lateral support element in accordance with the subject matter of the present disclosure can have a lower lateral stiffness or force than that of a conventional lateral support element. As can also be observed from the graphical representation in FIG. 10, however, under conditions of maximum lateral displacement, such as are represented by reference dimensions **DMX**, an interface and/or lateral support element in accordance with the subject matter of the present disclosure, such as one of interfaces **334**, **340** and/or **525** and/or one of lateral support elements **304**, **342** and/or **504**, for example, may have anticipated lateral stiffness or force that is approximately equal to the lateral stiffness or force of a conventional lateral support element, such as is represented in FIG. 10 by reference points **FFD**.

[0090] One example of a method **600** of manufacturing a gas spring assembly in accordance with the subject matter of the present disclosure, such as one of gas spring assemblies **120**, **200** and/or **400**, for example, is shown in FIG. 11 as including providing a flexible wall, such as flexible wall **264** of flexible spring member **206** and/or flexible wall **464** of flexible spring member **406**, as is represented in FIG. 11 by item number **602**. Method **600** also includes providing a first end member, such as end member **202** and/or **402**, for example, as is represented by item number **604**. Method **600** can further include securing a first end of the flexible wall on or along the first end member, as is represented that item number **606**. Method **600** can also include providing a lateral support element, such as lateral support element **304**, **342** and/or **504**, for example, as is represented in FIG. 11 by item number **608**.

[0091] Method **600** can further include positioning the lateral support element on, along or otherwise adjacent the flexible wall, as is represented in FIG. 11 by item number **610**. Method **600** can also include forming an interface, such as interface **334**, **340** and/or **525**, for example, such as is represented by item number **612**. Method **600** can further include providing a second end member, such as end member **204** and/or **404**, for example, as is represented by item number **614**. Method **600** can further include securing the second end member on or along an end of the flexible wall to at least partially form a spring chamber, such as spring chamber **208** and/or **408**, for example, as is represented in FIG. 11 by item number **616**.

[0092] As used herein with reference to certain features, elements, components and/or structures, numerical ordinals (e.g., first, second, third, fourth, etc.) may be used to denote different singles of a plurality or otherwise identify certain features, elements, components and/or structures, and do not imply any order or sequence unless specifically defined by the claim language. Additionally, the terms “transverse,” and the like, are to be broadly interpreted. As such, the terms “transverse,” and the like, can include a wide range of relative angular orientations that include, but are not limited to, an approximately perpendicular angular orientation. Also, the terms “circumferential,” “circumferentially,” and the like, are to be broadly interpreted and can include, but are not limited to circular shapes and/or configurations. In this regard, the terms

“circumferential,” “circumferentially,” and the like, can be synonymous with terms such as “peripheral,” “peripherally,” and the like.

[0093] Furthermore, the phrase “flowed-material joint” and the like, if used herein, are to be interpreted to include any joint or connection in which a liquid or otherwise flowable material (e.g., a melted metal or combination of melted metals) is deposited or otherwise presented between adjacent component parts and operative to form a fixed and substantially fluid-tight connection therebetween. Examples of processes that can be used to form such a flowed-material joint include, without limitation, welding processes, brazing processes and soldering processes. In such cases, one or more metal materials and/or alloys can be used to form such a flowed-material joint, in addition to any material from the component parts themselves. Another example of a process that can be used to form a flowed-material joint includes applying, depositing or otherwise presenting an adhesive between adjacent component parts that is operative to form a fixed and substantially fluid-tight connection therebetween. In such case, it will be appreciated that any suitable adhesive material or combination of materials can be used, such as one-part and/or two-part epoxies, for example.

[0094] Further still, the term “gas” is used herein to broadly refer to any gaseous or vaporous fluid. Most commonly, air is used as the working medium of gas spring devices, such as those described herein, as well as suspension systems and other components thereof. However, it will be understood that any suitable gaseous fluid could alternately be used.

[0095] It will be recognized that numerous different features and/or components are presented in the embodiments shown and described herein, and that no one embodiment may be specifically shown and described as including all such features and components. As such, it is to be understood that the subject matter of the present disclosure is intended to encompass any and all combinations of the different features and components that are shown and described herein, and, without limitation, that any suitable arrangement of features and components, in any combination, can be used. As one example, it will be appreciated that any combination of features, properties and/or characteristics from any one of more of interfaces **334**, **340** and/or **525** and from any one or more of lateral support elements **304**, **342** and/or **504** can be used in any

suitable configuration and/or arrangement. Thus it is to be distinctly understood claims directed to any such combination of features and/or components, whether or not specifically embodied herein, are intended to find support in the present disclosure.

[0096] Thus, while the subject matter of the present disclosure has been described with reference to the foregoing embodiments and considerable emphasis has been placed herein on the structures and structural interrelationships between the component parts of the embodiments disclosed, it will be appreciated that other embodiments can be made and that many changes can be made in the embodiments illustrated and described without departing from the principles hereof. Obviously, modifications and alterations will occur to others upon reading and understanding the preceding detailed description. Accordingly, it is to be distinctly understood that the foregoing descriptive matter is to be interpreted merely as illustrative of the subject matter of the present disclosure and not as a limitation. As such, it is intended that the subject matter of the present disclosure be construed as including all such modifications and alterations.

CLAIMS:

1. A gas spring assembly comprising:

a flexible wall having a longitudinal axis and extending peripherally about said longitudinal axis between a first end and a second end spaced longitudinally from said first end, said flexible wall including an inner surface and an outer surface with said inner surface at least partially defining a spring chamber; and,

a lateral support element including an element wall with a first surface facing away from said flexible wall and a second surface facing toward said flexible wall, said lateral support element disposed along said first end of said flexible wall such that an interface is formed between said outer surface of said flexible wall and said second surface of said lateral support element, said interface operative to generate a lateral spring-rate profile that varies according to lateral displacement of said flexible wall and said lateral support element relative to one another.

2. A gas spring assembly according to claim 1, wherein said gas spring assembly is laterally displaceable between a neutral position and a laterally-offset position such that in said neutral position said second end of said flexible wall and said lateral support element are disposed approximately coaxial alignment with one another and in said laterally-offset position said second end of said flexible wall and said lateral support element are disposed in laterally-spaced apart relation to one another.

3. A gas spring assembly according to claim 2, wherein a portion of said outer surface of said flexible wall is disposed in abutting engagement with an annular area of said second surface of said lateral support element in said neutral position.

4. A gas spring assembly according to claim 2, wherein said outer surface of said flexible wall is disposed in spaced relation to said second surface of said lateral support element in said neutral position.

5. A gas spring assembly according to either one of claims 2 and 3, wherein a portion of an annular area of said outer surface of said flexible wall is disposed in abutting engagement with a portion of an annular area of said second surface of said lateral support element and the remaining portion of said annular area of said outer surface of said flexible wall is disposed in spaced relation to the remaining portion of said annular area of said second surface of said lateral support element in said laterally-offset position.
6. A gas spring assembly according to any one of claims 1-3 and 5, wherein a friction-reducing material is disposed along said interface between at least a portion of said flexible wall and said lateral support element.
7. A gas spring assembly according to claim 6, wherein said outer surface of said flexible wall and said second surface of said lateral support element have a first coefficient of friction therebetween and said friction-reducing material generates an area along said interface having a second coefficient of friction that is less than said first coefficient of friction.
8. A gas spring assembly according to claim 7, wherein said friction-reducing material includes at least one of a quantity of free material applied to at least one of said flexible wall and said lateral support element, a surface treatment applied to at least one of said flexible wall and said lateral support element, and a friction-reducing component secured to one of said flexible wall and said lateral support element.
9. A gas spring assembly according to claim 8, wherein said friction-reducing material includes a quantity of free material in the form of at least one of a liquid, a semi-solid and a solid lubricant.

10. A gas spring assembly according to either one of claims 8 and 9, wherein said friction-reducing material includes a surface treatment that includes at least one of a polymeric coating and a nearly-frictionless-carbon coating applied to at least a portion of at least one surface of at least one of said flexible wall and said lateral support element.

11. A gas spring assembly according to any one of claims 8-10, wherein said friction-reducing material includes a friction-reducing component secured to said second surface of said lateral support element, said friction-reducing component being at least partially formed from one or more of a polymeric material and nearly frictionless carbon (NFC) coating disposed along a substrate.

12. A gas spring assembly according to any one of claims 1-11, wherein said second surface of said lateral support element has a reference plane disposed transverse to said longitudinal axis and includes a cross-sectional profile extending from an inner profile endpoint to an outer profile endpoint, said cross-sectional profile including:

- a first profile segment extending radially-outward and substantially linearly from said inner profile endpoint at a first included angle relative to said reference plane;

- a second profile segment disposed radially outward of said first profile segment and extending radially-outward toward said outer profile endpoint, said second profile segment having a concave shape facing toward said second end of said flexible wall;
- and,

- a third profile segment disposed radially outward of said second profile segment and extending radially-outward toward said outer profile endpoint, said third profile segment having a convex shape facing toward said second end of said flexible wall.

13. A gas spring assembly according to claim 12, wherein said cross-sectional profile includes a fourth profile segment disposed radially outward of said third profile segment, said fourth profile segment extending radially-outward and substantially linearly from adjacent said third profile segment at a second included angle relative to said reference plane.

14. A gas spring assembly according to any one of claims 1-13 further comprising:
 - a first end member secured across said first end of said flexible wall and operatively associated with said lateral support element; and,
 - a second end member secured across said second end of said flexible wall such that said spring chamber is at least partially defined by said flexible wall between said first and second end members.
15. A gas spring assembly according to claim 14, wherein at least a portion of said first end of said flexible wall is disposed between said first end member and said lateral support element to at least partially secure said flexible wall on said first end member.

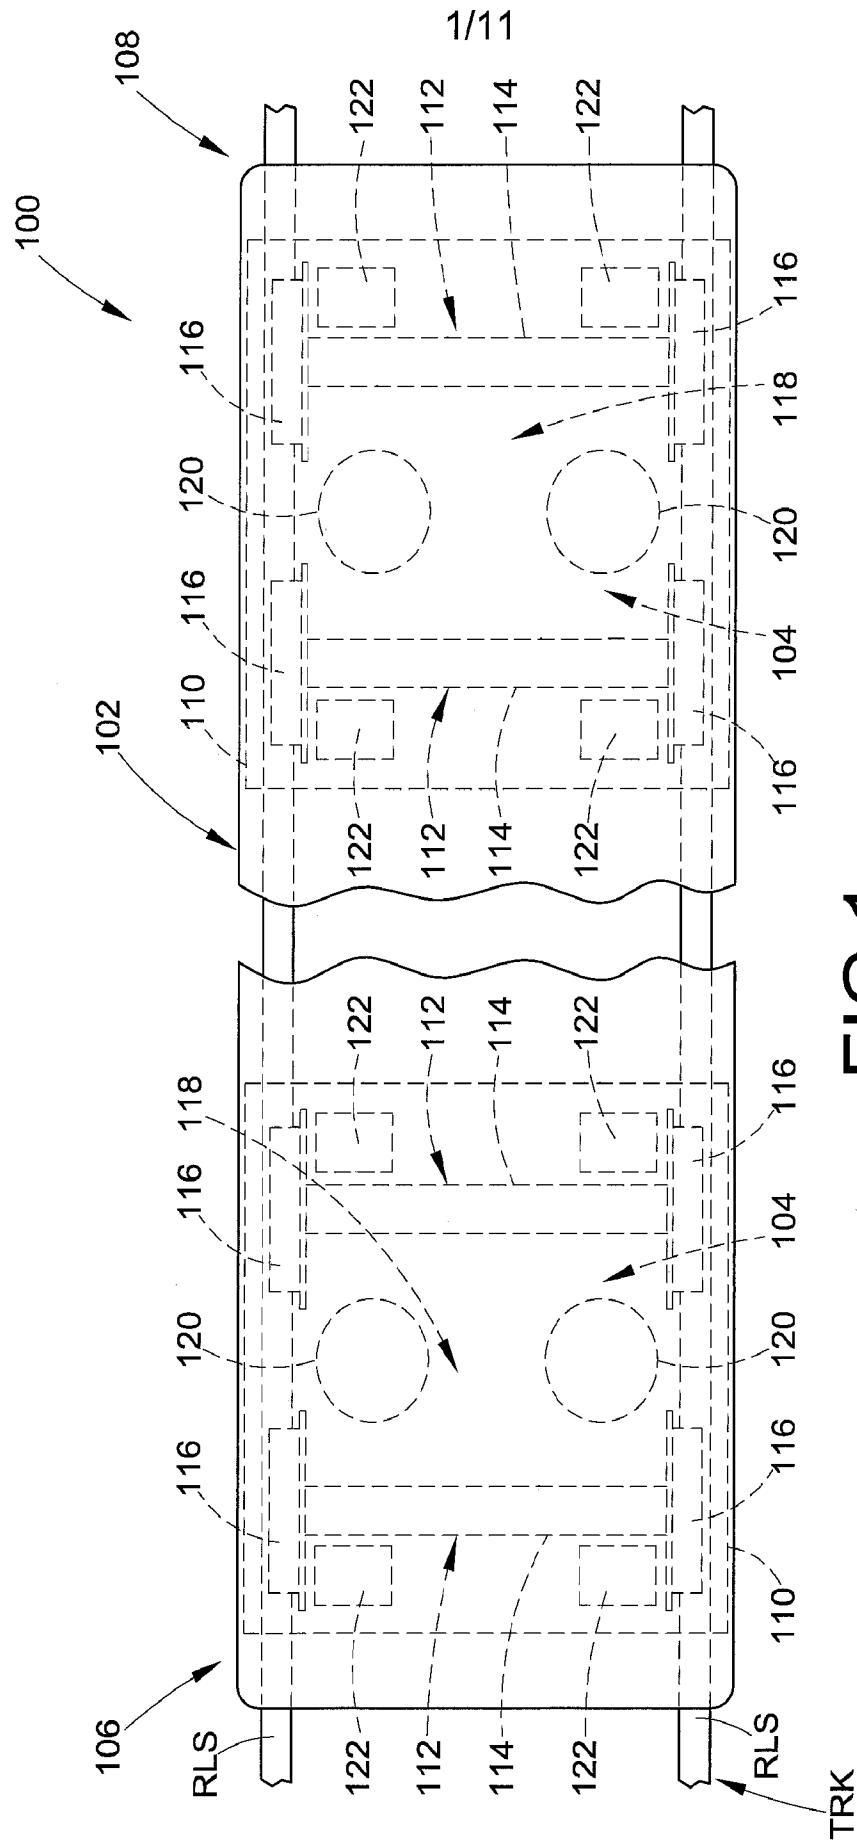
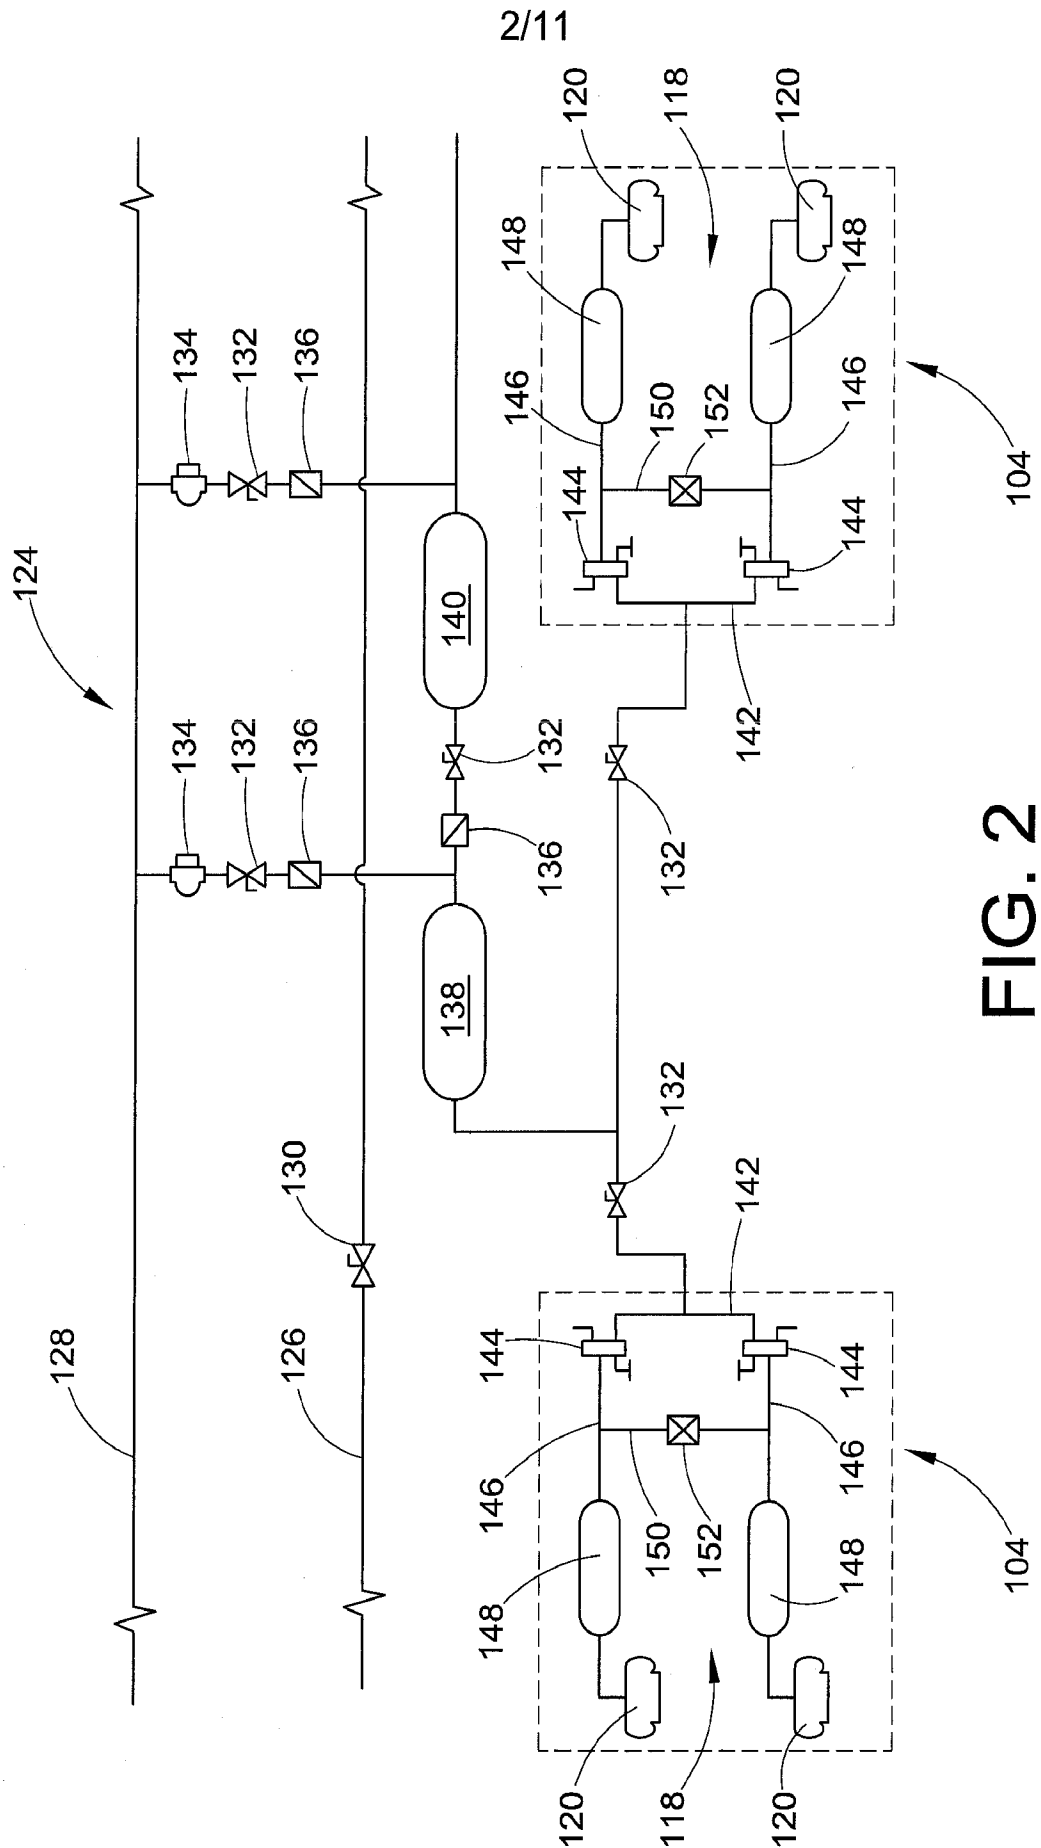


FIG. 1



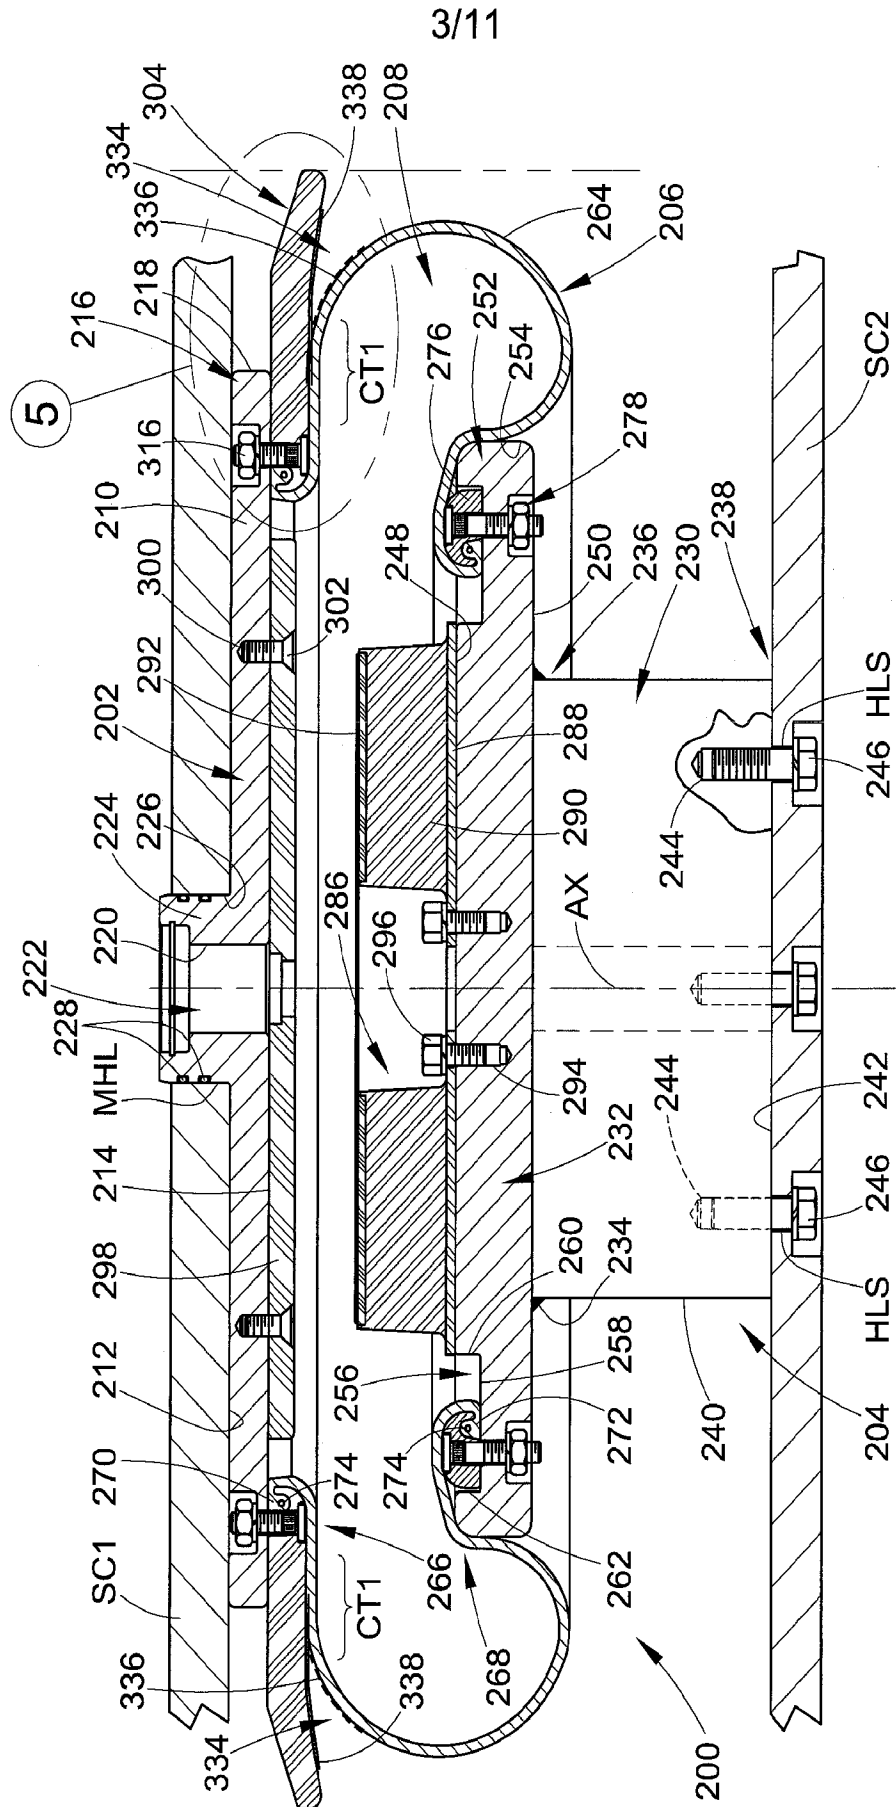


FIG. 3

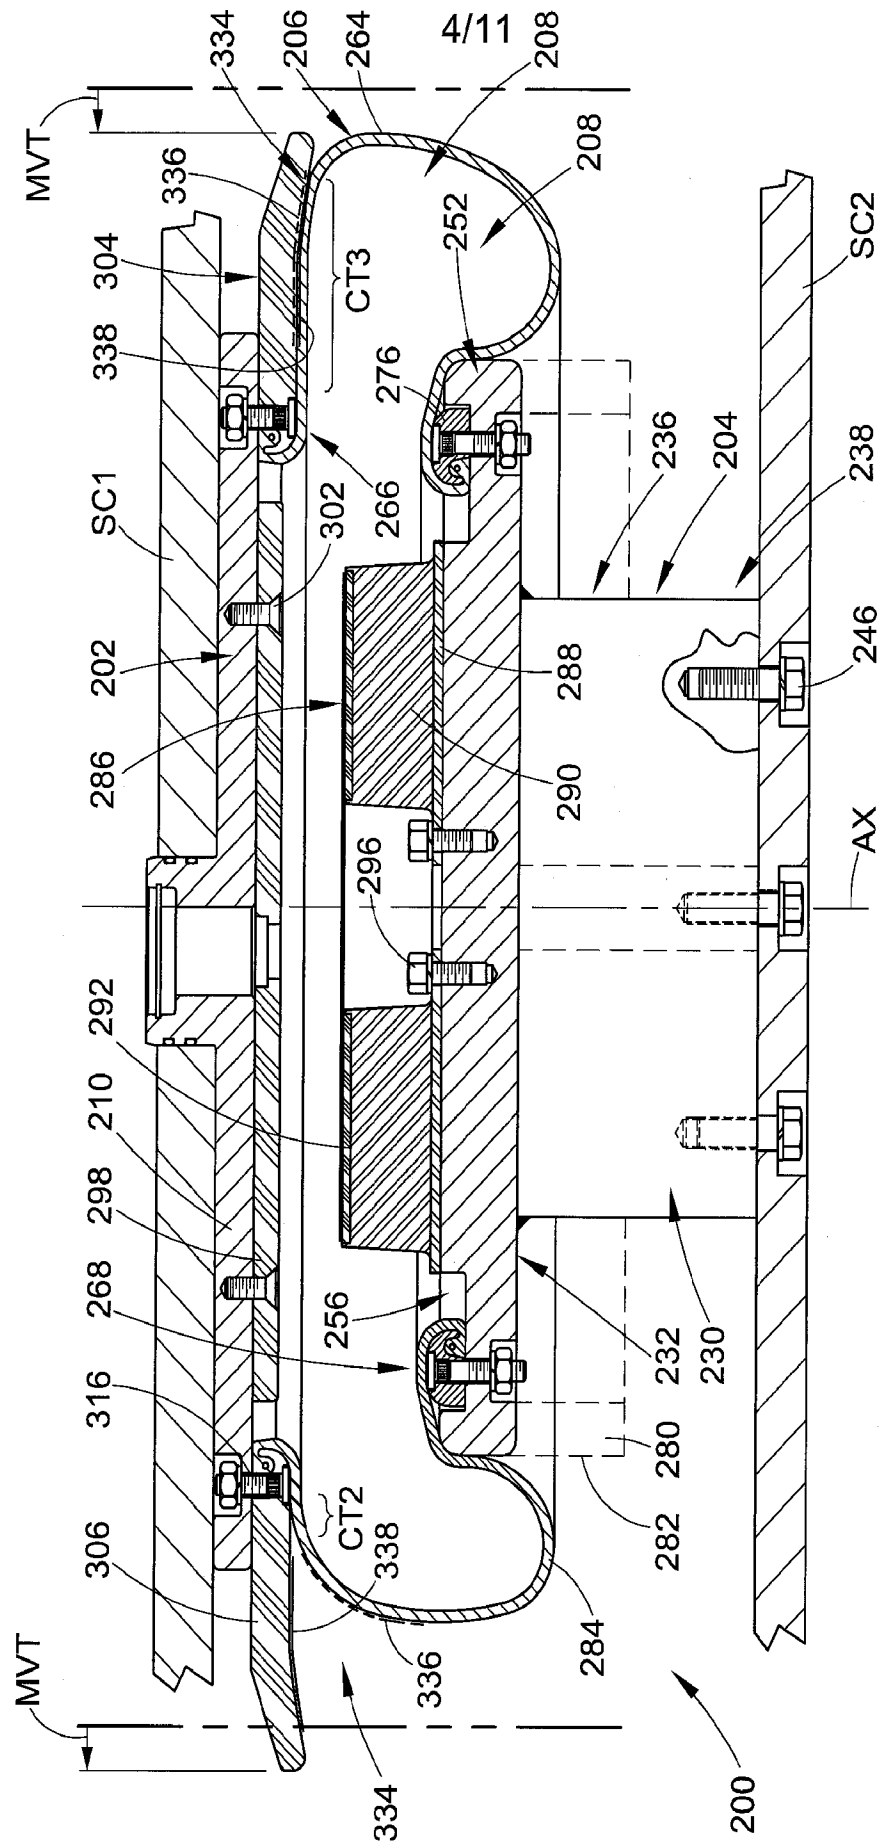


FIG. 4

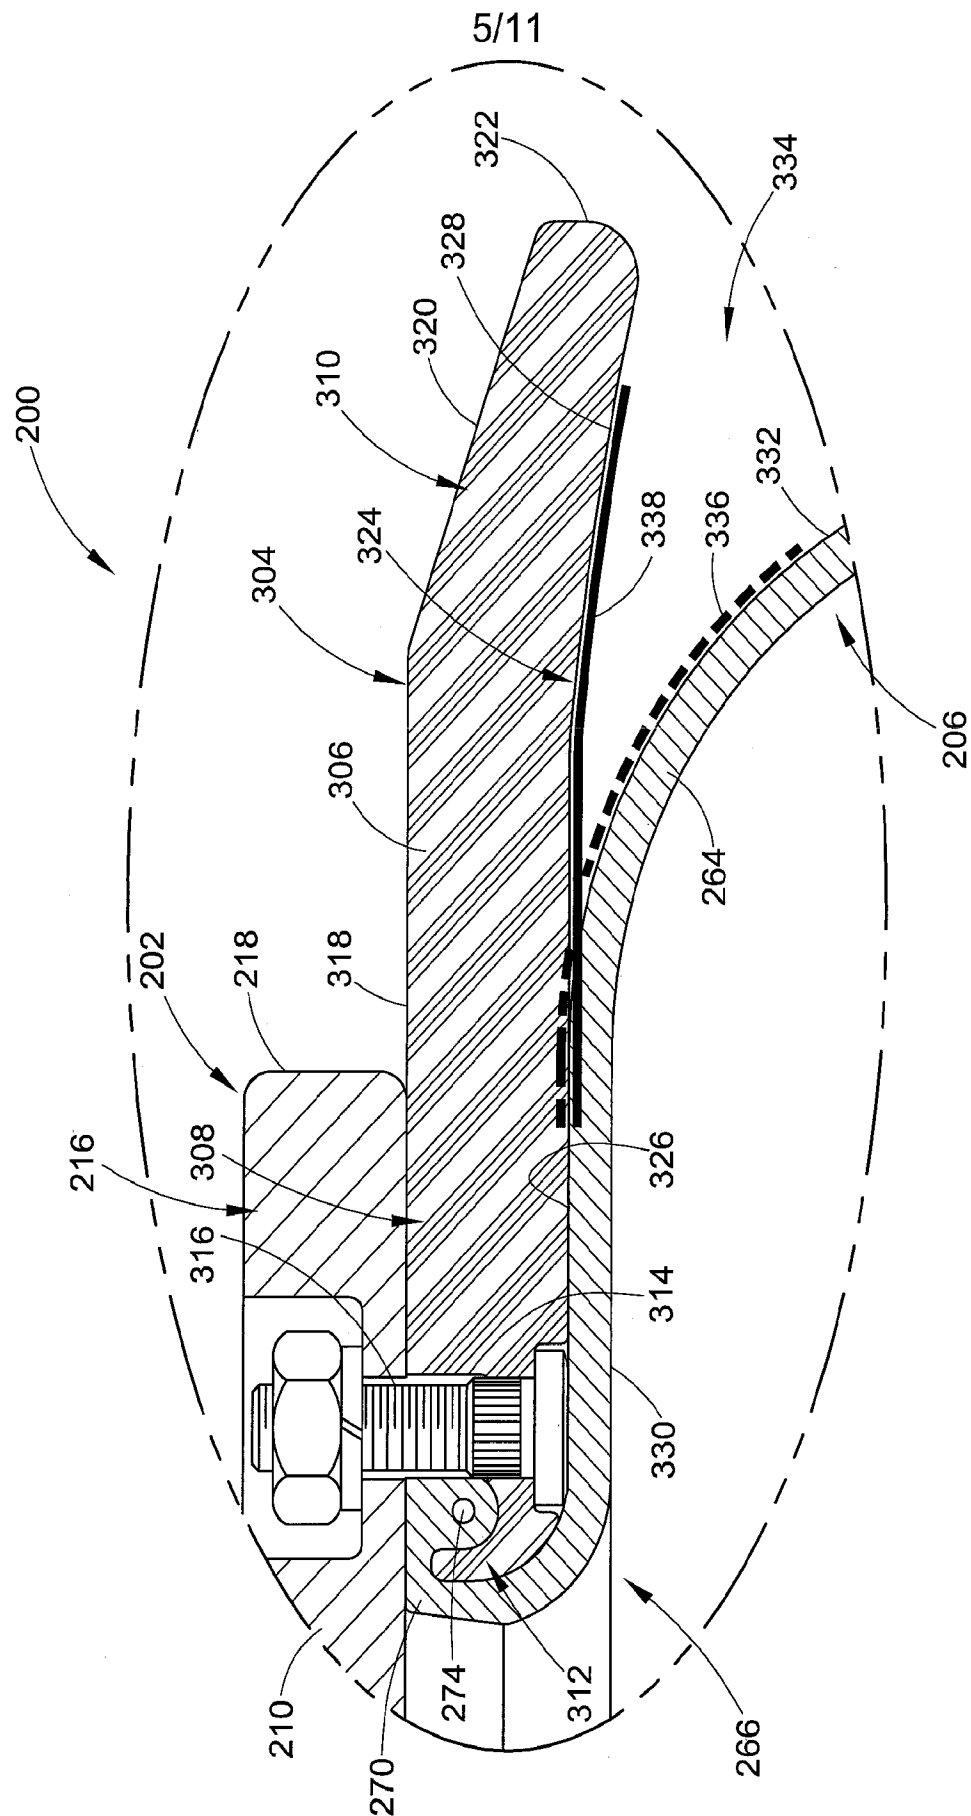


FIG. 5

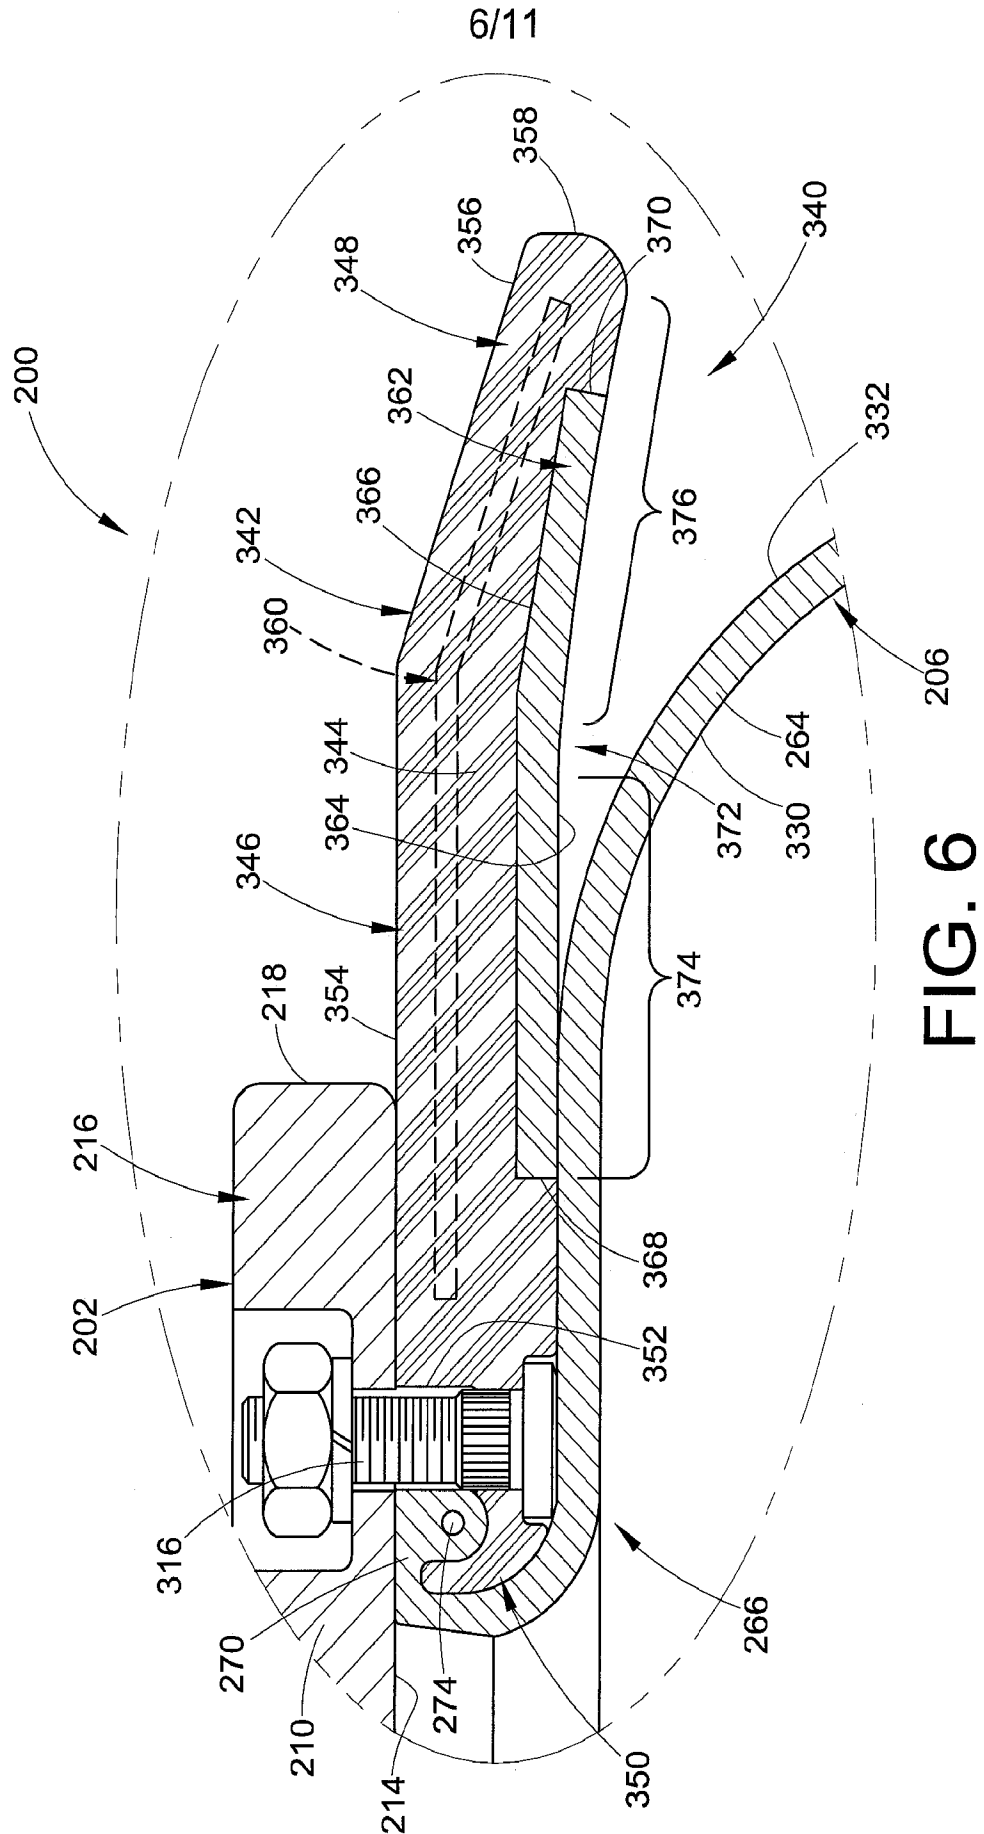


FIG. 6

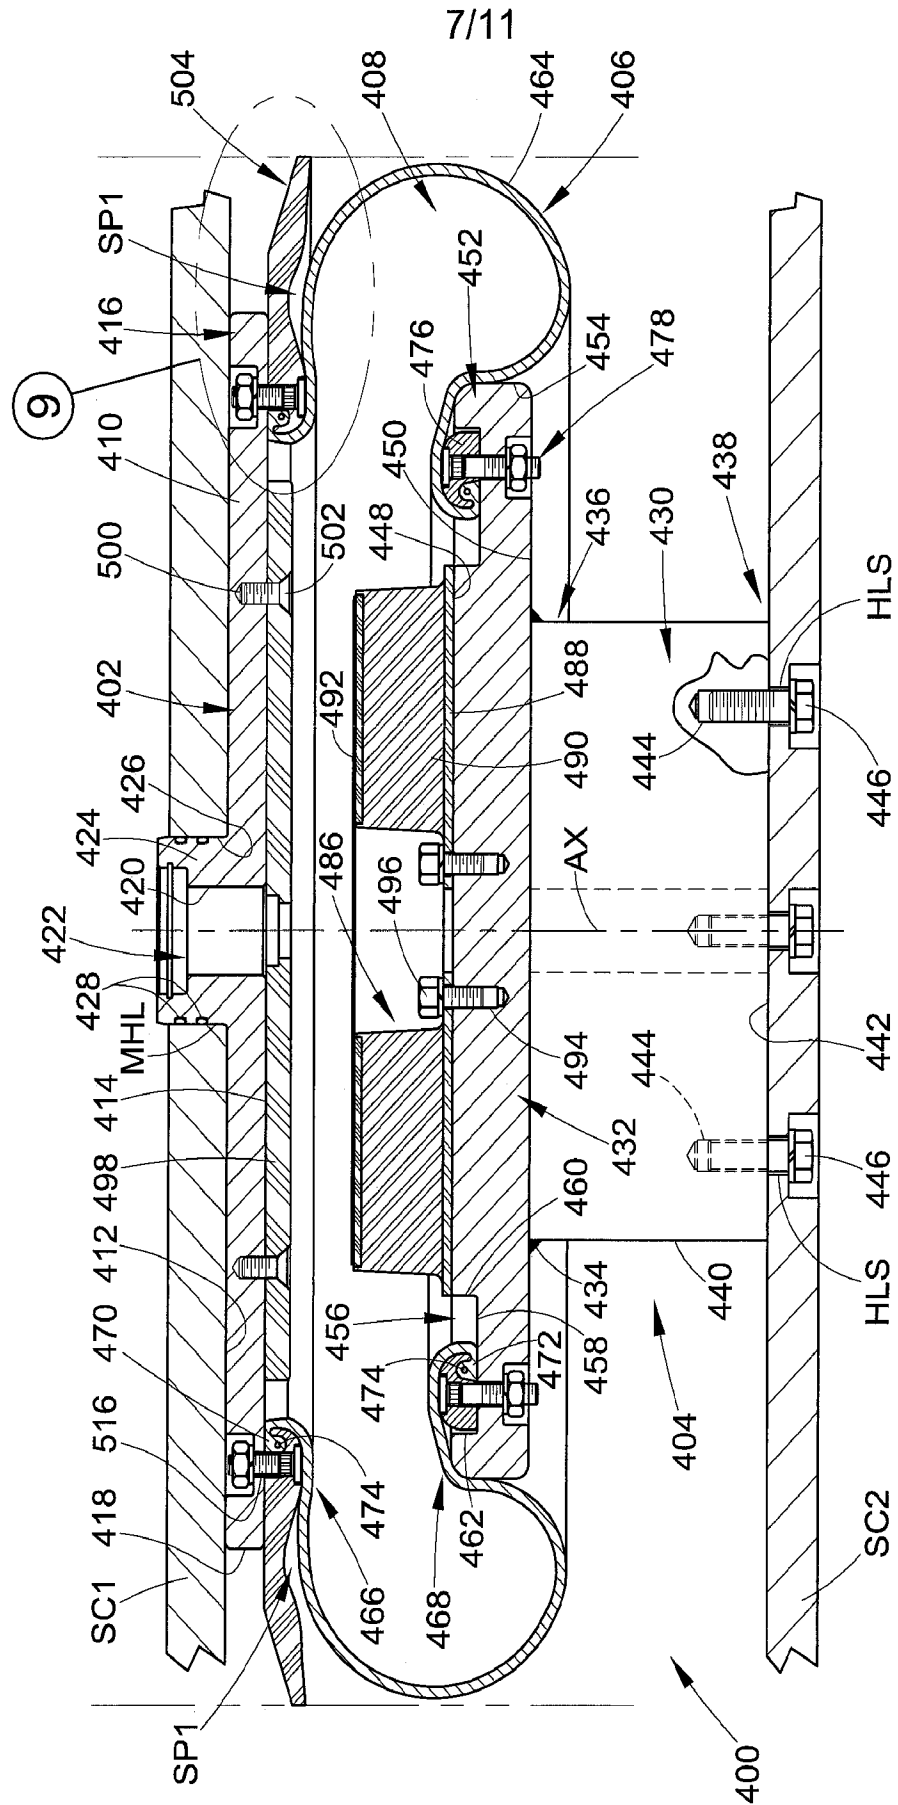


FIG. 7

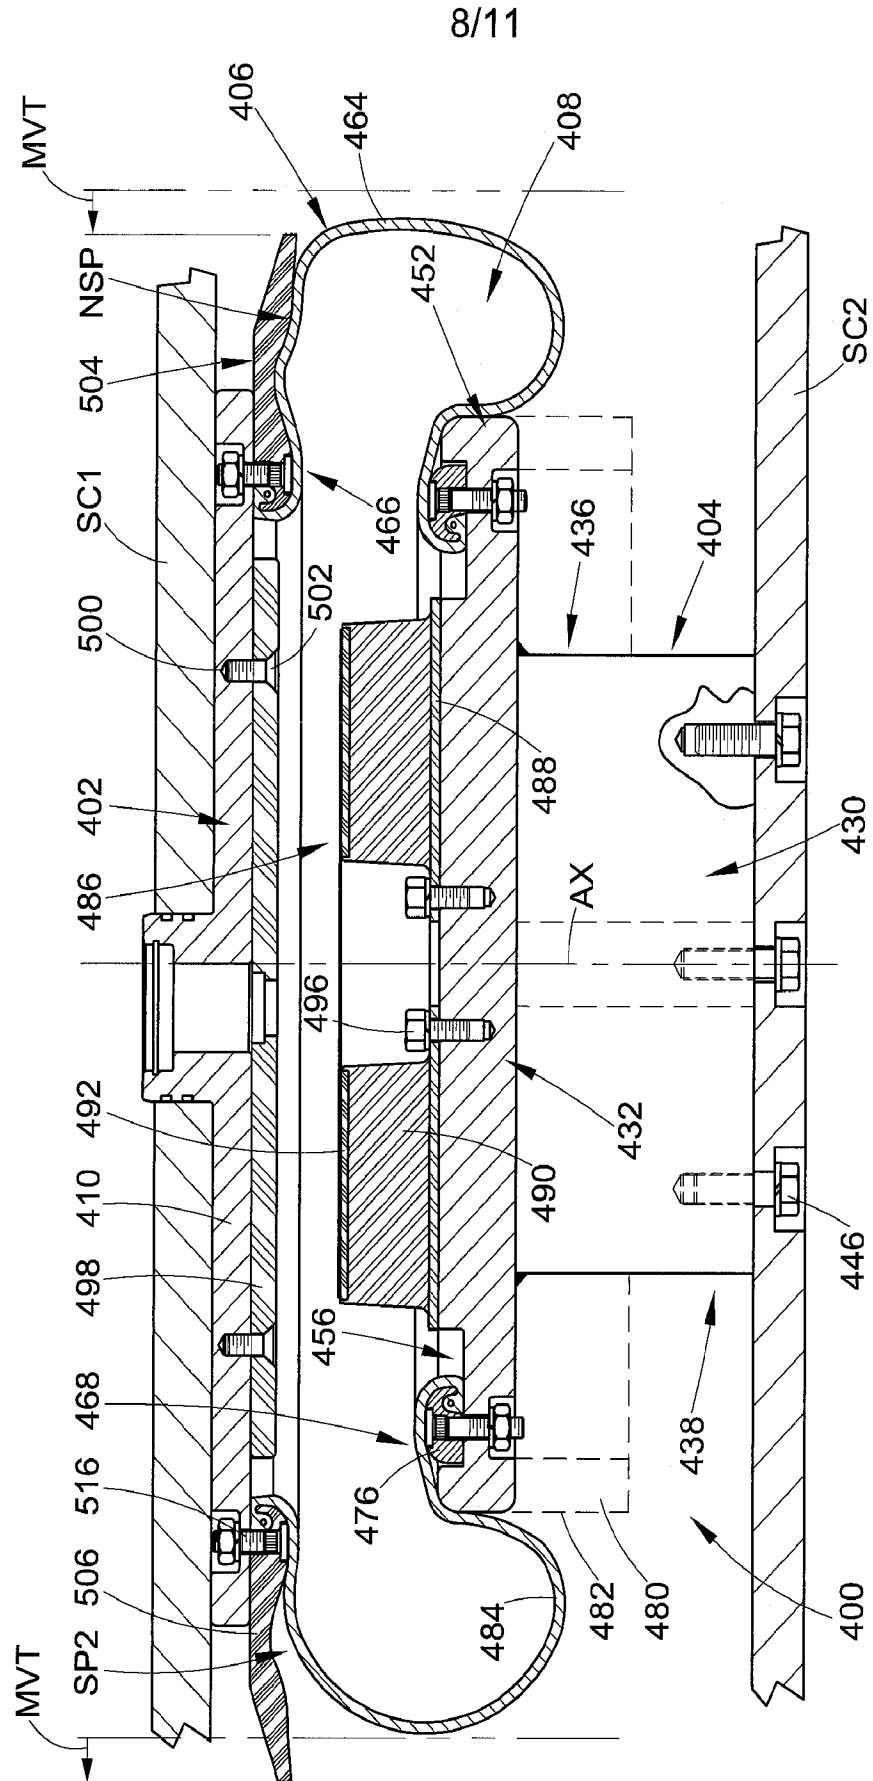


FIG. 8

9/11


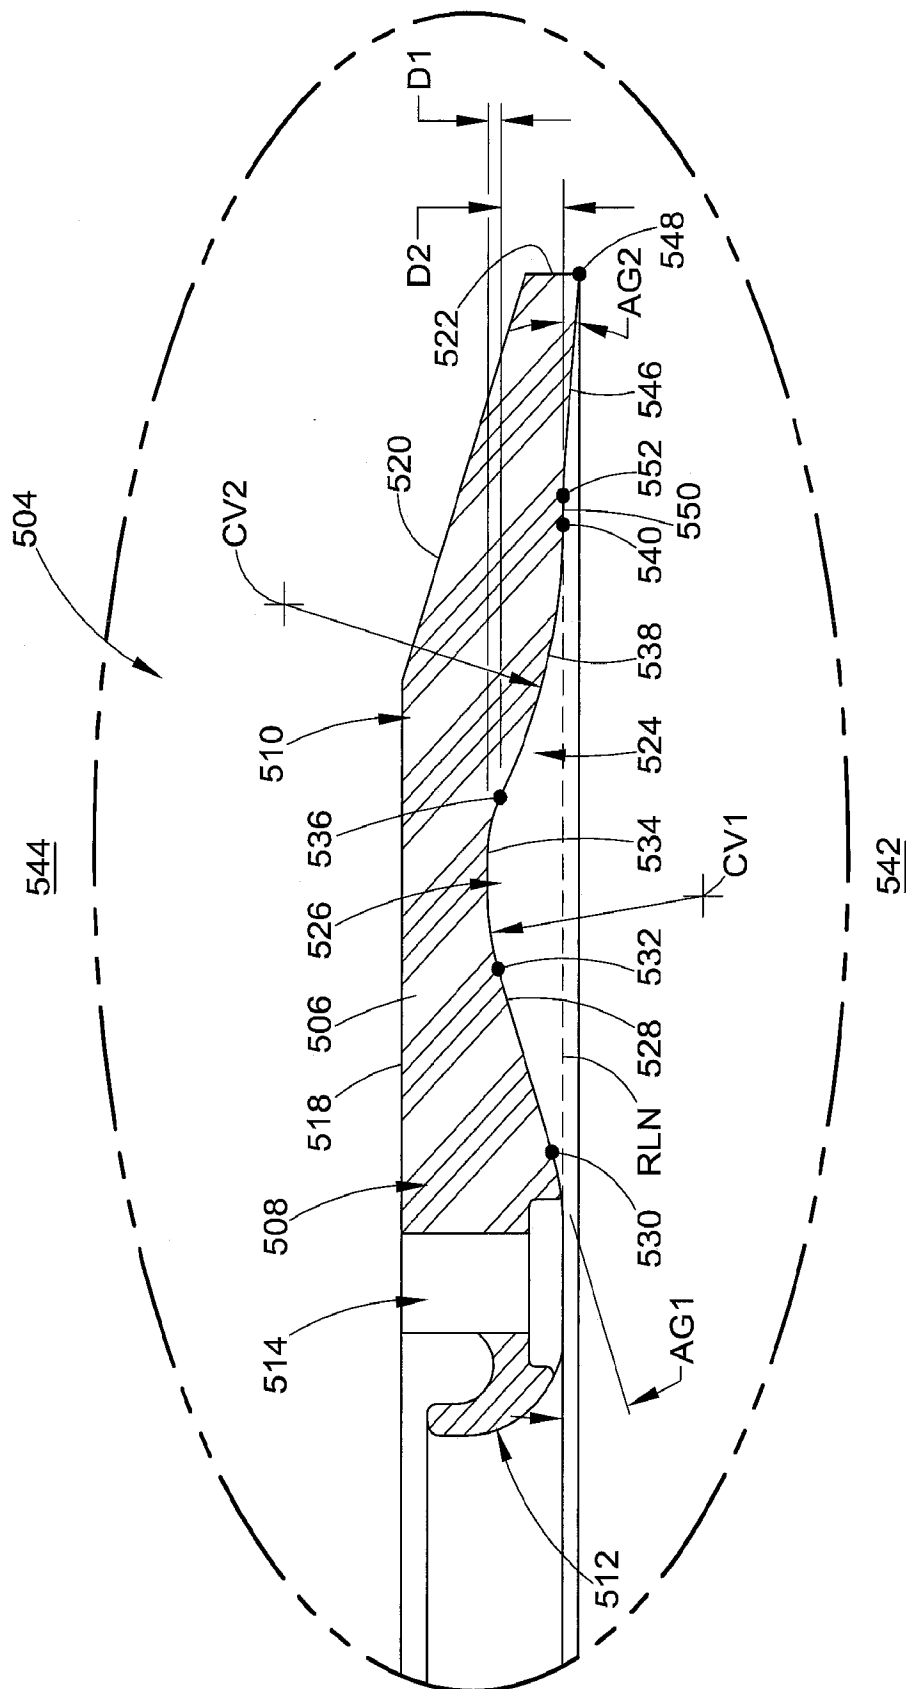


FIG. 9

10/11

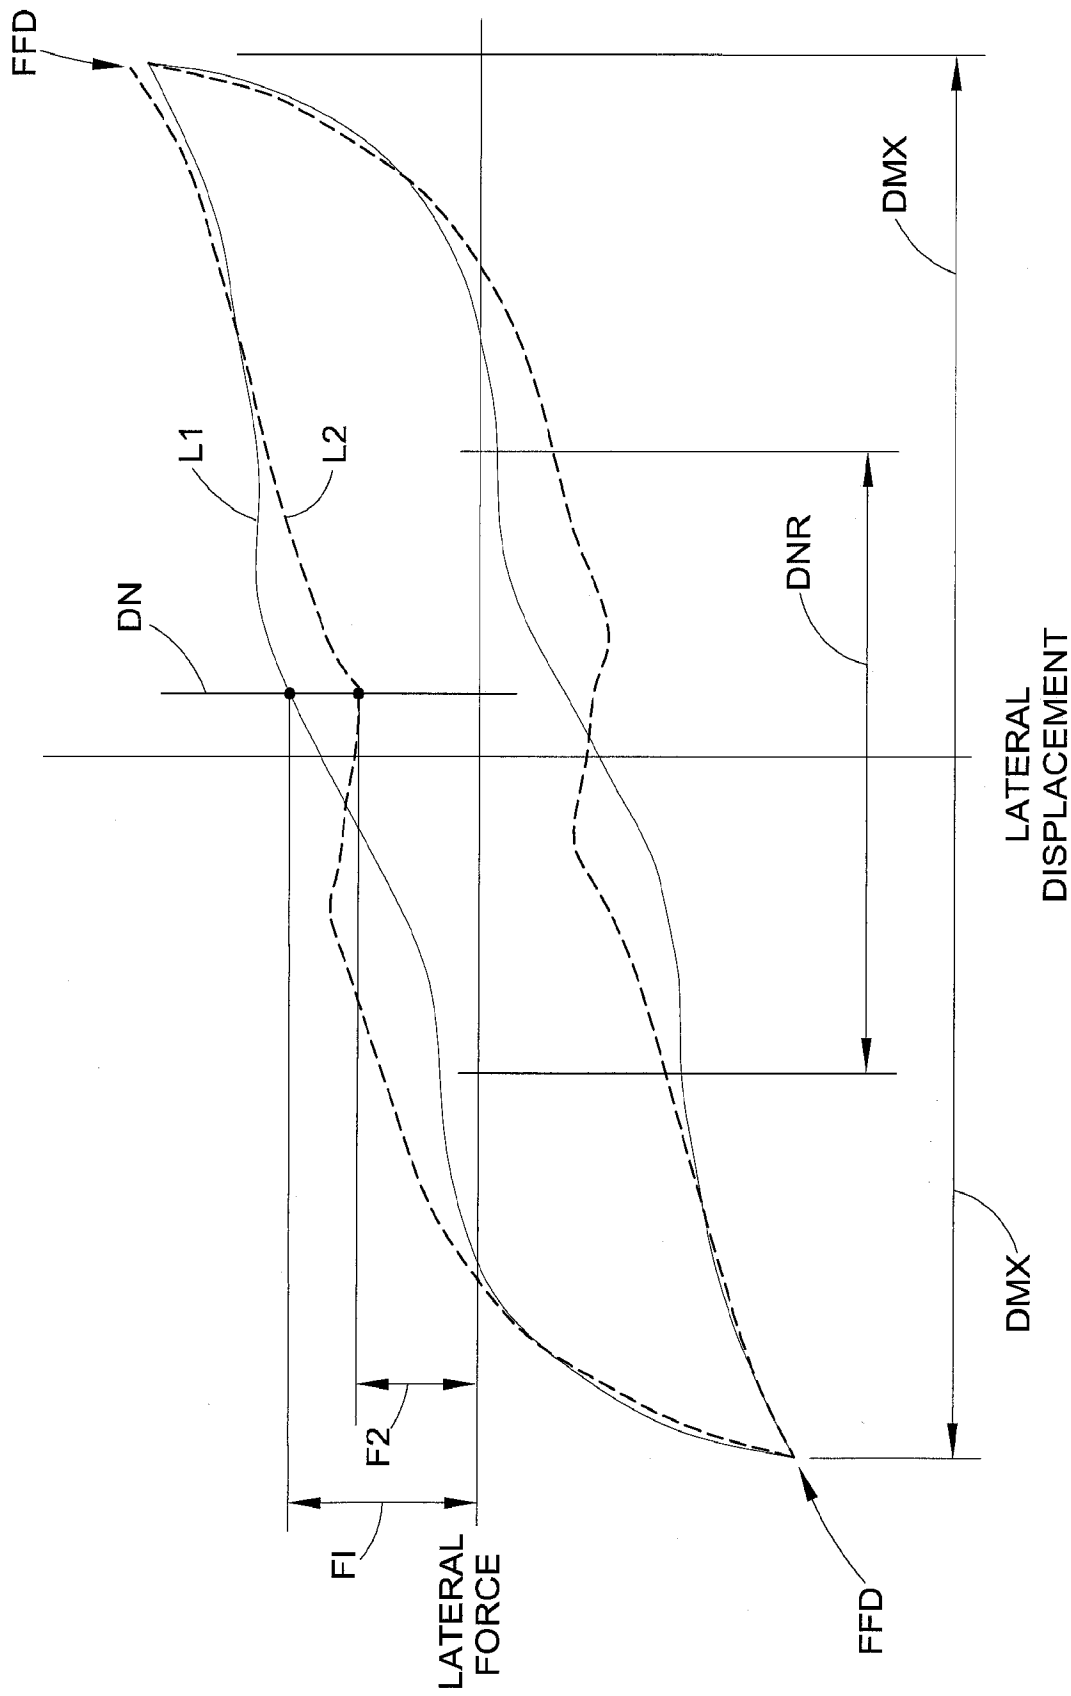

LATERAL
DISPLACEMENT
FIG. 10

11/11

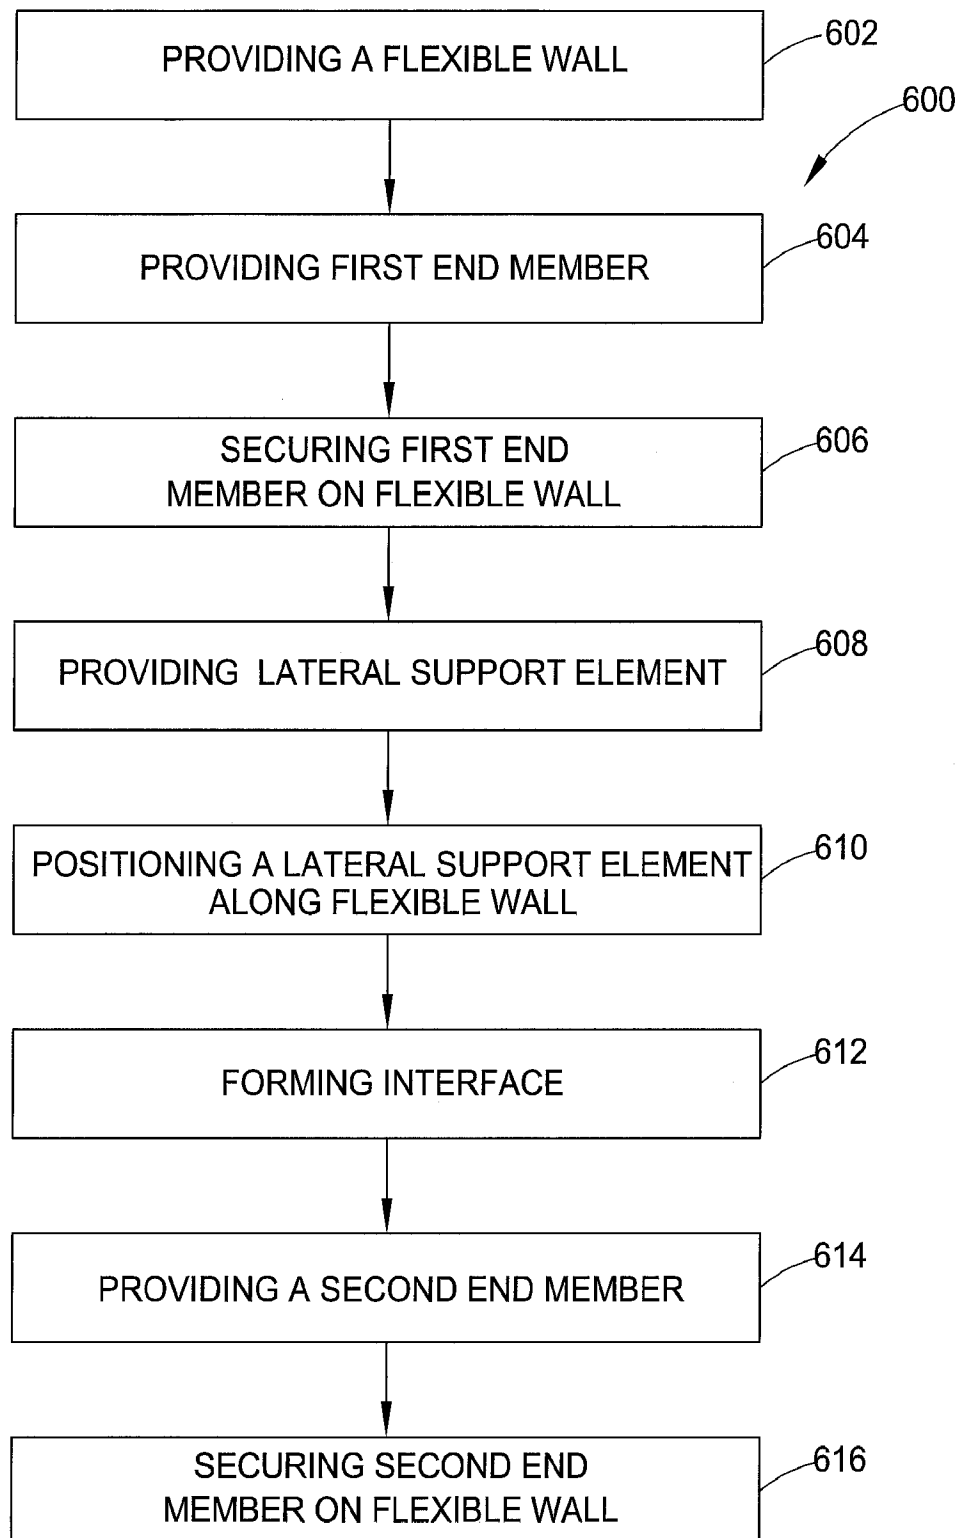


FIG. 11

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2013/050356

A. CLASSIFICATION OF SUBJECT MATTER
 INV. F16F9/04 F16F9/05
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 F16F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2005 199761 A (TOYO TIRE & RUBBER CO) 28 July 2005 (2005-07-28) Fig.1 pos. 3; paragraphs [0001] - [0021]; claims; figures	1-15
X	JP 2012 117637 A (TOYO TIRE & RUBBER CO) 21 June 2012 (2012-06-21) the whole document	1-11,14, 15 13
X	JP 2010 223372 A (TOYO TIRE & RUBBER CO) 7 October 2010 (2010-10-07) Fig.1 pos. 1,1a,1d,20; paragraphs [0001] - [0049]; claims; figures	1-11,14, 15 12,13
A		
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 October 2013

Date of mailing of the international search report

11/11/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Tiedemann, Dirk

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/050356

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	JP S55 76237 A (TOYO TIRE & RUBBER CO) 9 June 1980 (1980-06-09) Fig.1,2 pos. 2a,2b,2c; columns 1-8; claims; figures -----	1-11,14, 15 12,13
X A	DE 20 2010 008268 U1 (CONTINENTAL AG [DE]) 7 October 2010 (2010-10-07) Fig.1 pos.3; paragraphs [0007] - [0016]; claims; figures -----	1-6,14, 15 7,12
X A	EP 1 015 790 A1 (PHOENIX AG [DE]) 5 July 2000 (2000-07-05) Fig.1 pos.7,4,8; paragraphs [0003] - [0017]; claims; figures -----	1-6,14, 15 7,12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/050356

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2005199761 A	28-07-2005	JP 4371823 B2 JP 2005199761 A	25-11-2009 28-07-2005
JP 2012117637 A	21-06-2012	CN 103210236 A EP 2647871 A1 JP 2012117637 A WO 2012073537 A1	17-07-2013 09-10-2013 21-06-2012 07-06-2012
JP 2010223372 A	07-10-2010	JP 5150541 B2 JP 2010223372 A	20-02-2013 07-10-2010
JP S5576237 A	09-06-1980	JP S584216 B2 JP S5576237 A	25-01-1983 09-06-1980
DE 202010008268 U1	07-10-2010	NONE	
EP 1015790 A1	05-07-2000	AT 223004 T DE 19842733 A1 EP 1015790 A1 ES 2182370 T3 HU 0003709 A2 JP 2002510379 A US 6315274 B1 WO 9915808 A1	15-09-2002 01-04-1999 05-07-2000 01-03-2003 28-04-2001 02-04-2002 13-11-2001 01-04-1999