

(43) International Publication Date
3 September 2009 (03.09.2009)(10) International Publication Number
WO 2009/108363 A1(51) International Patent Classification:
G06F 15/16 (2006.01)(21) International Application Number:
PCT/US2009/001278(22) International Filing Date:
27 February 2009 (27.02.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/032,049 27 February 2008 (27.02.2008) US
12/360,400 27 January 2009 (27.01.2009) US(71) Applicant (for all designated States except US): **NCOM-PUTING INC.** [US/US]; 1 Lagoon Drive Suite 110, Redwood City, CA 94065 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KIPNIS, Sergey** [US/DE]; Hobachweg 10a, 91785 Pleinfeld (DE). **MAIER, Klaus, A** [US/DE]; Hofacker 14, 91785 Pleinfeld (DE). **SARTORI, Gabriele** [US/US]; 41310 Vargas Road, Fremont, CA 94539 (US).(74) Agent: **STEFFEY, Charles, E**; Schwegman Lundberg & Woessner, P.A., P.O. Box 2938, Minneapolis, MN 55402 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEM AND METHOD FOR OBTAINING CROSS COMPATIBILITY WITH A PLURALITY OF THIN-CLIENT PLATFORMS

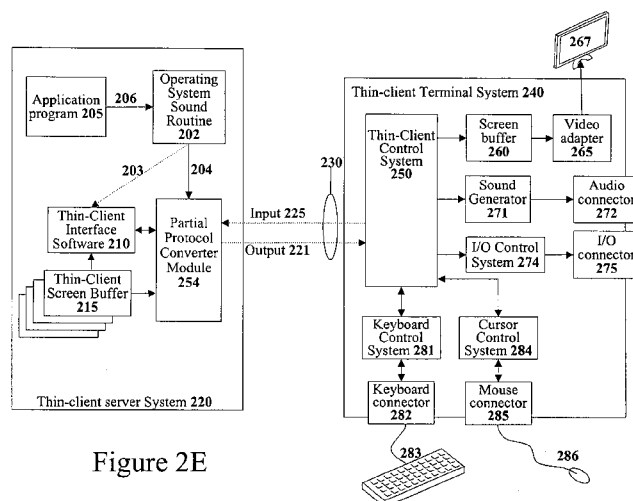


Figure 2E

(57) Abstract: Techniques for use within computer systems that communicate with multiple different terminal systems using multiple different terminal protocols are disclosed. In one embodiment, a partial protocol converter module is installed in a computer server system to enable the computer server system to communicate with terminal systems that use terminal protocol other than the terminal protocol used natively by the computer server system. The partial protocol converter module directly accesses a screen buffer in the computer server system that is associated with the terminal systems that use terminal protocol other than the terminal protocol used natively by the computer server system. The partial protocol converter module detects updates to the screen buffer and encodes these display screen updates into a message using the native protocol used by the terminal system and then transmits that encoded message to the terminal system.

SYSTEM AND METHOD FOR OBTAINING CROSS COMPATIBILITY
WITH A PLURALITY OF THIN-CLIENT PLATFORMS

5

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of United States Provisional Patent Application Serial No. 61/032,049 filed February 27, 2008 ("SYSTEM AND METHOD FOR OBTAINING CROSS COMPATIBILITY WITH A
10 PLURALITY OF THIN-CLIENT PLATFORMS"), and United States Patent Application Serial No. 12/360,400 filed January 27, 2009 ("SYSTEM AND METHOD FOR OBTAINING CROSS COMPATIBILITY WITH A PLURALITY OF THIN-CLIENT PLATFORMS"), each of which are incorporated herein in their entirety by this reference.

15

TECHNICAL FIELD

The present invention relates to the field of thin-client systems and computer terminal systems. In particular, but not by way of limitation, the present invention discloses techniques for allowing thin-client systems to
20 support multiple different terminal protocols or thin-client protocols.

BACKGROUND

Centralized computer systems with multiple computer terminals for accessing the centralized computer systems were once the dominant computer
25 architecture. Mainframe computer systems were shared by multiple computer users in a manner wherein each individual computer user had access to a separate computer terminal system coupled to the mainframe computer system.

In the late 1970s and early 1980s, personal computer systems revolutionized the computing industry by allowing each individual user to have
30 access to their own full computer system. Each computer user could run their own software applications on their own personal computer system and did not need to share any of the personal computer's resources with any other computer user.

Although personal computers have become the dominant form of
35 computing, there has been a resurgence of the centralized computer system with

multiple terminals form of computing. Terminal based computer systems can have reduced maintenance costs since the individual computer users cannot easily introduce computer viruses into the computer system or load in unauthorized software programs that may cause problems for the computer system. Furthermore, modern personal computer systems have become so powerful that their computing resources generally sit idle for the vast majority of the time such that valuable computing resources are being used very inefficiently.

10 BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, which are not necessarily drawn to scale, like numerals describe substantially similar components throughout the several views. Like numerals having different letter suffixes represent different instances of substantially similar components. The drawings illustrate generally, by way of example, but not by way of limitation, various embodiments discussed in the present document.

Figure 1 illustrates a diagrammatic representation of machine in the example form of a computer system within which a set of instructions, for causing the machine to perform any one or more of the methodologies discussed herein, may be executed.

Figure 2A illustrates a high-level block diagram of one embodiment of a thin-client terminal system coupled to a thin-client server computer system.

Figure 2B illustrates the thin-client system of **Figure 2A** wherein a protocol converter module has been added to a thin-client terminal system to allow it to communicate with a server system that uses a different terminal protocol.

Figure 2C illustrates the thin-client system of **Figure 2A** wherein a protocol converter module has been added to the thin-client server system to allow it to communicate with thin-client terminal systems that use a different terminal protocol.

Figure 2D illustrates the thin-client system of **Figure 2C** wherein the protocol converter module has been replaced with a partial protocol converter module that communicated in a native protocol of the thin-client terminal system for display information.

Figure 2E illustrates the thin-client system of **Figure 2D** wherein the partial protocol converter module is informed about some output calls to the operating system.

Figure 2F illustrates the thin-client system of **Figure 2A** wherein a
5 protocol redirector module has been added to a thin-client server system.

Figure 3 illustrates several thin-client terminals coupled to a thin-client server system using a local area network.

DETAILED DESCRIPTION

10 The following detailed description includes references to the accompanying drawings, which form a part of the detailed description. The drawings show illustrations in accordance with example embodiments. These embodiments, which are also referred to herein as “examples,” are described in enough detail to enable those skilled in the art to practice the invention. It will
15 be apparent to one skilled in the art that specific details in the example embodiments are not required in order to practice the present invention. For example, although the example embodiments are mainly disclosed with reference to a thin-client system, the teachings can be used in other environments. The example embodiments may be combined, other
20 embodiments may be utilized, or structural, logical and electrical changes may be made without departing from the scope what is claimed. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope is defined by the appended claims and their equivalents.

In this document, the terms “a” or “an” are used, as is common in patent
25 documents, to include one or more than one. In this document, the term “or” is used to refer to a nonexclusive or, such that “A or B” includes “A but not B,” “B but not A,” and “A and B,” unless otherwise indicated. Furthermore, all publications, patents, and patent documents referred to in this document are incorporated by reference herein in their entirety, as though individually
30 incorporated by reference. In the event of inconsistent usages between this document and those documents so incorporated by reference, the usage in the incorporated reference(s) should be considered supplementary to that of this document; for irreconcilable inconsistencies, the usage in this document controls.

Computer Systems

The present disclosure concerns computer systems. **Figure 1** illustrates a diagrammatic representation of machine in the example form of a computer system **100** that may be used to implement portions of the present disclosure.

5 Within computer system **100** there are a set of instructions **124** that may be executed for causing the machine to perform any one or more of the methodologies discussed herein. In a networked deployment, the machine may operate in the capacity of a server or a client machine in server-client network environment, or as a peer machine in a peer-to-peer (or distributed) network
10 environment. The machine may be a personal computer (PC), a tablet PC, a set-top box (STB), a Personal Digital Assistant (PDA), a cellular telephone, a web appliance, a network router, switch or bridge, or any machine capable of executing a set of instructions (sequential or otherwise) that specify actions to be taken by that machine. Further, while only a single machine is illustrated, the
15 term “machine” shall also be taken to include any collection of machines that individually or jointly execute a set (or multiple sets) of instructions to perform any one or more of the methodologies discussed herein.

The example computer system **100** includes a processor **102** (e.g., a central processing unit (CPU), a graphics processing unit (GPU) or both), a main
20 memory **104** and a static memory **106**, which communicate with each other via a bus **108**. The computer system **100** may further include a video display adapter **110** that drives a video display system **115** such as a Liquid Crystal Display (LCD) or a Cathode Ray Tube (CRT). The computer system **100** also includes an alphanumeric input device **112** (e.g., a keyboard), a cursor control device **114**
25 (e.g., a mouse or trackball), a disk drive unit **116**, a signal generation device **118** (e.g., a speaker) and a network interface device **120**.

The disk drive unit **116** includes a machine-readable medium **122** on which is stored one or more sets of computer instructions and data structures (e.g., instructions **124** also known as ‘software’) embodying or utilized by any
30 one or more of the methodologies or functions described herein. The instructions **124** may also reside, completely or at least partially, within the main memory **104** and/or within the processor **102** during execution thereof by the computer system **100**, the main memory **104** and the processor **102** also constituting machine-readable media.

The instructions 124 may further be transmitted or received over a network 126 via the network interface device 120. Such transfers may occur utilizing any one of a number of well-known transfer protocols such as the well known File Transport Protocol (FTP).

5 While the machine-readable medium 122 is shown in an example embodiment to be a single medium, the term "machine-readable medium" should be taken to include a single medium or multiple media (e.g., a centralized or distributed database, and/or associated caches and servers) that store the one or more sets of instructions. The term "machine-readable medium" shall also be
10 taken to include any medium that is capable of storing, encoding or carrying a set of instructions for execution by the machine and that cause the machine to perform any one or more of the methodologies described herein, or that is capable of storing, encoding or carrying data structures utilized by or associated with such a set of instructions. The term "machine-readable medium" shall
15 accordingly be taken to include, but not be limited to, solid-state memories, optical media, and magnetic media.

For the purposes of this specification, the term "module" includes an identifiable portion of code, computational or executable instructions, data, or computational object to achieve a particular function, operation, processing, or
20 procedure. A module need not be implemented in software; a module may be implemented in software, hardware/circuitry, or a combination of software and hardware.

The Resurgence of Terminal Systems

25 Before the advent of the inexpensive personal computer, the computing industry largely used mainframe or mini-computers that were coupled to many "dumb" terminals such that many user could share the same computer system. Such terminals are referred to as 'dumb' terminals since the computing ability resided within the mainframe or mini-computer system and the terminal system
30 merely displayed an output and accepted alpha-numeric input. No user application software ran locally on the terminal system. Computer operators shared the mainframe computer system with multiple individual users that each used individual computer terminals coupled to the mainframe computer. These computer terminal systems generally had very limited graphic capabilities and

were mostly visualizing only alpha-numeric characters on the display screen of the terminal.

With the introduction of inexpensive personal computer systems, the use of dumb computer terminals largely disappeared since personal computer
5 systems were much more cost effective. If the services of a dumb terminal were required in order to interface with a legacy terminal based computer system, a personal computer could easily emulate the operations of a dumb computer terminal at a cost very similar to the cost of a dedicated dumb computer terminal.

During the personal computer revolution, personal computer systems
10 introduced high resolution graphics to personal computer users. Such high-resolution graphics allowed for much more intuitive computer graphical user interfaces rather than the old text-only display of most computer terminals. For example, all current personal computer graphical user interfaces that use multiple different windows, icons, and pull-down menus are implemented using
15 high resolution graphics. Furthermore, high-resolution graphics allowed for software applications that use digital photos, videos, and graphical images.

In recent years, a new generation of computer terminal systems have been introduced into the marketplace as people have rediscovered some of the advantages of the terminal based computer systems. For example, computer
20 terminals allow for greater security and reduced maintenance costs since the users of computer terminals cannot introduce computer viruses by downloading or installing new software into the computer system. This new generation of computer terminal systems feature high-resolution graphics capabilities that personal computer users have become accustomed to.

25 Modern terminal-based computer systems allow multiple users at high-resolution terminals to share a single personal computer system and all of the software installed on that personal computer system. In this manner, a modern high-resolution terminal is capable of delivering the functionality of a personal computer system without the costs and the maintenance requirements of a
30 personal computer system. One category of these modern terminal systems is called "thin client" systems. Although the techniques set forth this document will mainly be disclosed with reference to thin-client systems, the techniques described herein are applicable in other area of the information technology (IT) industry as well.

A Thin-Client System

Figure 2A illustrates a high-level block diagram of one embodiment of a thin-client terminal system **240** coupled to a thin-client server computer system **220** with a communications channel **230**. Thin-client terminal system **240** provides terminal access to the computing resources of server computer system **220**. The thin-client server computer system **220** may be a typical computer system such as the computer system **100** illustrated in **Figure 1**. Since modern personal computer systems have become such powerful computer systems, thin-client server computer system **220** may be a standard modern personal computer system. The communications channel **230** may be any suitable bi-directional digital communication channel such as Ethernet, USB, etc.

Figure 3 illustrates a conceptual diagram of one thin-client environment wherein a single thin-client server computer system **220** provides computer resources to many individual thin-client terminal systems **240**. In the embodiment of **Figure 3**, each of thin-client terminal systems **240** are coupled to the thin-client server computer system **220** using local area network **230** as a communication channel. For example, an Ethernet computer network may be used to couple the individual thin-client terminal systems **240** to the thin-client server computer system **220**.

Referring back to **Figure 2A**, the goal of thin-client terminal system **240** is to provide most or all of the standard input and output features of a typical personal computer system to the user of thin-client terminal system **240**. However, this goal is to be done without providing the full computing resources or software of a personal computer system since those features will be provided by the thin-client server system **220** that will interact with the thin-client terminal system **240**.

From an output perspective, one embodiment of the thin-client terminal system **240** provides both a high-resolution video display system and an audio output system. The high-resolution video display system consists of a screen buffer **260** that contains the contents of a bit-mapped display and a video adapter **265** that generates a video display signal to drive a display system **267** using the bit-mapped display information in screen buffer **260**. The screen buffer **260** is filled with display information provided by thin-client control system **250** using

video information sent as output **221** by the thin-client server system **220** across a communications channel **230**. Similarly, the audio system consists of a sound generator **271** coupled to an audio connector **272** for creating a sound signal with information provided by thin-client control system **250** using audio information sent as output **221** by the thin-client server system **220** across a communications channel **230**.

From an input perspective, thin-client terminal system **240** allows for both alpha-numeric input and cursor control input from a user using the thin-client terminal system **240**. The alpha numeric input is provided by a keyboard **283** coupled to a keyboard connector **282** that supplies signals to a keyboard control system **281**. Thin-client control system **250** encodes keyboard input from keyboard control system **281** and sends that keyboard input as input **225** to the thin-client server system **220**. Similarly, the thin-client control system **250** encodes cursor control input from cursor control system **284** and sends that cursor control input as input **225** to the thin-client server system **220**. With the high resolution display system, the sound generation system, the keyboard input system, and the cursor control input system; the thin client terminal system **240** provides the major input and output features typically used by a person using a personal computer system.

The thin-client terminal system **240** may include other input, output, or combined input/output systems in order to provide additional functionality to the user of the thin-client terminal system **240**. For example, the thin-client terminal system **240** of **Figure 2A** includes input/output control system **274** coupled to input/output connector **275**. Input/output control system **274** may be a Universal Serial Bus (USB) controller and input/output connector **275** may be a USB connector in order to provide USB capabilities to the user of thin-client terminal system **240**.

Thin-client server system **220** is equipped with software for interacting with multiple thin-client terminal systems. As illustrated in **Figure 2A**, thin-client interface software **210** in thin-client server system **220** supports thin-client terminal system **240** as well as any other thin-client terminal systems coupled to thin-client server system **220**. Each individual thin-client terminal system will have its own screen buffer in the thin-client server system **220** as illustrated by the multiple thin-client terminal screen buffers **215**.

Multiple Different Thin-Client Systems

As the terminal-based model of computing experienced a resurgence of popularity, many different graphics terminal protocols have been introduced into the marketplace. The various graphics terminal protocols include the Remote Desktop Protocol (RDP) (by Microsoft of Redmond, Washington), the Citrix MetaFrame ICA protocol (by Citrix Systems), the Virtual Network Computing protocol (VNC), the Sun Ray protocol (by Sun Microsystems, of Mountain View, California), the X Terminal protocol used in various UNIX-based computer systems, the User eXtension Protocol (UXP) (by NComputing of Redwood City, California), and a newly developing graphics terminal protocol known as Net2Display (A proposed VESA standard).

These different graphics terminal protocols are generally incompatible with each other. Thus, if an entity begins installing graphics terminals that use one of these graphics terminal protocols, then that entity may feel “locked in” to the vendor of the products for that particular graphics protocol. Otherwise, the entity may end up supporting multiple similar graphics terminal devices with incompatible graphics terminal protocols. Even if an information technology (IT) department is very diligent about only purchasing graphics terminals from one particular vendor, that IT department may end up having to support multiple different graphics terminal protocols due to a corporate acquisition of another entity that selected a different graphics terminal protocol as their preferred graphics terminal protocol.

Thin-Client Terminal System with Protocol Converter

One method of reducing this multiple graphics terminal protocol problem is to use thin-client terminal systems that include a protocol converter such that the thin-client terminal systems can handle multiple different graphics terminal protocols. **Figure 2B** illustrates such an embodiment. **Figure 2B** illustrates the thin-client terminal system **240** of **Figure 2A** wherein a protocol converter module **251** is included within the thin-client control system **250** of the thin-client terminal system **240**. The protocol converter module **251** would be responsible for handling multiple different graphics terminal protocols such that the thin-client terminal system **240** of **Figure 2B** would be capable of operating

in multiple different thin-client environments that use different graphics terminal protocols.

However, there are a number of problems associated with the proposed solution of a thin-client terminal based protocol converter **251** as illustrated in **Figure 2B**. One of the primary problems with this approach is that embedding a protocol converter into a thin-client terminal system **240** is not practical on an economic basis. One of the goals of thin-client terminal systems is to reduce deployment costs on a per user basis. In order to achieve this goal, thin-client terminal systems are constructed as lean as possible in order to be able to manufacture the thin-client terminal systems for a very low cost. By introducing a protocol converter **251** into thin-client terminal system **240**, the cost of that thin-client terminal system may increase greatly due to the costs of more memory, greater processing power, and license fees needed to implement other proprietary graphics terminal protocols. Another problem may be an increased deployment cost since each individual thin-client terminal system **240** may need to be individually configured by an administrator in order to specify which of multiple graphics terminal protocols that thin-client terminal system **240** should be using.

Thin-Client Server System with Protocol Converter

As set forth in the previous section, placing a protocol converter within the multiple individual thin-client terminal systems **240** is a not a practical method of handling the problem of multiple different graphics terminal protocols. So an alternative solution would be to put a protocol converter in the thin-client server system instead of in the individual thin-client terminal systems.

Figure 2C illustrates the thin-client environment of **Figure 2A** wherein a protocol converter module **253** has been added within the thin-client server system **220**. The protocol converter **253** may allow communication to pass through unchanged when the thin-client interface software **210** in the thin-client server system **220** is communicating a thin-client terminal system that uses the same native graphics terminal protocol. However, when the thin-client interface software **210** attempts to communicate with a thin-client terminal system that uses a different type of graphics terminal protocol, the protocol converter module **253** will translate the communication from the thin-client interface

software **210** into the specific graphics terminal protocol used natively by the thin-client terminal system before sending it as output **221**. Similarly, when that thin-client terminal system that uses a different native graphics terminal protocol sends input **225** information (such as keystrokes from a keyboard or cursor control device movements) then protocol converter module **253** will translate that input information into the native graphics terminal protocol used by thin-client interface software **210** within the thin-client server system **220**.

The solution to the multiple graphics terminal protocol problem illustrated in **Figure 2C** is more economical than the proposed solution illustrated in **Figure 2B**. For example, the only change this is required is the addition of single protocol converter module **253** into thin-client server system **220**. Furthermore, the configuration for all the different thin-client terminal systems that will be used can be done at the thin-client server system **220** instead of at all the individual thin-client terminal systems.

However, there are still some issues associated with the solution to the multiple graphics terminal protocol problem illustrated in **Figure 2C**. On problem is that protocol conversion is not a trivial task such that the performance of the entire thin-client terminal system may suffer. For each unit of communication (command, packet, request, response, or what ever the communication unit is for a particular graphics terminal protocol), the protocol converter module **253** must decode the graphics terminal protocol command, translate that graphics terminal command into the native graphics terminal protocol, and construct a new communication in the native graphics terminal protocol of the destination device along with reformatted data from the original graphics terminal command. With the large amount of data that passes between a thin-client server system and a thin-client terminal system, this protocol conversion task can consume a large amount of the processing power of the thin-client server system **220**. This problem is further compounded with every additional non-native thin-client terminal system that is added to the thin-client environment since each non-native thin-client terminal system will require such protocol conversion.

In addition to the additional processing burden on the thin-client server system **220**, the protocol converter module **253** introduces an additional delay time into the thin-client system. For example, when the thin-client server system

220 has an update for the screen display of a thin-client terminal system, that display update is first written to the thin-client terminal's associated screen buffer 215 in the thin-client server system 220. Next, that change to the thin-client terminal's screen buffer 215 in the thin-client server system 220 is
5 encoded into a thin-client graphics protocol message in the graphics protocol native to the thin-client server system 220 by thin-client interface software 210. That thin-client graphics protocol message is then intercepted by protocol converter module 253 before it is sent out on communication channel 230. Protocol converter module 253 then must decode the thin-client graphics
10 protocol screen display update message, translate the screen display update message, and then encode the screen display update into the native thin-client graphics protocol message used by the recipient thin-client terminal system 240. This significant amount of processing by the protocol converter module 253 of the screen display update message may delay the screen update on the thin-client
15 terminal system 240 in a manner that is noticeable by a user of the thin-client terminal system 240.

Thin-Client Server System with a Partial Protocol Converter

To provide a better solution to the multiple graphics terminal protocol
20 problem, the present disclosure introduces a partial protocol converter module that improves the performance of the system. The proposed partial protocol converter converts the protocol of some of the communication that occurs between a thin-client server system and a thin-client terminal system but other communication is handled both in the thin-client server system and the thin-
25 client terminal system using the native graphics terminal protocol of the thin-client terminal system.

Referring back to the example thin-client environment illustrated in
Figure 2A, a thin-client server system 220 communicates bi-directionally with a thin-client terminal system 240 across a communications channel 230. Although
30 the communication across communications channel 230 is bi-directional, the vast majority of that communication is output 221 from the thin-client server system 220 to the thin-client terminal system 240 with a much smaller amount of input 225 from the thin-client terminal system 240 to the thin-client server system 220. Specifically, the amount of high-resolution graphics display

information transmitted from a thin-client screen buffer 215 in thin-client server system 220 to the thin-client terminal system 240 is significantly larger than the relatively small amount of user input information (keystrokes and cursor control device movements) from the thin-client terminal system 240 to the thin-client server system 220. Thus, if the amount of work that must be performed when sending high-resolution graphics display information from the thin-client server system 220 to the thin-client terminal system 240 could be reduced, a much more efficient thin-client environment would be realized.

All of the various different graphics terminal protocols handle the creation of high-resolution graphics display output 221 information in a similar manner. Specifically, all of the different graphics terminal protocols for thin-client terminal systems create a display screen buffer within the memory system of the thin-client server system 220 for each thin-client terminal systems coupled to the thin-client server system 220 as depicted by thin-client screen buffers 215. (Multiple different display screen buffers for the multiple different thin-client terminal systems are denoted by the stack of boxes.) These thin-client terminal screen buffers 215 are usually in the main memory of the thin-client server system 220 and each individual screen buffer contains a digital representation of the associated thin-client terminal's display screen. The same content available in thin-client terminal screen buffer 215 in the server system 220 becomes available in an associated thin-client terminal system's screen buffer 260 after a display screen update message is sent to the thin-client terminal system 240. Specifically, the thin-client interface software 210 encodes any changes detected in the server-based screen buffer 215 and then sends those changes to the associated thin-client terminal system 240 where the thin-client control system 250 decodes the changes and updates the local screen buffer 260 accordingly.

One embodiment of the present disclosure takes advantage of this commonality among the various different graphics terminal systems. Instead of performing laborious protocol conversions as set forth in the embodiment of **Figure 2C**, one embodiment of the present disclosure directly monitors the thin-client screen buffer 215 in the in the server system 220 for each graphics terminal system that uses a non native graphics terminal protocol and directly generates display screen updates in the native graphics terminal protocol for the thin-client terminal system.

Figure 2D illustrates a block diagram of an embodiment of such a system. Referring to **Figure 2D**, a partial protocol converter module **254** exists between thin-client interface software **210** in the thin-client server system **220** and all the thin-client terminal systems. When the thin-client interface software **210** in the thin-client server system **220** is communicating with a thin-client terminal system that uses the same native protocol (with input **225** or output **221**), the partial protocol converter module **254** allows such communication to pass through unchanged. However, when the thin-client interface software **210** in the thin-client server system **220** is communicating with a thin-client terminal system that uses a different graphics terminal protocol, then partial protocol converter module **254** may perform some limited protocol conversion.

For example, in one embodiment, the partial protocol converter module **254** may receive input **225** (such as cursor control movements and keystrokes) from a thin-client terminal system **240** that does not use the same native protocol as and thin-client interface software **210** and thus translate such communication before passing it along to thin-client interface software **210**. However, instead of receiving graphics screen updates from thin-client interface software **210** and translating such graphics screen updates, the partial protocol converter module **254** will instead read directly from the thin-client screen buffer **215** associated with that thin-client terminal system **240** and transmit updates to the thin-client screen buffer **215** using the native protocol of that thin-client terminal system **240**. In one embodiment, the partial protocol converter module **254** continues to receive display update messages from thin-client interface software **210** in the native graphics protocol of the server but may simply discard such messages.

Any other output from the thin-client interface software **210** that does not concern the image on the display screen (as represented in the thin-client screen buffer **215**) may be translated by partial protocol converter module **254** before being sent to the thin-client terminal system **240**. By eliminating the computational task of performing protocol conversion on updates to the thin-client screen buffer **215**, the partial protocol converter module **254** eliminates the vast majority of the protocol conversion work that must be performed by the full protocol converter module **253** in the embodiment disclosed in **Figure 2C**.

Partial Protocol Converter with Operating System Redirection

Other means of avoiding graphics terminal protocol conversion work can be implemented instead or in addition to the partial protocol converter technique described with reference to **Figure 2D**. In one alternate embodiment, various requests made to the thin-client interface software **210** from an application program associated with thin-client graphics terminal can be intercepted in order to prevent the need for performing graphics terminal protocol conversions associated with such requests.

Figure 2E illustrates another embodiment of a thin-client server system **220** with a partial protocol converter **254**. When application program running on thin-client server system **220** needs to generate a sound, the application program may call an operating system sound routine **202** that would generally access the hardware resources of thin-client server system **220** in order to generate a sound. However, if the application program (such as application program **205**) is being run on behalf of a user located on a remote thin-client terminal system **240** coupled to the thin-client server system **220** then the thin-client interface software **210** must have a method of detecting the request to generate a sound and a method of transmitting a similar request to generate a sound to the thin-client terminal system such that the user of the remote thin-client terminal system **240** will hear the sound.

One common method of achieving these objectives is to have thin-client interface software **210** instruct the operating system sound routine **202** to forward any requests from an application program that is associated with a user at a thin-client terminal system to thin-client interface software **210** along line **203**. In this manner, the thin-client interface software **210** will be informed of any sounds created by application program **205** that is associated with a remote thin-client terminal system. In response, thin-client interface software **210** may send a corresponding sound request message to the associated thin-client terminal system in order to generate a sound at the thin-client terminal system.

If application program **205** is associated with a thin-client terminal system that does not use the native protocol of the thin-client interface software **210**, then partial protocol converter **254** may instead instruct operating system sound routine **202** to forward any requests from application program **205** directly

to partial protocol converter **254** along line **204**. (Note that operating system sound routine **202** would then no longer forward the request along line **203**.) By having the operating system sound routine **202** direct the request directly to partial protocol converter **254**, it can immediately create and sent a sound request
5 message to the thin client terminal system using that thin-client terminal's native protocol. Note that this same operating system request redirection technique can be used for any request made to an operating system that would result in some type of output that will need to be directed to a remote thin-client terminal system. Note that sound request calls associated with applications for users at
10 graphics terminals that use the same native graphics terminal protocol as the thin-client server system **202** would continue to be directed to thin-client interface software **210**.

Full Redirection Embodiment.

15 As set forth in the previous section with reference to **Figure 2E**, a partial protocol converter **254** may be used perform protocol conversion on some communications and intercept operating system requests with regard to other communication. Any mix of these two techniques (graphics terminal protocol conversion and operating system request intercept) may be used including an
20 embodiment that uses operating system request intercepts for all communication with non-native thin-client terminal systems as illustrated in the embodiment disclosed by **Figure 2F**.

In the embodiment of **Figure 2F**, the thin-client interface software **210** will continue to operate normally and communicate with its associated thin-
25 client terminal systems that use the same native graphics terminal protocol as thin-client interface software **210**. However, the protocol redirector module **257** will handle all communication with associated thin-client terminal systems that use a different graphics terminal protocol by communicating with the operating system in thin-client server system **220**. Note that protocol redirector module
30 **257** does not have 'protocol conversion' in its name since no graphics terminal protocol conversion takes place in the embodiment of **Figure 2F**.

To handle all output to thin-client terminal systems that do not use the native graphics terminal protocol of thin-client server system **202**, the protocol redirector module **257** will either access output data directly or intercept requests

to the operating system that generate output. For example, with regard to accessing output data directly, protocol redirector module **257** is illustrated directly accessing output data from a thin-client screen buffer **215**. Protocol redirector **257** will then send display screen updates directly to the associated thin-client terminal system in its native graphics terminal protocol. With regard to intercepting operating system calls, protocol redirector module **257** has instructed operating system sound routine **202** to be informed of any operating system requests from application programs that are associated with its associated thin-client terminal systems. Thus, when application program **205** makes a request **206** to operating system sound routine **202** to generate a sound, operating system sound routine **202** makes a corresponding request **204** into a sound generation routine in protocol redirector module **257**. Protocol redirector module **257** will then generate and send the appropriate graphics terminal protocol messages to the associated thin-client terminal system in its native protocol in order to have that thin-client terminal system generate a sound that will be heard by the user of the thin-client terminal system.

Input from thin-client terminal systems that use a different graphics terminal protocol than the server system may be handled in a similar manner. Specifically, when a user types into a keyboard **283** or moves a cursor control device **286** associated with a thin-client terminal system **240** that is handled by protocol redirector module **257** then protocol redirector module **257** will receive such messages from that thin-client terminal system **240** as input **226**. Protocol redirector module **257** will then decode these input messages and relay the input data directly to an appropriate operating system input module **211** while specifying which particular thin-client terminal system supplied the input data. The operating system input module **211** will supply the input data to application program **205** as needed.

As illustrate in the various different embodiments of **Figure 2D, 2E, and 2F**, the thin-client interface software **210** remains untouched. In this manner, the thin-client interface software **210** will continue to operate normally and communicate with its associated thin-client terminal systems in their native graphics terminal protocol. However, thin-client terminal systems that use other graphics terminal protocols will have all of their communication handled by partial protocol converter **254** or protocol redirector module **257** depending on

the implementation. In order to reduce the amount of traffic on the communication channel 230, partial protocol converter 254 or protocol redirector module 257 will instruct thin-client interface software 210 as to what types of packets thin-client interface software 210 does not need to generate since the partial protocol converter 254 or protocol redirector module 257 will now handle some of the communication with thin-client terminal systems. For example, the thin-client interface software 210 does not need to generate display update messages for non native thin-client terminal systems if the partial protocol converter 254 or the protocol redirector module 257 will be directly reading out of the thin-client screen buffers 215 and directly sending display update messages to those thin-client terminal systems in the native graphics terminal protocol.

The preceding technical disclosure is intended to be illustrative, and not restrictive. For example, the above-described embodiments (or one or more aspects thereof) may be used in combination with each other. Other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of the claims should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. In the appended claims, the terms “including” and “in which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.” Also, in the following claims, the terms “including” and “comprising” are open-ended, that is, a system, device, article, or process that includes elements in addition to those listed after such a term in a claim are still deemed to fall within the scope of that claim. Moreover, in the following claims, the terms “first,” “second,” and “third,” etc. are used merely as labels, and are not intended to impose numerical requirements on their objects.

The Abstract is provided to comply with 37 C.F.R. §1.72(b), which requires that it allow the reader to quickly ascertain the nature of the technical disclosure. The abstract is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. Also, in the above Detailed Description, various features may be grouped together to streamline the disclosure. This should not be interpreted as intending that an unclaimed disclosed feature is essential to any claim. Rather, inventive subject matter may lie in less than all features of a particular disclosed embodiment. Thus, the

following claims are hereby incorporated into the Detailed Description, with each claim standing on its own as a separate embodiment.

CLAIMS

1. A method of communicating with a terminal system, said method comprising:

- locating a terminal screen buffer within a server system, said terminal screen buffer created for said terminal system that does not use a first terminal protocol used natively by said server system;
- detecting updates to said terminal screen buffer;
- encoding said updates to said terminal screen buffer into a display update message in a second terminal protocol used natively by said terminal system; and
- transmitting said display update message to said terminal system.

2. The method of communicating with said terminal system as set forth in claim 1, said method further comprising:

- receiving messages for said terminal system in said first terminal protocol used natively by said server system;
- translating said messages for said terminal system from said first terminal protocol used natively by said server system to said second terminal protocol used natively by said terminal system; and
- transmitting said messages in said second terminal protocol to said terminal system.

3. The method of communicating with said terminal system as set forth in claim 1, said method further comprising:

- receiving messages from said terminal system, said messages encoded in said second terminal protocol used natively by said terminal system;
- translating said messages from said terminal system from said second terminal protocol used natively by said terminal system to said first terminal protocol used natively by said server system; and
- passing said messages in said first terminal protocol to terminal interface software in said server system.

4. The method of communicating with said terminal system as set forth in claim 1, said method further comprising:

intercepting requests to an operating system for generating output from application programs associated with said terminal system;
generating corresponding output request messages encoded in said second terminal protocol used natively by said terminal system; and
transmitting said corresponding output messages to said terminal system in a native protocol for said terminal system.

5. The method of communicating with said terminal system as set forth in claim 1, said method further comprising:

receiving messages from said terminal system, said messages encoded in said second terminal protocol used natively by said terminal system;
decoding said messages from said terminal system to determine input data; and
passing said input data to an operating system input module in said server system.

6. The method of communicating with said terminal system as set forth in claim 1, said method further comprising:

receiving display update messages encoded in said first terminal protocol used natively by said server system addressed for said terminal system; and
discarding said display update messages encoded in said first terminal protocol used natively by said server system.

7. The method of communicating with said terminal system as set forth in claim 4 wherein said output comprises a sound.

8. The method of communicating with said terminal system as set forth in claim 5 wherein said input data comprises keystrokes.

9. A computer system for communicating with a terminal system that does not use a first terminal protocol native to said computer system, said computer system further comprising:

- a terminal screen buffer associated with said terminal system;
- a terminal communication module, said terminal communication module detecting updates to said terminal screen buffer and encoding said updates into a display update message in a second terminal protocol used natively by said terminal system, said terminal communication module transmitting said display update message to said terminal system.

10. The computer system for communicating with said terminal system as set forth in claim 9 wherein said terminal communication module further receives messages for said terminal system in said first terminal protocol used natively by said server system, translates said messages for said terminal system from said first terminal protocol to said second terminal protocol used natively by said terminal system, and transmitting said messages to said terminal system.

11. The computer system for communicating with said terminal system as set forth in claim 9 wherein said terminal communication module further receives receiving messages from said terminal system encoded in said second terminal protocol used natively by said terminal system, translates said messages from said second terminal protocol to said first terminal protocol used natively by said server system, and passes said messages in said first terminal protocol to terminal interface software in said server system.

12. The computer system for communicating with said terminal system as set forth in claim 9 wherein said terminal communication module further intercepts requests for generating output from application programs associated with said terminal system, generates corresponding output request messages encoded in said second terminal protocol used natively by said terminal system, and transmits said corresponding output messages to said terminal system.

13. The computer system for communicating with said terminal system as set forth in claim 9 wherein said terminal communication module further receives messages encoded in said second terminal protocol used natively by said terminal system from said terminal system, decodes said messages from said terminal system to determine input data, and passes said input data to an operating system input module in said server system.

14. The computer system for communicating with said terminal system as set forth in claim 9 wherein said terminal communication module further receives display update messages encoded in said first terminal protocol used natively by said server system addressed for said terminal system and discards said display update messages encoded in said first terminal protocol used natively by said server system.

15. A machine-readable medium, said machine-readable medium comprising a set of instructions that, when executed, implement a method of communicating with a terminal system, said method comprising:

- locating a terminal screen buffer within a server system, said terminal screen buffer created for said terminal system that does not use a first terminal protocol used natively by said server system;
- detecting updates to said terminal screen buffer;
- encoding said updates to said terminal screen buffer into a display update message in a second terminal protocol used natively by said terminal system; and
- transmitting said display update message to said terminal system.

16. The machine-readable medium as set forth in claim 15 wherein said method implemented by said instructions further comprises:

- receiving messages for said terminal system in said first terminal protocol used natively by said server system;
- translating said messages for said terminal system from said first terminal protocol used natively by said server system to said second terminal protocol used natively by said terminal system; and

transmitting said messages in said second terminal protocol to said terminal system.


17. The machine-readable medium as set forth in claim 15 wherein said method implemented by said instructions further comprises:
receiving messages from said terminal system, said messages encoded in said second terminal protocol used natively by said terminal system;
translating said messages from said terminal system from said second terminal protocol used natively by said terminal system to said first terminal protocol used natively by said server system; and
passing said messages in said first terminal protocol to terminal interface software in said server system.

18. The machine-readable medium as set forth in claim 15 wherein said method implemented by said instructions further comprises:
intercepting requests to an operating system for generating output from application programs associated with said terminal system;
generating corresponding output request messages encoded in said second terminal protocol used natively by said terminal system; and
transmitting said corresponding output messages to said terminal system in a native protocol for said terminal system.

19. The machine-readable medium as set forth in claim 15 wherein said method implemented by said instructions further comprises:
receiving messages from said terminal system, said messages encoded in said second terminal protocol used natively by said terminal system;
decoding said messages from said terminal system to determine input data; and
passing said input data to an operating system input module in said server system.

20. The machine-readable medium as set forth in claim 15 wherein said method implemented by said instructions further comprises:

- receiving display update messages encoded in said first terminal protocol used natively by said server system addressed for said terminal system; and
- discarding said display update messages encoded in said first terminal protocol used natively by said server system.

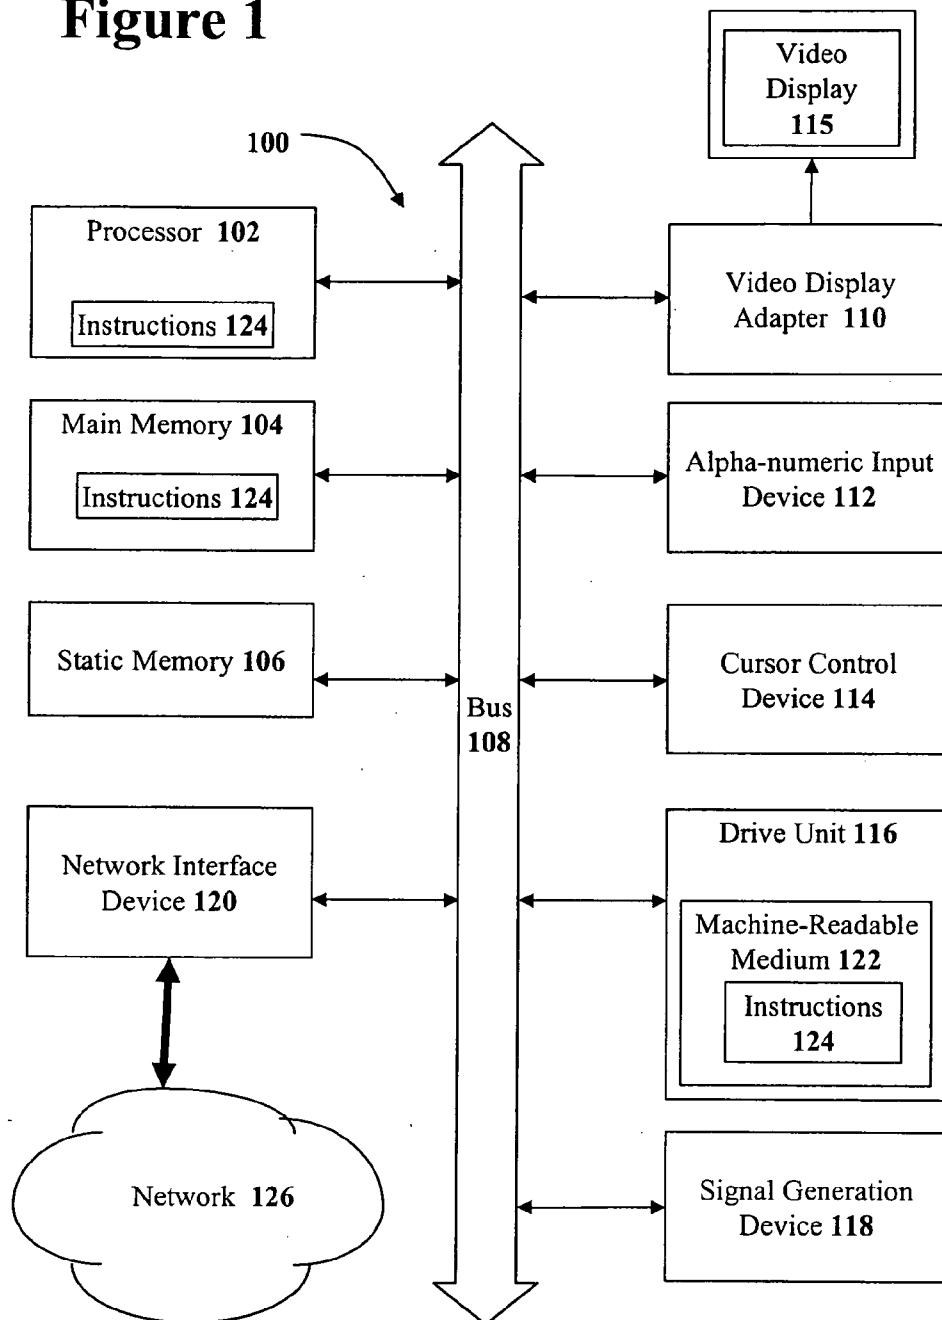Figure 1

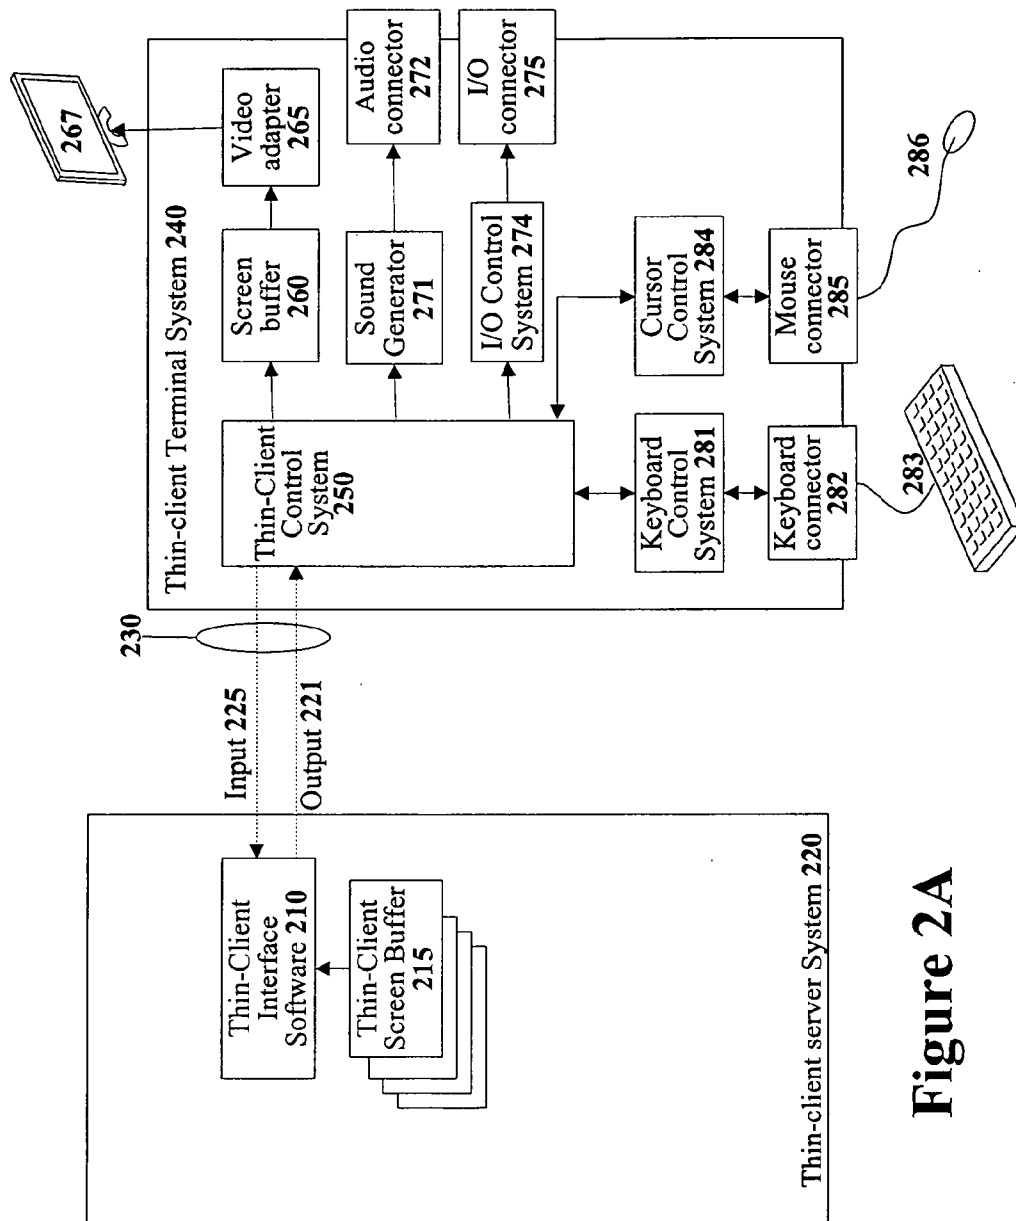


Figure 2A

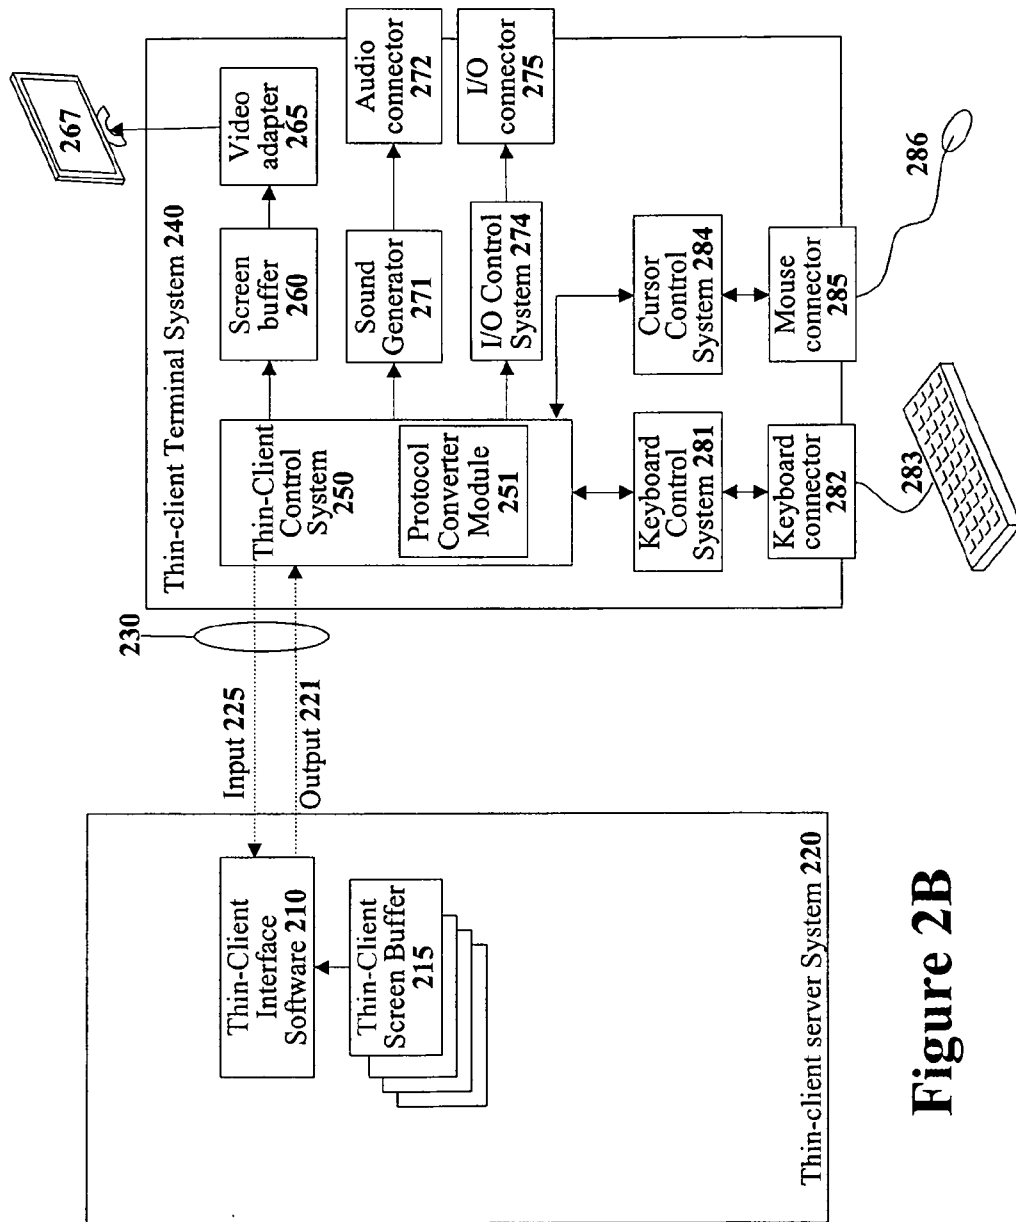


Figure 2B

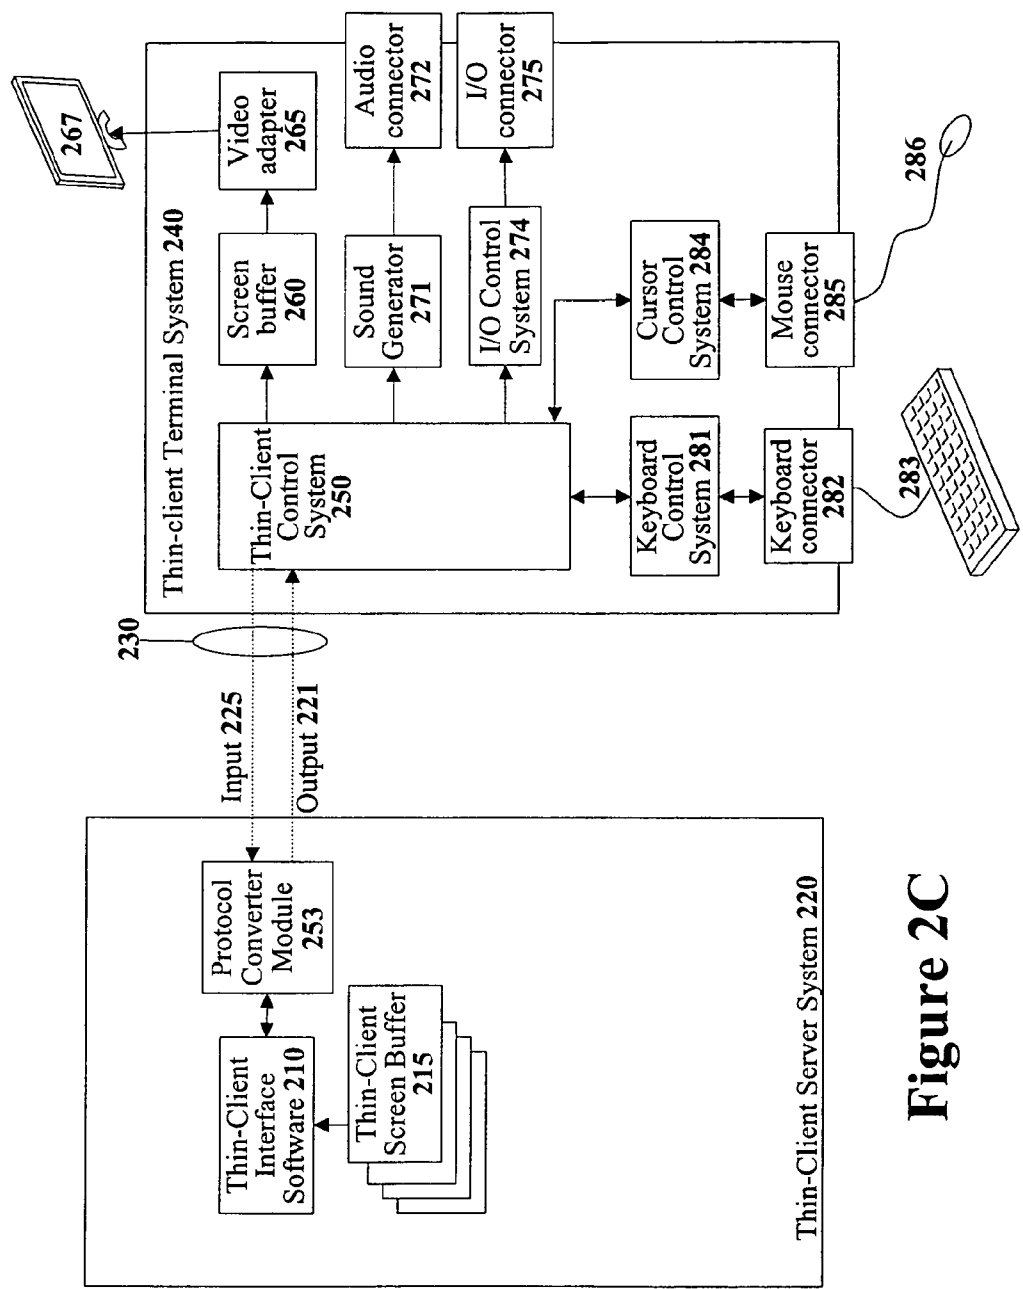


Figure 2C

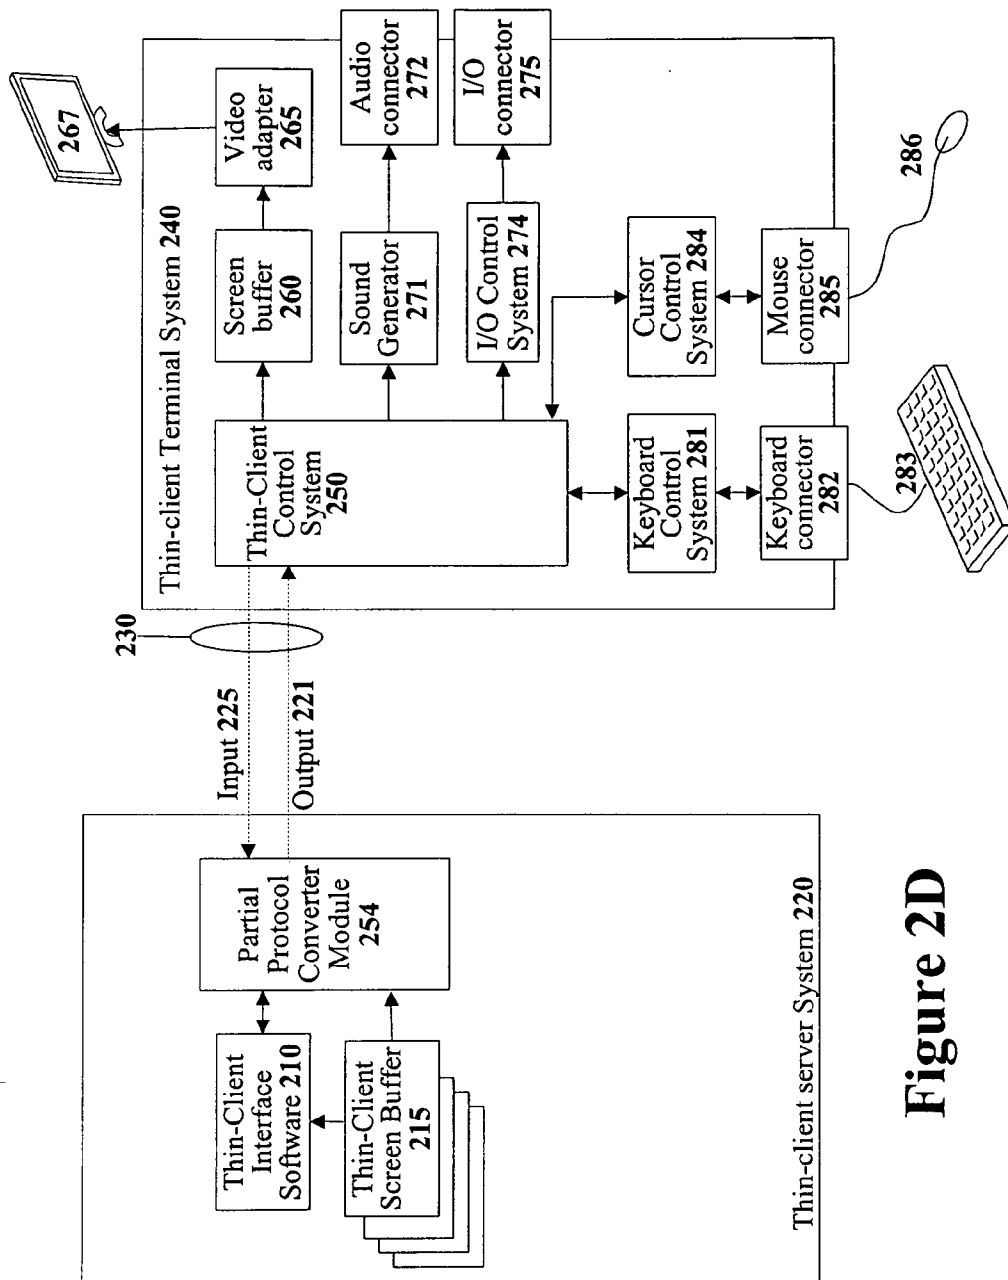


Figure 2D

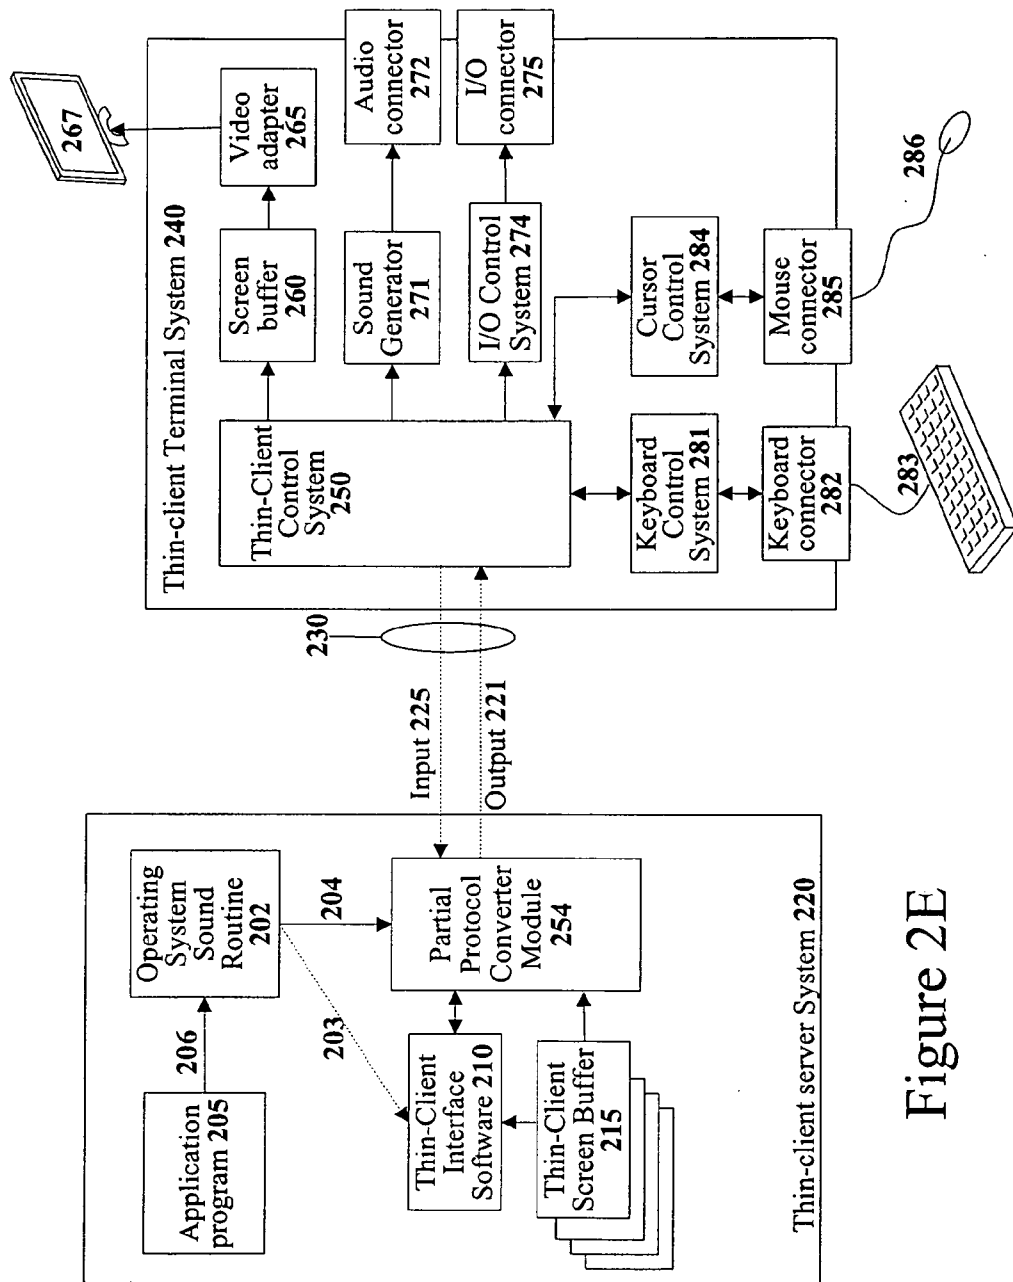


Figure 2E

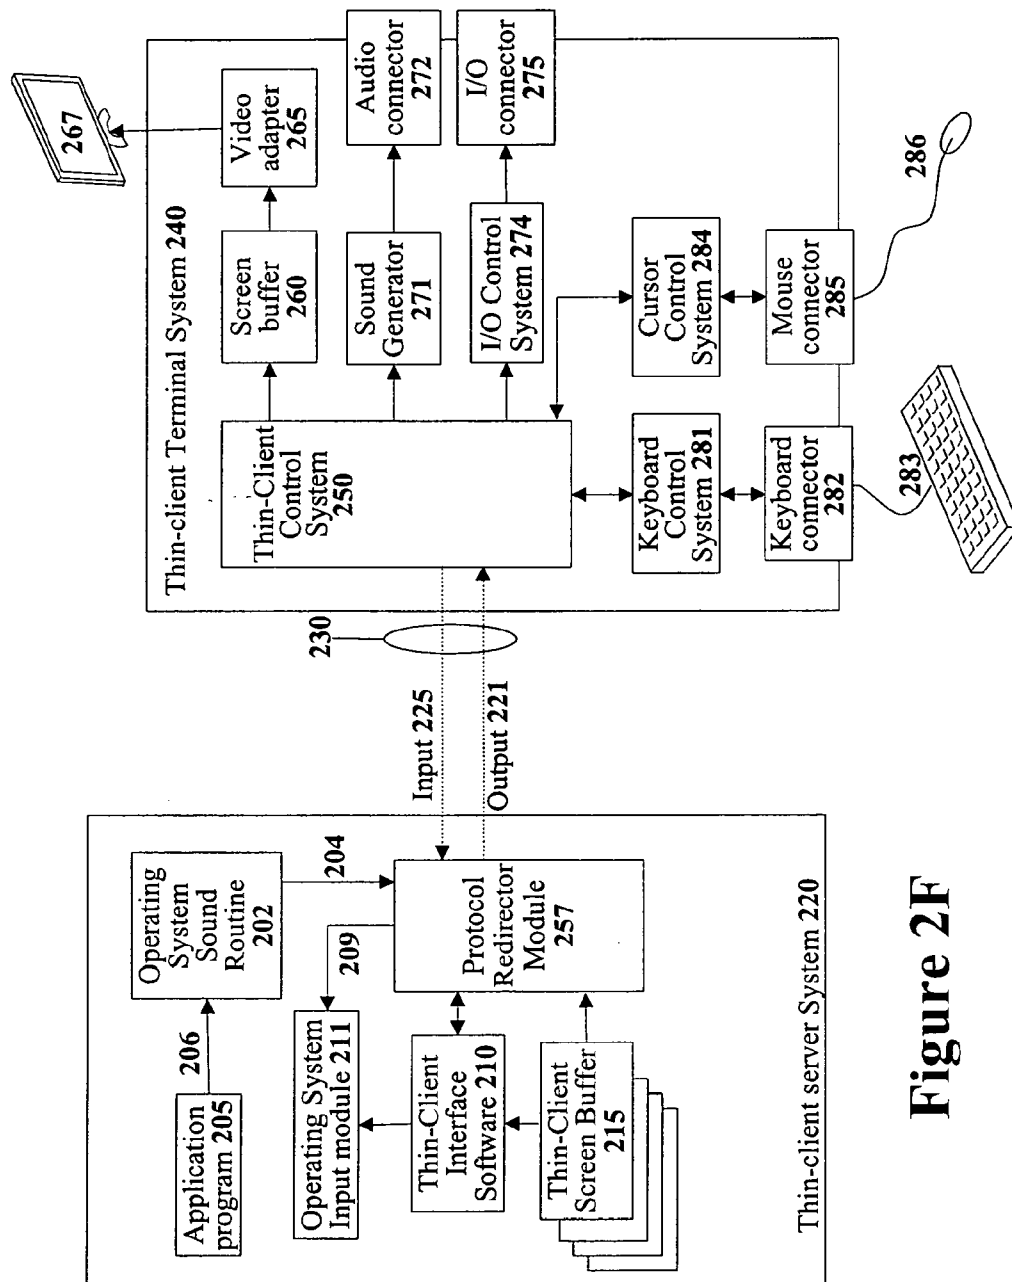


Figure 2F

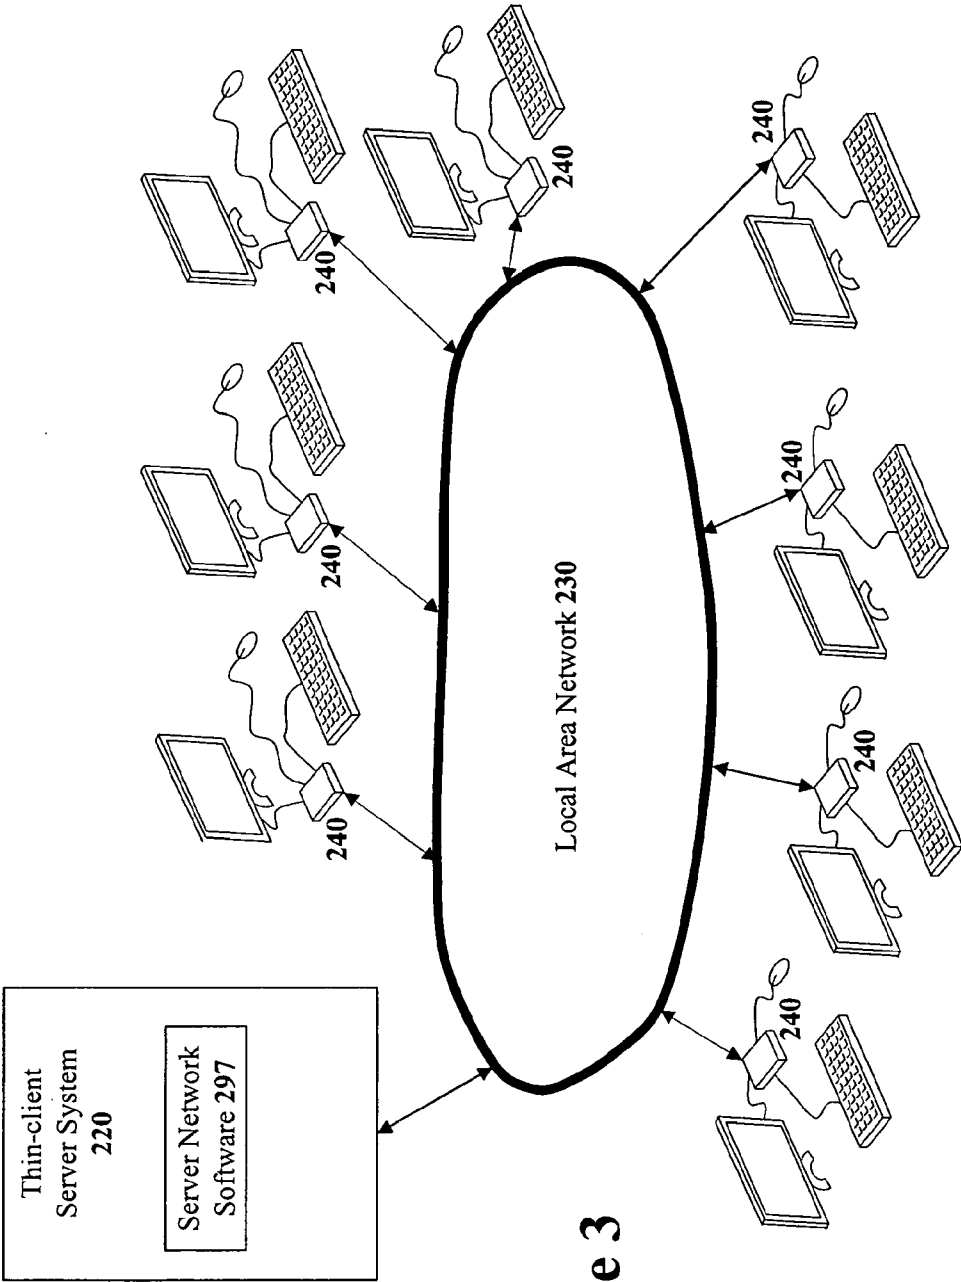


Figure 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 09/01278

A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - G06F 15/16 (2009.01) USPC - 709/230 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) USPC: 709/230 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched USPC: 709/201, 203, 206, 223, 230, 238; 715/700, 736, 748, 751; 719/311, 313, 328, 310 (keyword limited - see terms below)		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Electronic databases: PubWEST (PGPB, USPT, EPAB, JPAB); Google Scholar Search Terms Used: terminal, workstation, client, screen, display, monitor, buffer, capture, printscreen, detect, identify, spot, determine, update, change, modification, alter, encode, message, send, transmit, server, system, manage, translate etc.		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X - Y	US 2006/0206820 A1 (Buflard et al.) 14 September 2006 (14.09.2006), entire document, especially para [0005], [0018]-[0020], [0022]-[0024], [0026]-[0029], [0040], [0051]-[0053], Fig. 1, 3 and 5	1-5, 8-13, and 15-19 6-7, 14, and 20
Y	US 2007/0016682 A1 (Hodgson) 18 January 2007 (18.01.2007), para [0024], [0055]-[0056], [0058], [0061], [0063] and [0087]	6, 14, and 20
Y	US 2007/0124474 A1 (Margulis) 31 May 2007 (31.05.2007), para [0047] and [0126]	7
A	US 2005/0046637 A1 (Mondal) 03 March 2005 (03.03.2005), entire document	1-20
☐ Further documents are listed in the continuation of Box C. ☐		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 15 April 2009 (15.04.2009)		Date of mailing of the international search report 22 APR 2009
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201		Authorized officer: Lee W. Young PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774