




(86) Date de dépôt PCT/PCT Filing Date: 2014/07/01
(87) Date publication PCT/PCT Publication Date: 2015/01/08
(45) Date de délivrance/Issue Date: 2021/07/27
(85) Entrée phase nationale/National Entry: 2016/01/27
(86) N° demande PCT/PCT Application No.: IL 2014/050581
(87) N° publication PCT/PCT Publication No.: 2015/001551
(30) Priorité/Priority: 2013/07/04 (US61/842,973)

(51) Cl.Int./Int.Cl. *A44C 25/00* (2006.01)
(72) Inventeurs/Inventors:
BERKA, RONEN, IL;
MAN, TAL, IL
(73) Propriétaires/Owners:
BERKA, RONEN, IL;
MAN, TAL, IL
(74) Agent: INTEGRAL IP

(54) Titre : BIJOU AYANT DES ELEMENTS DECORATIFS INTERCHANGEABLES
(54) Title: JEWELRY WITH INTERCHANGEABLE DECORATIVE ELEMENTS

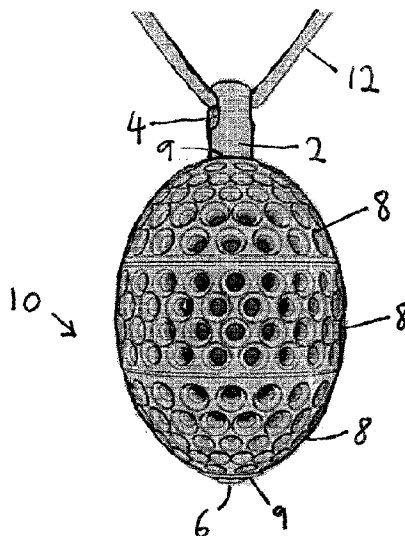

(57) **Abrégé/Abstract:**

A jewelry system with interchangeable decorative segments is provided. The jewelry system includes a plurality of decorative segments, each such segment having a center aperture that extends through the segment along a vertical axis in the center of the segment from a top surface to a bottom surface. The jewelry system also includes a central rod for receiving one or more segments, the rod including a stopper at the lower end to support the received segments and an eyelet at the upper end to receive a chain which when received, prevents the received segments from slipping off the top part of the rod while also facilitating the jewelry to be worn.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2015/001551 A1

(43) International Publication Date
8 January 2015 (08.01.2015)

(51) International Patent Classification:
A44C 25/00 (2006.01)

(21) International Application Number:
PCT/IL2014/050581

(22) International Filing Date:
1 July 2014 (01.07.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/842,973 4 July 2013 (04.07.2013) US

(72) Inventors; and

(71) Applicants : **BERKA, Ronen** [IL/IL]; 24 Aya St.,
4704004 Ramat Hasharon (IL). **MAN, Tal** [IL/IL]; 24 Aya
St., 4704004 Ramat Hasharon (IL).

(74) Agents: **DR. FRIEDMAN, Mark** et al.; Moshe Aviv
Tower, 54th Floor, 7 Jabotinsky Street, 5252007 Ramat
Gan (IL).

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:


— with international search report (Art. 21(3))

— with amended claims and statement (Art. 19(1))

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

(54) Title: JEWELRY WITH INTERCHANGEABLE DECORATIVE ELEMENTS

FIG. 1

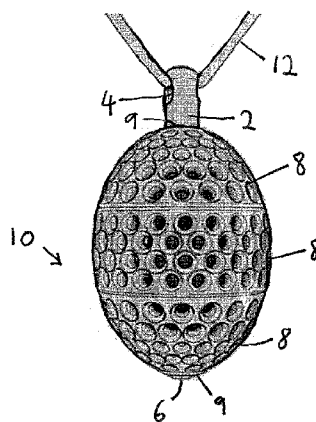

(57) Abstract: A jewelry system with interchangeable decorative segments is provided. The jewelry system includes a plurality of decorative segments, each such segment having a center aperture that extends through the segment along a vertical axis in the center of the segment from a top surface to a bottom surface. The jewelry system also includes a central rod for receiving one or more segments, the rod including a stopper at the lower end to support the received segments and an eyelet at the upper end to receive a chain which when received, prevents the received segments from slipping off the top part of the rod while also facilitating the jewelry to be worn.

JEWELRY WITH INTERCHANGEABLE DECORATIVE ELEMENTS

5

10 CROSS REFERENCES TO RELATED APPLICATIONS

This patent application is related to and claims the benefit of U. S. Provisional Patent Application No. 61/842,973 filed July 4, 2013, entitled JEWELRY WITH INTERCHANGEABLE DECORATIVE ELEMENTS.

15

FIELD AND BACKGROUND OF THE INVENTION

The present invention relates to jewelry.

Jewelry has been known for centuries to adorn the body. One of the earliest types of bodily adornment is the pendant. Primeval man liked to put a tiny aperture in a beautiful rock and slip a string usually made of grass or vine so it could be hung
20 around the neck. Shells and other indigenous materials could also be used. In Ancient Egypt, Pharaohs normally wore scarab beetle pendants to symbolize their wealth and power.

25 SUMMARY OF THE INVENTION

Some embodiments of the present invention are related to jewelry having interchangeable decorative elements or segments which can be easily and quickly assembled and disassembled and/or reconfigured according to the particular preference or current mood of the wearer.

30 According to some embodiments of the present invention there is provided a jewelry system including a) a plurality of decorative segments, each of the segments including a center aperture that extends through each respective segment along a vertical axis from a top surface to a bottom surface thereof; and b) a central rod for

receiving one or more of the segments, the rod including a stopper at a lower proximal end.

In some embodiments of the present invention, the diameter of the stopper is larger than the diameter of each of the center apertures of the segments, the rod further includes an eyelet at an upper proximal end. Preferably, the jewelry system also includes a chain that is received through the eyelet of the rod, and each segment is interchangeable one or more other segments.

Some embodiments of the present invention allow for decorative elements to be securely fastened and securely maintained on a central rod. This is as opposed to threading beads and the like on a necklace which can be tricky due to the flimsiness of necklace material (whether a chain, string or the like).

Some embodiments of the present invention are such that removing the pendant from the chain and replacing the decorative segments is a simple and straightforward task which does not demand a good level of dexterity.

Some embodiments of the present invention are directed to a pendant. When assembled, the pendant features interchangeable decorative elements or segments which are threaded, via a central aperture in each of the segments, onto a vertically-oriented central rod and thereafter suspended from a chain or cord of a necklace, bracelet, earring, or similar articles of jewelry, by threading the chain or cord through an integrally-formed aperture or eyelet at the top end of the central rod. The rod includes an integrally-formed stopper at the low end to keep the decorative segments on the rod. The elements or segments can form a particular shape or name or pattern when loaded onto the rod in a desired order.

The stopper at the lower end of the rod is dimensioned so as to prevent the segment(s) from slipping off the rod at the low end. Threading a chain (neck chain, bracelet chain, rod of a brooch, earring connection piece etc.) through the eyelet keeps the segment(s) from slipping off the rod at the high end, and essentially locks the decorative elements/segment on the pendant while attaching the pendant to the necklace. Each segment can be of specific geometry, material, dimensions and can be inlaid with gemstones in any desired pattern.

Embodiments of the present invention are directed to a jewelry system. The jewelry system comprises, a plurality of segments, each of the segments comprising an aperture that extends through each of the segments, the apertures positioned in each of the segments to allow for the apertures in each of to segments to align at least

substantially coaxially when the plurality of segments are brought together; and, a rod for receiving the segments and extending through the apertures of the segments, the rod including a first end including a stopper for limiting movement of the segments along the rod.

5 Optionally, the jewelry system is such that the apertures of each of the segments are centrally positioned in the segment, and the rod is vertically oriented for receiving each of the segments in a coaxial alignment.

 Optionally, the jewelry system is such that the rod and the stopper are integrally formed as a single unit.

10 Optionally, the jewelry system is such that the rod further comprises an eyelet at a second end of the rod opposite to the first end of the rod.

 Optionally, the jewelry system additionally comprises a cord which is received through the eyelet of the rod.

15 Optionally, the jewelry system is such that the segments are interchangeable with each other.

 Optionally, the jewelry system is such that the segments include decorative segments.

BRIEF DESCRIPTION OF THE DRAWINGS

20 Some embodiments of the invention are herein described, by way of example only, with reference to the accompanying drawings, where like reference numerals or characters represent corresponding or like elements. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of embodiments of the invention. In this
25 regard, the description taken with the drawings makes apparent to those skilled in the art how embodiments of the invention may be practiced.

 FIG. 1 is a preferred embodiment of the jewelry system of the present invention;

30 FIG. 2 is an exploded view of the preferred embodiment of the present invention;

 FIG. 3 is a cross-sectional view of the jewelry system of FIG. 1, taken along line 3-3 of FIG. 2;

 FIG. 4 is a cross-sectional view of the jewelry system of FIG. 1, taken along line 4-4 of FIG. 2; and,

FIG. 5 is a cross-sectional view of the jewelry system of FIG. 1, taken along line 5-5 of FIG. 2.

DETAILED DESCRIPTION OF THE DRAWINGS

5 Referring now to Figs. 1-5, there is shown a jewelry system 1 in accordance with embodiments of the present invention, including a pendant 10. Fig. 2 illustrates an exploded view of the pendant 10 shown in Fig. 1. Pendant 10 includes decorative segments 8 and a central rod 2.

10 The central rod 2 is, for example, a single piece with an integrally formed stopper 6 on the one end and an eyelet 4 on the other. There are typically not any moving parts and the rod 2 itself does not need to be assembled or disassembled. The central rod 2, is also, for example, straight and solid. This allows for decorative elements, for example, the segments 8, to be easily loaded and securely attached.

15 Each of decorative segments 8 include an aperture 9, which is, for example centrally positioned, and which extends vertically from a top surface 5 to a bottom surface 7 of decorative segment 8. Rod 2 includes a stopper 6 at a lower proximal end and an eyelet 4 at an upper proximal end. The main body of rod 2 has a diameter smaller than the diameter of aperture 9 so that rod 2 may receive each of decorative segments 8 thereon, while stopper 6 has a diameter larger than that of aperture 9, which prevents decorative segments 8 from sliding off the lower end of rod 2. Eyelet 4 has a diameter large enough to receive an ordinary necklace or chain 12 which, when threaded through eyelet 4 serves a dual purpose, namely: enabling pendant 10 to be worn by a user, and preventing decorative segments 8 from slipping off the top end of rod 2.

25 The chain 12 of the necklace is threaded through the eyelet 4 which is, for example, integrally formed at the upper end (proximal end) of the central rod 2. The eyelet 4 is typically a completely closed ring, which ensures that the pendant 10 will not become dislodged from the necklace 12, even during vigorous activity such as running or dancing.

30 Fig. 3 shows a cross-sectional view of top decorative segment 8 in which the aperture 9 is shown extending through a center portion of decorative segment 8.

Fig. 4 shows a cross-sectional view of middle decorative segment 8 in which the aperture 9 is shown extending through a center portion of decorative segment 8.

Fig. 5 shows a cross-sectional view of bottom decorative segment 8 in which the aperture 9 is shown extending through a center portion of decorative segment 8.

Each of decorative segments 8 may be interchanged with one or more other decorative segments (including decorative segments not shown) as part of the jewelry system of the present invention. The decorative segments 8 are such that they freely revolve about the axis of the central rod 2, which preferably has a circular cross-section.

The pendant 10 can be 'loaded' with any number of segments, such as segments 8, limited only by the length of the central rod 2. The pendant 10 can alternatively be worn without any elements loaded on the rod 2. In such a case the decorative nature of the stopper 6 and the aesthetically pleasing material from which the system 1 is made add to the attractiveness of the pendant 10.

As used herein, the singular form "a", "an" and "the" include plural references unless the context clearly dictates otherwise.

It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable subcombination or as suitable in any other described embodiment of the invention. Certain features described in the context of various embodiments are not to be considered essential features of those embodiments, unless the embodiment is inoperative without those elements.

Although the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, it is intended to embrace all such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims.

What is claimed is:

1. A jewelry system comprising:

- a) a plurality of segments, each of said segments comprising a top surface, a bottom surface and an aperture that extends vertically from said top surface to said bottom surface of each of said segments, such that said apertures in each of said segments align at least substantially coaxially with the other apertures when said plurality of segments are brought together such that a flat top surface of a first segment contacts a flat bottom surface of a second segment, wherein the flat top surface of the first segment and the flat bottom surface of the second segment contact one another at a maximum width of each of the flat surfaces, wherein said plurality of segments comprises at least two segments having an essentially flat top or bottom surface and a non-flat opposite surface; and,
- b) a rod upon which said plurality of segments are assemblable, said rod including a first end including a stopper for limiting movement of said segments along said rod and a completely closed eyelet integrally formed in a second end of said rod opposite to said first end of said rod, said eyelet adapted to receive there-through a threadable, frictionally engageable member, which, when threaded through said eyelet, secures said plurality of segments on said rod and wherein the rod has a diameter smaller than a diameter of said apertures so as to receive each of said segments thereon, and wherein the diameter of the stopper is larger than the diameter of each of said apertures of each of said segments so as to prevent the segments from slipping over the stopper and off the rod.

- 2. The jewelry system of claim 1, wherein said apertures of each of said segments are centrally positioned in said segment, and said rod is vertically oriented for receiving each of said segments in a coaxial alignment.
- 3. The jewelry system of claim 2, wherein said rod and said stopper are integrally formed as a single unit.
- 4. The jewelry system of claim 1, additionally comprising a cord, said cord being received through said eyelet of said rod.

5. The jewelry system of claim 1, wherein said segments are interchangeable with each other.
6. The jewelry system of claim 1, wherein said segments include decorative segments.
7. The jewelry system of claim 1, wherein said threadable, frictionally engageable member is a necklace chain.
8. The jewelry system of claim 1, wherein said threadable, frictionally engageable member is a bracelet chain.
9. The jewelry system of claim 1, wherein said threadable, frictionally engageable member is a rod of a brooch.
10. The jewelry system of claim 1, wherein said threadable, frictionally engageable member is an earring connection piece.
11. The jewelry system of claim 1, wherein each of said segments comprises at least one flat top surface or bottom surface having a diameter which is substantially equal to a diameter of another flat top surface or bottom surface of an immediately contacting segment.
12. The jewelry system of claim 1, wherein the cross section of the pendant is largest at its center point.
13. The jewelry system of claim 1, wherein said plurality of segments comprises at least three segments and wherein at least one of said plurality of segments has a different three-dimensional shape than that of other of the plurality of segments.

FIG. 1

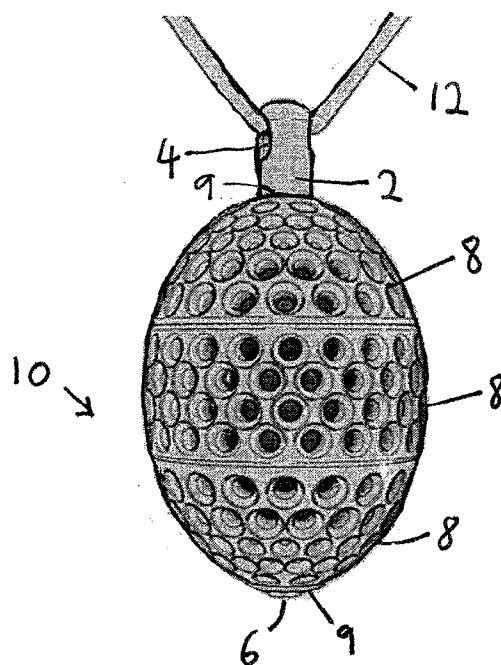


FIG. 2

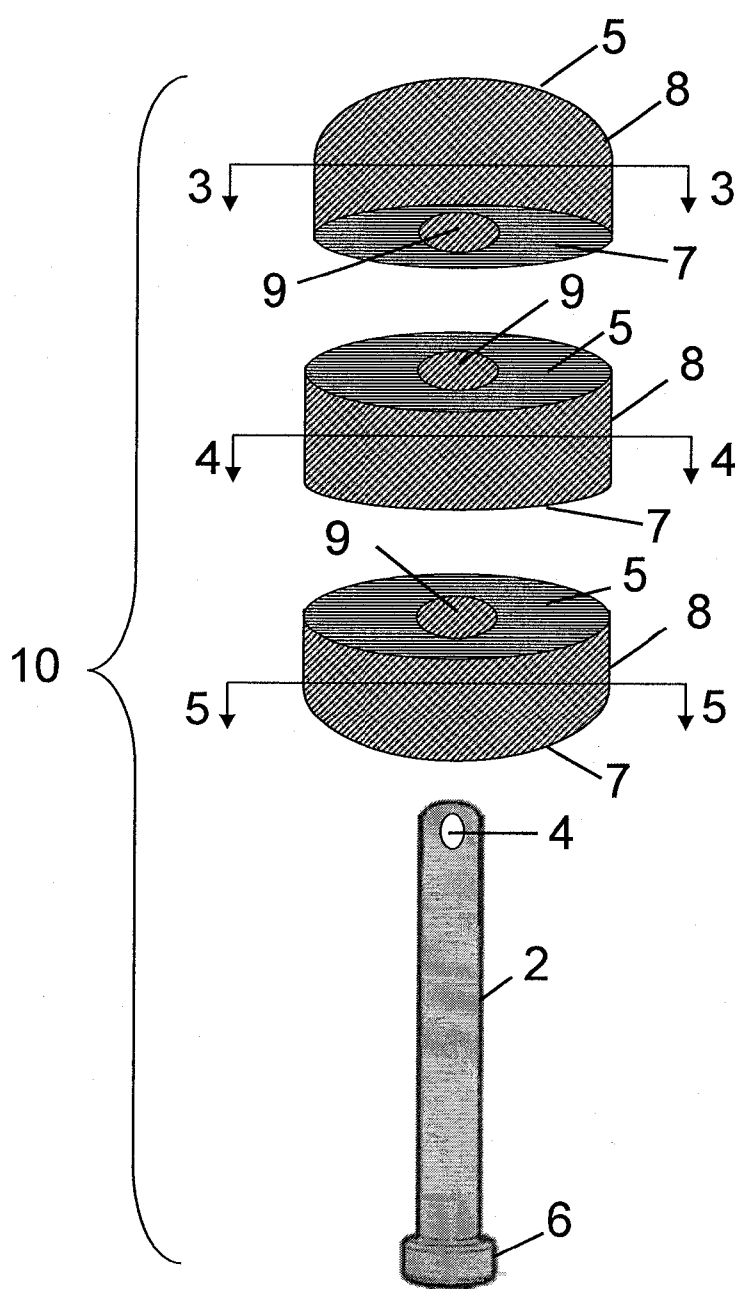


FIG. 3

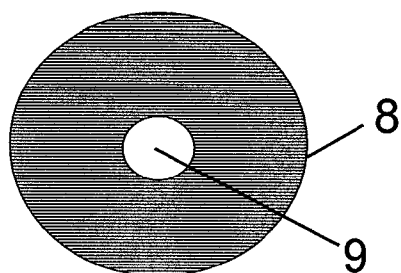


FIG. 4

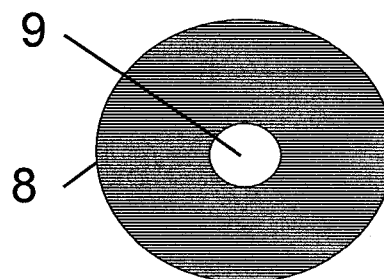


FIG. 5

