(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
10 November 2011 (10.11.2011)

PCT

(10) International Publication Number
WO 2011/139554 A1

(51) International Patent Classification:
E21B 43/01 (2006.01) *E21B 43/36* (2006.01)

(21) International Application Number:
PCT/US2011/033091

(22) International Filing Date:
19 April 2011 (19.04.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/775,723 7 May 2010 (07.05.2010) US
12/820,248 22 June 2010 (22.06.2010) US

(71) Applicant *(for all designated States except US)*: **CHEVRON U.S.A. INC.** [US/US]; 6001 Bollinger Canyon Road, San Ramon, California 94583 (US).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **BECK, Blaine, E.** [US/US]; 3103 Castlewind Drive, Katy, Texas 77450 (US).

(74) Agents: **VICK, John, E., Jr.** et al.; Chevron Corporation, Law Department, Post Office Box 6006, San Ramon, Ca 94583-0806 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR SECURING SUBSEA DEVICES TO A SEABED

(57) Abstract: An apparatus and method for securing subsea devices to a seabed are provided. The apparatus generally includes a mud can housing that defines a internal space that can be evacuated to drive the housing into the seabed and secured it thereto. At least one receiver is connected to the housing. Each receiver is configured to receive a subsea device so that each subsea device in each receiver is secured to the seabed in a vertical orientation when the mud can housing is secured to the seabed.

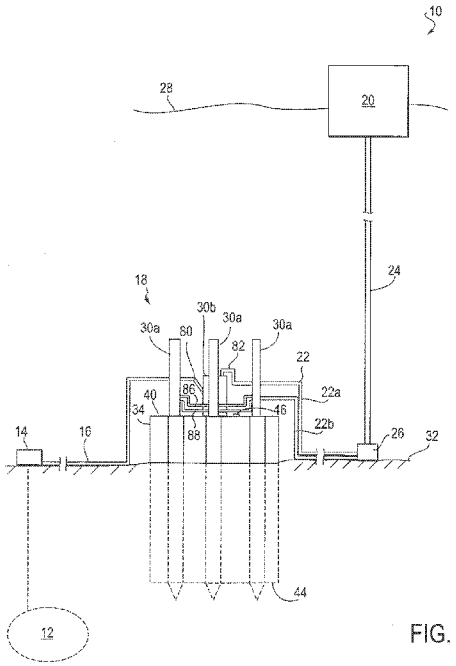


FIG. 1

WO 2011/139554 A1

Published:

— *with international search report (Art. 21(3))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

APPARATUS AND METHOD FOR SECURING SUBSEA DEVICES TO A SEABED

CROSS REFERENCE TO RELATED APPLICATIONS:

This application is a continuation-in-part of U.S. patent application Serial No. 12/775,723, filed May 7, 2010, which is hereby incorporated herein in its entirety by reference.

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] This invention relates to an apparatus and method for securing subsea devices to a seabed, such as for securing pumps, separators, compressors, solids management equipment, or other equipment used in the handling or processing of fluids for producing fluids from a subsea hydrocarbon reservoir, e.g., to temporarily secure such a device to a seabed and subsequently remove it therefrom.

[0003] 2. Description of Related Art

[0004] In the production of fluids from a subsea hydrocarbon reservoir, it may be advantageous to provide a variety of subsea devices to enable or aid in the production process. For example, subsea pumps can be used to deliver fluids produced from such a reservoir through a pipeline that extends to a topside processing or storage facility. Pumps can also be used for increasing the pressure of an injection fluid, i.e., a fluid injected into the reservoir to aid in the production of fluids from the reservoir. Separators can be used to promote phase separation, e.g. oil, gas, water, and solids, and direction of the products of separation to downstream equipment or to dampen flow surges.

[0005] Some subsea devices are conventionally used by installing the devices directly into a well. These devices, commonly termed "in-well" devices, are typically designed and constructed with a high aspect ratio, i.e., to be tall with a small footprint so that the devices will fit into a wellbore of a relatively small diameter. For example, some in-well devices are 4 to 10 inches or less in diameter and are 10-250 feet in height. A variety of different subsea devices that are tall and narrow in diameter have been developed for such intended installation and use in wellbores. Additional in-well devices are anticipated to be produced in the future. While these in-well devices can be effective when used in this manner, the

difficulty and cost for installing and servicing such devices can be high. In addition, the number of devices that can be used in a particular well is typically limited.

[0006] Thus, a need exists for an improved apparatus and method for deploying and using such subsea devices. The apparatus and method should be compatible with subsea devices that have a high aspect ratio, including in-well devices that are designed for use in wellbores, and should be capable of installations in which each subsea device is disposed in its vertical orientation.

SUMMARY OF THE INVENTION

[0007] The embodiments of the present invention generally provide an apparatus and method for securing subsea devices to a seabed, e.g., for securing subsea devices that have a high aspect ratio. The subsea devices can be disposed in their vertical orientation, e.g., an orientation that the subsea device is typically disposed when used in a wellbore. It is appreciated that the subsea devices can include pumps and other devices, which may be designed and proven for use in wellbores. For example, the subsea devices can include one or more separator for pre- or post-processing of the fluids, and a plurality of subsea pumps, and the apparatus can be configured to receive a flow of fluid from a subsea reservoir, separate different phase components of the fluid, and deliver at least some of the components of the fluid therefrom at an increased pressure.

[0008] According to one embodiment of the present invention, the apparatus includes a mud can housing having a circumferential side and an upper side that define a space therein. The housing has an open bottom so that the housing is configured to be driven into the seabed and secured to the seabed by evacuating the space within the housing. At least one receiver is connected to the housing. Each receiver defines a vertically-oriented cavity configured to receive a subsea device in a vertical orientation so that each subsea device in each receiver is secured to the seabed in a vertical orientation when the mud can housing is secured to the seabed. In some cases, a plurality of receivers are connected to the housing, each receiver being configured to receive a respective subsea device, and some or all of the receivers can be located about a perimeter of the housing and connected to the circumferential side of the housing. One or more subsea devices can be disposed entirely within a respective one of the receivers, or each device can extend above the upper side of the housing, e.g., so that the device extends above the seabed and the housing when installed.

[0009] Each receiver can be configured to receive the respective subsea device through an opening defined in the top of the apparatus so that the subsea devices can be

installed in the apparatus and removed from the apparatus while the housing is secured to the seabed. Each receiver can define an orientation feature that is configured to rotate a subsea device that is lowered into the receiver so that the device is rotated to a predetermined orientation when installed therein.

[0010] In some cases, each receiver defines at least one receiver connector configured to mate with a corresponding connector of a subsea device installed in the receiver, each receiver being connector configured to provide one or more electrical connections (for power and/or communication/instrumentation) and/or one or more fluid connection ports (for primary fluid entry and exit and/or secondary fluid, e.g. chemical treating, corrosion inhibition, anti-scale and hydrate inhibition fluids addition) entry to the devices. A manifold can be provided and configured to fluidly connect the subsea devices to a plurality of ports on the housing so that the devices can be connected in a plurality of configurations by selectively providing fluid links between the ports.

[0011] According to one method of the present invention, a mud can housing is disposed on the seabed, the mud can housing having a circumferential side and an upper side that define a space therein. The space within the housing is evacuated to thereby drive the housing into the seabed and secure the housing to the seabed. One or more subsea devices are disposed in one or more receivers connected to the housing so that each subsea device is secured to the seabed in a vertical orientation. For example, the method can include providing a mud can housing that defines a plurality of the receivers located about a perimeter of the housing and connected to the circumferential side of the housing. In one example, at least one separator and a plurality of subsea pumps are disposed in receivers of the apparatus so that the apparatus is configured to receive a flow of fluid from a subsea reservoir, separate different phase components of the fluid, and deliver at least some of the components of the fluid therefrom at an increased pressure.

[0012] Each subsea device can be lowered into the receiver so that the subsea device is rotated by an orientation feature of the receiver and rotated to a predetermined position, in orientation and/or elevation. One or more electrical and/or fluid connections can be formed between the subsea devices. In some cases, the devices can be connected via a manifold to a plurality of ports on the housing, and the devices can be connected in a desired configuration by selectively providing fluid links between the ports. Each subsea device can be removed from the receiver while the housing is secured to the seabed, e.g., for maintenance, repair, or replacement.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Having thus described the invention in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

[0014] FIG. 1 is a elevation view schematically illustrating a system for producing hydrocarbons from a subsea reservoir, including an apparatus for securing subsea devices to a seabed according to one embodiment of the present invention;

[0015] FIG. 2 is a perspective view of the apparatus of FIG. 1;

[0016] FIG. 3 is a perspective view of a portion of the apparatus of FIG. 2;

[0017] FIG. 4 is a plan view of the apparatus of FIG. 2;

[0018] FIG. 5 is an elevation view of the apparatus of FIG. 2, shown with one subsea device partially installed in the apparatus and a second device in its final position;

[0019] FIG. 6 is a partial view of one of the apparatus of FIG. 2 and one of the subsea devices;

[0020] FIG. 7 is a line drawing illustrating in perspective an apparatus according to another embodiment of the present invention, with inlet and outlet primary fluid ports for the three in-well type devices shown interconnected, presenting a parallel multiple device embodiment;

[0021] FIG. 8 is a line drawing illustrating in perspective the apparatus of FIG. 7, shown with the subsea devices installed or in the process of being installed or withdrawn in the apparatus;

[0022] FIG. 9 is a line drawing illustrating in perspective the apparatus of FIG. 8, shown during installation of the subsea devices with a remote operated vehicle (ROV) assisting and/or observing the installation;

[0023] FIG. 10 is a line drawing illustrating in perspective the apparatus of FIG. 7, shown with the subsea devices installed in the apparatus, wherein inlet and outlet primary fluid ports are shown interconnected for each of three in-well type devices and for a second set of three in-well type devices, presenting a combined series and parallel multiple device embodiment;

[0024] FIG. 11 is a line drawing illustrating the top portion of FIG. 10; and

[0025] FIG. 12 is a partial view of one of the subsea devices of the apparatus of FIG. 5, where the subsea device is a pig launcher and receiver.

DETAILED DESCRIPTION OF THE INVENTION

[0026] The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all embodiments of the invention are shown. Indeed, this invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. Like numbers refer to like elements throughout.

[0027] Referring now to the drawings and, in particular, to FIG. 1, there is shown a schematic view of a system **10** for producing hydrocarbons from a subsea reservoir **12** according to one embodiment of the present invention. More particularly, the system **10** can be adapted to produce a flow of produced fluid from a subsea well **14** or other subsea source of fluids, e.g., an incoming pipeline. It is appreciated that the flow of fluid can include a single or multiple phases of materials, such as a mixed flow including one or more of the following: oil, produced water, natural gas, sea water, other fluids, solid particulates, etc. The fluid can be processed, pumped, or otherwise handled subsea before being delivered from the seabed through one or more subsea flowlines, risers, or other pipelines to a surface or land location. For example, as shown in FIG. 1, the produced fluid can received from the well **14** via a subsea flowline **16**, processed in an apparatus **18**, and then provided to a topside facility **20** at the sea surface **28**, e.g., via one or more subsea flowlines **22**, a riser **24**, and/or an optional intermediate subsea manifold **26** or other equipment. The subsea manifold **26** and/or the topside facility **20** may also receive fluid from other wells or sources. Alternatively, single-phase or multi-phase portions of the fluid (including solids) can be re-injected into the reservoir **12** instead of being delivered to the surface of land location.

[0028] As shown in FIG. 1, the system **10** includes the apparatus **18** for securing subsea devices **30a**, **30b** (designated collectively by reference numeral **30**) to the seabed **32**. The apparatus **18** generally includes a mud can housing **34** that can be driven into the seabed **32** and secured to the seabed **32** by evacuating an interior space within the housing **34**. In the illustrated embodiment, the housing **34** resembles a conventional "mud can" and has a circumferential side **36** that defines a cylindrical, tubular shape. An upper side **38** near the top of the circumferential side **36** substantially closes the upper end **40** of the circumferential side **36** to define an internal space **42** in the housing **34** that is open at the lower end **44** of the circumferential side **36**. Thus, the housing **34** has an open bottom so that the housing **34** is configured to be driven into the seabed **32** by evacuating the internal space **42** of the housing **34** via a tube or other port **46** that communicates with the space **42** through the side **36** or

upper side **38**. More particularly, the housing **34** can be disposed on the seabed **32**, and a remote operated vehicle (ROV) **48** (FIG. 2) or other subsea device can be connected to the port **46** and operated to evacuate water from the internal space **42**. Except for the port **46**, the internal space **42** can be closed by the cooperation of the circumferential side **36**, the upper side **38**, and the seabed **32**. As the water is removed from the internal space **42**, the reduced pressure in the housing **34** can result in the housing **34** being pushed downward into the seabed **32** by the pressure of the seawater outside the housing **34**. In this way, the housing **34** can be driven into the seabed **32** and secured thereto. In some cases, the housing **34** can be driven into the seabed **32** by a distance of more than half of the height of the housing **34** so that more than half of the housing **34** is driven into the seabed **32**. It is appreciated that the necessary depth to which the housing **34** must be driven for lateral and vertical support and for vertical orientation with the sea bed, or that can be driven as limited by geophysical resistance can depend on the nature of the seabed **32**, the configuration of the housing **34**, the characteristics of any equipment that is to be secured to the housing **34**, the anticipated use of the apparatus **18**, and the like.

[0029] FIG. 2 illustrates the circumferential side **36** and the upper side **38** of the housing **34**. For purposes of illustrative clarity, the housing **34** is shown in FIG. 3 without the upper side **38**. The apparatus **18** includes one or more receivers **50** that are connected to the side **36** of the housing **34**. As illustrated in FIGS. 2 and 3, the apparatus **18** includes six receivers **50a** disposed at the circumferential side **36** of the housing **34**, and the receivers **50a** are integrated into the side **36** of the housing **34**. A central receiver **50b** is also provided at the central axis of the housing **34**. The receivers **50a**, **50b** are designated collectively by reference numeral **50**. In other embodiments, the apparatus **18** can include any number of receivers **50**, and the side **36** can extend continuously and the receivers **50a** can be connected to the inside or outside of the circumferential side **36**.

[0030] Each receiver **50** defines a vertically-oriented cavity **52** that is configured to receive a subsea device **30** in a vertical orientation. Each cavity **52** is typically tall and narrow so that the receiver **50** can receive a subsea device **30** having a similar aspect ratio, e.g., subsea devices such as pumps, sensors, separators, and the like that are designed for deployment in wellbores having relatively small diameters. The subsea devices can also include pig launchers, pig receivers, tubing, hangers, packers, and the like. For example, each receiver **50** can have a generally tubular or cylindrical shape with a diameter of about 4-12 inches and a height of 100-250 feet. As shown in FIGS. 4 and 5, the receivers **50a** can be located at successive circumferential positions along the side **36** of the housing **34**, e.g., about

a perimeter of the housing **34**, and the housing **34** can be generally symmetrical when viewed from above (FIG. 4).

[0031] Each receiver **50** can be closed at its bottom **54** and open at its top **56**, and the bottoms of the receivers **50** can be pointed to facilitate the operation of driving the apparatus **18** into the seabed **32**. Alternatively, the bottom **54** of each receiver **50** can be open during installation to reduce the necessary force for driving the apparatus **18** into the seabed **32**, and the mud from the receivers **50** can be subsequently removed to clear the receiver **50** for service. If each receiver **50** defines an opening at its top **56**, as illustrated, the subsea devices **30** can be installed in the apparatus **18** and/or removed from the apparatus **18** while the apparatus **18** is secured to the seabed **32**. For example, the housing **34** can be disposed on the seabed **32** and secured to the seabed **32** without the devices **30** in place. Thereafter, the devices **30** can be installed in the apparatus **18**, operated, and, if necessary, repaired or otherwise maintained in-place, removed, and/or replaced. Thus, in some cases, the apparatus **18** can include devices **30** that are temporarily installed in the apparatus **18**, devices **30** that are permanently installed in the apparatus **18**, and/or a combination of devices **30** that are temporarily and permanently installed. In some cases, the bottoms **54** of the receivers **50** can extend below the lower end **44** of the circumferential side **36**, such that the weight of the apparatus **18** tends to self drive the receivers **50** into the seabed **32** before the side **36** engages the seabed **32** and the evacuate of the internal space **42** begins. In either case, the receivers **50** can also be "jetted" into the seabed **32** by pumping water into the receivers **50** so that the water flows out the bottom of each receiver **50** and breaks up the soil under the receiver **50**, thereby reducing the driving force, either in conjunction with or prior to the other methods for installing the apparatus **18**.

[0032] As shown in FIG. 5, the subsea devices **30** can be disposed vertically in the receivers **50** so that the devices **30** are secured to the seabed **32** in a vertical orientation when the mud can housing **34** is secured to the seabed **32**. Subsea devices intended for vertical positioning within wellbores or other subsea devices can be disposed in their typical configuration in the apparatus **18** so that the devices operate in their typical and/or intended fashion. In the embodiment illustrated in FIG. 5, the subsea devices **30a** being disposed in the outer receivers **50a** are subsea pumps. The pumps **30a** are tall, narrow devices designed to be deployed in a vertical orientation in a subsea wellbore. As illustrated, the pumps **30a** can be longer than the receivers **50a** and disposed partially in the receivers **50a** so that an upper portion of each pump **30a** extends from the respective receiver **50a** in which the pump **30a** is disposed. A stop **60** can be provided on the outer surface of each device **30a** (e.g.,

pump or other device) so that the stop **60** rests against the top **56** of the receiver **50** when the device **30a** is properly disposed in the receiver **50**. In this resting position, each device **30** can be disposed in a respective receiver **50** so that the device **30** extends above and below the upper side **38** of the housing **34**, as shown in FIG. 5. In some cases, the devices **30** can extend from the housing **34** by a distance that is equal to or greater than the distance by which the devices **30** are inserted into the housing **34**. Thus, a housing **34** can be used to secure devices **30** which are longer than the housing **34** and, in some cases, even two or more times as long as the receivers **50**.

[0033] The receivers **50** and the subsea devices **30** can be configured so that the subsea devices **30** are easily or automatically oriented to a predetermined position in the receivers **50**. For example, each receiver **50** can define an inner surface **62** with one or more orientation features thereon. As shown in FIG. 6, the orientation features can include slots **64** that are defined between raised surfaces **66** on the inner surface **62**. Each slot **64** is wide at the top **56** of the receiver **50** and narrower at lower locations of the receiver **50**. Each device **30** can also define one or more orientation features, such as on or more rails **70** that extend radially outward from the outer surface **72** of the device **30**. The receiver **50** can be sized and configured so that the device **30** will fit into the receiver **50** only when the rails **70** are disposed in the slots **64**, and the slots **64** can be disposed so that the device **30** is orientated at a predetermined rotational orientation when the device **30** is lowered into the receiver **50** with the rails **70** in the slots **64**. If the device **30** is inserted into the receiver **50** at a different rotational orientation, the interaction of the rails **70** with the raised surfaces **66** between the slots **64** will tend to result in a rotation of the device **30** to the predetermined position as the device **30** is lowered to its resting position in the receiver **50**. In this way, the orientation features **64**, **66** on the inner surface **62** of the receiver **50** can interact with the orientation features **70** of the device **30** so that the device **30** is rotated to a predetermined orientation when installed in the receiver **50**. Thus, the devices **30** can be inserted into the receivers **50**, e.g., by an ROV, without requiring that the ROV determine or ensure the exact rotational orientation of the devices **30**. It is appreciated that the orientation features can vary in different embodiments. For example, in some cases, each side of each raised surface **66** can define a concave or s-shaped profile, and the top of each raiser surface **66** can have a sharp point to reduce the likelihood of the rails **70** getting caught on the top of the surfaces **66**. Also, in some cases, a single rail **70** and slot **64** may be used to avoid the possibility of the subsea device **30** being disposed in the receiver **50** in an incorrect orientation.

[0034] The orientation features **64**, **66** of the receiver **50** can be configured to otherwise ensure the proper positioning of the device **30**, e.g., in elevation, horizontally, rotationally, or otherwise. Further, in some cases, each receiver **50** can be configured to otherwise engage the device **30** and/or simulate the conditions of a well, e.g., by providing threads on the receiver **50** to engage threads on the device **30** to secure the device **30** in place, by providing fluid paths or other structures that would typically be provided in a well, or the like. An external collet or a locking bolt device can connect the top of the receiver **50** and a mating surface of the device **30**, e.g., "ears" or a ring on the device **30** that stops vertical movement when it reaches the top of the receiver **50** and which could be clamped down or otherwise secured. In this way, each receiver **50** can seal at least a portion of the device **30** from the surrounding seawater, support the device **30** in a particular position and orientation, provide connections to the device **30**, and otherwise provide a well-like environment for the device **30**.

[0035] The subsea device **30b** in the central receiver **50b** of FIG. 5 can be a separator, such as a conventional gas-liquid cylindrical cyclone (GLCC) separator, which can receive a flow of the produced fluid through in inclined inlet pipe **80** (including a tangential nozzle), separate gas and liquid phases of the fluid by generating a liquid vortex within the separator, and provide two fluid outputs: a mostly gas-phase flow that is delivered from a first outlet **82** and via a tubular portion **22a** of the flowline **22** to the subsea manifold **26** and the topside facility **20**, and a mostly liquid-phase flow that is delivered from a second outlet **84** and to some or all of the subsea devices **30a** for processing (e.g., pumping) before being output via a second tubular portion **22b** of the flowline **22** to the manifold **26** and the topside facility **20**. The subsea device **30b** can also be a solid-liquid hydrocyclone, a device to split a single-phase flow that is then delivered to the multiple devices **30**, a hydraulic receiver to support a closed-loop hydraulic power system, or any of a number of devices fluidly positioned on either the incoming or outgoing side of device **30**.

[0036] The apparatus **18** can also be configured to provide connections between the various devices **30** disposed in the receivers **50**. For example, the apparatus **18** can provide an electrical connection between the devices **30** for powering the devices **30** and/or communicating to the devices **30** to control their operation; a fluid connection for transferring the produced fluid between the devices **30** so that the devices **30** can provide parallel or series treatment of the fluid; a hydraulic fluid connection between the devices **30** for providing power for operating the devices **30** and/or communication for controlling their operation; or the like. As shown in FIGS. 4 and 5, the apparatus **18** can include two members **86**, **88** that

extend circumferentially and define receiver connectors **90**, each connector **90** being associated with one of the receivers **50** and configured to mate with a corresponding connector **90** of the subsea device **30** that is installed in the receiver **50**. For example, the members **86**, **88** can be pipes, the inner pipe **86** being configured to connect to an inlet of each of the devices **30**, and the outer pipe **88** being configured to connect to an outlet of each of the devices **30** so that the devices **30** operate in parallel to receive produced fluid from the inner pipe **86**, pump or otherwise process the produced fluid, and provide the processed produced fluid (e.g., at a higher pressure) to the outer pipe **88**.

[0037] In the embodiment illustrated in FIG. 5, the inner pipe **86** can be connected to the second outlet **84** of the GLCC separator **30b** to receive the mostly liquid-phase flow therefrom, and the outer pipe **88** can be connected by the second tubular portion **22b** of the flowline **22** to the manifold **26** for delivery to the topside facility **20**. The mostly gas-phase flow can be delivered from the GLCC separator **30b** to the manifold **26** and then delivered to the topside facility **20**, either together with the mostly liquid-phase flow or separately therefrom. Thus, the apparatus **18** can include one or more separators and a plurality of subsea pumps and can be configured to receive a flow of the produced fluid, separate different phase components of the fluid, and deliver at least some of the components of the fluid therefrom at an increased pressure.

[0038] In addition, or alternative, the members **86**, **88** can provide an electrical connection to the devices **30** to provide power for operating the devices **30** and/or for communicating with the devices **30** to control their operation. The nature of the connections between the devices **30** can depend on the intended operation and function of the various devices **30**. For example, in some cases, one or more of the devices **30** can be configured to operate as a power transducer, e.g., by receiving electrical power from a remote facility (subsea or topside, such as the facility **20**) and generate a hydraulic working fluid that can be delivered to the other subsea devices **30** via hydraulic connections and used to operate the other subsea devices **30**, or by receiving hydraulic power from a remote facility (subsea or topside, such as the facility **20**) and generate electrical power that can be provided to the other subsea devices **30** via electrical connections and used to operate the other subsea devices **30**.

[0039] Further, the subsea devices **30** can be configured in any arrangement, possibly with some of the devices **30** performing similar operations (in parallel or series) and other devices **30** performing different operations (in parallel or series). In fact, the apparatus **18** provides a versatile base that can be used to secure any number and type of subsea devices **30**

in various configurations depending on the anticipated needs for the particular subsea hydrocarbon reserve.

[0040] FIGS. 7-11 illustrate an alternative embodiment in which the subsea devices **30** are connected in a different configuration. The housing **34**, shown individually in FIG. 7 and without the upper side **38**, can be similar to that illustrated in FIG. 2, though the embodiment of FIG. 7 is shown to have a typical greater height than the embodiment of FIG. 2. The subsea devices **30** are shown in successive stages of installation in FIGS. 8 and 9. More particular, FIG. 8 illustrates the apparatus **18** with three devices **30a** installed therein and connected by pipes. The connector pipes **92** can provide connections that are similar to those of the circumferential pipes **86**, **88** illustrated in FIGS. 4 and 5; however, unlike the circumferential pipes illustrated in FIGS. 4 and 5, each connector pipe **92** in FIGS. 8-11 can extend in a generally straight and/or direct path between one of the devices **30a** and either a port or another of the devices **30a**. For example, the output of one device **30** can be delivered by one of the pipes **92** to the input of another device **30** for a series arrangement of flow. Valves or other fluid isolation devices **94** can be provided to control the flow of fluids through the connector pipes **92** and, hence, to and from the devices **30**. The connector pipes **92** can be formed of stock components, such as straight pipe sections, elbows, valves, and the like.

[0041] As shown in FIG. 9, an ROV **48** can be used in the installation of the apparatus **18**, e.g., for driving the housing **34** into the seabed **32**, installing the devices **30** into the housing **34**, connecting the various devices **30**, or the like. FIGS. 10 and 11 illustrate the apparatus **18** with the subsea devices **30a** installed and connected. In some cases, a separator or other additional device can be used in conjunction with the apparatus **18** of this embodiment, and the separator or other device can be installed on the housing **34** or separately therefrom.

[0042] The apparatus **18** can be modified after installation, e.g., according to the needs of the production operation, the performance of the apparatus **18**, or the like. For example, additional pumps or other devices can be added, the existing devices **30** can be removed or replaced for maintenance or upgrade, the apparatus **18** can be linked to another similar apparatus **18** for providing increased capacity, or the like.

[0043] The connections between the various devices **30** can also be modified after the devices **30** are installed. It is appreciated that valves can be provided in the various connections between the devices **30** and otherwise throughout the apparatus **18** so that each

device **30** can be isolated. In this way, one or more of the devices **30** can be removed from operation, e.g., for repair or replacement, even while the other devices **30** continue to operate.

[0044] In one embodiment, the apparatus **18** can include a manifold that is configured to fluidly connect the subsea devices **30** to a plurality of ports on the housing **34**. The ports, in turn, can be connected by jumper fluid links, which can be removable and reconfigurable. Thus, the devices **30** can be connected in a plurality of configurations by selectively providing the fluid links between the various ports. For example, the connector pipes **92** shown in FIGS. 8-11 can be connected by flexible pipes that function as the fluid links, or some of the connector pipes **92** can be flexible pipes that function as the fluid links.

[0045] As noted above, various types of subsea devices **30** can be installed and operated in the apparatus **18**. Further, it is appreciated that the devices **30** can be used in a variety of different configurations and/or operations. For example, while the embodiment of FIG. 1 is described above for separating a fluid from a subsea reservoir **12** and pumping the fluid from the seabed **32**, the apparatus **18** can alternatively be used for pumping other types of fluids and, in some cases, for pumping fluids into the subsea well **14**. More particularly, the subsea devices **30** of the apparatus **18** of FIG. 1 can be pumps that are configured to increase the pressure of an injection fluid, i.e., a fluid injected into the reservoir **12** to aid in the production of fluids from the reservoir **12**. For example, the devices **30** can receive the injection fluid from the topside facility **20** and pump the fluid into the well **14**. The fluid can be a chemical used for a subsea scale squeeze operation, in which the chemical is pumped into the subsea well **14** to reduce hydrate formations in the well **14** and/or otherwise condition the well or associated equipment.

[0046] In some cases, one or more of the subsea devices **30** can be a pig launcher and/or a pig receiver. As shown in FIG. 12, the device **30** can be configured to store a plurality of pigs **100**, each pig **100** being configured to pass through the pipes of the system **10**, e.g., to clean the pipes by pushing solids through the pipes. As illustrated, the device **30** can store a plurality of the pigs **100** in a supply tube **102**, and the pigs **100** can be released or launched from the tube **102** one at a time, so that the device **30** can be used to initiate multiple cleaning operating in downstream flow paths over a long period and then re-loaded only occasionally, e.g., when all of the pigs **100** have been used or when the apparatus **18** is otherwise being maintained. Pigs **100** from upstream flow paths can be received from upstream flow paths to a receiver tube **104**. The device **30** can be configured to launch pigs **100** into various flow paths of the system **10** and/or receive pigs **100** from various flow paths of the system **10**. Valves **106** can be used to control the flow of the fluid and the pigs **100**

through the device **30**. A connector **108** can join the receiver tube **104** and the supply tube **102** so that the pigs **100** received by the device **30** can be re-launched. In some cases, the device **30** can operate in parallel to other devices in the apparatus **18**, e.g., to receive an incoming pig **100** upstream of a pump in the apparatus **18** and then re-launch the pig **100** downstream of the pump.

[0047] Many modifications and other embodiments of the invention set forth herein will come to mind to one skilled in the art to which this invention pertains having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

WHAT IS CLAIMED IS:

1. An apparatus for securing subsea devices to a seabed, the apparatus comprising:

a mud can housing having a circumferential side and an upper side that define a space therein, the housing having an open bottom such that the housing is configured to be driven into the seabed and secured to the seabed by evacuating the space within the housing; and

at least one receiver connected to the housing, each receiver defining a vertically-oriented cavity configured to receive a subsea device in a vertical orientation, such that each subsea device in each receiver is secured to the seabed in a vertical orientation when the mud can housing is secured to the seabed.

2. An apparatus according to Claim 1 wherein a plurality of receivers are connected to the housing, each receiver configured to receive a respective subsea device.

3. An apparatus according to Claim 1 wherein the receivers are located about a perimeter of the housing and connected to the circumferential side of the housing.

4. An apparatus according to Claim 2 wherein each receiver is configured to receive the respective subsea device through an opening defined in the top of the apparatus such that subsea devices can be installed in the apparatus and removed from the apparatus while the housing is secured to the seabed.

5. An apparatus according to Claim 2 wherein each receiver defines an orientation feature configured to rotate a subsea device that is lowered into the receiver such that the device is rotated to a predetermined orientation when installed therein.

6. An apparatus according to Claim 2 wherein each receiver defines at least one receiver connector configured to mate with a corresponding connector of a subsea device installed in the receiver, each receiver connector configured to provide at least one of the group consisting of an electrical connection and a fluid connection.

7. An apparatus according to Claim 2, further comprising a manifold configured to fluidly connect the subsea devices to a plurality of ports on the housing such that the devices

can be connected in a plurality of configurations by selectively providing fluid links between the ports.

8. An apparatus according to Claim 2 wherein the mud can housing is secured to the seabed and further comprising a plurality of subsea devices, each subsea device disposed in a respective one of the receivers, and each device extending above and below the upper side of the housing.

9. An apparatus according to Claim 8 wherein the plurality of subsea devices comprises at least one separator and a plurality of subsea pumps, the apparatus being configured to receive a flow of fluid from a subsea reservoir, separate different phase components of the fluid, and deliver at least some of the components of the fluid therefrom at an increased pressure.

10. A method for securing subsea devices to a seabed, the method comprising:

disposing a mud can housing on the seabed, the mud can housing having a circumferential side and an upper side that define a space therein;

evacuating the space within the housing and thereby driving the housing into the seabed and securing the housing to the seabed; and

disposing at least one subsea device in at least one receiver connected to the housing such that each subsea device is secured to the seabed in a vertical orientation.

11. A method according to Claim 10 wherein disposing the subsea devices comprises disposing a plurality of the subsea devices into a plurality of receivers connected to the housing.

12. A method according to Claim 10, further comprising providing the mud can housing, the mud can housing defining a plurality of the receivers located about a perimeter of the housing and connected to the circumferential side of the housing.

13. A method according to Claim 10, further comprising removing the subsea device from the receiver while the housing is secured to the seabed.

14. A method according to Claim 10 wherein disposing the subsea device in the receiver comprising lowering the subsea device into the receiver such that the subsea device is rotated by an orientation feature of the receiver and rotated to a predetermined orientation.

15. A method according to Claim 11, further comprising forming a connection between the subsea devices, the connection being at least one of the group consisting of an electrical connection and a fluid connection.

16. A method according to Claim 11, further comprising connecting the devices via a manifold to a plurality of ports on the housing and connecting the devices in a desired configuration by selectively providing fluid links between the ports.

17. A method according to Claim 11 wherein disposing the subsea devices comprises disposing at least one separator and a plurality of subsea pumps such that the apparatus is configured to receive a flow of fluid from a subsea reservoir, separate different phase components of the fluid, and deliver at least some of the components of the fluid therefrom at an increased pressure.

18. A method according to Claim 11, further comprising storing a plurality of pigs in one of the subsea devices and launching the pigs to perform a cleaning operation.

19. A method according to Claim 11, further comprising receiving a pig in one of the subsea devices and re-launching the pig therefrom.

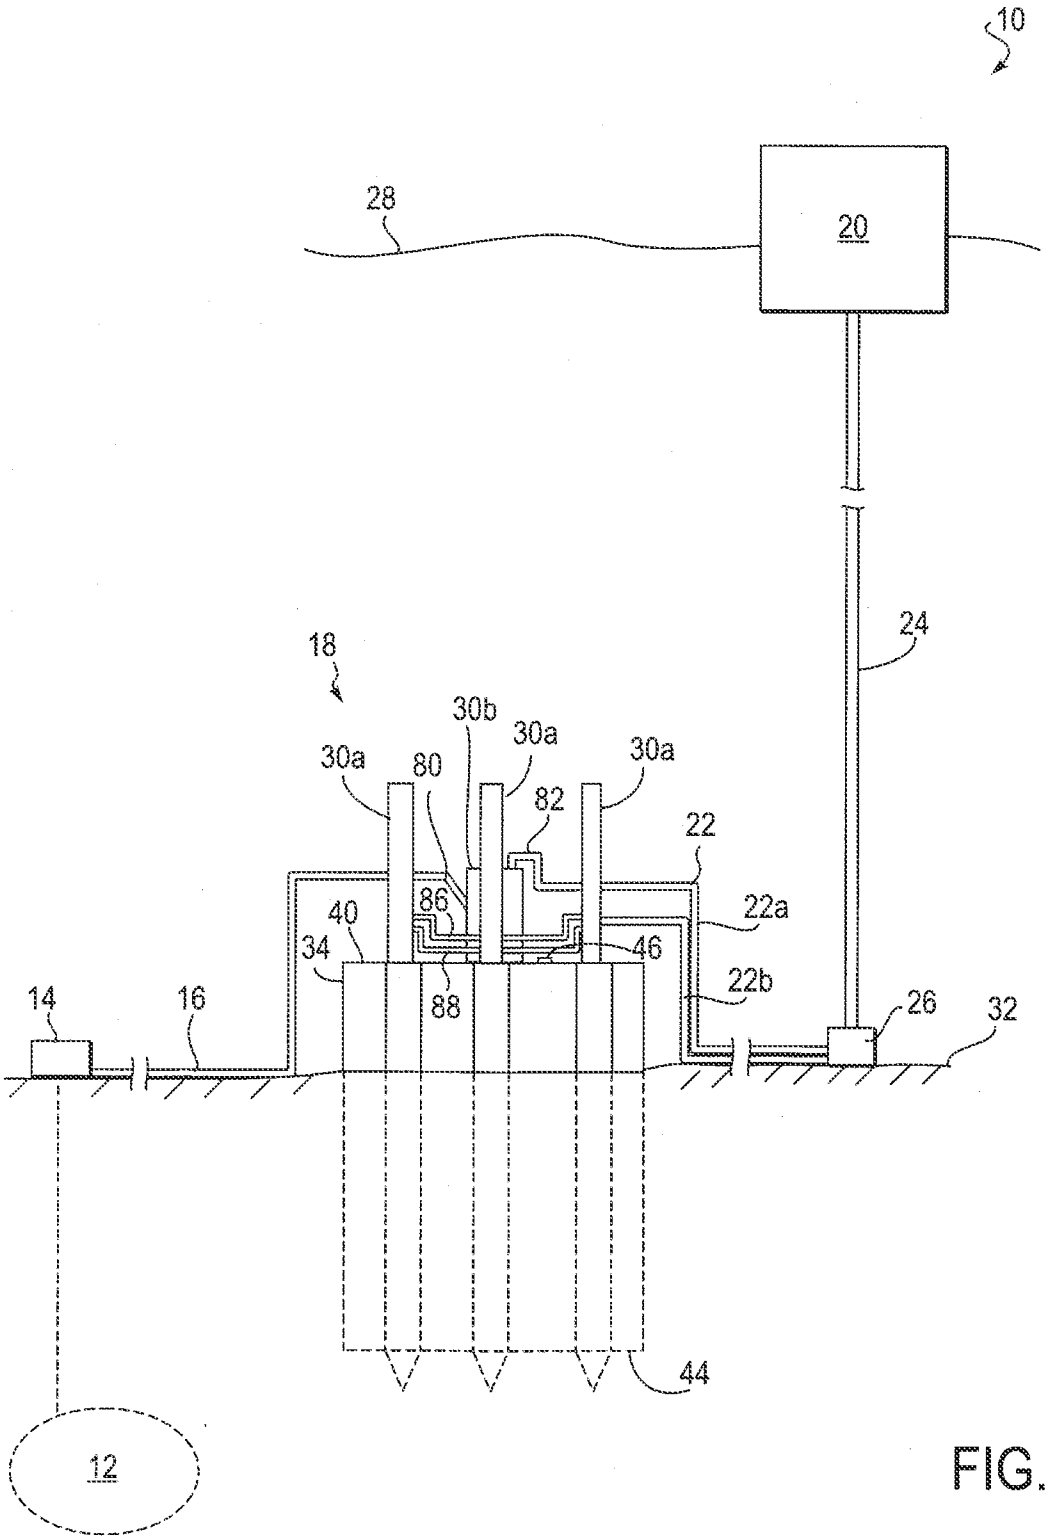

10
28
20
24
18
30b
30a
30a
30a
80
82
22
86
40
22a
34
46
22b
14
16
88
26
32
44
12

FIG. 1

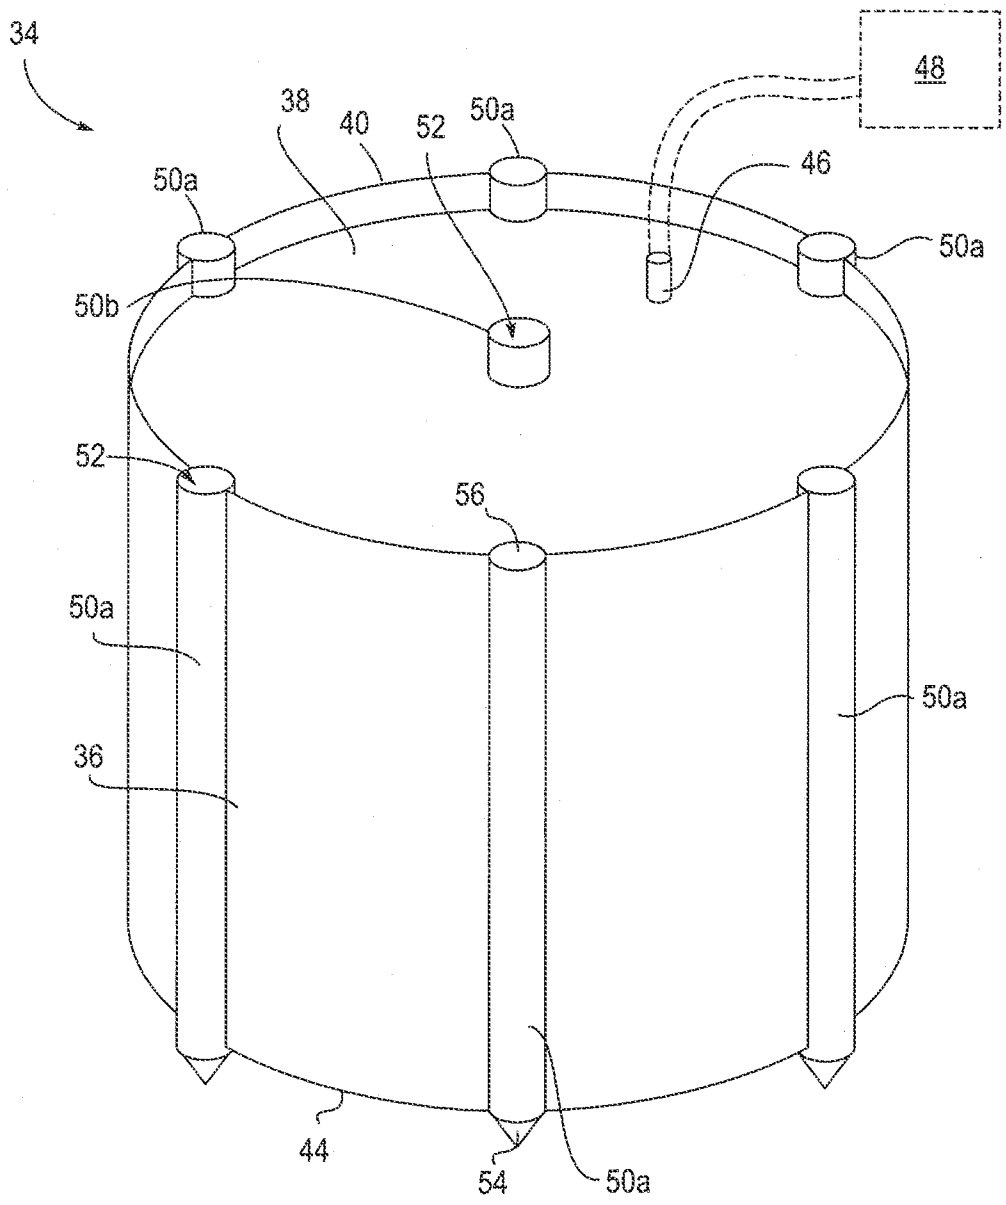


FIG. 2

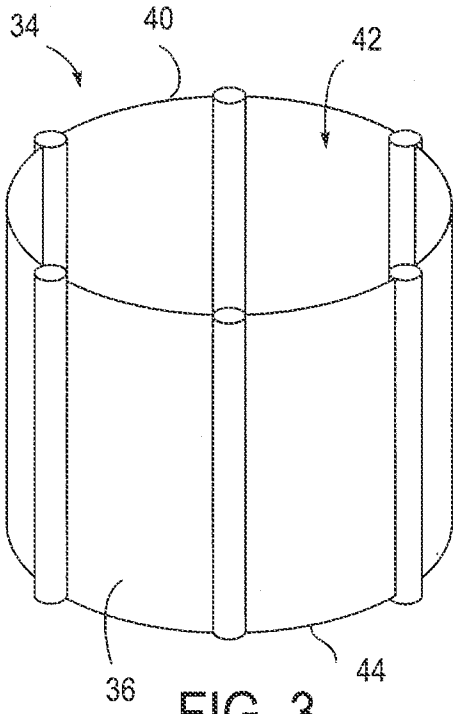


FIG. 3

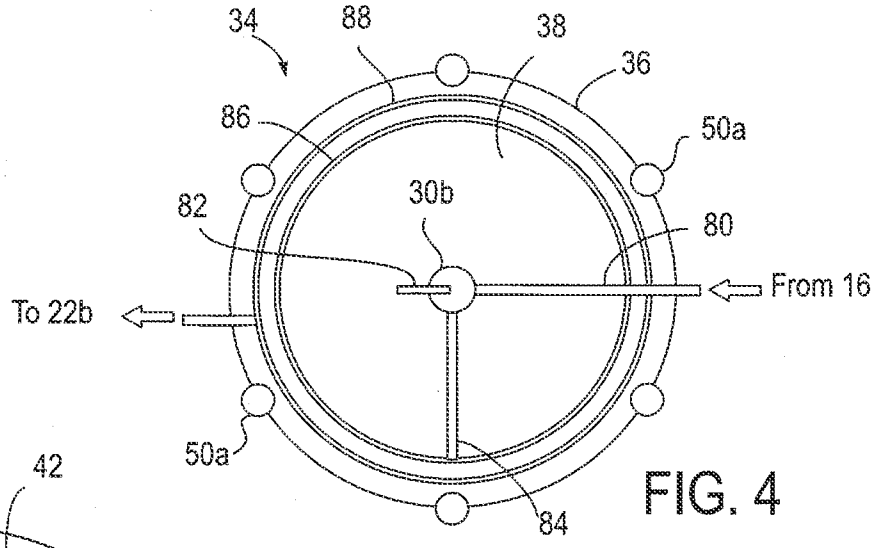


FIG. 4

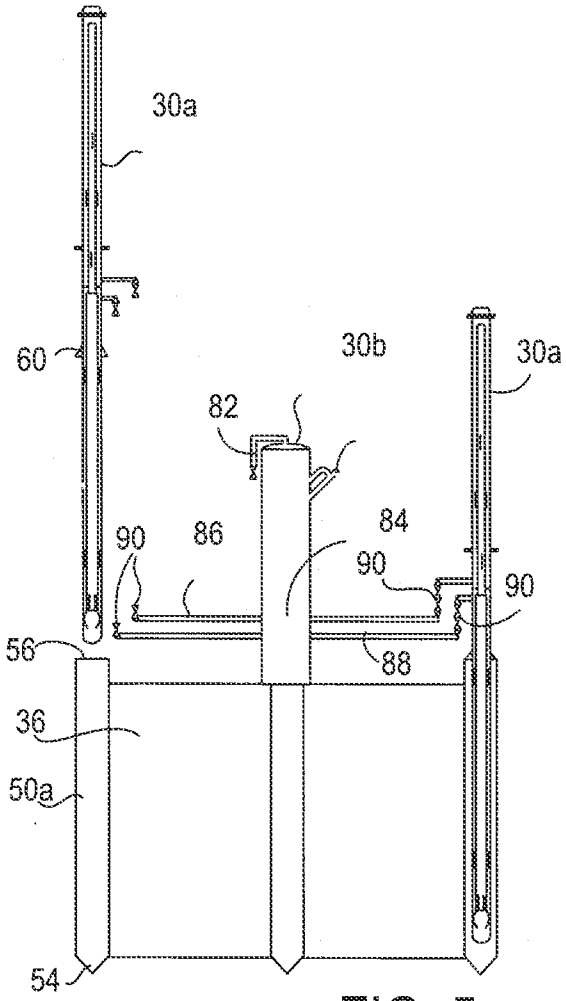


FIG. 5

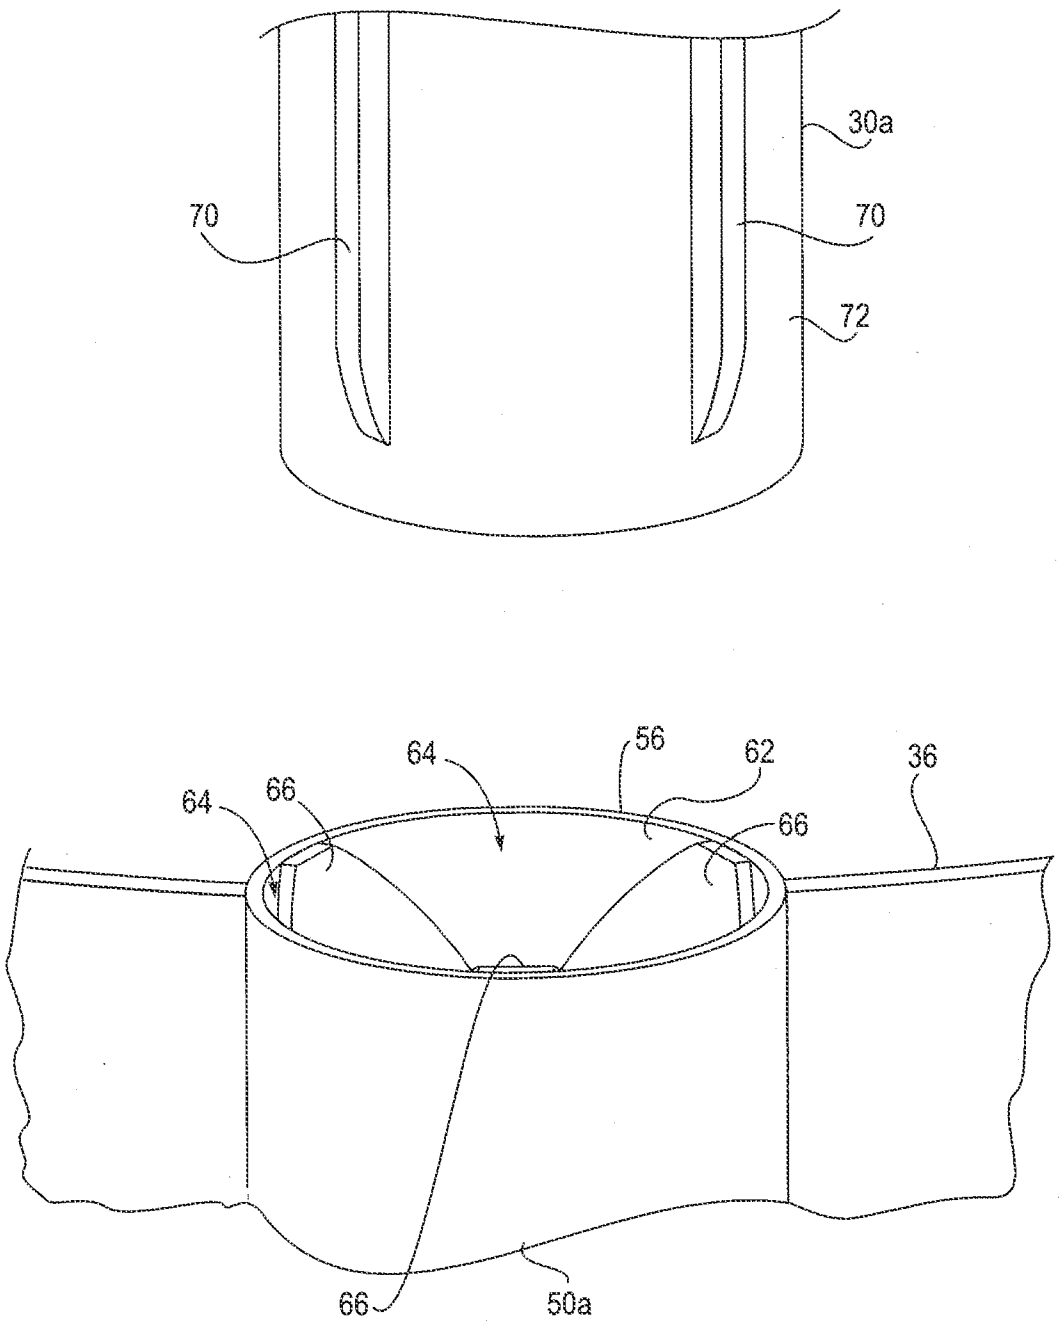


FIG. 6

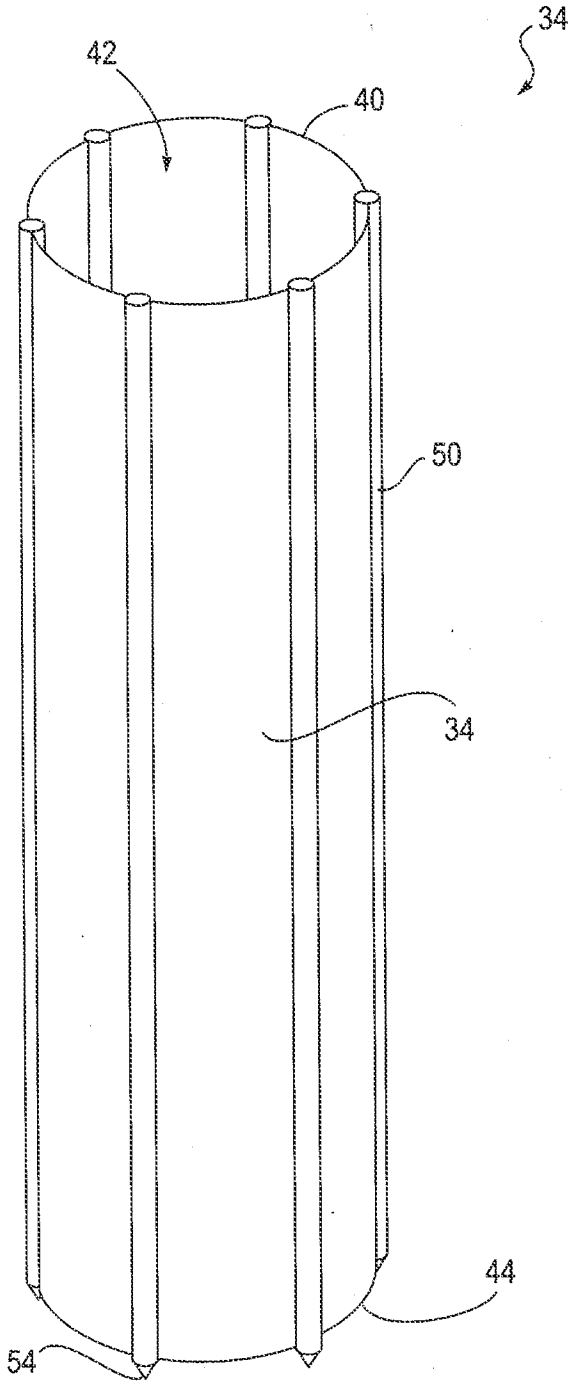


FIG. 7

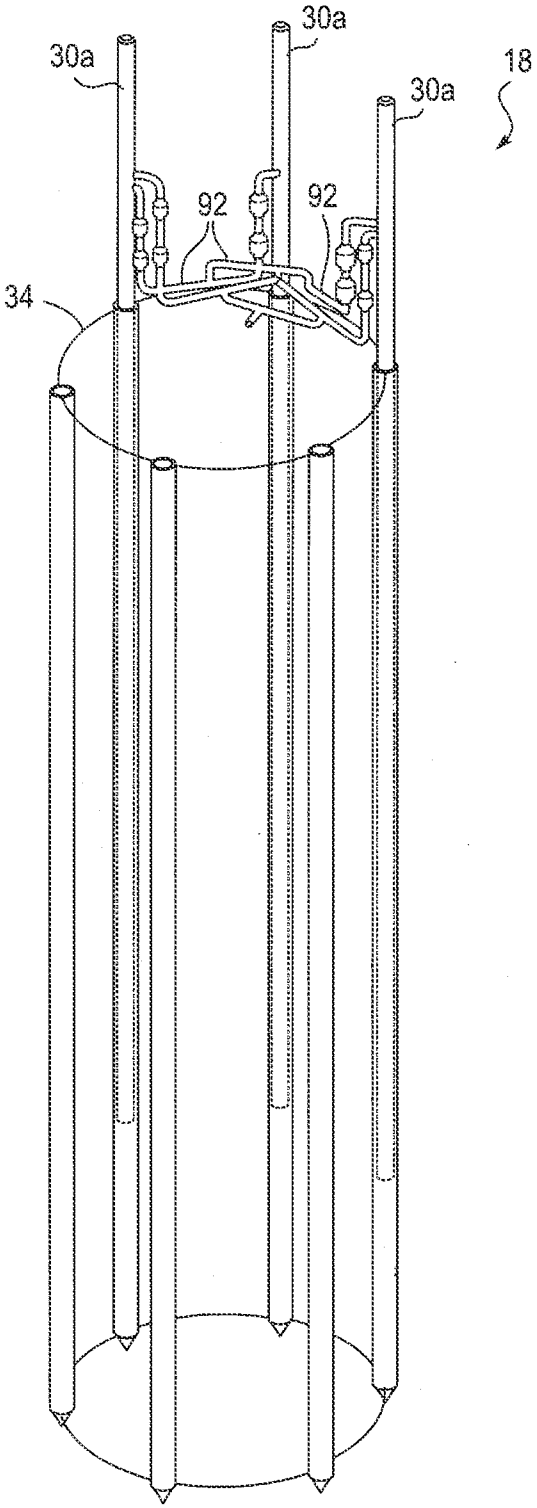


FIG. 8

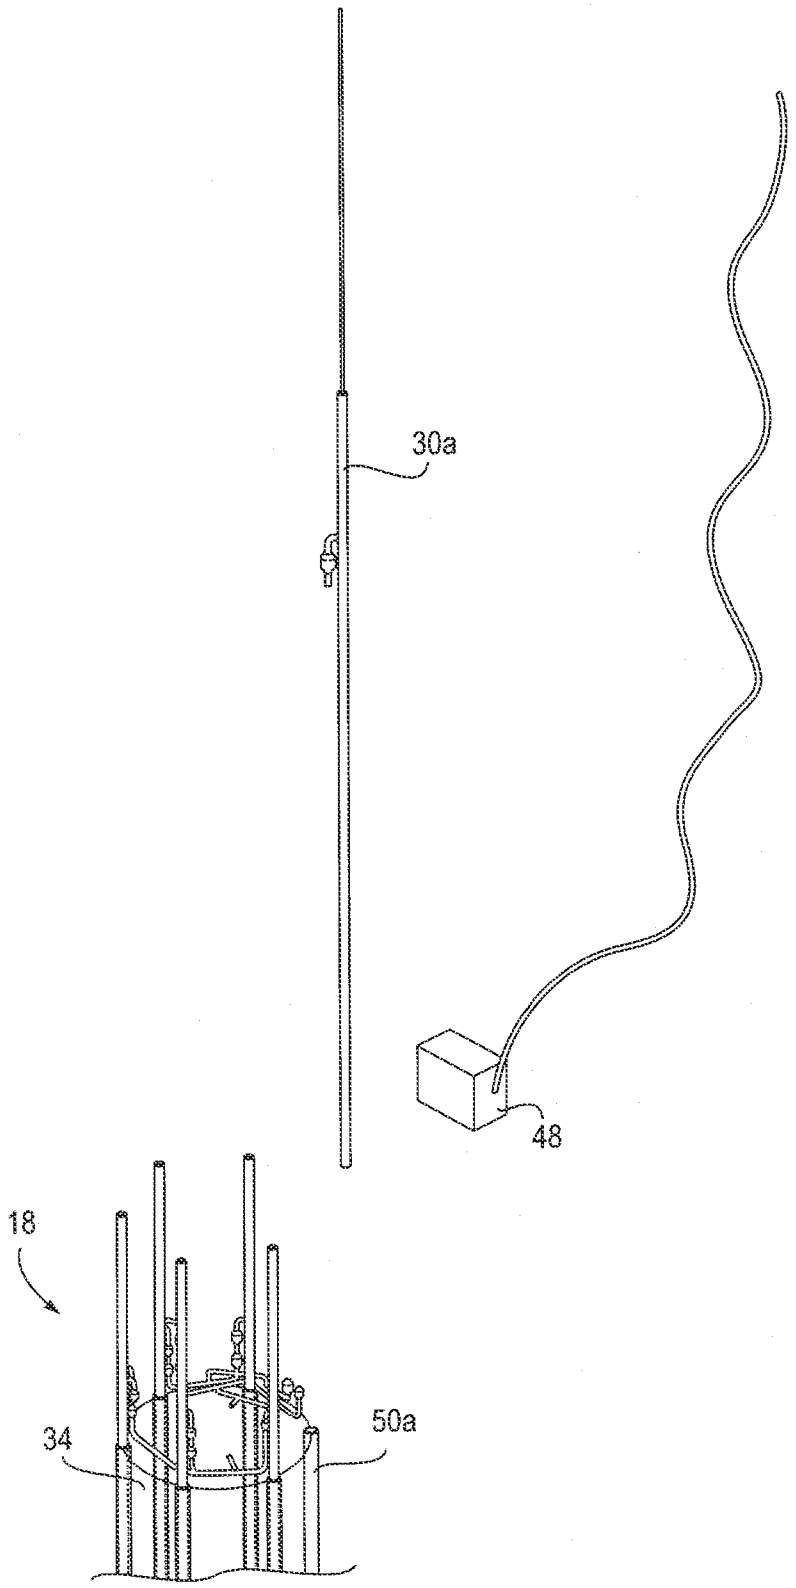


FIG. 9

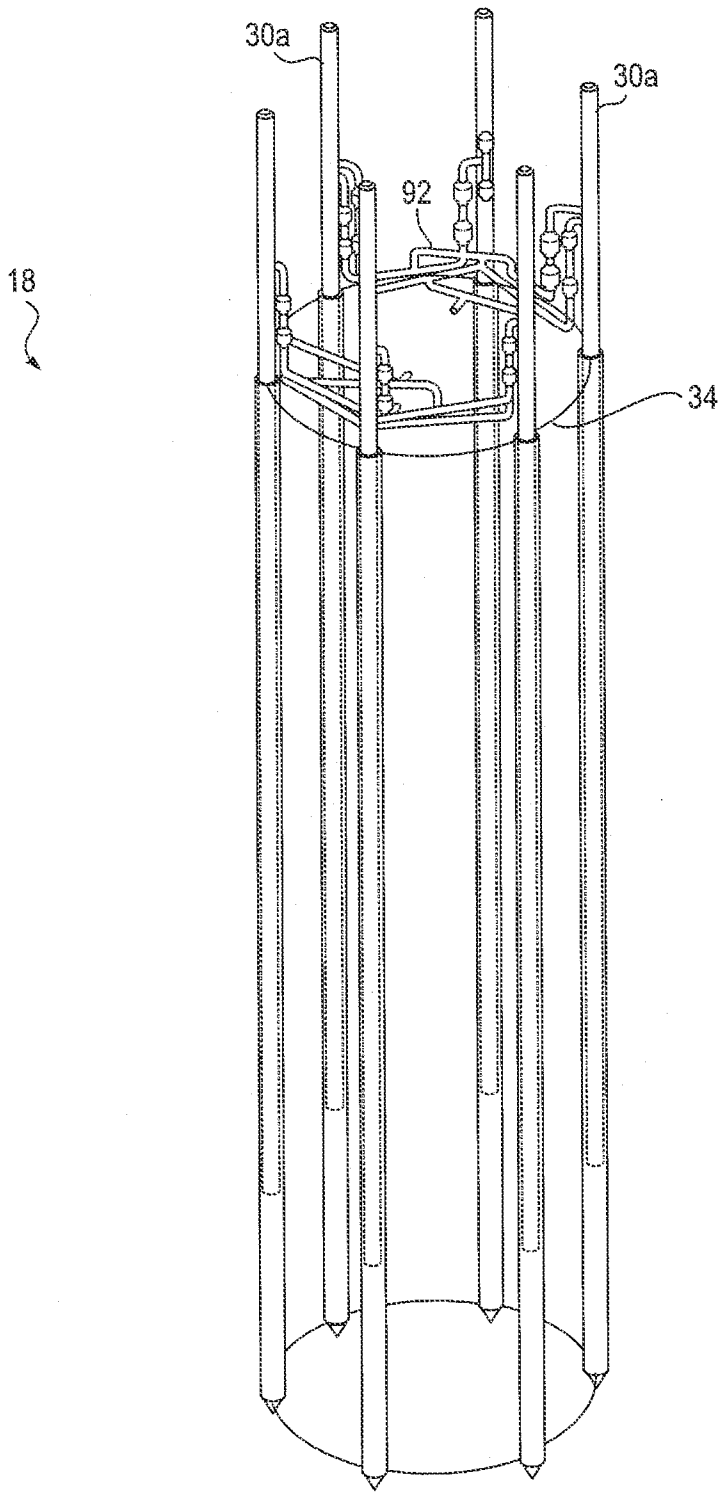


FIG. 10

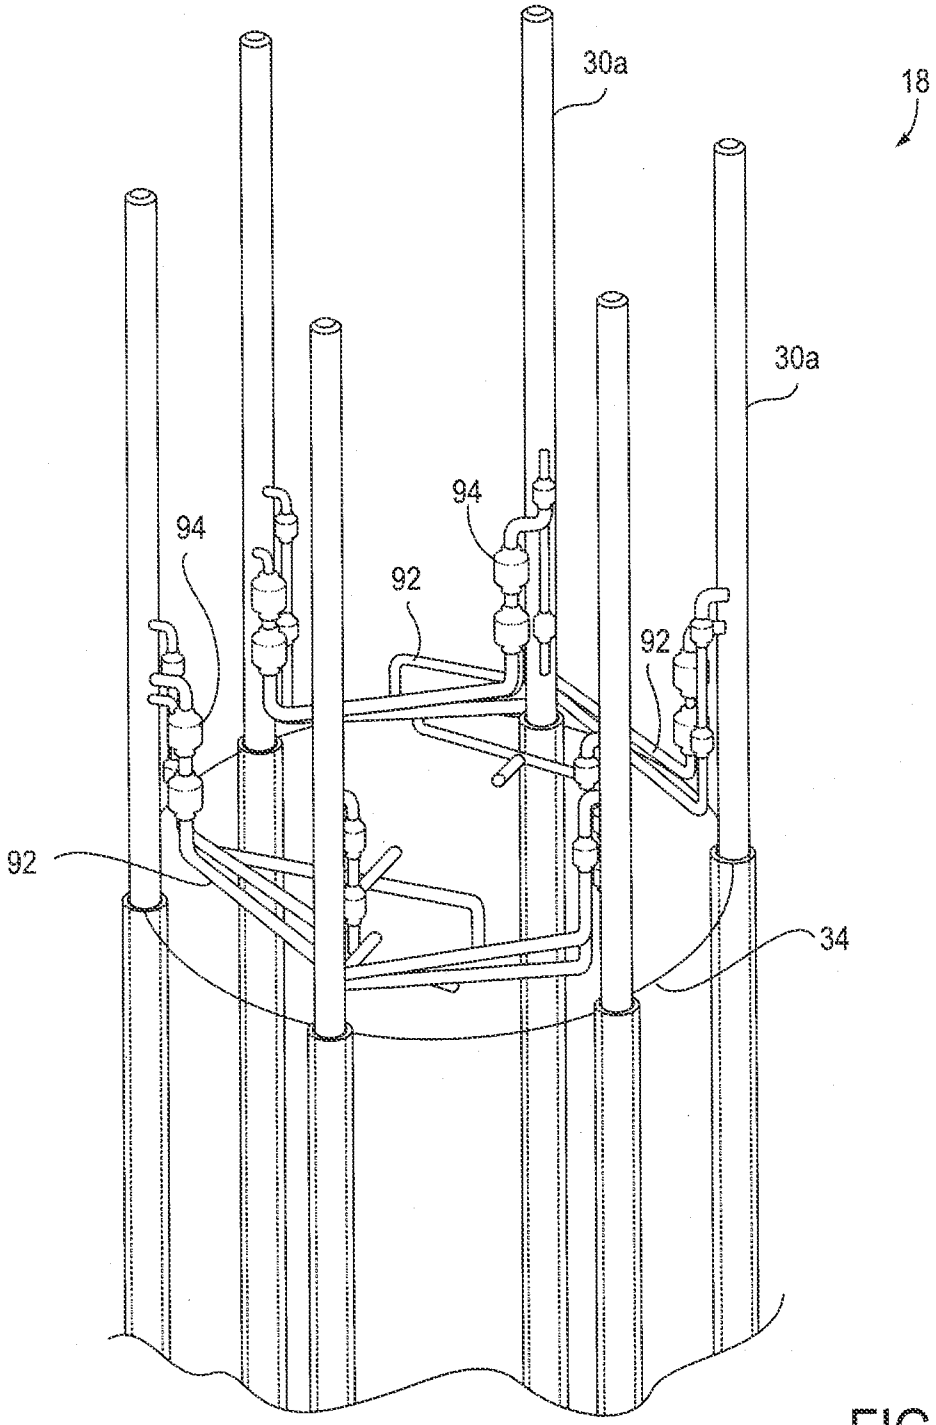


FIG. 11

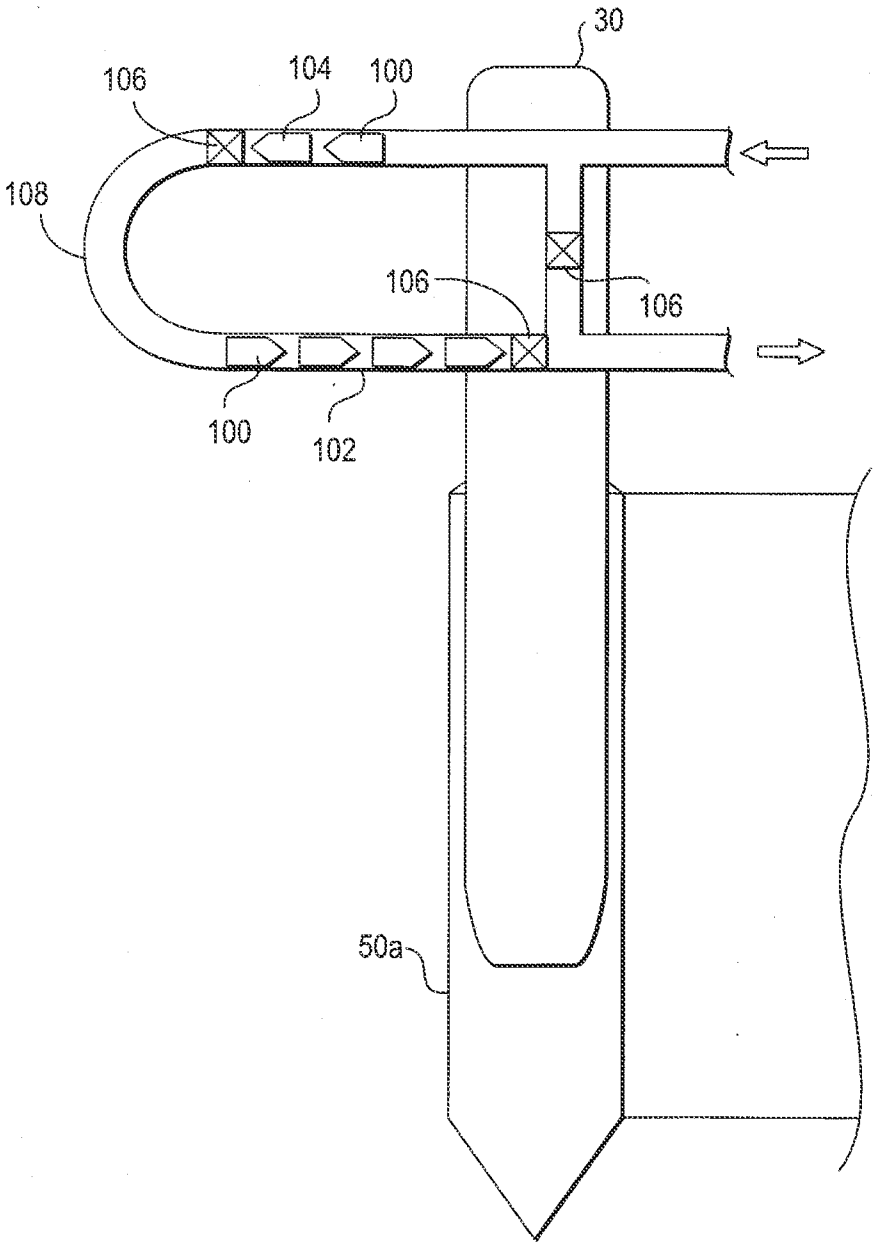


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2011/033091

A. CLASSIFICATION OF SUBJECT MATTER

E21B 43/01(2006.01)i, E21B 43/36(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 43/01; B63B; B65G 5/00; B01D 19/00; E21B 33/035; E02B 17/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: mud can housing, receiver, subsea device

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 03-099646 A2 (STOLT OFFSHORE S.A. et al.) 04 December 2003 See abstract, claim 1 and figure 3	1-19
A	US 03987638 A (BURKHARDT; JOSEPH A. et al.) 26 October 1976 See abstract, claim 1 and figure 1	1-19
A	US 03877520 A (PUTNAM PAUL S.) 15 April 1975 See abstract, column 2 and figure 1	1-19
A	US 05224962 A (KARAL; KAREL et al.) 06 July 1993 See abstract, claim 1 and figures 1-5	1-19

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents,such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
29 SEPTEMBER 2011 (29.09.2011)	**29 SEPTEMBER 2011 (29.09.2011)**
Name and mailing address of the ISA/KR Korean Intellectual Property Office Government Complex-Daejeon, 189 Cheongsa-ro, Seo-gu, Daejeon 302-701, Republic of Korea Facsimile No. 82-42-472-7140	Authorized officer BAHNG, Seung Hoon Telephone No. 82-42-481-8444

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2011/033091

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 03-099646 A2	04.12.2003	AU 2003-246443 A1	12.12.2003
		AU 2003-246443 A8	12.12.2003
		BR 0304831 A	23.11.2004
		GB 0212003 D0	03.07.2002
		GB 0419347 D0	29.09.2004
		GB 2401090 A	03.11.2004
		GB 2401090 B	03.08.2005
		NO20040316A	18.03.2004
		US 2005-0201835 A1	15.09.2005
		WO 03-099646 A3	04.12.2003
US 03987638 A	26.10.1976	US 04039025 A	02.08.1977
US 03877520 A	15.04.1975	None	
US 05224962 A	06.07.1993	None	