PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: B24D 3/00, 7/06, 11/00

A1

(11) International Publication Number:

WO 97/47434

(43) International Publication Date:

18 December 1997 (18.12.97)

(21) International Application Number:

PCT/NL96/00241

(22) International Filing Date:

14 June 1996 (14.06.96)

(81) Designated States: CA, HU, IL, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

(71)(72) Applicant and Inventor: FERRONATO, Sandro, Gio-

The Hague (NL).

vanni, Giuseppe [CH/NL]; Noorderkerkstraat 19, NL-8081 ET Elburg (NL). (74) Agent: DE BRUIJN, Leendert, C.; Nederlandsch Octrooibu-

reau, Scheveningseweg 82, P.O. Box 29720, NL-2502 LS


Published

With international search report.

(54) Title: FLEXIBLE ABRASIVE MEMBER HAVING INTERLOCKING DEPOSITS

(57) Abstract

A flexible abrasive member comprises a porous layer which carries deposits with embedded abrasive particles, said deposits being separated from each other. The deposits are arranged and shaped in such a way that they are mutually interlocked. Thereby, the tearing strength of the member is increased. As an example, the deposits may have cooperating convex and concave shapes. Also, the deposits may have hook-shaped or arrow-shaped protrusions which are hooked into each other.

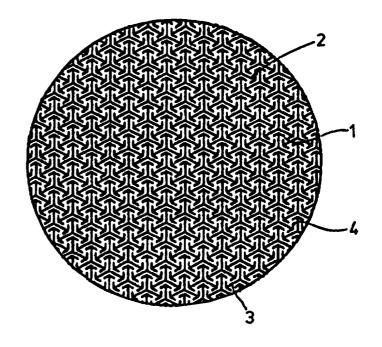

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	Ll	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

1

Flexible abrasive member having interlocking deposits

15

20

25

30

35

The invention is related to a flexible abrasive member comprising a porous layer which carries deposits with embedded abrasive particles, said deposits being separated from each other.

Such flexible members are widely used for grinding and polishing. They are available as two general types, i.e. one type for dry grinding and one type for wet grinding. Flexible members of these types are known from US-A-5389119. They can be manufactured in various ways, for instance by means of electroplating, electroless plating, gas deposition, sintering or screening by using resin.

These known flexible abrasive members have the disadvantage that the strength against disintegration, such as tearing, is too low. Generally, the porous layer consists of a mesh material which itself has a considerable tearing strength. However, after a regular pattern of closely spaced deposits has been applied onto said mesh, its tearing strength is much lower.

This loss in tearing strength can be attributed to the occurrence of nominal tear directions which are constituted by the tear lines or tear channels, lying between the rows of regularly spaced deposits. Once a small tear has been initiated, it propagates itself even under low tear forces due to these tear lines or tear channels.

The object of the invention is to provide a flexible abrasive member having separated deposits with embedded abrasive particles which still has an excellent tear strength. This object is achieved in that the deposits are arranged and shaped in such a way that they are mutually interlocked.

Any effort to tear the porous layer material will be counteracted by the interlocking shapes of the deposits, which themselves have an excellent resistance against the loads resulting from tear forces. On the other hand, the flexible character of the abrasive member is maintained, thanks to the spacing between the deposits.

The inventive concept of the invention can be carried out in various ways, provided the interlocking cooperation between the deposits is maintained. According to one of the possibilities, the deposits have cooperating convex and concave shapes. For instance, the deposits may have hook-shaped protrusions which are hooked into each

2

other. Such protrusions may be S-shaped, or comprise two S-shapes which cross each other.

According to a further alternative, the deposits are arrow-shaped, for instance with the deposits each comprising three arrow-shapes pointing away from each other.

Also, the deposits may have blunt protrusions which fit between each other, such as deposits which are cross-shaped having four blunt protrusions pointing away from each other, or deposits having three blunt protrusions pointing away from each other.

The size of the deposits may lie between 2,5 and 15 mm.

15

20

25

30

35

An important advantage of the flexible abrasive member according to the invention is obtained by the mutual support of the adjacent deposits, which effect occurs due to the interlocking cooperation of the deposits. This support leads to a stabilisation of the deposits, whereby their resistance against e.g. tilting under the influence of abrasive shear forces is greatly improved.

This favourable effect can in particular be used in grinding or polishing of e.g. granite. This material generally comprises relatively hard and soft areas. The deposits of these prior art flexible abrasive members have a tendency to dig into the softer parts of the granite. This normally results in an uneven surface, entailing loss of lustre and gloss.

According to the invention, the stabilised deposits show this tendency far less or not at all, giving a much better polishing or grinding result and a finer and smoother surface effect. As an example, with the flexible member according to the invention a higher gloss reading of about 5-10 can be achieved. Thus, the final polishing step is made easier and faster.

This important advantage of the flexible abrasive member according to the invention is related to its ability to maintain a plain grinding surface even while large grinding forces are exerted on the deposits. These grinding forces result in shear loadings on the deposit. As a result, the seperated deposits in traditional flexible abrasive members have the tendency to tilt under the influence of such grinding forces. The influence if this tendency to tilt manifests itself in particular in the softer parts of the above granite, which are less able to resist the tilting movement and are therefore ground

3

away more deeply than the harder parts thereof. The product obtained has a less smooth surface, leading to a lower gloss.

In contrast, the deposits of a flexible abrasive member according to the invention are far less prone to such tilting movements. Having regard to the fact that these deposits are interlocked, they are able to exert a mutual stabilizing force on each other. Thus, all deposits are held in their correct position during grinding, which leads to a smoother and more accurate surface. The flexible abrasive member can therefore be used as a precision tool.

Also, the flexible abrasive member according to the invention is suitable for working small objects. Objects which are small in relation to the grinding surface of the flexible abrasive member, exert strong local forces on said member which could result in deformations of its surface due to tilting of the deposits. Here as well the interlocking relationship of the deposits in the flexible member according to the invention leads to better results. In particular, the flexible abrasive member carried out as a grinding or polishing belt benefits from the interlocking relationship of the deposits.

Furthermore, good results are also obtained in grinding or polishing the edge areas of platelike or blockshaped objects. These edge areas, which normally are formed by the intersection of two faces of such object which are at an angle of about 90 degrees, are exerting a concentrated load on the surface of the flexible abrasive member. Here as well, the interlocking relationship of the deposits results in a smoother and more plain edge surface.

The invention will now be explained further with reference to two embodiments shown in the figures.

Figure 1 shows a first embodiment of a flexible abrasive disc according to the invention.

30 Figure 2 shows a second embodiment.

10

15

Figure 3 shows a third embodiment.

The flexible abrasive disc as shown in figure 1 comprises a base member consisting of a porous layer 1. By means of a known technique, such as electro-plating, electroless plating, etc., deposits 2 are applied to the porous layer 1, in such a way that they are embedded therein. In the embodiment of figure 1, each deposit generally consists of three arrows, which mutually enclose angles of 120°. Each arrow of deposit 2 consists of a leg 3 and an arrow head 4.

4

As is clear from figure 1, the arrow heads 4 grip behind the arrow heads of neighbouring deposits 2, which means that they prevent too large relative movements of neighbouring deposits 2. For instance, in case the porous layer 1 would give way as a result of an initial tear, a further development of this tear is prevented due to the fact that the further relative movement of the deposits which are embedded in the porous layer 1, is prevented due to the fact that their arrow heads come to lie against eachother.

It will be clear that numerous other embodiments are possible for the deposits to obtain the same effect. As an example, the embodiment of figure 2 is shown, comprising again a base member consisting of a porous layer 1, but now having cross-shaped deposits 5. The cross-shaped deposits 5 are each composed of crossing "S"-shapes 6, the ends of which hook behind eachother.


In the partly shown embodiment of figure 2 a porous layer 1 comprises deposits 7 each having four blunt protrusions 8. These blunt protrusions 8 fit between eachother and thereby offer an interlocking relationship.

In the alternative of course also other deposits with more or 20 less blunt protrusions could be provided.

Claims

- 1. Flexible abrasive member comprising a porous layer (1) which carries deposits with embedded abrasive particles, said deposits being separated from each other, characterised in that the deposits (2, 5) are arranged and shaped in such a way that they are mutually interlocked.
- 2. Member according to claim 1, wherein the deposits (2, 5) have cooperating convex and concave shapes.
- 3. Member according to claim 1 or 2, wherein the deposits have hook-shaped protrusions (4, 6) which are hooked into each other.
 - 4. Member according to claim 3, wherein the deposits (5) are S-shaped.
- 5. Member according to claim 3 or 4, wherein the deposits (5) comprise two S-shapes (6) which cross each other.
 - 6. Member according to claim 3, wherein the deposits (2) are arrow-shaped.
 - 7. Member according to claim 6, wherein the deposits (2) each comprise three arrow-shapes (3, 4) pointing away from each other.
- 8. Member according to claim 1 or 2, wherein the deposits (7) have blunt protrusions (8) which fit between each other.
 - 9. Member according to claim 8, wherein the deposits (7) are cross-shaped having four blunt protrusions (8) pointing away from each other.
- 25 10. Member according to claim 8, wherein the deposits have three blunt protrusions pointing away from each other.
 - 11. Member according to any of the preceding claims, wherein the size of the deposits is between 2.5 and 12 mm.
- 12. Hand pad for grinding and polishing, comprising a flexible 30 member according to any of the preceding claims.
 - 13. Belt for grinding and polishing, comprising a flexible member according to any of claims 1-11.
 - 14. Disc for grinding and polishing, comprising a flexible member according to any of claims 1-11.
- 35 15. Block for grinding and polishing, comprising a flexible member according to any of claims 1-11.

1/1

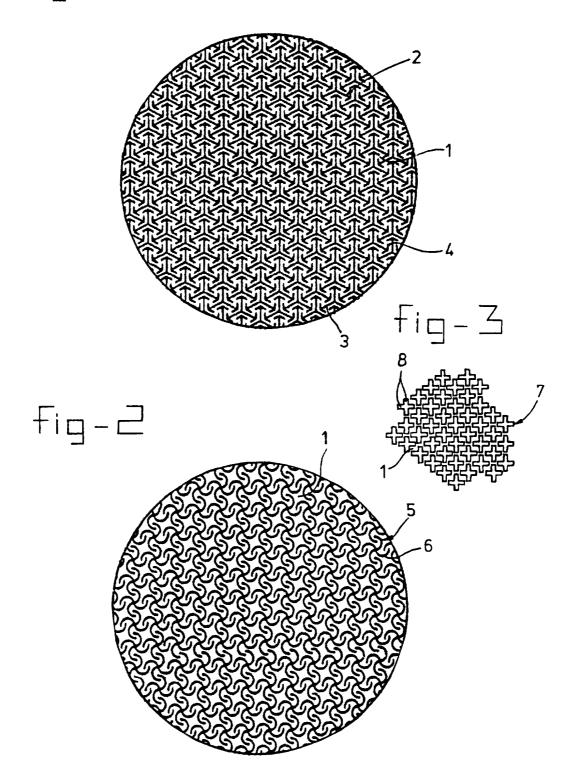

INTERNATIONAL SEARCH REPORT

Inte mal Application No PCT/NL 96/00241

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 B24D3/00 B24D7/06 B24D11/00 According to International Patent Classification (IPC) or to both national classification and IPC **B. FIELDS SEARCHED** Minimum documentation searched (classification system followed by classification symbols) IPC 6 B24D Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practical, search terms used) C. DOCUMENTS CONSIDERED TO BE RELEVANT Category Citation of document, with indication, where appropriate, of the relevant passages Relevant to claim No. EP 0 642 889 A (MINNESOTA MINING AND 1,6, MANUFACTURING COMPANY) 15 March 1995 11-15 see the whole document see page 5, line 39 - line 45 EP 0 657 250 A (L. R. OLIVER & CO. INC.) Υ 1,6, 14 June 1995 11-15 see the whole document FR 2 147 606 A (D. H. PROWSE AND COMPANY Α 1-4,13, LIMITED) 9 March 1973 14 see the whole document WO 96 07508 A (STRUERS A/S) 14 March 1996 A 1-3,6,14see the whole document -/--] xl Further documents are listed in the continuation of box C. Patent family members are listed in annex. X I Special categories of cited documents: "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international "X" document of particular relevance; the claimed invention filing date cannot be considered novel or cannot be considered to "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such docudocument referring to an oral disclosure, use, exhibition or ments, such combination being obvious to a person skilled in the art. other means *P* document published prior to the international filing date but later than the priority date claimed '&' document member of the same patent family Date of the actual completion of the international search Date of mailing of the international search report 25. 02. 97 13 February 1997 Name and mailing address of the ISA Authorized officer European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Molto Pinol, F Fax: (+31-70) 340-3016

1

INTERNATIONAL SEARCH REPORT

Inten al Application No PCT/NL 96/00241

Category	tion) DOCUMENTS CONSIDERED TO BE RELEVANT Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	common or accommond with measured within abbidophiams of the referent passages	
A	EP 0 064 748 A (METALLWERK OSKAR WEIL GMBH & CO KG (LAHRER STAHLSPÄNE)) 17 November 1982 see the whole document	1,8-10
A	us 5 389 119 A (SANDRO G. G. FERRONATO AND NATALINO FERRONATO) 14 February 1995 cited in the application see the whole document	

1

Form PCT/ISA/218 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Inte nal Application No
PCT/NL 96/00241

Patent document cited in search report	Publication date	Patent family member(s)		Publication date	
EP-A-642889	15-03-95	US-A- BR-A- CA-A- CN-A- JP-A-	5489235 9403458 2130136 1111558 7164330	06-02-96 16-05-95 14-03-95 15-11-95 27-06-95	
EP-A-657250	14-06-95	US-A-	5453041	26-09-95	
FR-A-2147606	09-03-73	GB-A- AT-B- AU-A- BE-A- CA-A- CH-A- DE-A- NL-A,B SE-B- US-A- ZA-A-	1375571 326516 4462372 786752 962065 546626 2235503 7210364 387881 3860400 7204824	27-11-74 10-12-75 24-01-74 16-11-72 04-02-75 15-03-74 08-02-73 30-01-73 20-09-76 14-01-75 25-04-73	
WO-A-9607508	14-03-96	EP-A-	0728055	28-08-96	
EP-A-064748	17-11-82	DE-A- AT-T- WO-A- US-A-	3118343 9013 8700872 4590113	25-11-82 15-09-84 12-02-87 20-05-86	
US-A-5389119	14-02-95	NL-A- EP-A-	9300661 0623424	16-11-94 09-11-94	