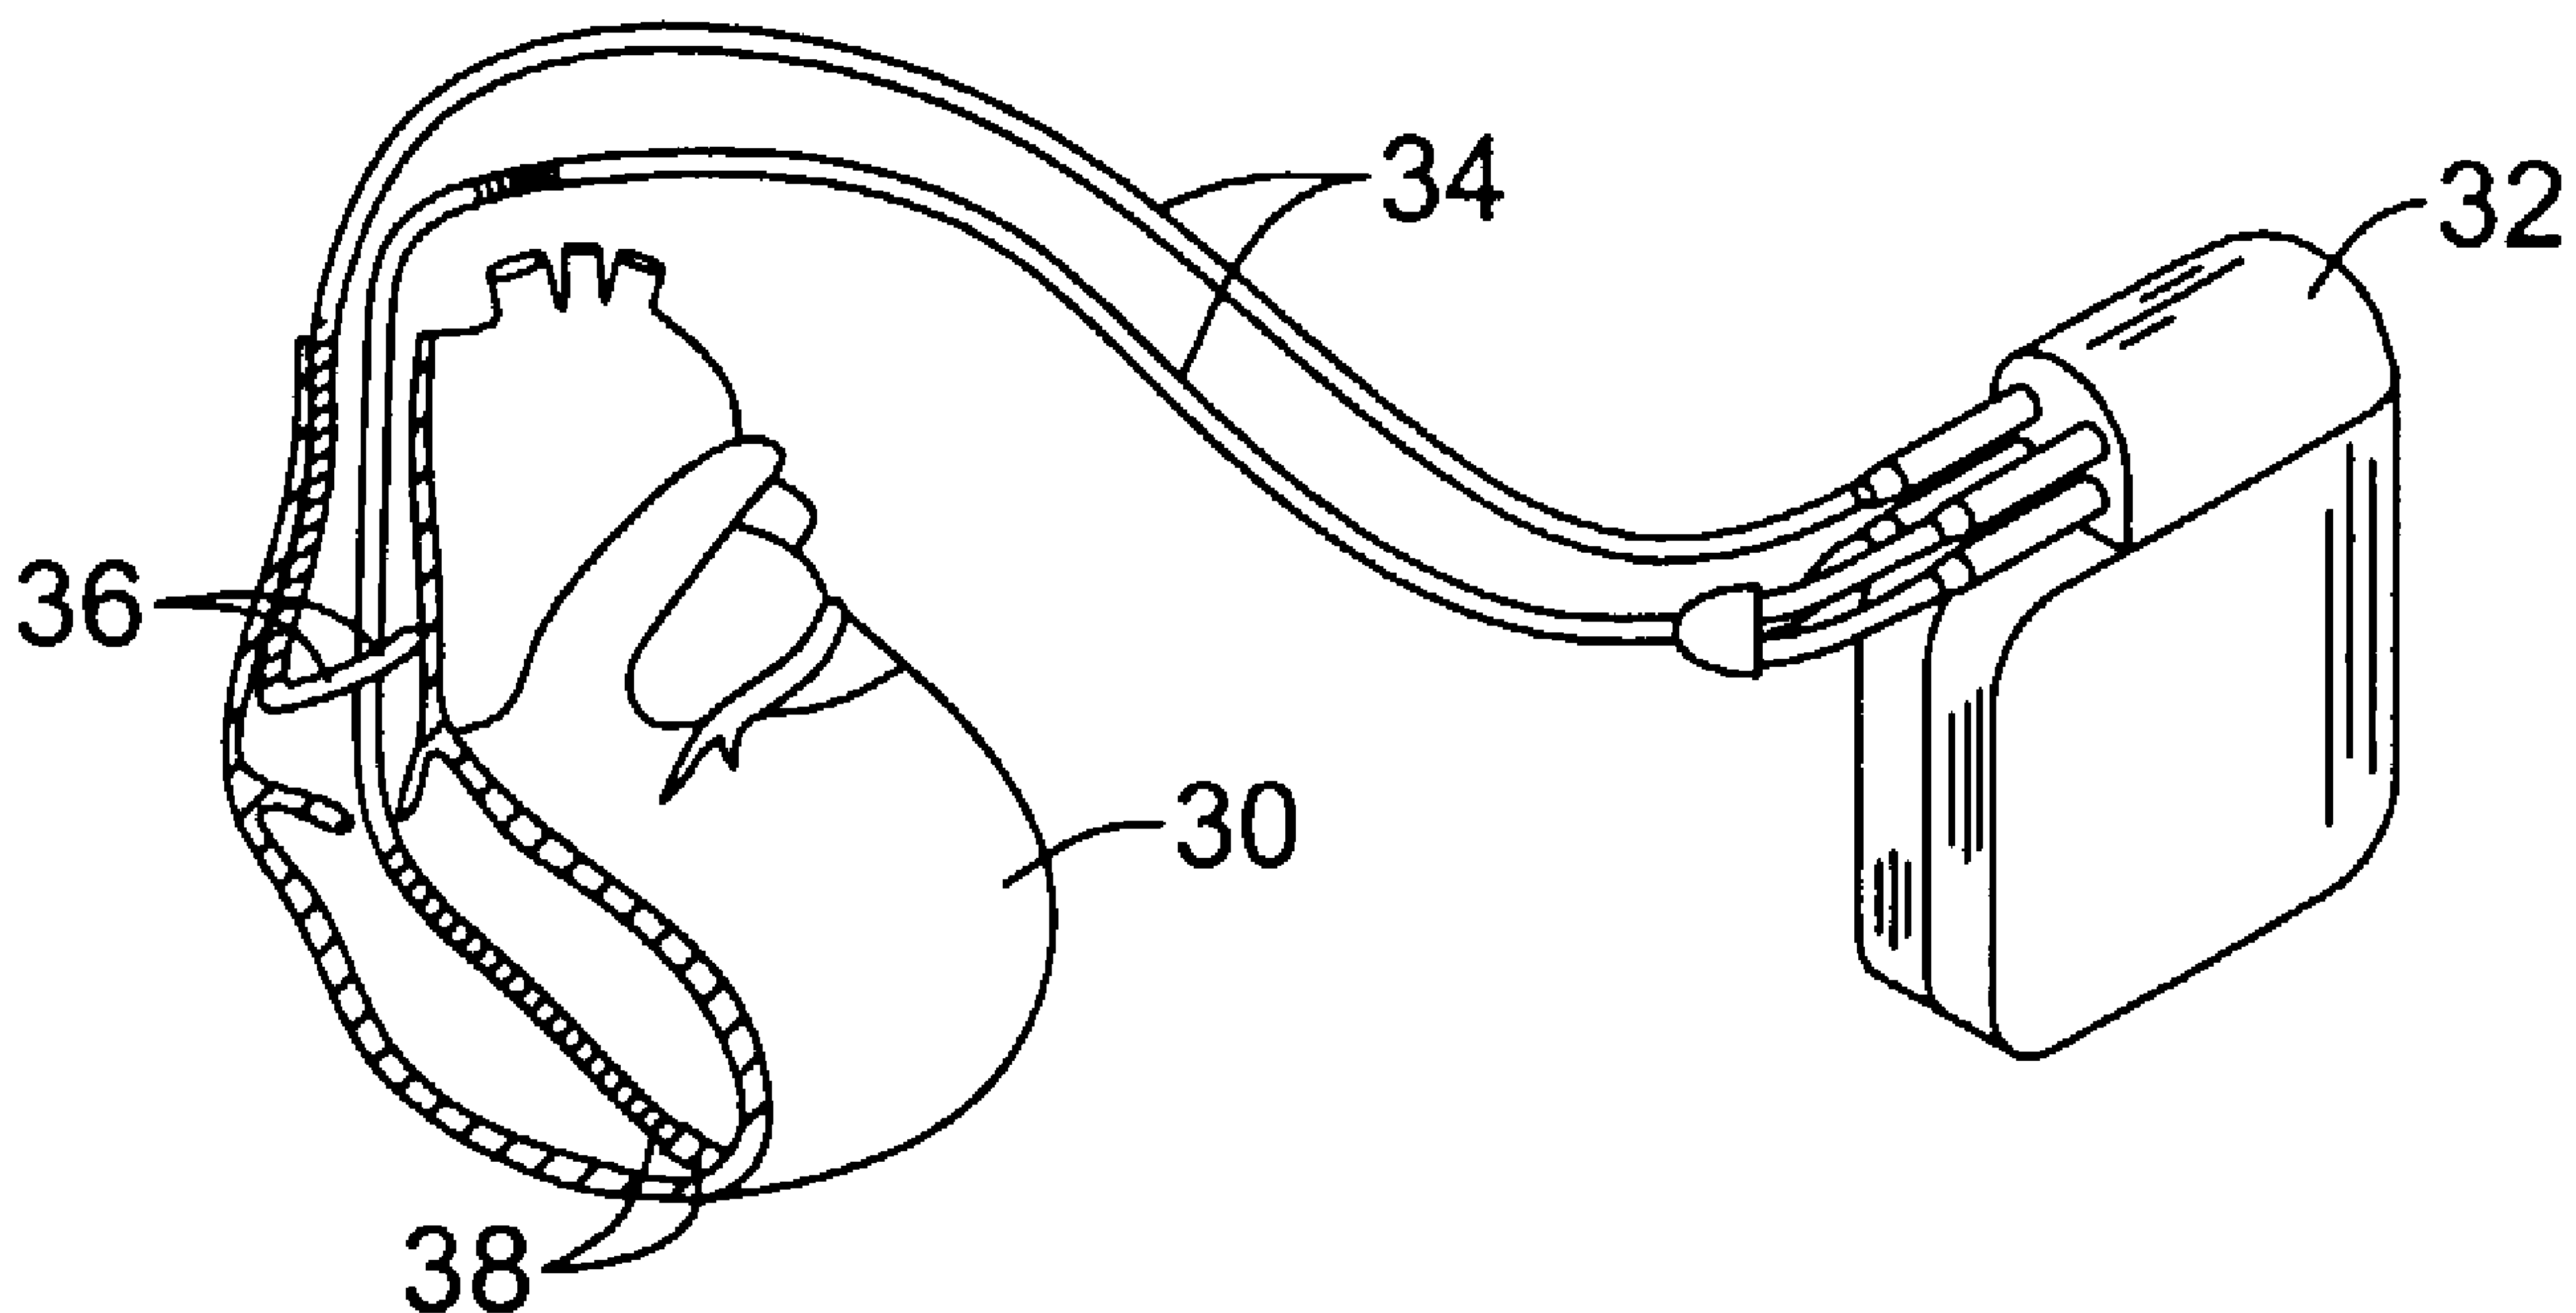




(86) Date de dépôt PCT/PCT Filing Date: 2005/10/19
(87) Date publication PCT/PCT Publication Date: 2006/06/01
(85) Entrée phase nationale/National Entry: 2007/05/16
(86) N° demande PCT/PCT Application No.: US 2005/037760
(87) N° publication PCT/PCT Publication No.: 2006/057735
(30) Priorité/Priority: 2004/11/29 (US10/999,274)

(51) Cl.Int./Int.Cl. *A61N 1/39* (2006.01),
A61B 5/0452 (2006.01)
(71) Demandeur/Applicant:
CAMERON HEALTH, INC., US
(72) Inventeurs/Inventors:
PALREDDY, SUREKHA, US;
WARREN, JAY A., US;
OSTROFF, ALAN H., US
(74) Agent: CASSAN MACLEAN

(54) Titre : PROCEDE ET APPAREIL DESTINES A L'ALIGNEMENT ET A LA COMPARAISON DES BATTEMENTS
(54) Title: METHOD AND APPARATUS FOR BEAT ALIGNMENT AND COMPARISON



(57) Abrégé/Abstract:

Methods of using a template having a template data set and template parameters to provide improved alignment of captured cardiac signal data to a stored template. More particularly, in an illustrative method, a captured cardiac signal is first configured using template parameters for a stored template. Then, once configured, the captured cardiac signal is then compared to the stored template. Other embodiments include implantable cardiac treatment devices including operational circuitry configured to perform the illustrative method. In a further embodiment, more than one stored templates may be used. Each template can have independently constructed templates, such that a single captured cardiac signal may be configured using first parameters for comparison to a first template, and using second parameters for comparison to a second template.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 June 2006 (01.06.2006)

PCT

(10) International Publication Number
WO 2006/057735 A1

(51) International Patent Classification:

A61N 1/39 (2006.01) A61B 5/0452 (2006.01)

(21) International Application Number:

PCT/US2005/037760

(22) International Filing Date: 19 October 2005 (19.10.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10/999,274 29 November 2004 (29.11.2004) US

(71) Applicant (for all designated States except US):

CAMERON HEALTH, INC. [US/US]; 905 Calle Amanecer, Suite 300, San Clemente, CA 92673 (US).

(72) Inventors; and

(75) **Inventors/Applicants (for US only): PALREDDY, Surekha** [US/US]; 25952 Miramonte Drive, Mission Viejo, CA 92692 (US). **WARREN, Jay, A.** [US/US]; 30522 Via Andulucia, San Juan Capistrano, CA 92675 (US). **OSTROFF, Alan H.** [US/US]; 3510 Tres Rios, San Clemente, CA 92673 (US).

(74) **Agent: CROMPTON, David, M.**; Crompton, Seager & Tuft, LLC, 1221 Nicollet Avenue, Suite 800, Minneapolis, MN 55403 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

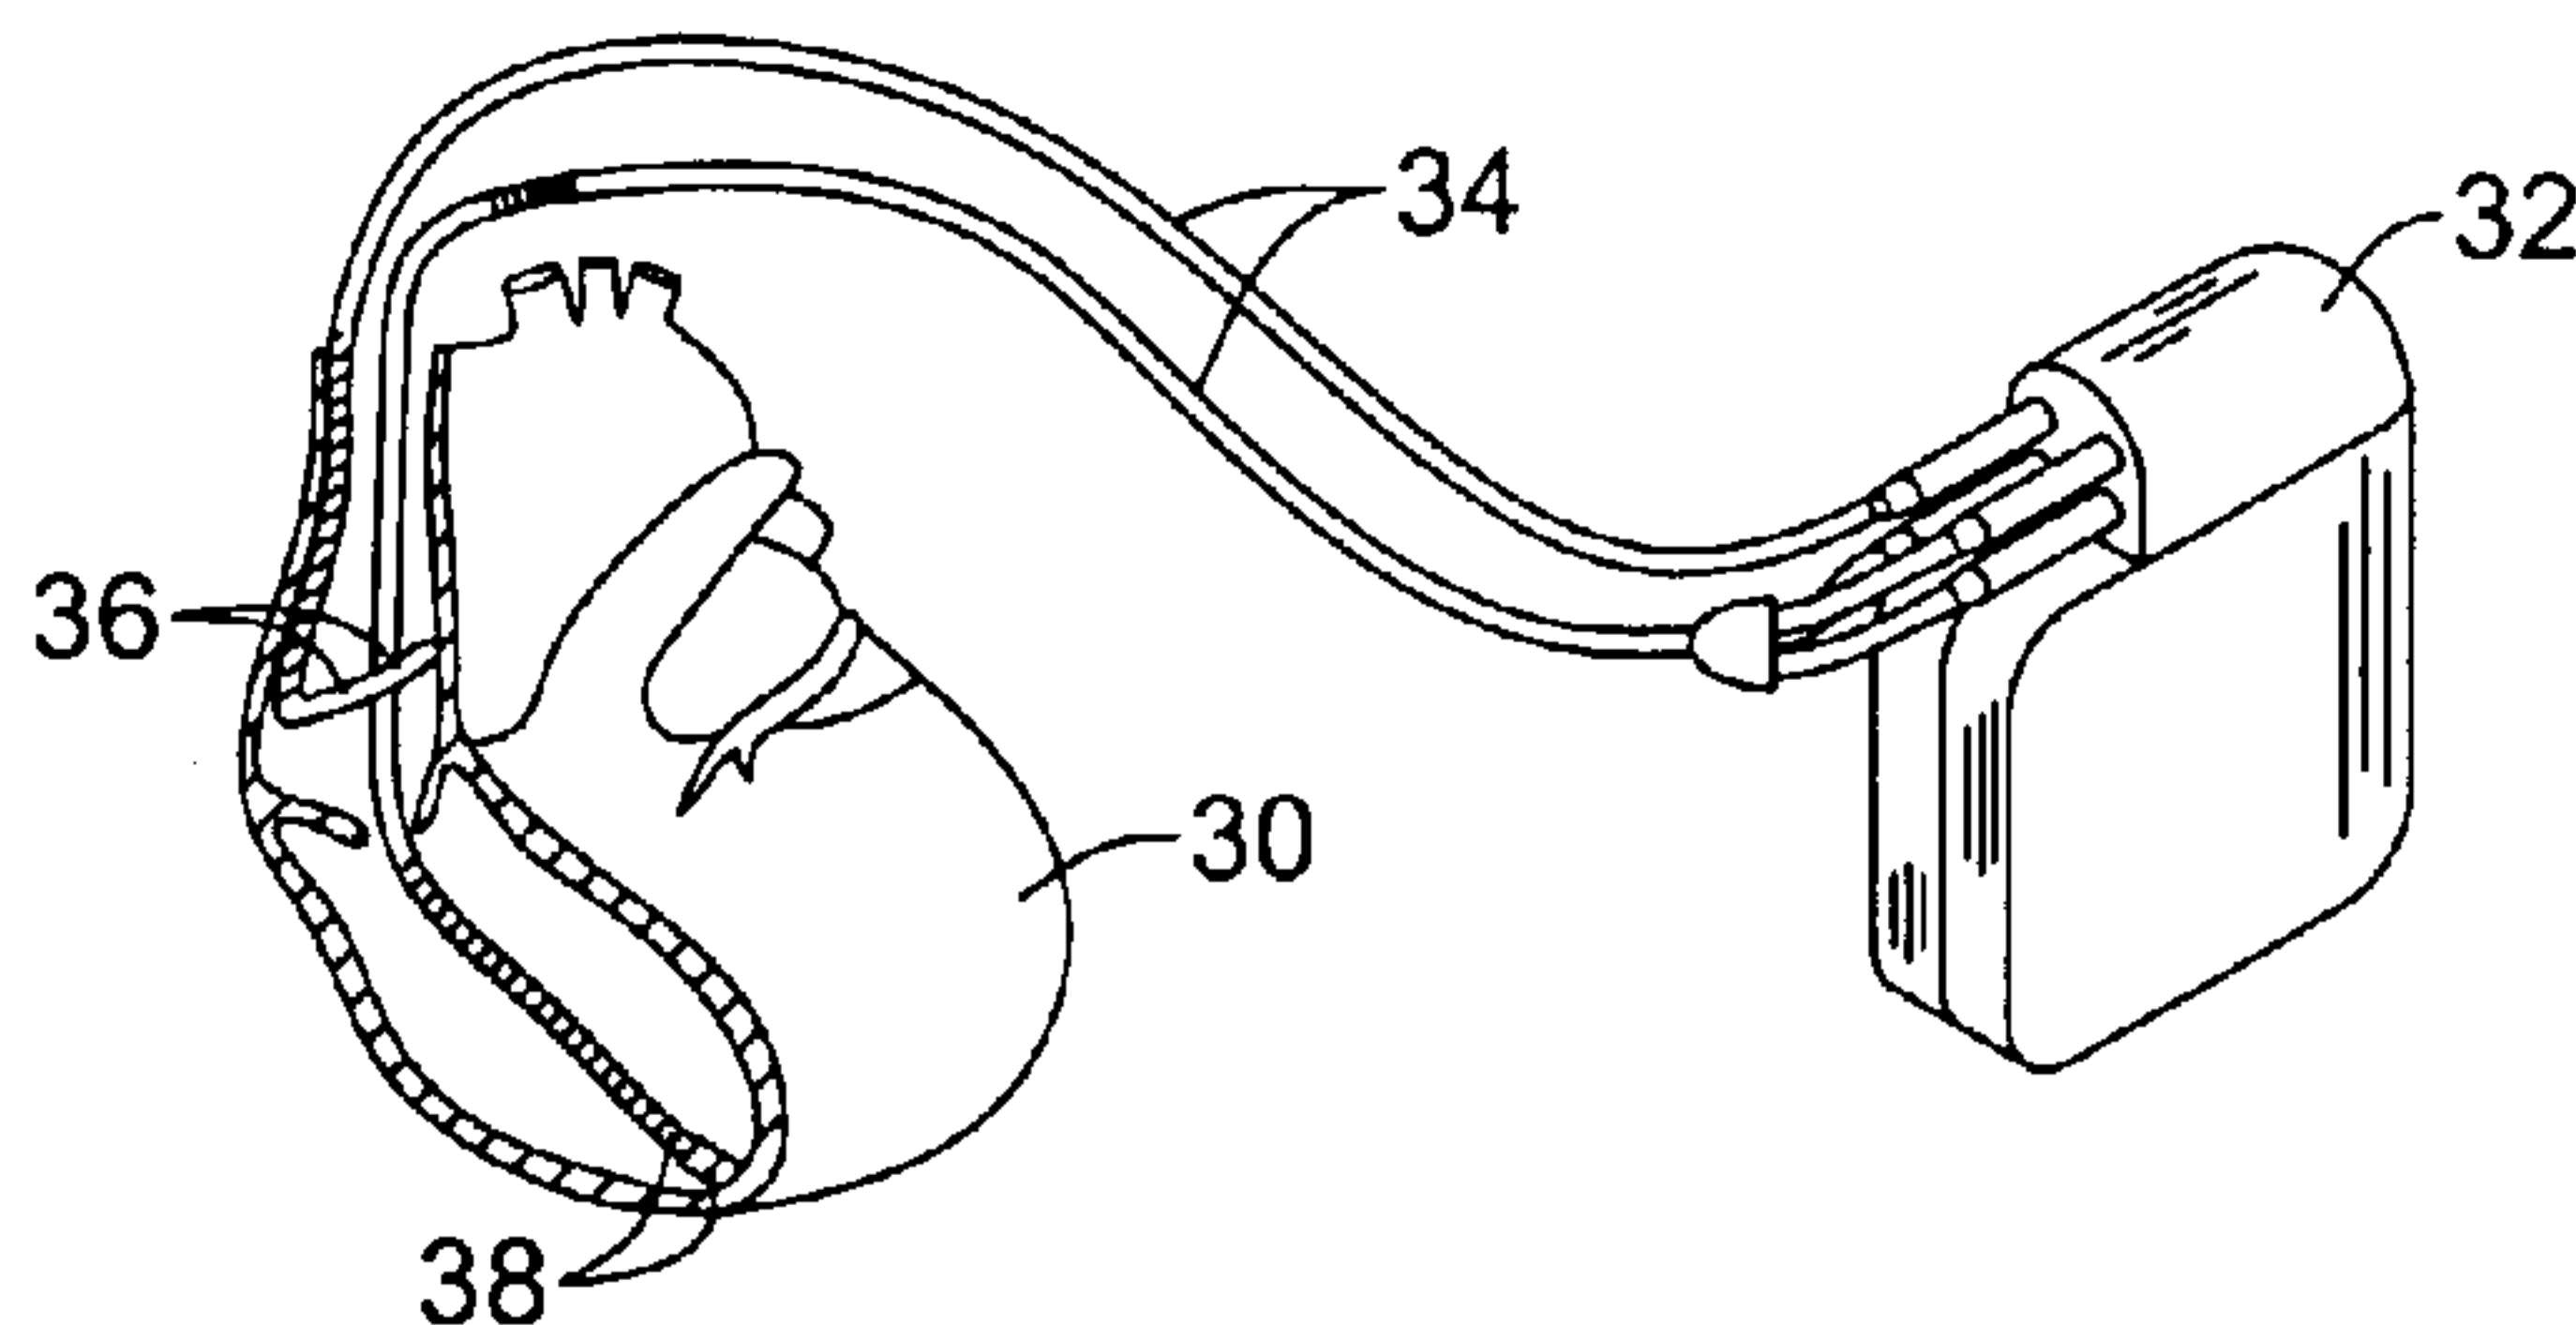
(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) **Title:** METHOD AND APPARATUS FOR BEAT ALIGNMENT AND COMPARISON



(57) **Abstract:** Methods of using a template having a template data set and template parameters to provide improved alignment of captured cardiac signal data to a stored template. More particularly, in an illustrative method, a captured cardiac signal is first configured using template parameters for a stored template. Then, once configured, the captured cardiac signal is then compared to the stored template. Other embodiments include implantable cardiac treatment devices including operational circuitry configured to perform the illustrative method. In a further embodiment, more than one stored templates may be used. Each template can have independently constructed templates, such that a single captured cardiac signal may be configured using first parameters for comparison to a first template, and using second parameters for comparison to a second template.

METHOD AND APPARATUS FOR BEAT ALIGNMENT AND COMPARISON

Related Applications

The present invention is related to U.S. Patent Application Serial No. 10/999,853, filed on November 29, 2004, entitled METHOD FOR DEFINING SIGNAL TEMPLATES IN IMPLANTABLE CARDIAC DEVICES, the disclosure of which is incorporated herein by reference.

Field

The present invention is related to the field of electrical cardiac treatment and devices. More particularly, the present invention is related to analysis of electrical cardiac signals for diagnostic/therapeutic purposes.

Background

Implantable cardiac rhythm management devices are an effective treatment in managing irregular cardiac rhythms in particular patients. Implantable cardiac rhythm management devices are capable of recognizing and treating arrhythmias with a variety of therapies. To effectively deliver these therapies, however, cardiac rhythm management devices must first accurately sense and classify an episode.

In order to apply the proper therapy in responding to an episode, some cardiac rhythm management devices compare sensed cardiac signals to a previously stored "template" representing normal sinus rhythm (NSR) or other "template" frequently intended to represent the patient's NSR. Problems arise when the cardiac rhythm management device inaccurately compares a sensed cardiac complex to a stored NSR template, and as a result, misclassifies the sensed cardiac complex. The severity of this problem escalates if the cardiac rhythm management device inappropriately delivers and/or withholds therapy due to the misclassification. In illustration, when a particular group of sensed complexes are erroneously compared to a stored template because of an improper alignment to the template, a cardiac rhythm management device may mistakenly classify these sensed complexes as a mismatch and even possibly as a tachyarrhythmia.

Much of the analysis performed on cardiac signals includes sampling a cardiac signal and comparing the sampled signal to a stored template. Thus, a series of sampled signals are compared to stored data. Often a correlation analysis is performed

to compare the two data sets. Typically, a number of peaks will appear in each signal. If the peaks are poorly aligned, low correlation will often result. With poor alignment, a “good” sampled signal may, in analysis, illustrate poor correlation, erroneously indicating treatment. Techniques for enabling and assuring good alignment are
5 therefore desired.

Summary

The present invention, in an illustrative embodiment, makes use of a template having a template data set and template parameters to provide improved alignment of captured cardiac signal data to a stored template. More particularly, in an illustrative
10 method, a captured cardiac signal is first configured using template parameters for a stored template. Then, once configured, the captured cardiac signal is then compared to the stored template. Other embodiments include implantable cardiac treatment devices including operational circuitry configured to perform the illustrative method.

In a further embodiment, more than one stored templates may be used. Each
15 template can have independently constructed templates, such that a single captured cardiac signal may be configured using first parameters for comparison to a first template, and using second parameters for comparison to a second template.

Brief Description of the Drawings

20 Figures 1A-1B illustrate, respectively, representative subcutaneous and intravenous implantable cardiac treatment systems;

Figure 2 is a block diagram for an illustrative template formation method;

Figure 3 is a block diagram for an illustrative embodiment; and

Figures 4A-4E show, graphically, an illustrative method for capture, alignment,
25 and comparison of a cardiac signal.

Detailed Description

The following detailed description should be read with reference to the drawings. The drawings, which are not necessarily to scale, depict illustrative
30 embodiments and are not intended to limit the scope of the invention. Those skilled in the art will recognize that many of the examples provided have suitable alternatives that may be utilized.

The present invention is generally related to implantable cardiac treatment systems that provide therapy for patients who are experiencing particular arrhythmias.

The present invention is directed toward detection architectures for use in cardiac rhythm devices. In particular, the present invention is suited for implantable cardiac treatment systems capable of detecting and treating harmful arrhythmias. Although the detection architecture is intended primarily for use in an implantable medical device
5 that provides defibrillation therapy, the invention is also applicable to cardiac rhythm devices (including external devices) directed toward anti-tachyarrhythmia pacing (ATP) therapy, pacing, and other cardiac rhythm devices capable of performing a combination of therapies to treat rhythm disorders.

To date, implantable cardiac treatment systems have been either epicardial
10 systems or transvenous systems. For example, transvenous systems can be implanted generally as shown in Figure 1B. However, as further explained herein, the present invention is also adapted to function with a subcutaneous implantable cardiac treatment system as shown in Figure 1A.

Figure 1A illustrates a subcutaneously placed implantable cardiac treatment
15 system, in particular, an implantable cardioverter/defibrillator (ICD) system. In this illustrative embodiment, the heart 10 is monitored using a canister 12 coupled to a lead system 14. The canister 12 may include an electrode 16 thereon, while the lead system 14 connects to sensing electrodes 18, 20, and a coil electrode 22 that may serve as a shock or stimulus delivery electrode as well as a sensing electrode. The various
20 electrodes define a number of sensing vectors V1, V2, V3, V4. It can be seen that each vector provides a different vector "view" of the heart's 10 electrical activity. The system may be implanted subcutaneously as illustrated, for example, in U.S. Patents No. 6,647,292 and 6,721,597, the disclosures of which are both incorporated herein by reference. By subcutaneous placement, it is meant that electrode placement does not
25 require insertion of an electrode into a heart chamber, in or on the heart muscle, or the patient's vasculature. In some embodiments, a shock is applied using the canister electrode 12 and one of the lead system electrodes 18, 20, or 22, often the coil electrode 22. In other embodiments, one of the sense electrodes 18, 20 may be used in conjunction with the coil electrode 22 for providing a shock.

30 Figure 1B illustrates a transvenous ICD system. The heart 30 is monitored and treated by a system including a canister 32 coupled to a lead system 34 including atrial electrodes 36 and ventricular electrodes 38. A number of configurations for the electrodes may be used, including placement within the heart, adherence to the heart, or disposition within the patient's vasculature.

Figure 2 is a block diagram for an illustrative template formation method. The illustrative method begins with a start block 40 and has a first step of sampling a signal 42. The signal may be, for example, captured using subcutaneous, transvenous, epicardial, intracardial, or even external electrodes. The illustrative template formation method then defines template parameters 44. Illustratively included in defining the template parameters 44 are the steps of selecting a fiducial point 46 and defining a template window around the fiducial point 48.

With the template parameters defined, and a sample chosen, the next step in the illustrative template formation method is to verify the template 50. This step 50 may include statistical analysis of the template data, comparison of the template to later sampled signals, or other steps that can assure that the template provides an accurate representation of a benign cardiac rhythm. If the template is verified at 50, it passes and is stored as shown at 52. The method of template formation can then be done, as noted at 54. The template is stored both as a template data set and as template parameters. If the template cannot be verified at 50, it fails and the method returns to the start 40. In some embodiments, an attempt to form a template occurs periodically, and if the formation method fails, the method is done 54 until prompted to start again at a later time.

Selecting a fiducial point 46 can be performed in a number of different manners, for example as discussed in copending U.S. Patent Application Serial No. 10/999,853, filed on November 29, 2004, entitled METHOD FOR DEFINING SIGNAL TEMPLATES IN IMPLANTABLE CARDIAC DEVICES. For example, a largest positive or negative peak in the signal may be selected. Alternatively, a peak occurring at a particular time (e.g. the first significant peak in the sensed signal) may be selected. In alternative embodiments, a peak or zero in a first or, more likely, second derivative may be selected.

In some methods, the step of setting the template window around the fiducial point 70 is performed by identifying the begin and end of a QRS signal. The observation of monotonic segments may be used to estimate the beginning and end of the QRS segment, as further explained in copending U.S. Patent Application Serial No. 10/999,853, filed on November 29, 2004, entitled METHOD FOR DEFINING SIGNAL TEMPLATES IN IMPLANTABLE CARDIAC DEVICES. A monotonic segment is a signal segment of consecutive samples in which the sensed amplitude changes in the same direction or stays the same. For example, a series of consecutive

samples in which each successive sample is greater than or equal to (in amplitude) the previous sample would be an increasing monotonic segment. Similarly, a series of consecutive samples in which each successive sample is less than or equal to (in amplitude) the previous sample would be a decreasing monotonic segment. One method for observing monotonic segments is by determining the zero crossing points of the first derivative of the cardiac complex signal. The largest monotonic segment in the sensed signal occurring before the fiducial point may be presumed to represent the start of the QRS complex, while the largest monotonic segment occurring after the fiducial point can then be presumed to represent the end of the QRS complex. One, two, or another number of sample points may be observed beyond these begin and end points for retention in the template window.

For another example, given an isoelectric line in the sensed signal, the number of crossings of the isoelectric line may be noted. Consecutive crossings occurring at intervals of at least a minimum amount may indicate Q-R and R-S intervals, such that the QRS signal can be identified as including the consecutive crossings plus data samples going back and forward a predefined number of samples, such as three samples.

The method shown in Figure 2 is merely illustrative of one form of template formation. For the present invention, it is sufficient that a tailored template having a template data set and template parameters is or has been formed. Once formed, the template can then be used as further illustrated below.

Figure 3 is a block diagram for an illustrative embodiment. The method starts with detecting ON such that cardiac signals are being monitored. When a beat (or other event) is sensed, as shown at 62, the method then includes holding a number of samples 64 of the monitored cardiac signal. The beat (or other event) may be sensed in any suitable fashion. If desired, the methods of copending U.S. Patent Application No. 10/858,598, filed June 1, 2004 entitled METHOD AND DEVICES FOR PERFORMING CARDIAC WAVEFORM APPRAISAL, may be used to verify whether the sensed signal likely corresponds to a cardiac event and/or a ventricular event. The disclosure of U.S. Patent Application Serial No. 10/858,598 is incorporated herein by reference. If the sensed signal does likely correspond to such an event, the signal may be selected for further analysis.

Next, in accordance with predefined template parameters, the template window is defined at 66. The template window definition may include identifying a fiducial

point 68 and setting a window around the fiducial point 70. Next, a comparison is performed 72. The results of the comparison can be used in a variety of manners. Correlation Waveform Analysis is one type of comparison that can be performed. Illustrative types and uses of the comparison are shown in copending U.S. Application
5 No. 10/856,084, filed May 27, 2004 entitled METHOD FOR DISCRIMINATING BETWEEN VENTRICULAR AND SUPRAVENTRICULAR ARRHYTHMIAS, the disclosure of which is incorporated herein by reference. Other conventional comparisons and uses thereof may be utilized here as well.

Figures 4A-4E show, graphically, an illustrative method for capture, alignment,
10 and comparison of a cardiac signal to a template. Figure 4A illustrates a sensed signal 80 which can be detected as being a beat. As shown in Figure 4B, a number of samples 82 are used to discretely capture the beat. Figure 4C shows that, from the samples 82, a fiducial point 84 has been selected as the peak of the highest positive excursion of the signal from an isoelectric line. Figure 4D illustrates the windowing of the samples 82,
15 with a window 86 defined around the fiducial point 84. Because the signal has a relatively large trailing portion, the fiducial point 84 is displaced from the center of the window 86 by an offset. The steps of selecting a fiducial point and defining the window (as well as the offset) therearound are performed using template parameters defined while forming the template itself.

20 Next, as shown in Figure 4E, the sample is aligned with the template. More specifically, the sample fiducial point 84 is aligned with the template fiducial point 90. The leading edge 92 and trailing edge 94 of the template and sample windows are then aligned. A comparison 96 can then be performed. By not only aligning the fiducial points 84, 90, but also reconfiguring the sample window and matching the sample
25 window to that used to generate the template, the method advantageously focuses the comparison 96 on the most relevant and useful data available.

The present invention, in some embodiments, is also embodied in devices using operational circuitry including select electrical components provided within the canister 12 (Figure 1A) or canister 32 (Figure 1B). In such embodiments, the operational
30 circuitry may be configured to enable the above methods to be performed. In some similar embodiments, the present invention may be embodied in readable instruction sets such as a program encoded in machine or controller readable media, wherein the readable instruction sets are provided to enable the operational circuitry to perform the analysis discussed in the above embodiments. Further embodiments may include a

controller or microcontroller adapted to read and execute the above methods. These various embodiments may incorporate the illustrative methods shown in Figures 2, 3 and 4A-4E, for example.

The following illustrative embodiments are explained in terms of operational
5 circuitry. The operational circuitry may be configured to include such controllers, microcontrollers, logic devices, memory, and the like, as selected, needed, or desired, for performing the method steps for which each is adapted and configured.

An illustrative embodiment of the present invention includes an implantable cardioverter/defibrillator comprising a lead electrode assembly including a number of
10 electrodes, and a canister housing operational circuitry, wherein the lead electrode assembly is coupled to the canister. In the illustrative embodiment, the operational circuitry is configured to analyze cardiac events using a template having a template data set and template parameters, and the operational circuitry is configured to perform the steps of: capturing a signal using electrodes implanted in a patient's torso;
15 configuring the captured signal in accordance with the template parameters; aligning the template data set with the captured signal; and comparing the template data set to the captured signal.

In a further embodiment, the operational circuitry is further configured to perform the step of classifying the captured signal as being normal or abnormal. In
20 another embodiment, the operational circuitry is configured such that the template parameters include a manner of selecting a fiducial point for the template and the captured signal. In yet another embodiment, the operational circuitry is configured such that the template parameters include a manner of selecting data points around the fiducial point of the captured signal.

In another embodiment, the operational circuitry is further configured such that
25 the template parameters include a manner of selecting data points to form a template window. For another embodiment, the operational circuitry is further configured for performing the step of capturing a signal using subcutaneously implanted electrodes. In yet another embodiment, the operational circuitry is further configured such that:
30 the template includes a fiducial point within the template data set defined by the template parameters; the template data set includes begin and end points relative the fiducial point, the placement of the begin and end points being defined by the template parameters; and the step of configuring the captured signal comprises: selecting a fiducial point in the captured signal; and identifying beginning and ending points of the

captured signal according to the placement of the begin and end points of the template data set.

In yet another apparatus embodiment, the operational circuitry is further configured such that the step of comparing the template data set to the captured signal includes performing a correlation waveform analysis between the captured signal defined between its beginning and ending points, and the template data set. The operational circuitry may include a microcontroller. In another embodiment, the operational circuitry includes readable media including an instruction set for performing the capturing, configuring, aligning and comparing steps.

10 An embodiment of the present invention may include an implantable cardioverter/defibrillator comprising a lead electrode assembly including a number of electrodes, and a canister housing operational circuitry, wherein: the lead electrode assembly is coupled to the canister; the operational circuitry is configured to analyze cardiac events using a template having a template data set and template parameters; and
15 the operational circuitry is configured to perform a number of steps. In the illustrative embodiment, the steps may include, for a number of selected captured cardiac signals, the steps of: configuring the captured signal in accordance with the template parameters, aligning the template data set with the captured signal, and comparing the template data set to the captured signal. The operational circuitry may be further
20 configured for tracking the number of normal and abnormal captured signals, and determining whether therapy is indicated.

In a further embodiment, the operational circuitry is further configured such that the configuring step includes identifying a fiducial point in the selected captured cardiac signals. In another embodiment, the operational circuitry is further configured
25 to perform the steps of: capturing a number of cardiac signals; analyzing the individual captured cardiac signals to determine whether the captured cardiac signals likely represent a cardiac event; and selecting those individual captured cardiac signals which likely represent a cardiac event.

Those skilled in the art will recognize that the present invention may be
30 manifested in a variety of forms other than the specific embodiments described and contemplated herein. Accordingly, departures in form and detail may be made without departing from the scope and spirit of the present invention as described in the appended claims.

What is claimed is:

1. A method of analyzing cardiac events using a template having a template data set and template parameters, the method comprising:
 - capturing a signal using electrodes implanted in a patient's torso;
 - configuring the captured signal in accordance with the template parameters;
 - aligning the template data set with the captured signal; and
 - comparing the template data set to the captured signal.
2. The method of claim 1, further comprising classifying the captured signal as being normal or abnormal.
3. The method of claim 1, wherein the template parameters include a manner of selecting a fiducial point for the template and the captured signal.
4. The method of claim 3, wherein the template parameters include a manner of selecting data points around the fiducial point of the captured signal.
5. The method of claim 1, wherein the template parameters include a manner of selecting data points to form a template window.
6. The method of claim 1, wherein the step of capturing a signal is performed using subcutaneously implanted electrodes.
7. The method of claim 1, wherein:
 - the template includes a fiducial point within the template data set defined by the template parameters;
 - the template data set includes begin and end points relative the fiducial point, the placement of the begin and end points being defined by the template parameters; and
 - the step of configuring the captured signal comprises:
 - selecting a fiducial point in the captured signal; and
 - identifying beginning and ending points of the captured signal according to the placement of the begin and end points of the template data set.

8. The method of claim 7, wherein the step of comparing the template data set to the captured signal includes performing a correlation waveform analysis between the captured signal defined between its beginning and ending points, and the template data set.

9. A method of analyzing a patient's cardiac rhythm using a template having a template data set and a collection of template parameters, the method comprising:

performing the following method steps on a number of selected captured cardiac signals:

- a. configuring the captured signal in accordance with the template parameters;
 - b. aligning the template data set with the captured signal; and
 - c. comparing the template data set to the captured signal to determine whether the captured signal is normal or abnormal;
- tracking the number of normal and abnormal captured signals; and
determining whether therapy is indicated.

10. The method of claim 9, wherein the configuring step includes identifying a fiducial point in the selected captured cardiac signals.

11. The method of claim 10, further comprising:
capturing a number of cardiac signals;
analyzing the individual captured cardiac signals to determine whether the captured cardiac signals likely represent a cardiac event; and
selecting those individual captured cardiac signals which likely represent a cardiac event.

12. An implantable cardioverter/defibrillator comprising:
a lead electrode assembly including a number of electrodes; and
a canister housing operational circuitry;
wherein:
the lead electrode assembly is coupled to the canister;
the operational circuitry is configured to analyze cardiac events using a template having a template data set and template parameters; and
the operational circuitry is configured to perform the steps of:
capturing a signal using electrodes implanted in a patient's torso;
configuring the captured signal in accordance with the template parameters;
aligning the template data set with the captured signal; and
comparing the template data set to the captured signal.
13. The implantable cardioverter/defibrillator of claim 12, wherein the operational circuitry is further configured to perform the step of classifying the captured signal as being normal or abnormal.
14. The implantable cardioverter/defibrillator of claim 12, wherein the operational circuitry is configured such that the template parameters include a manner of selecting a fiducial point for the template and the captured signal.
15. The implantable cardioverter/defibrillator of claim 14, wherein the operational circuitry is configured such that the template parameters include a manner of selecting data points around the fiducial point of the captured signal.
16. The implantable cardioverter/defibrillator of claim 12, wherein the operational circuitry is further configured such that the template parameters include a manner of selecting data points to form a template window.
17. The implantable cardioverter/defibrillator of claim 12, wherein the operational circuitry is further configured for performing the step of capturing a signal using subcutaneously implanted electrodes.

18. The implantable cardioverter/defibrillator of claim 12, wherein the operational circuitry is further configured such that:

the template includes a fiducial point within the template data set defined by the template parameters;

the template data set includes begin and end points relative the fiducial point, the placement of the begin and end points being defined by the template parameters; and

the step of configuring the captured signal comprises:

selecting a fiducial point in the captured signal; and

identifying beginning and ending points of the captured signal according to the placement of the begin and end points of the template data set.

19. The implantable cardioverter/defibrillator of claim 12, wherein the operational circuitry is further configured such that the step of comparing the template data set to the captured signal includes performing a correlation waveform analysis between the captured signal defined between its beginning and ending points, and the template data set.

20. The implantable cardioverter/defibrillator of claim 12, wherein the operational circuitry includes a microcontroller.

21. The implantable cardioverter/defibrillator of claim 12, wherein the operational circuitry includes readable media including an instruction set for performing the capturing, configuring, aligning and comparing steps.

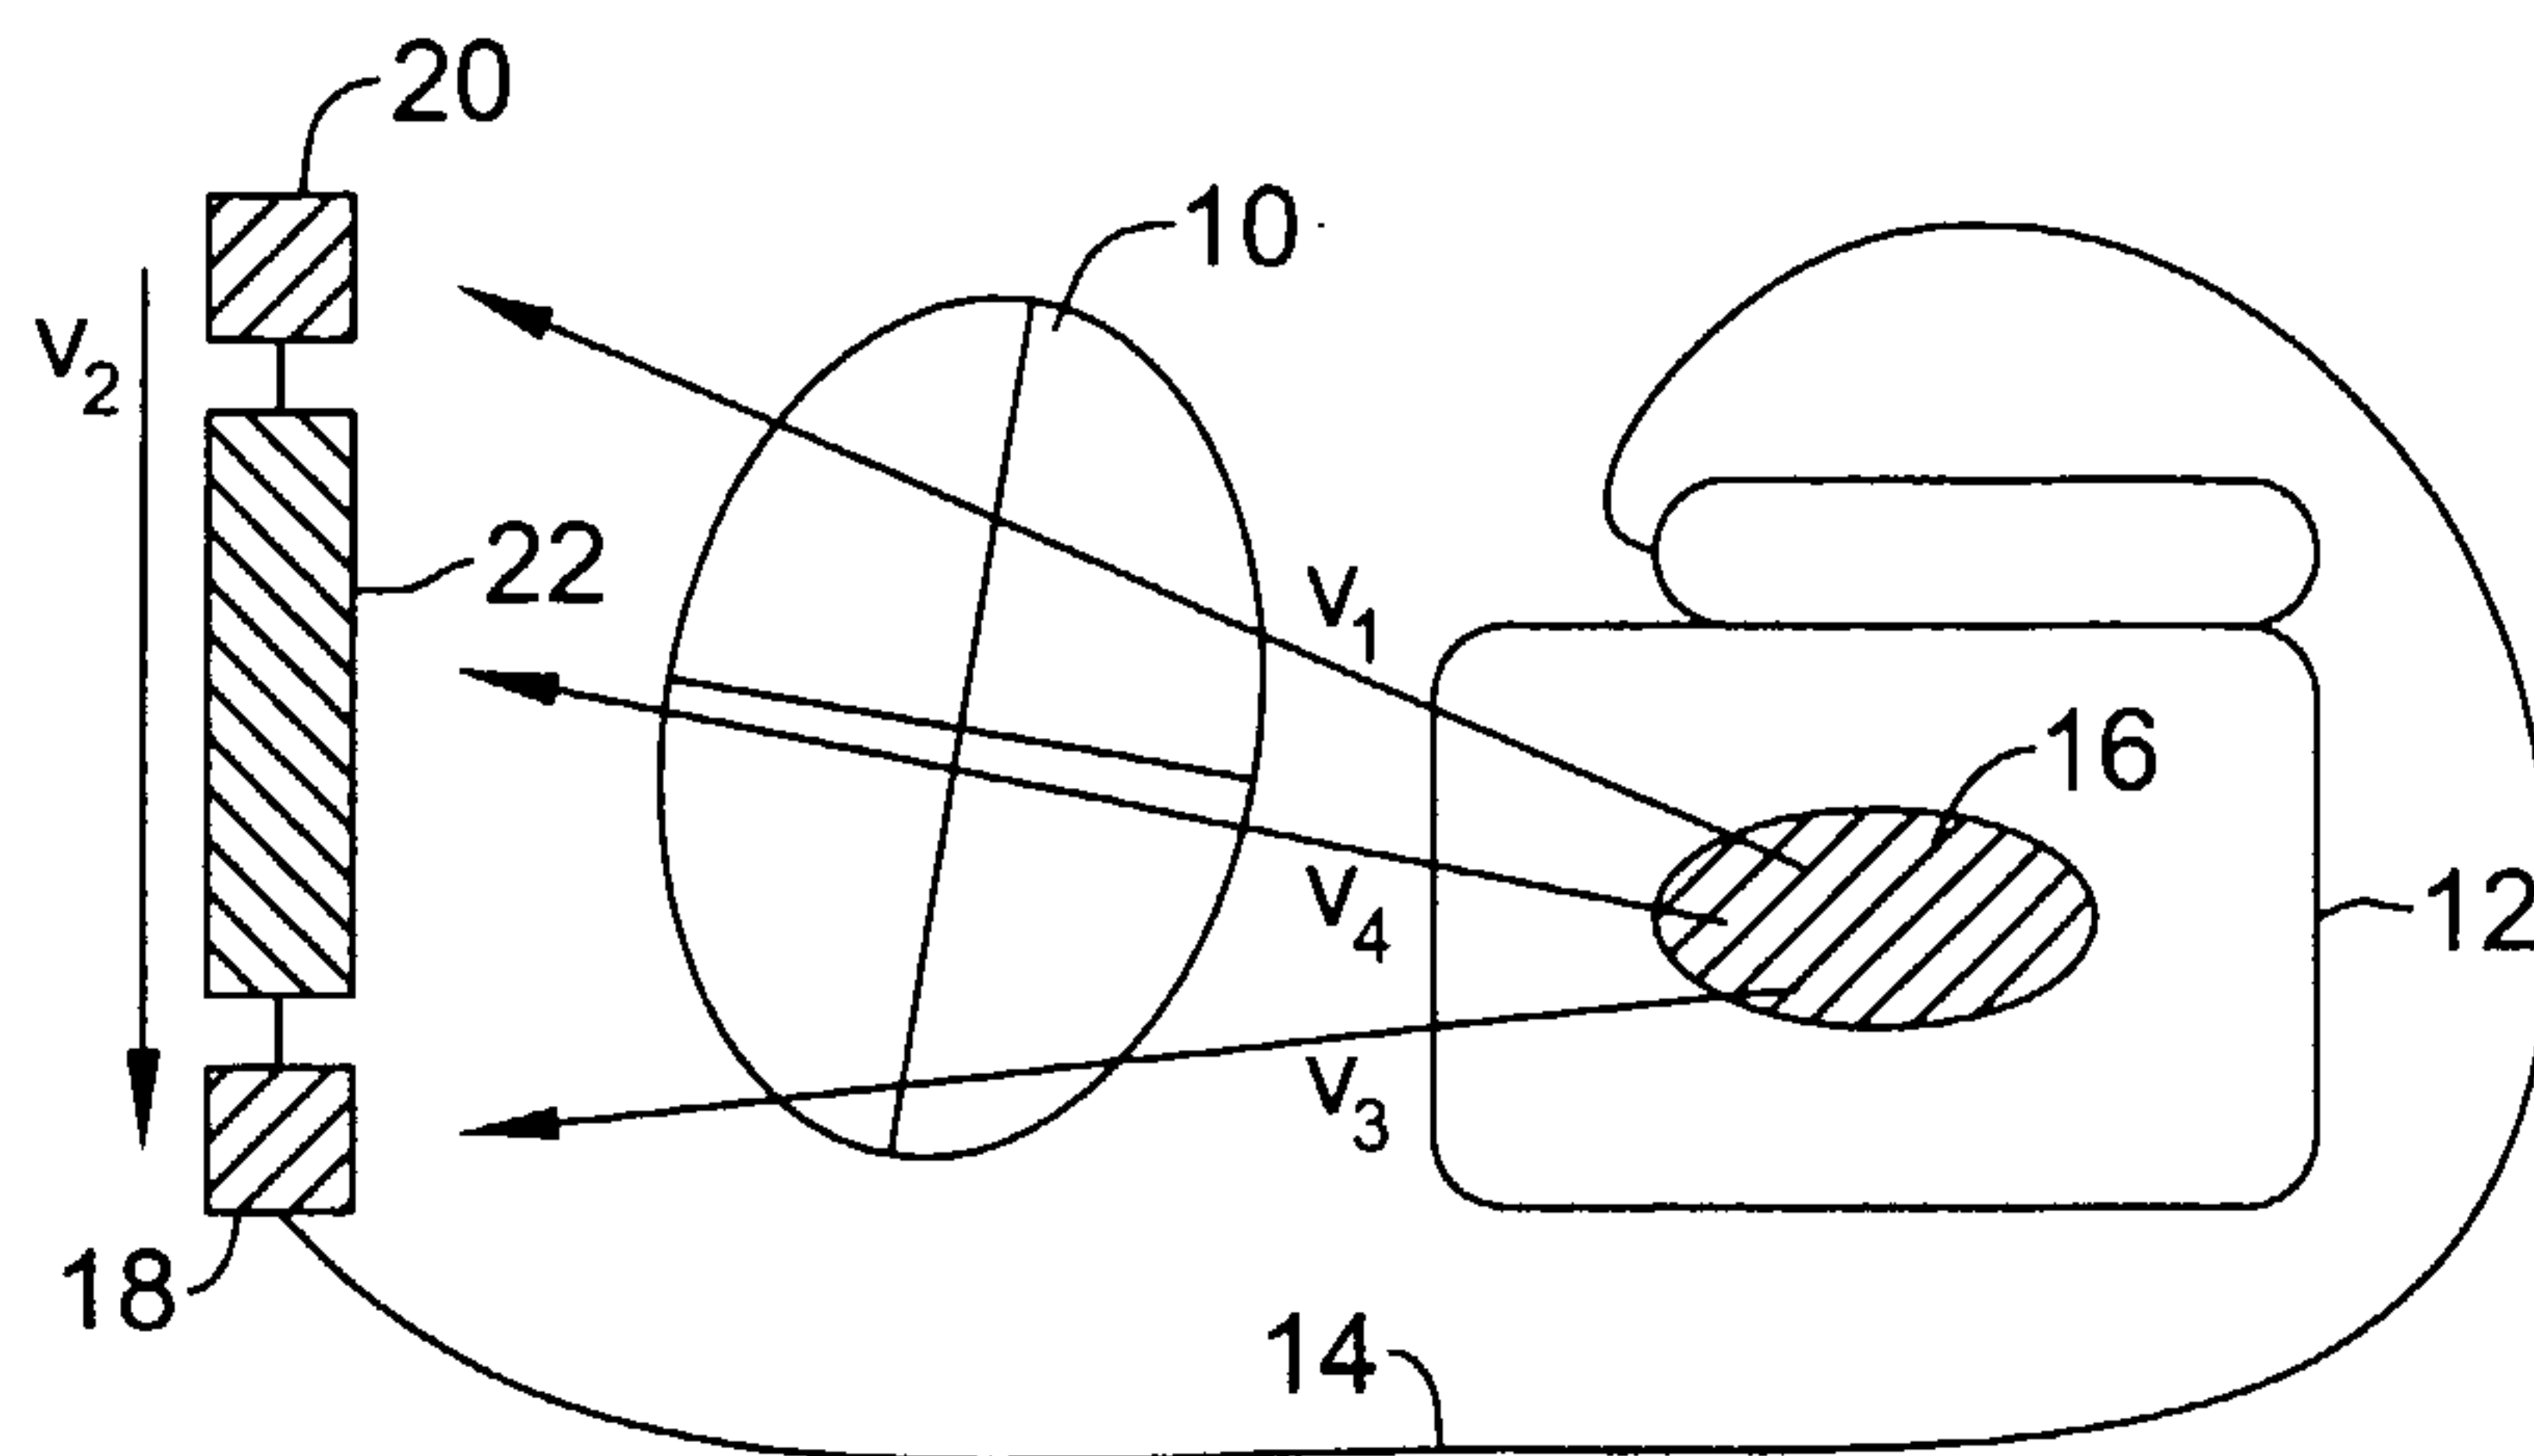
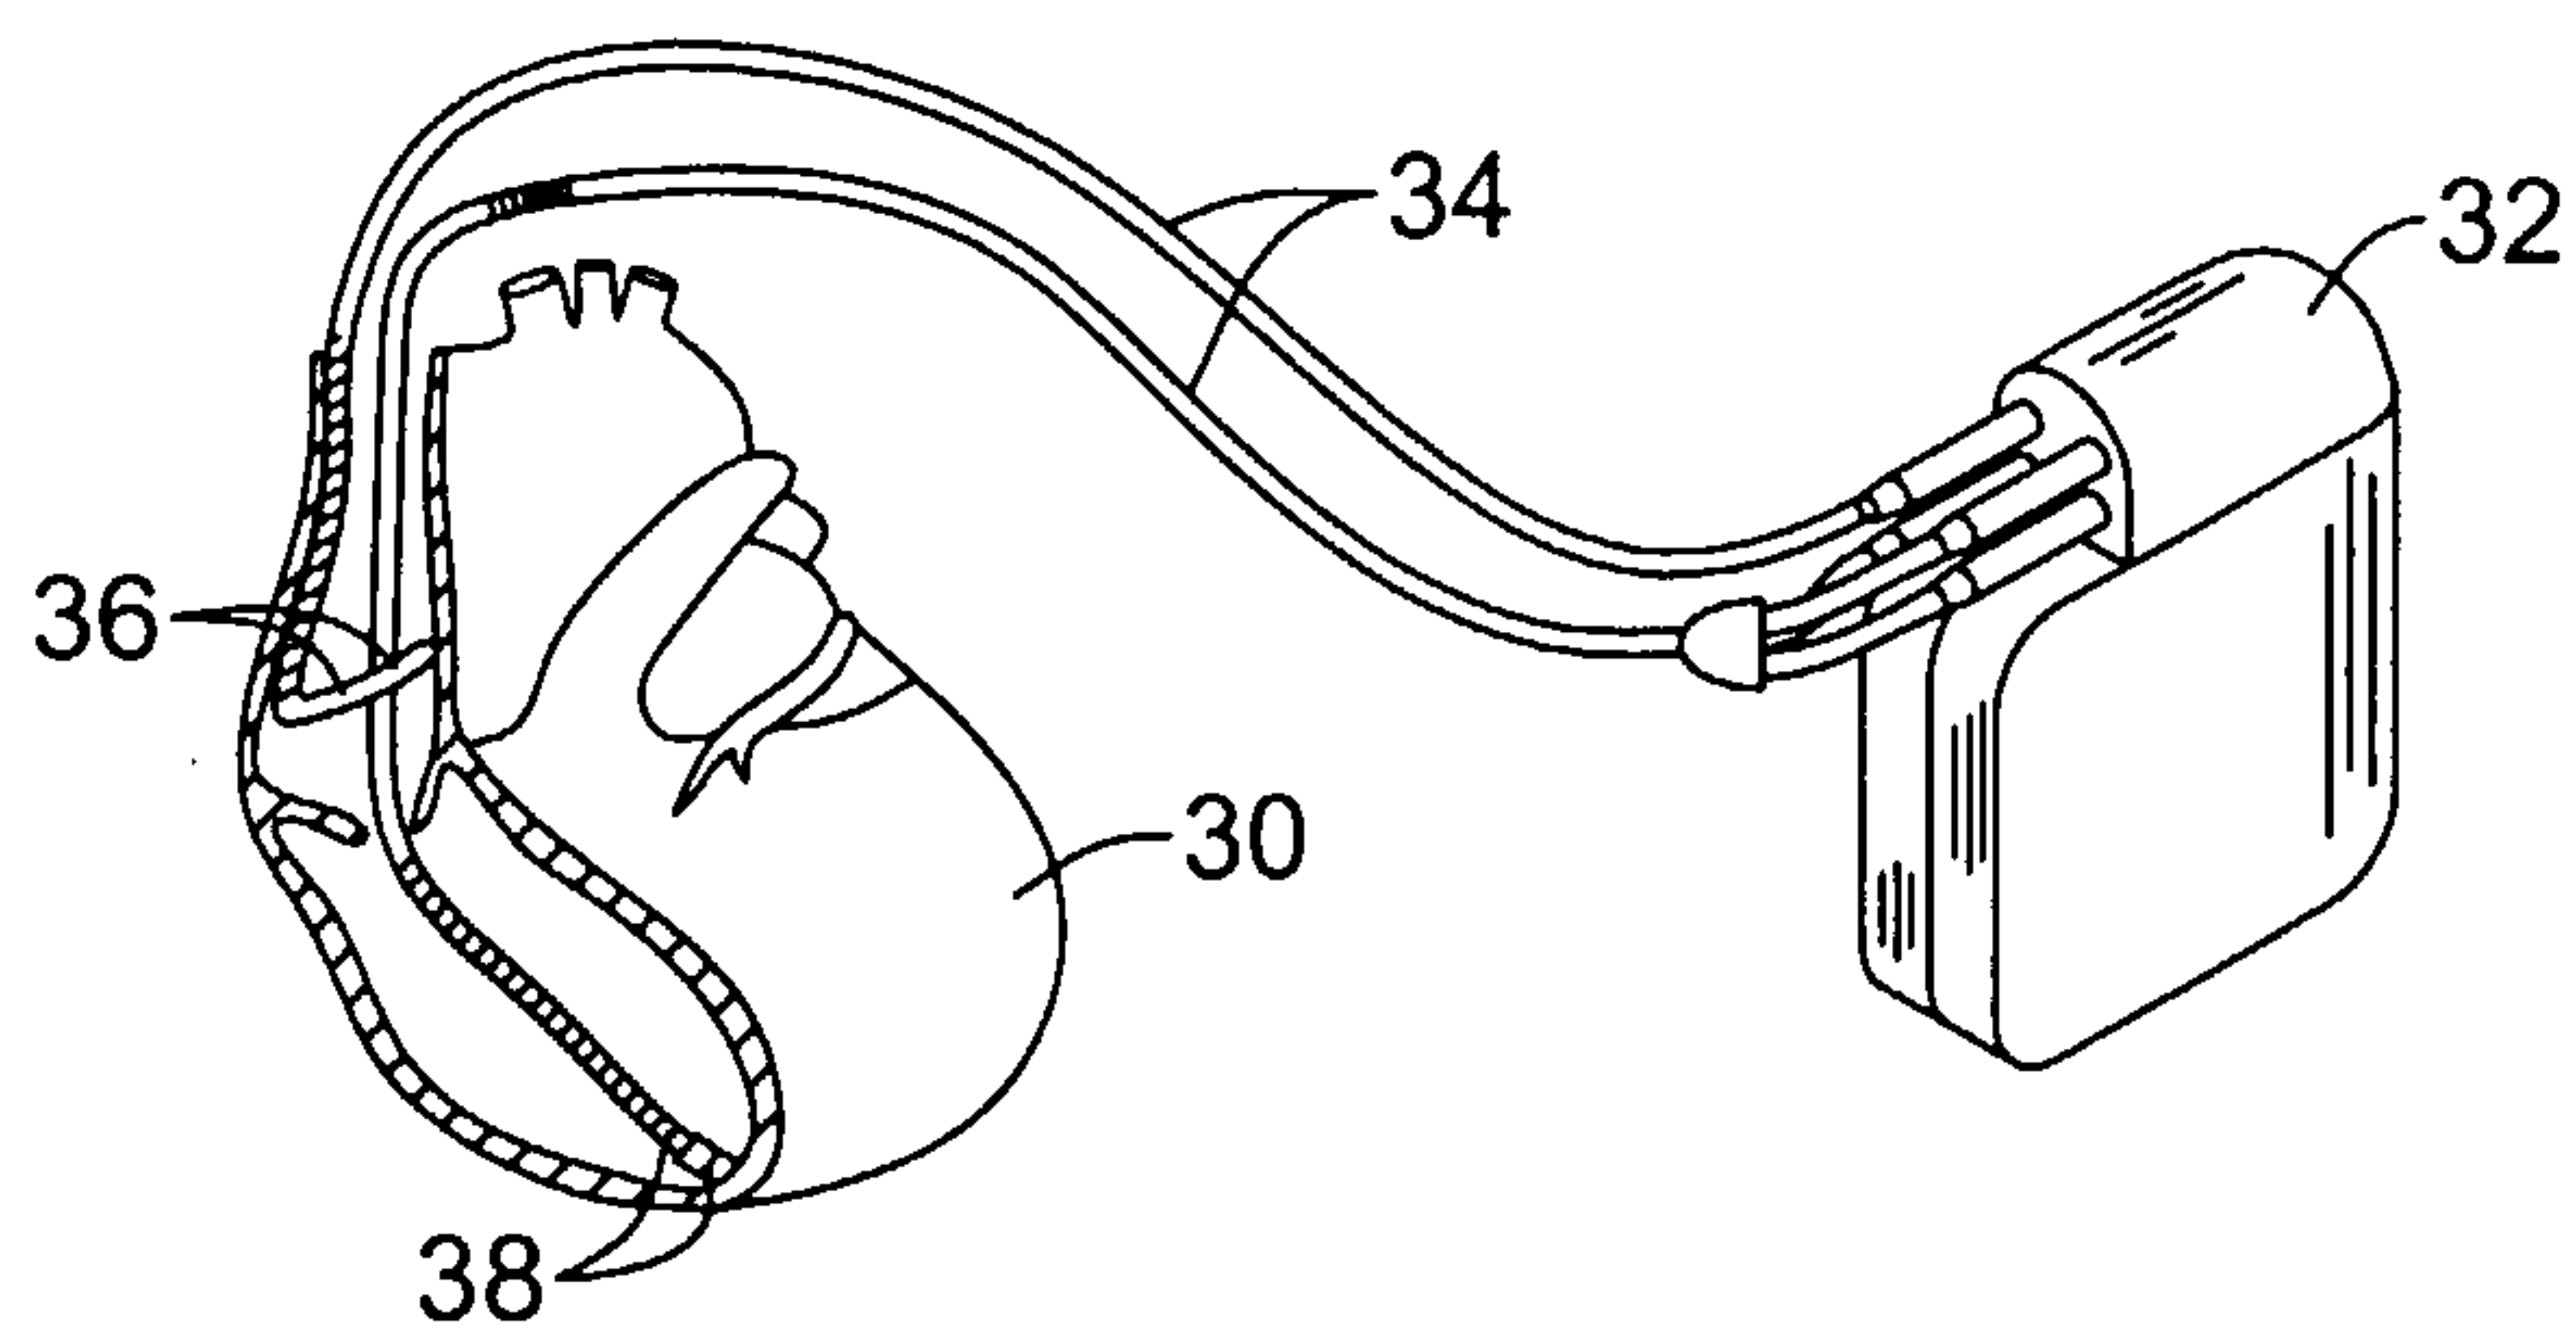
22. An implantable cardioverter/defibrillator comprising:
a lead electrode assembly including a number of electrodes; and
a canister housing operational circuitry;
wherein:
the lead electrode assembly is coupled to the canister;
the operational circuitry is configured to analyze cardiac events using a template having a template data set and template parameters; and
the operational circuitry is configured to perform the steps of:
for a number of selected captured cardiac signals, the steps of:

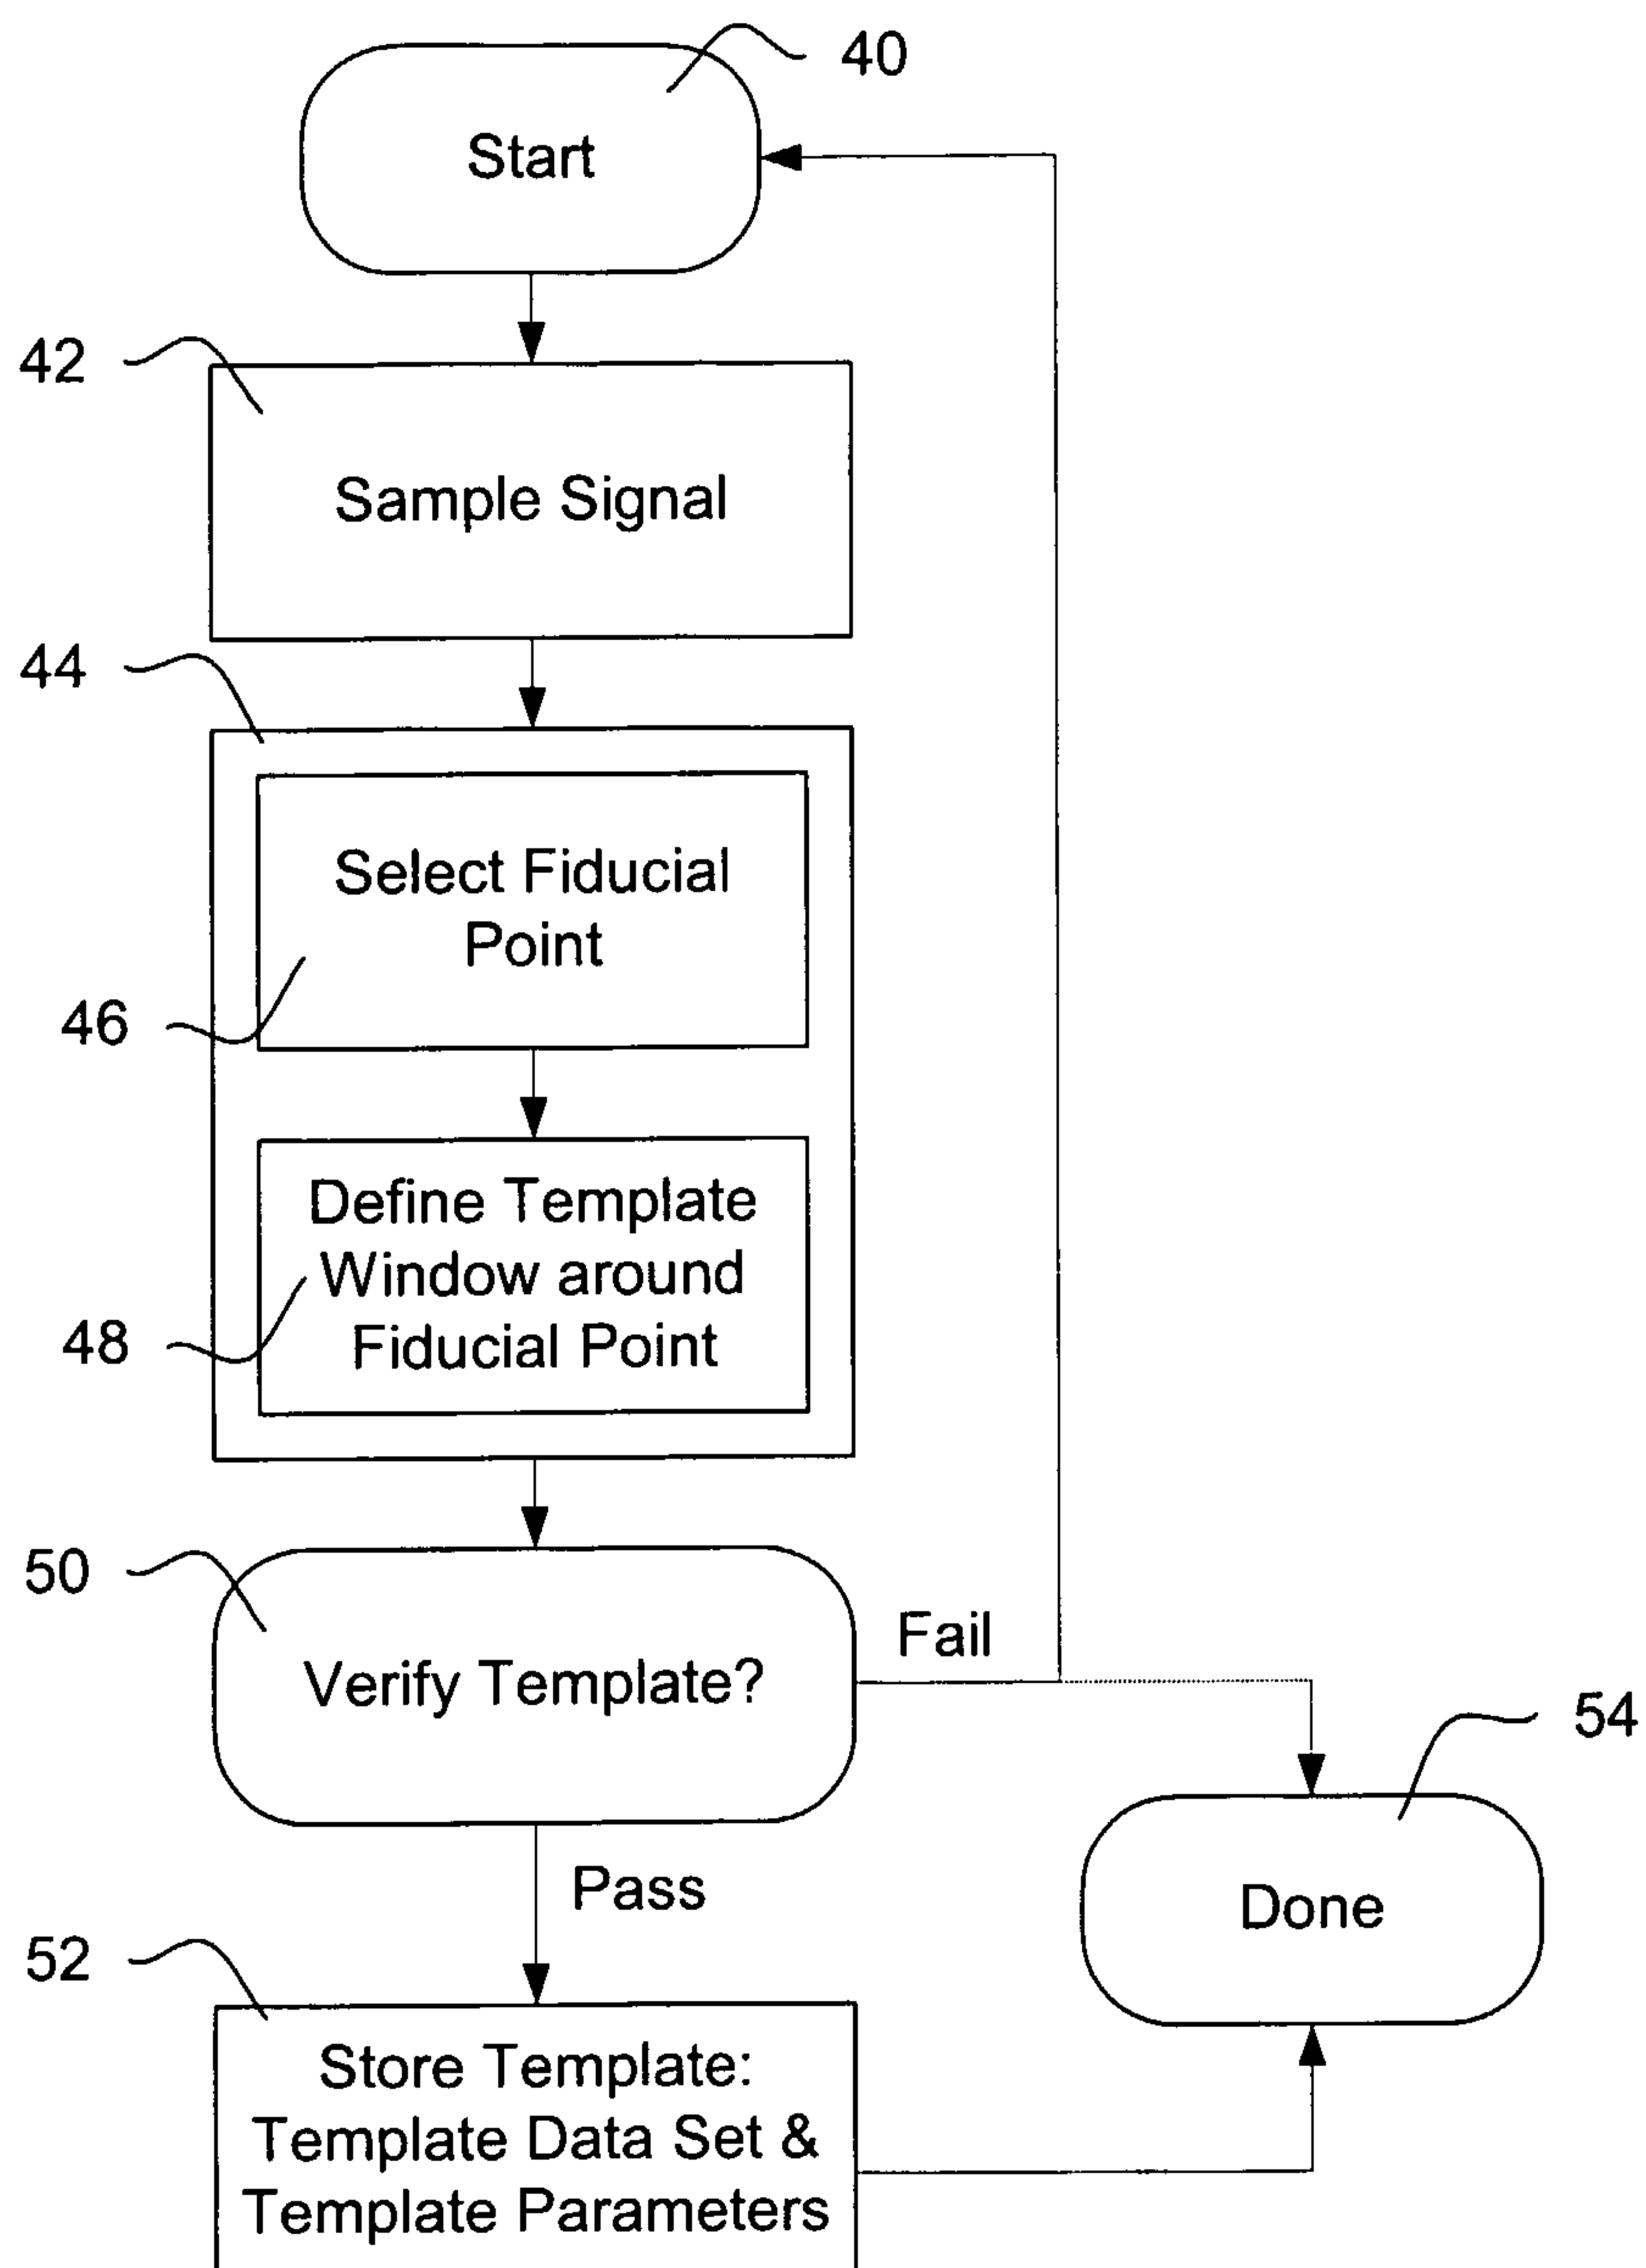
- a. configuring the captured signal in accordance with the template parameters;
- b. aligning the template data set with the captured signal; and
- c. comparing the template data set to the captured signal to determine whether the captured signal is normal or abnormal;

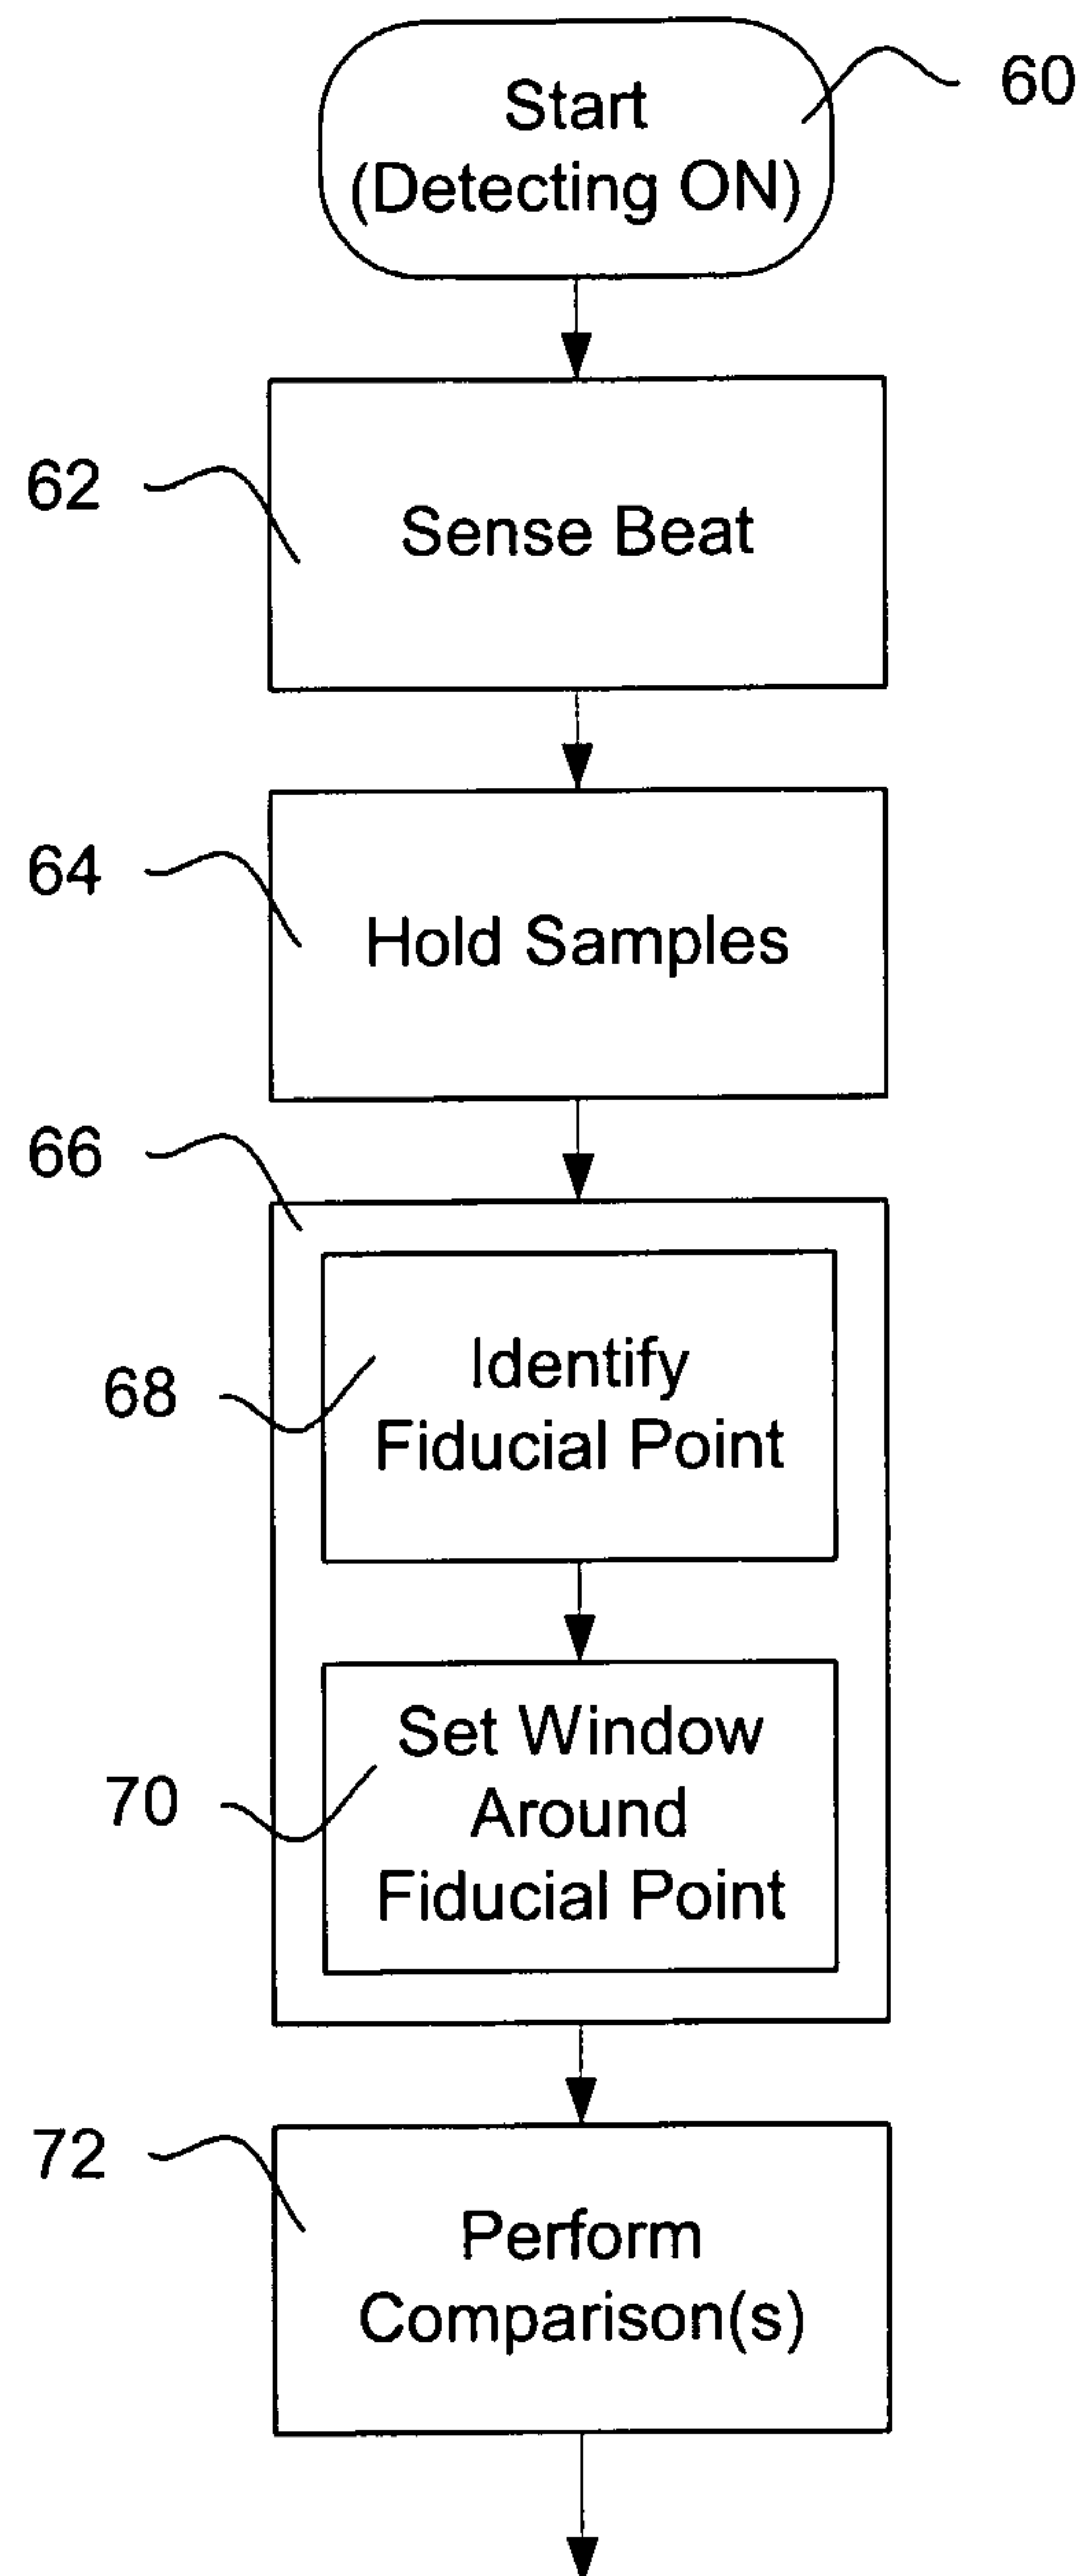
tracking the number of normal and abnormal captured signals; and
determining whether therapy is indicated.

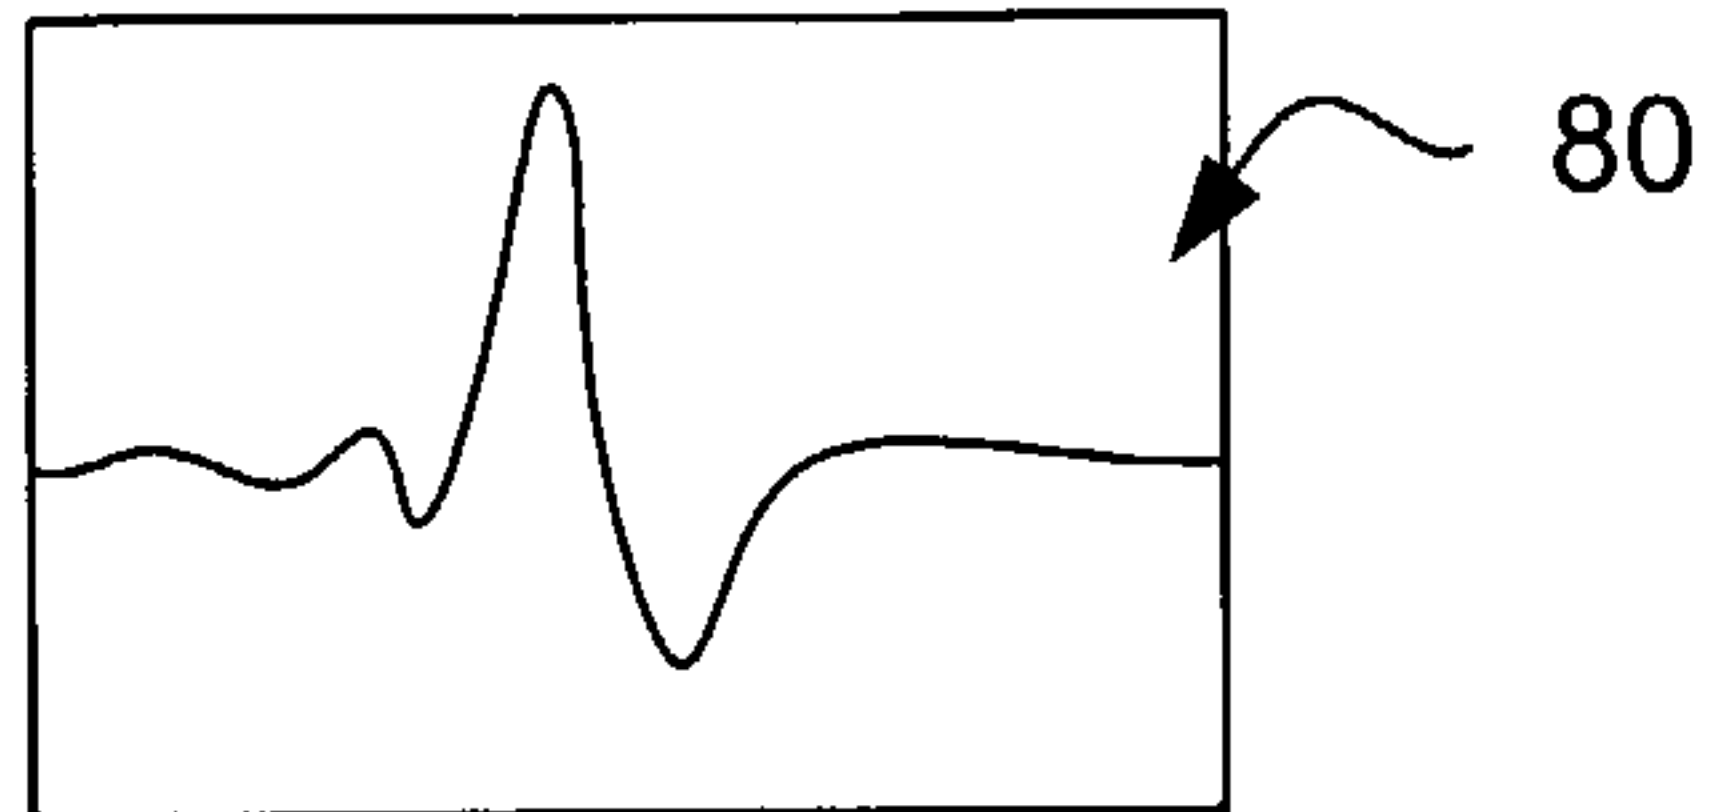
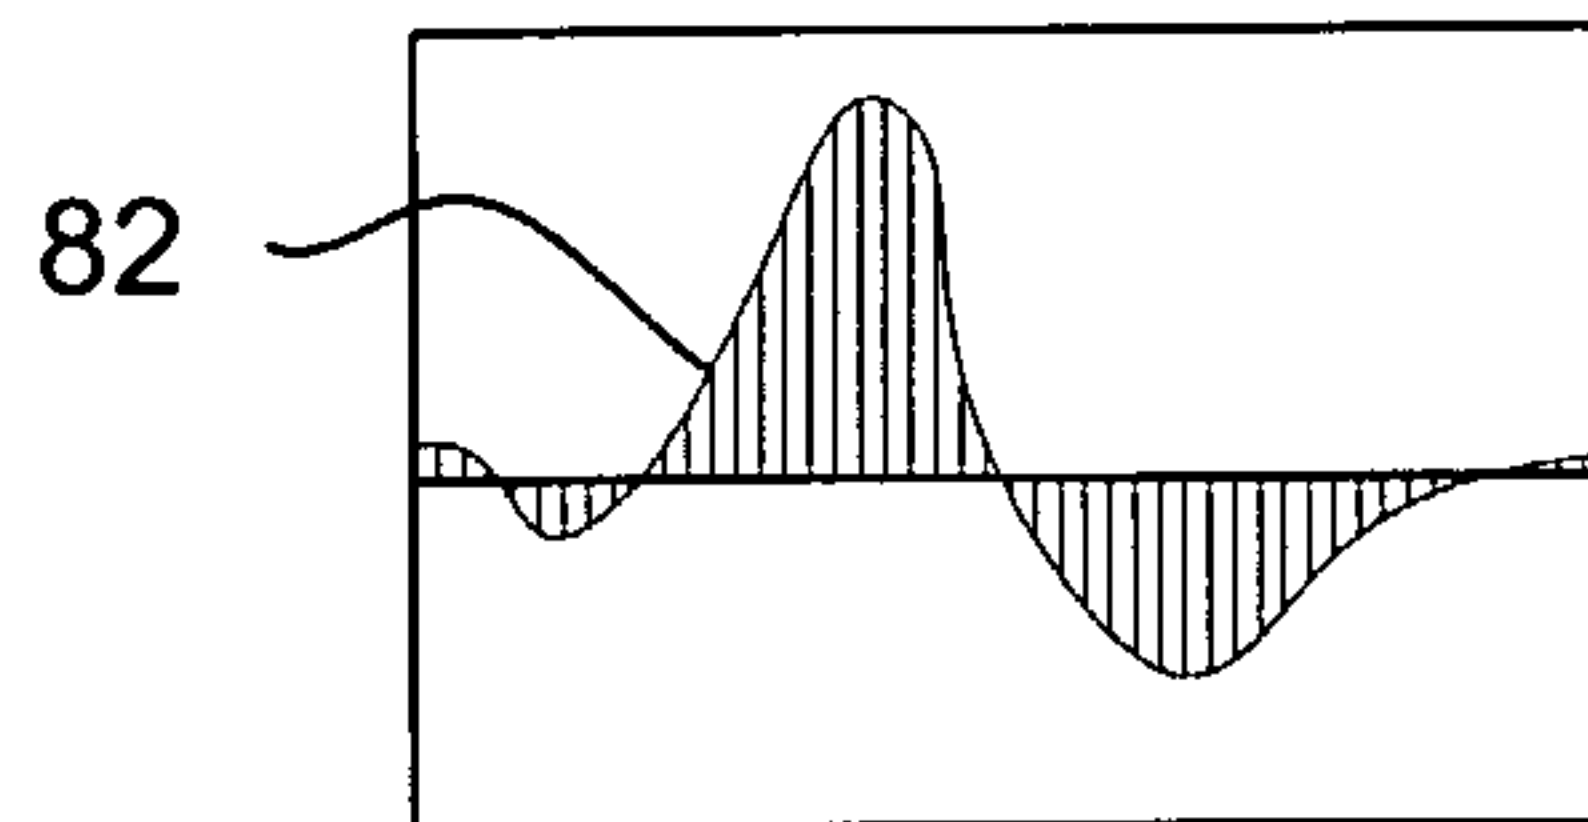
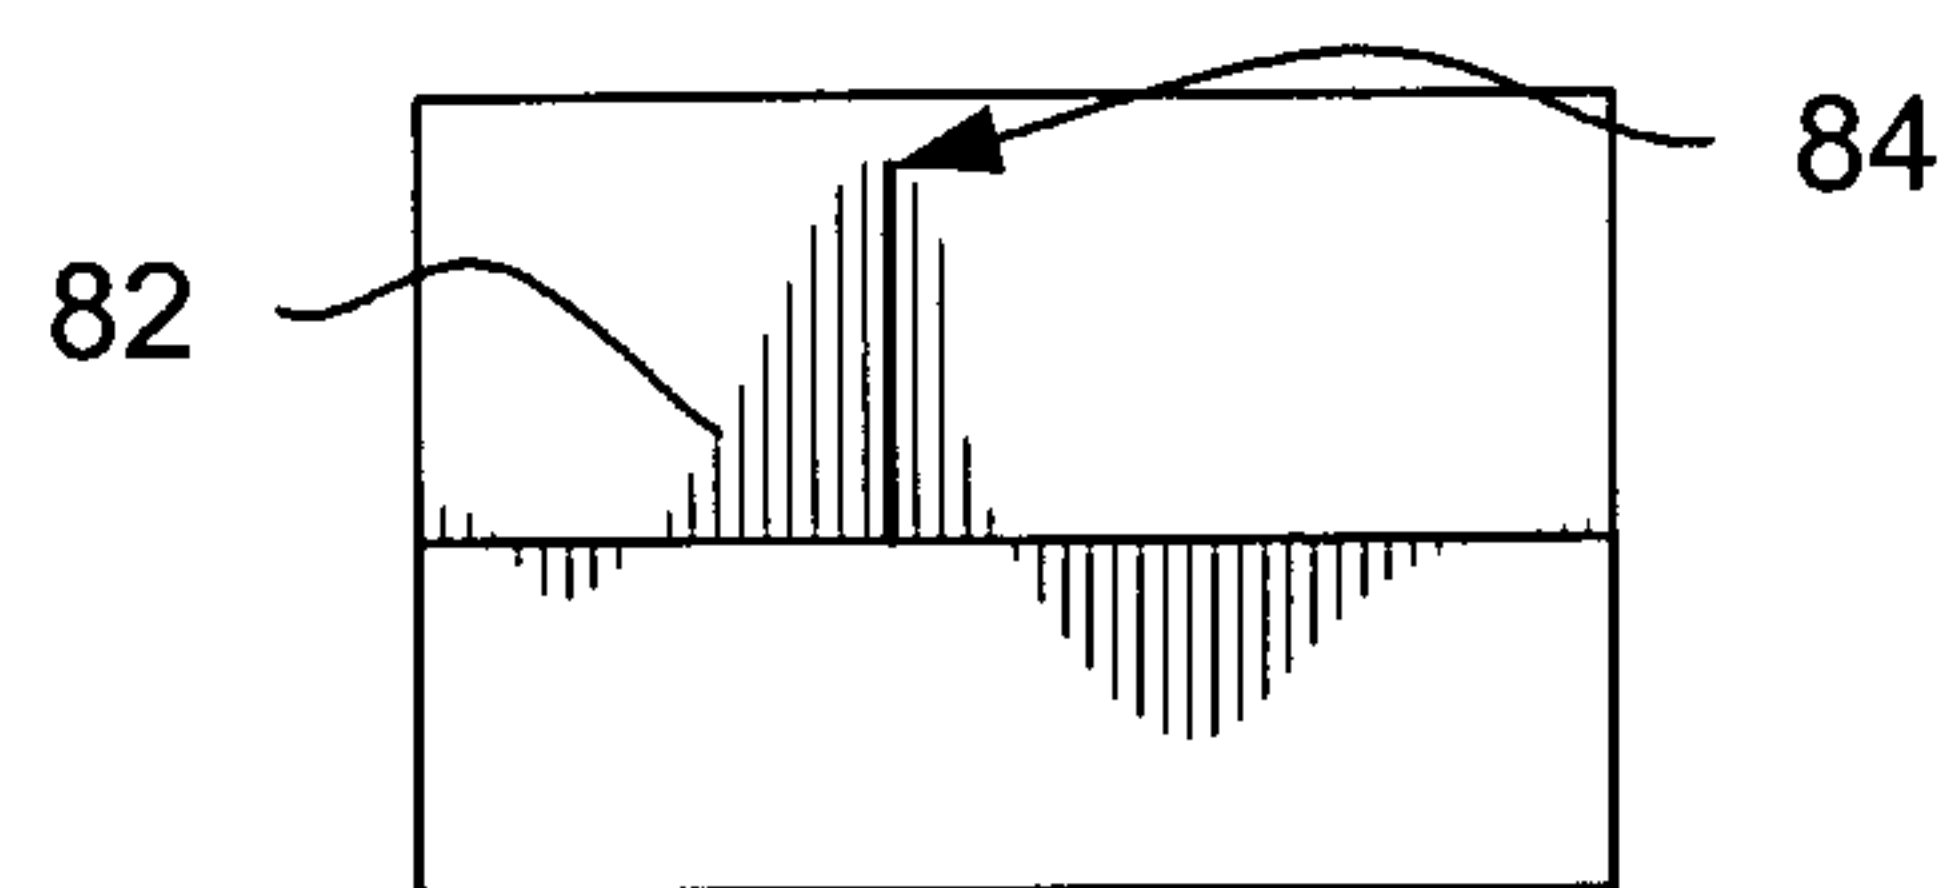
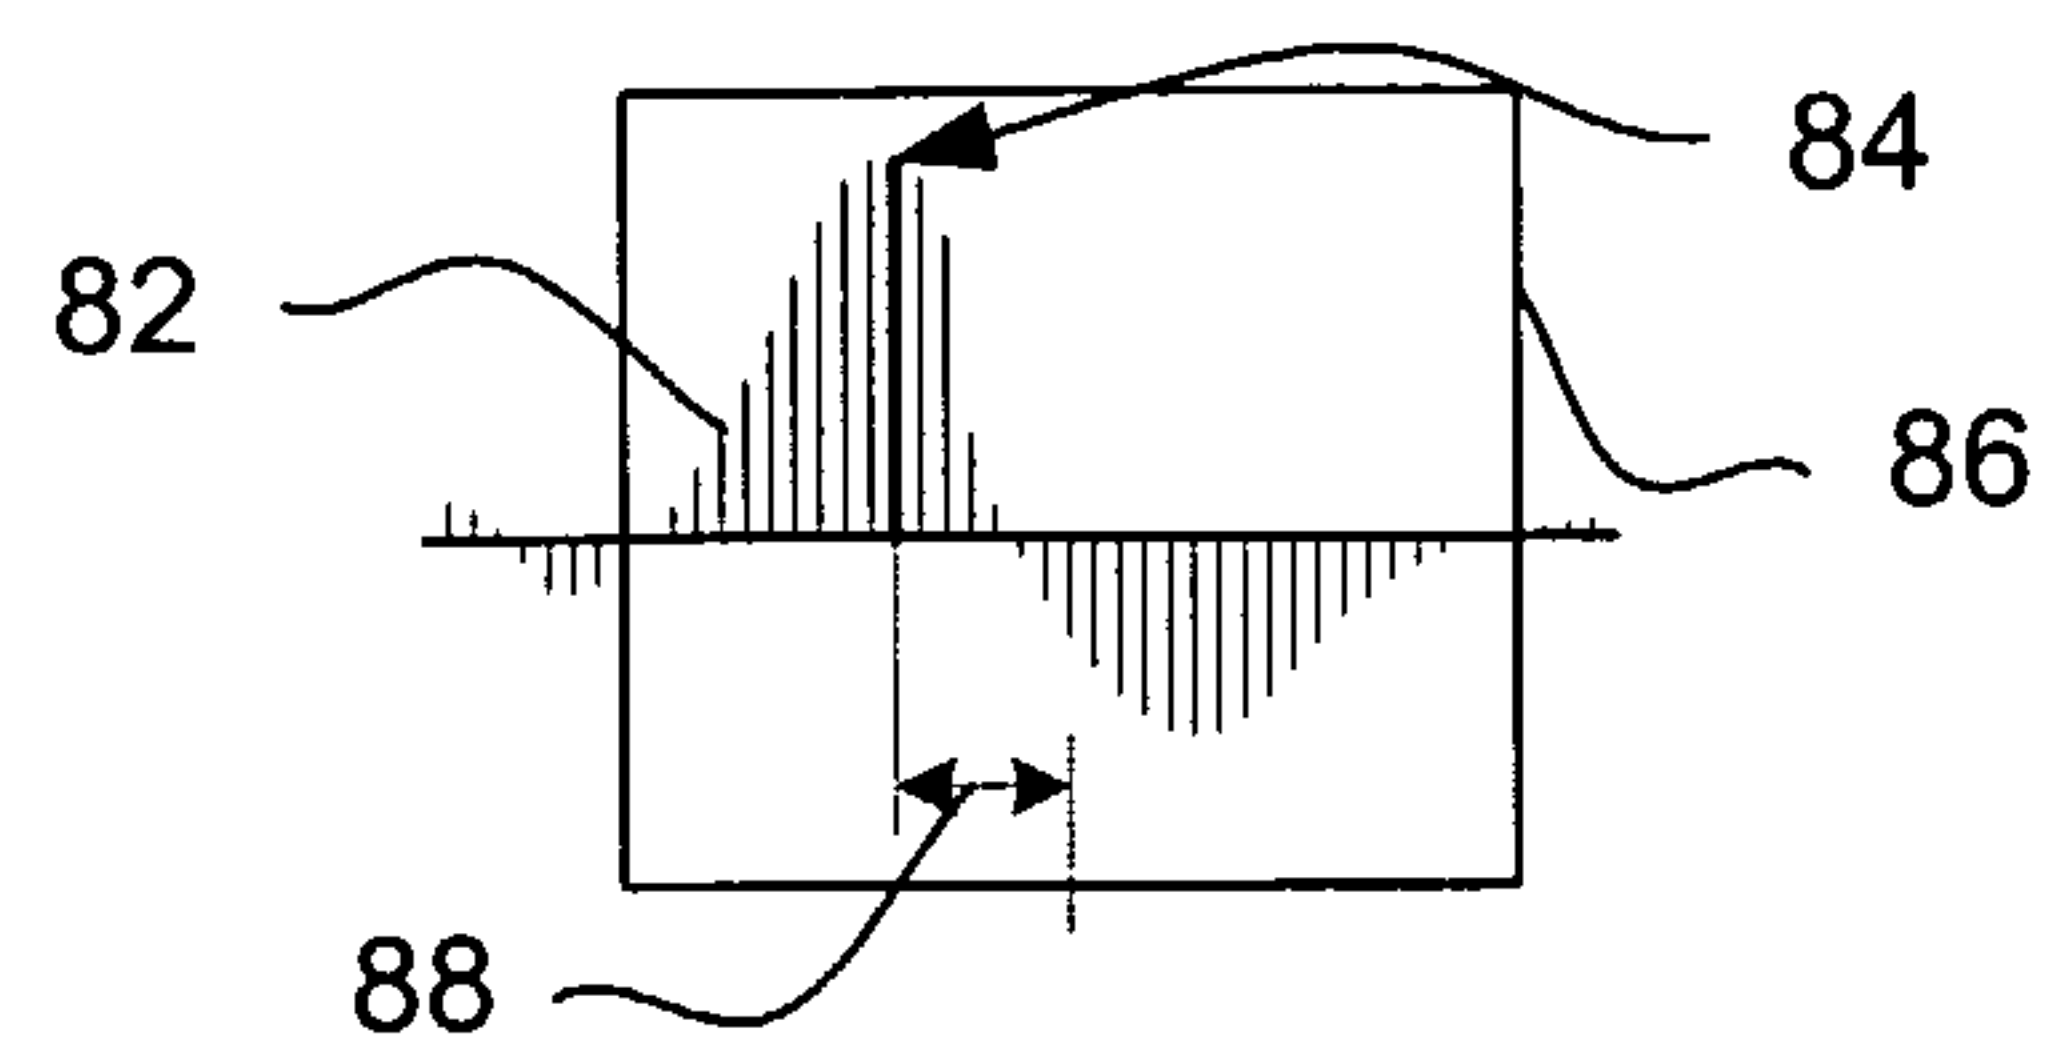
23. The implantable cardioverter/defibrillator of claim 22, wherein the operational circuitry is further configured such that the configuring step includes identifying a fiducial point in the selected captured cardiac signals.

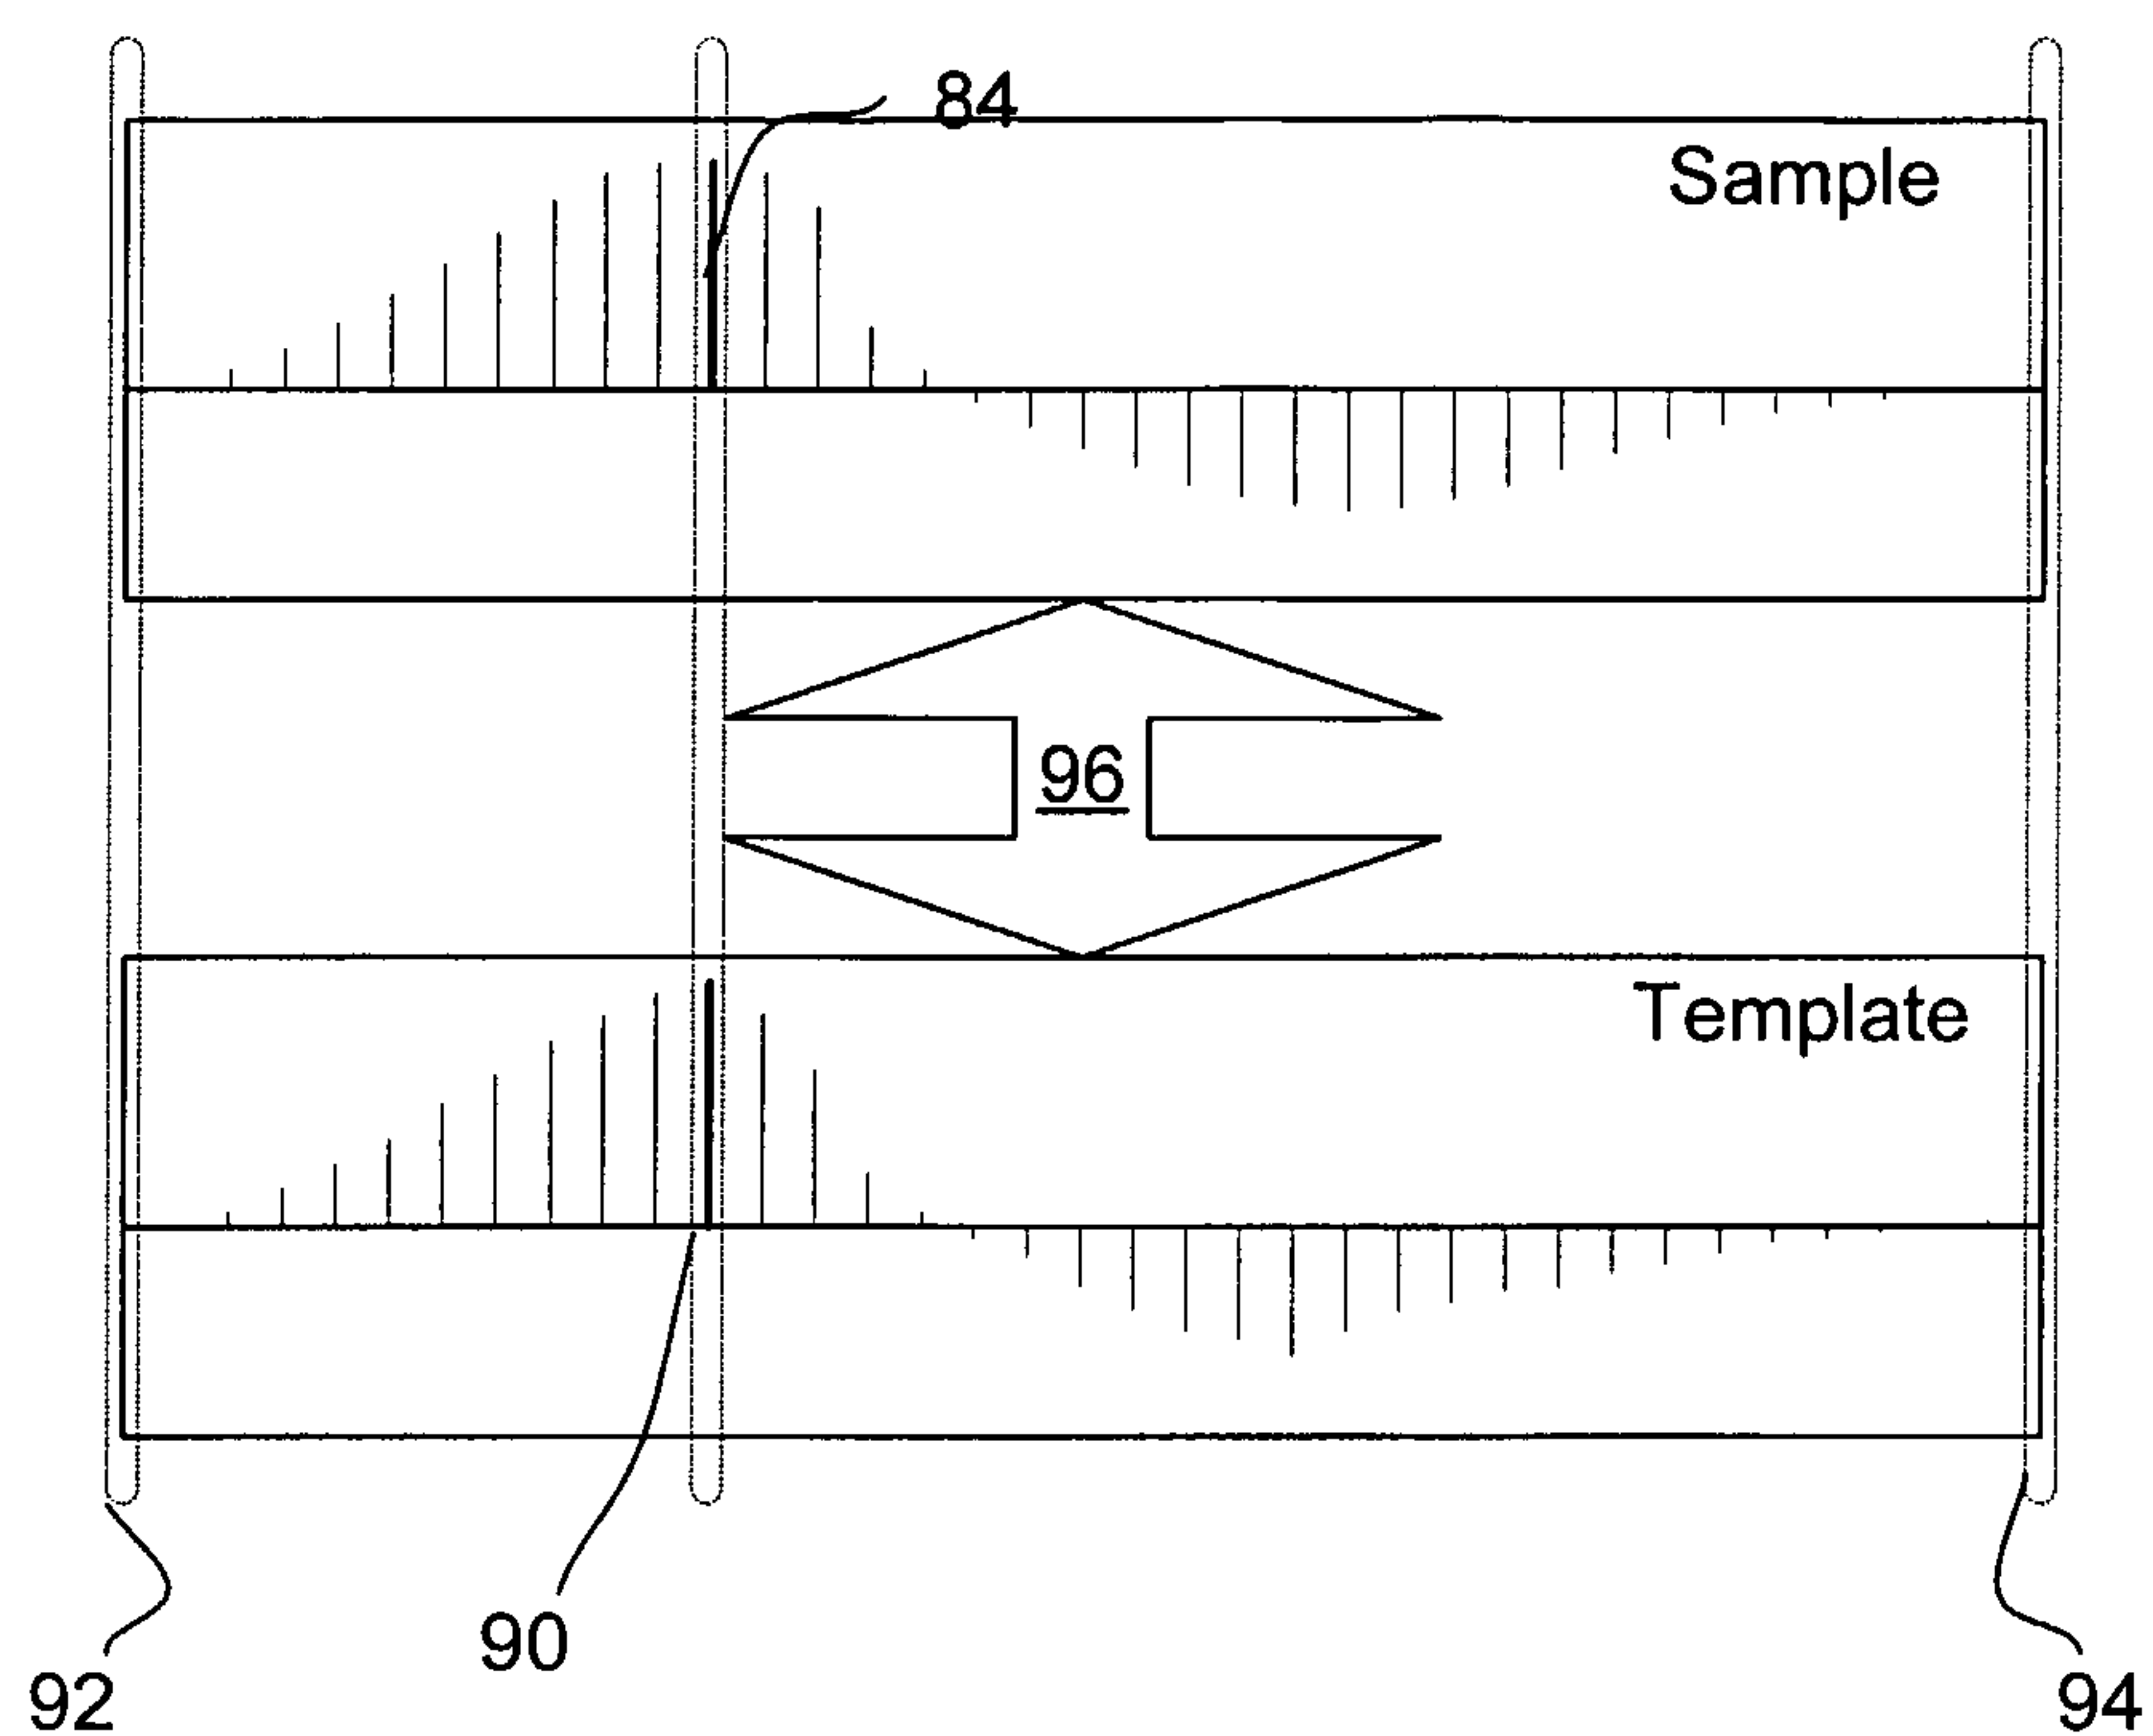
24. The implantable cardioverter/defibrillator of claim 23, wherein the operational circuitry is further configured to perform the steps of:
capturing a number of cardiac signals;
analyzing the individual captured cardiac signals to determine whether the captured cardiac signals likely represent a cardiac event; and
selecting those individual captured cardiac signals which likely represent a cardiac event.

*Fig. 1A**Fig. 1B*

**FIG. 2**

**FIG. 3**

***FIG. 4A******FIG. 4B******FIG. 4C******FIG. 4D***

***FIG. 4E***

