



US 20060217596A1

(19) **United States**(12) **Patent Application Publication**
Williams(10) **Pub. No.: US 2006/0217596 A1**(43) **Pub. Date: Sep. 28, 2006**(54) **ILLUMINATED SURGICAL RETRACTOR**(75) Inventor: **Jeffrey B. Williams**, Ravenna, OH
(US)

Correspondence Address:


RENNER OTTO BOISSELLE & SKLAR, LLP
1621 EUCLID AVENUE
NINETEENTH FLOOR
CLEVELAND, OH 44115 (US)(73) Assignee: **Lumitex, Inc.**, Strongsville, OH(21) Appl. No.: **11/445,426**(22) Filed: **Jun. 1, 2006****Related U.S. Application Data**







(60) Division of application No. 10/294,291, filed on Nov. 14, 2002, which is a continuation-in-part of application No. 09/735,104, filed on Dec. 12, 2000, now Pat.


No. 6,504,985, which is a continuation of application No. 09/120,406, filed on Jul. 22, 1998, now Pat. No. 6,185,356, which is a continuation-in-part of application No. 08/886,666, filed on Jul. 2, 1997, now abandoned.


Publication Classification(51) **Int. Cl.**
A61B 1/32 (2006.01)(52) **U.S. Cl.** **600/245**(57) **ABSTRACT**

Illuminated surgical retractors include at least one retractor blade and a light delivery system. The light delivery system may include an array of lights which may be attached directly to the retractor blade or to a support in the shape of an elongated blade that extends along the length of the retractor blade for illuminating all or a portion of the length of the retractor blade.

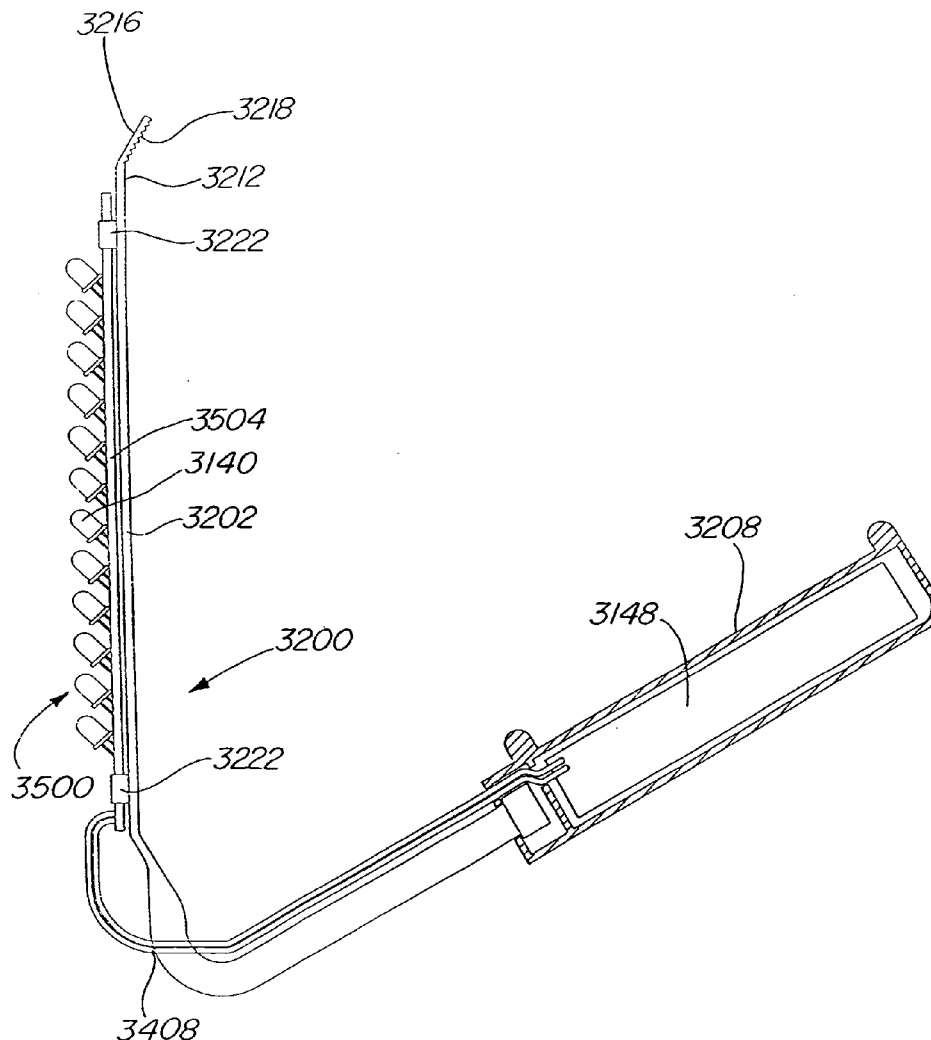

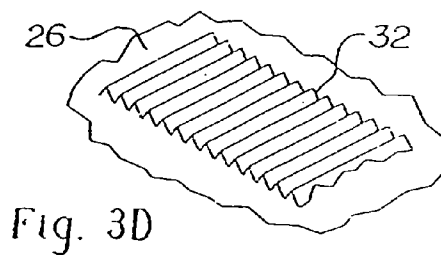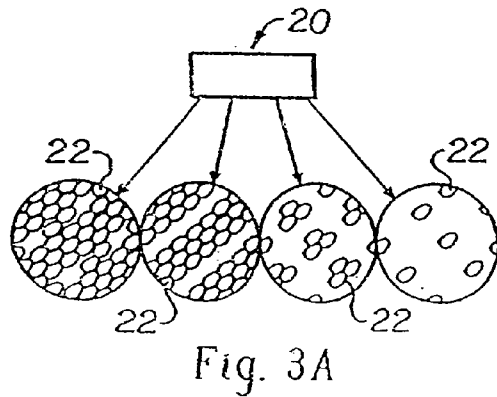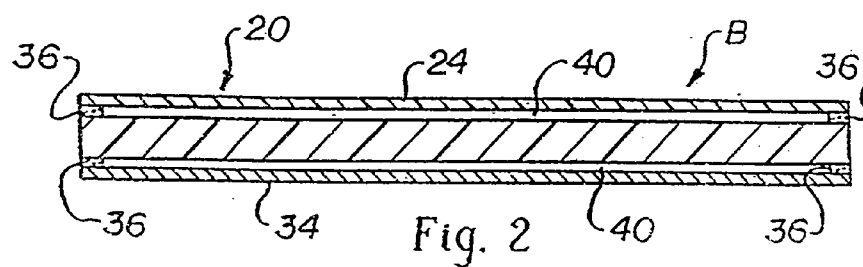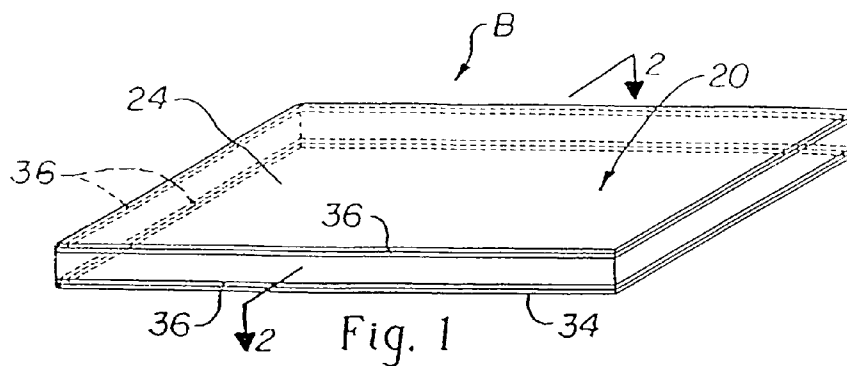

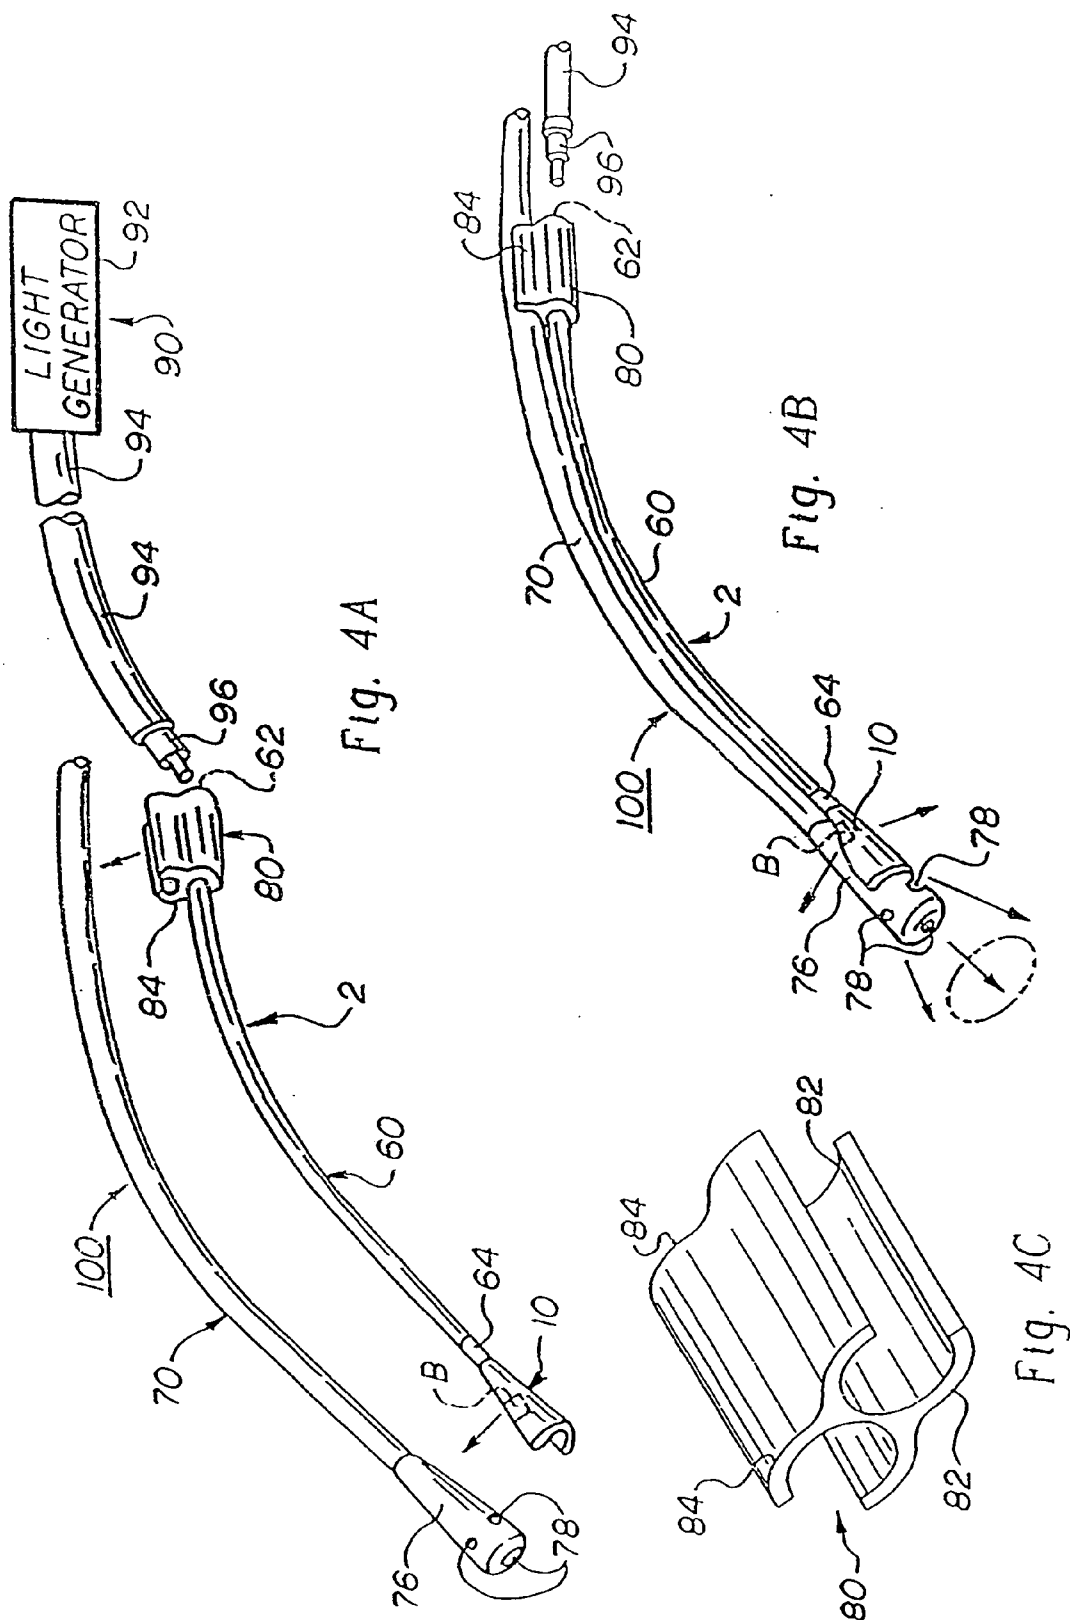

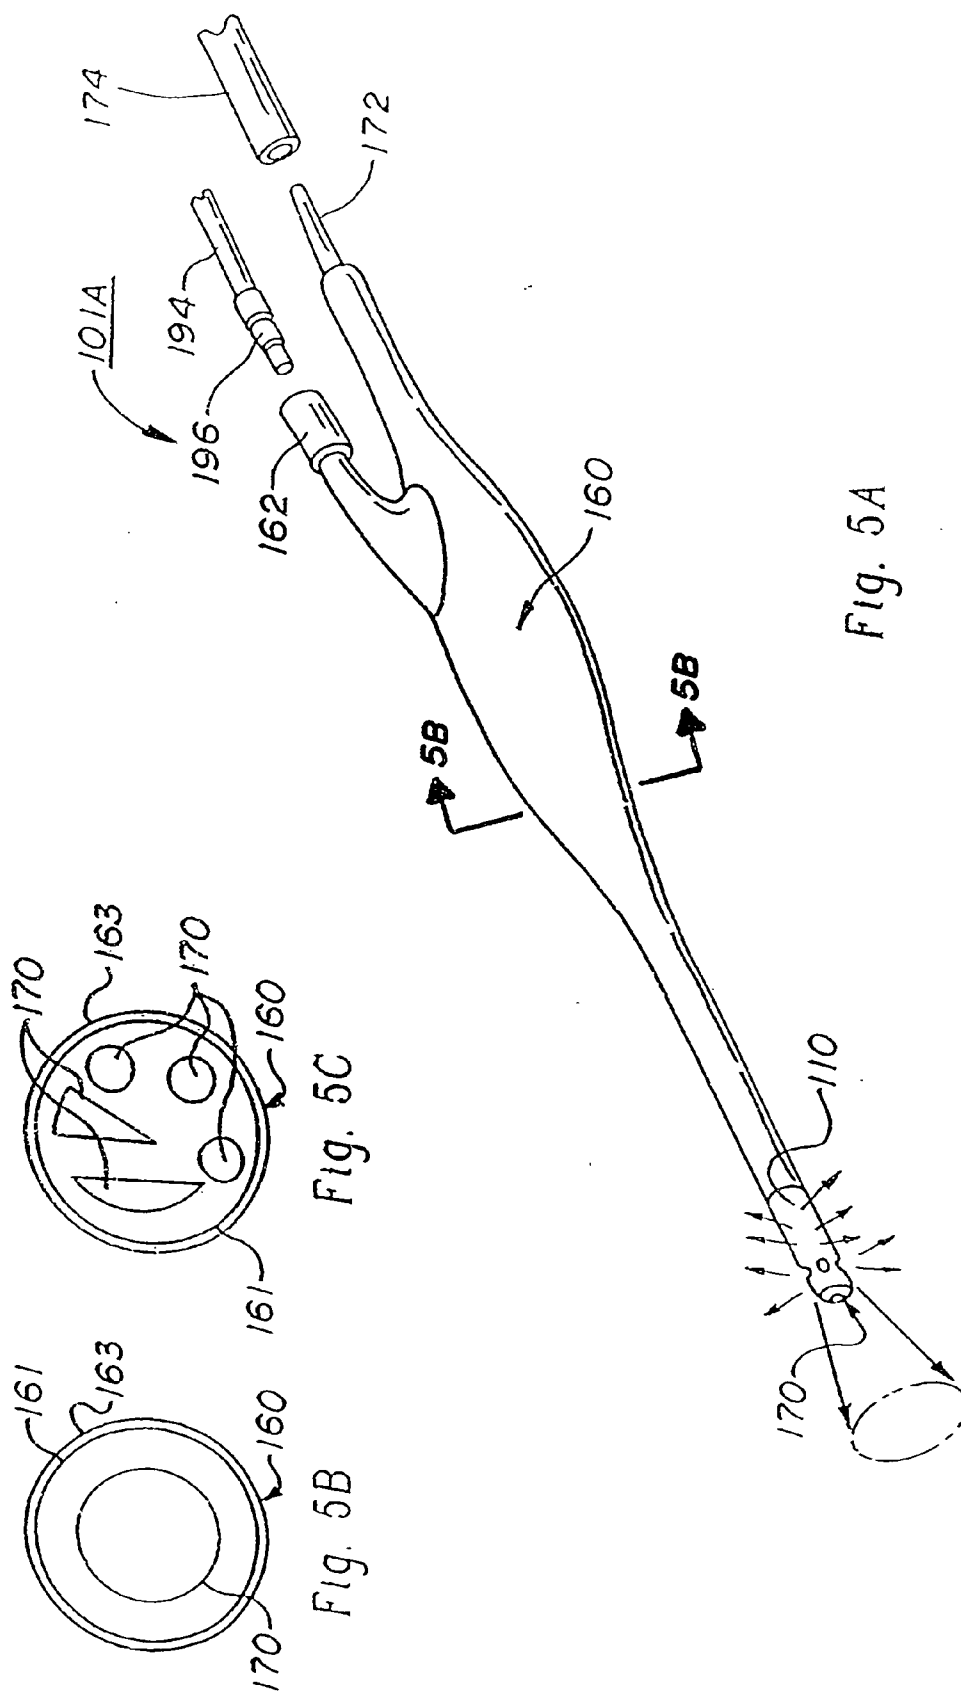

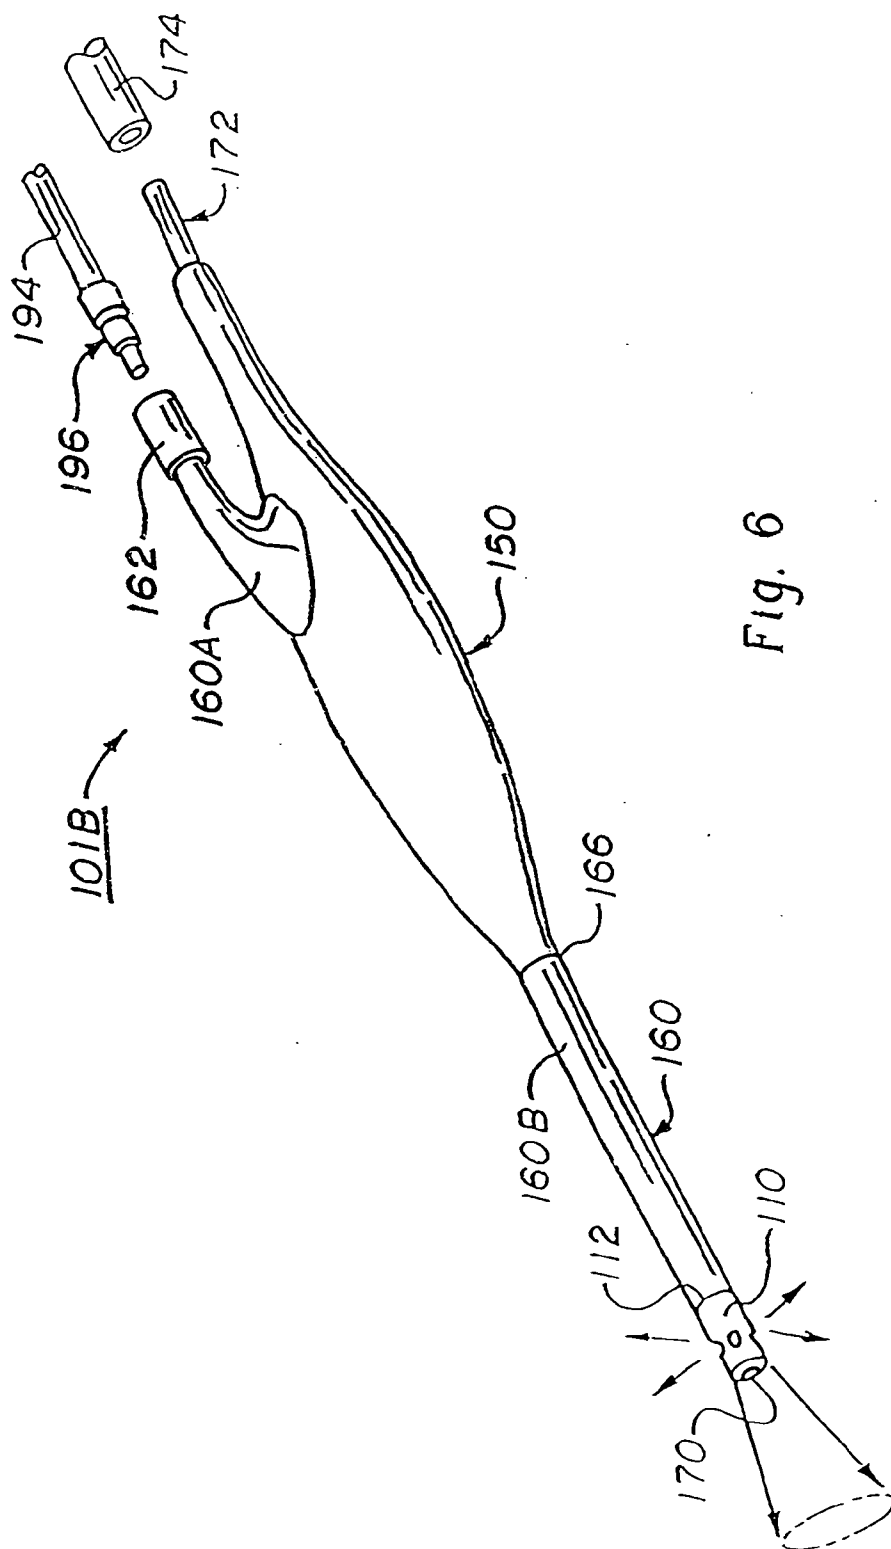


Fig. 6

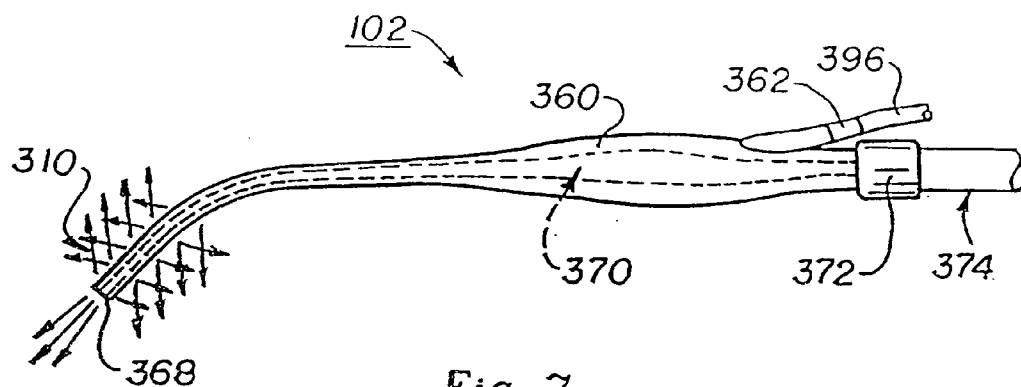


Fig. 7

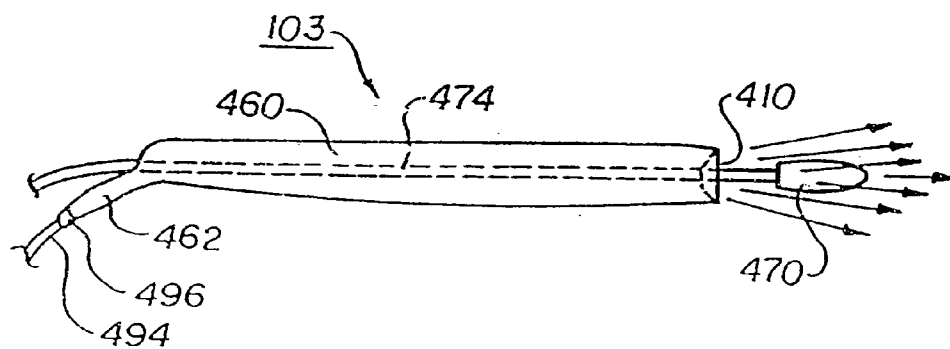
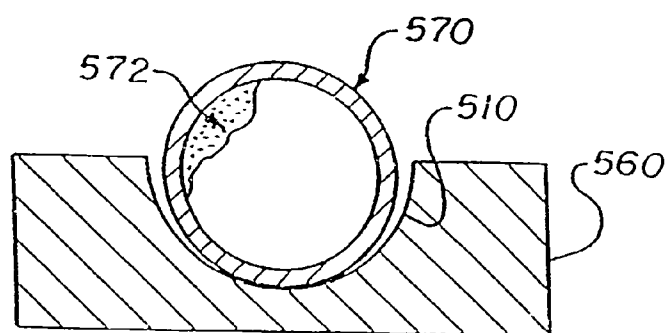
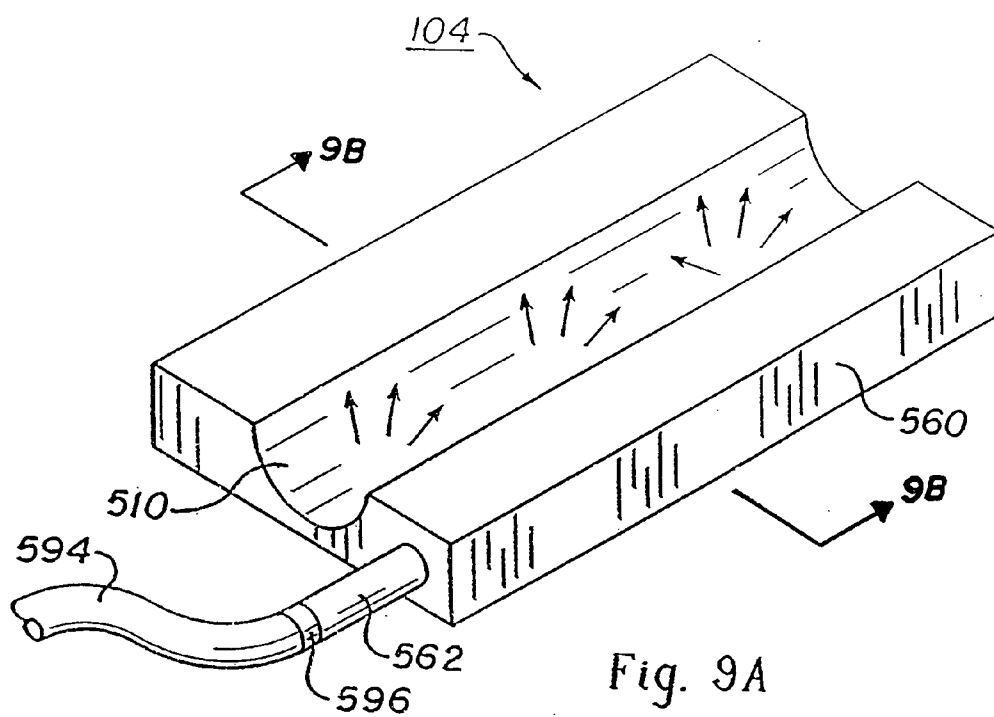
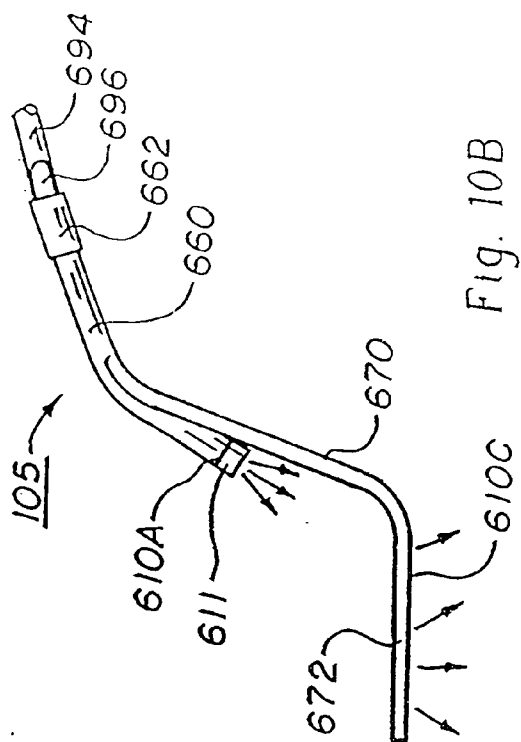
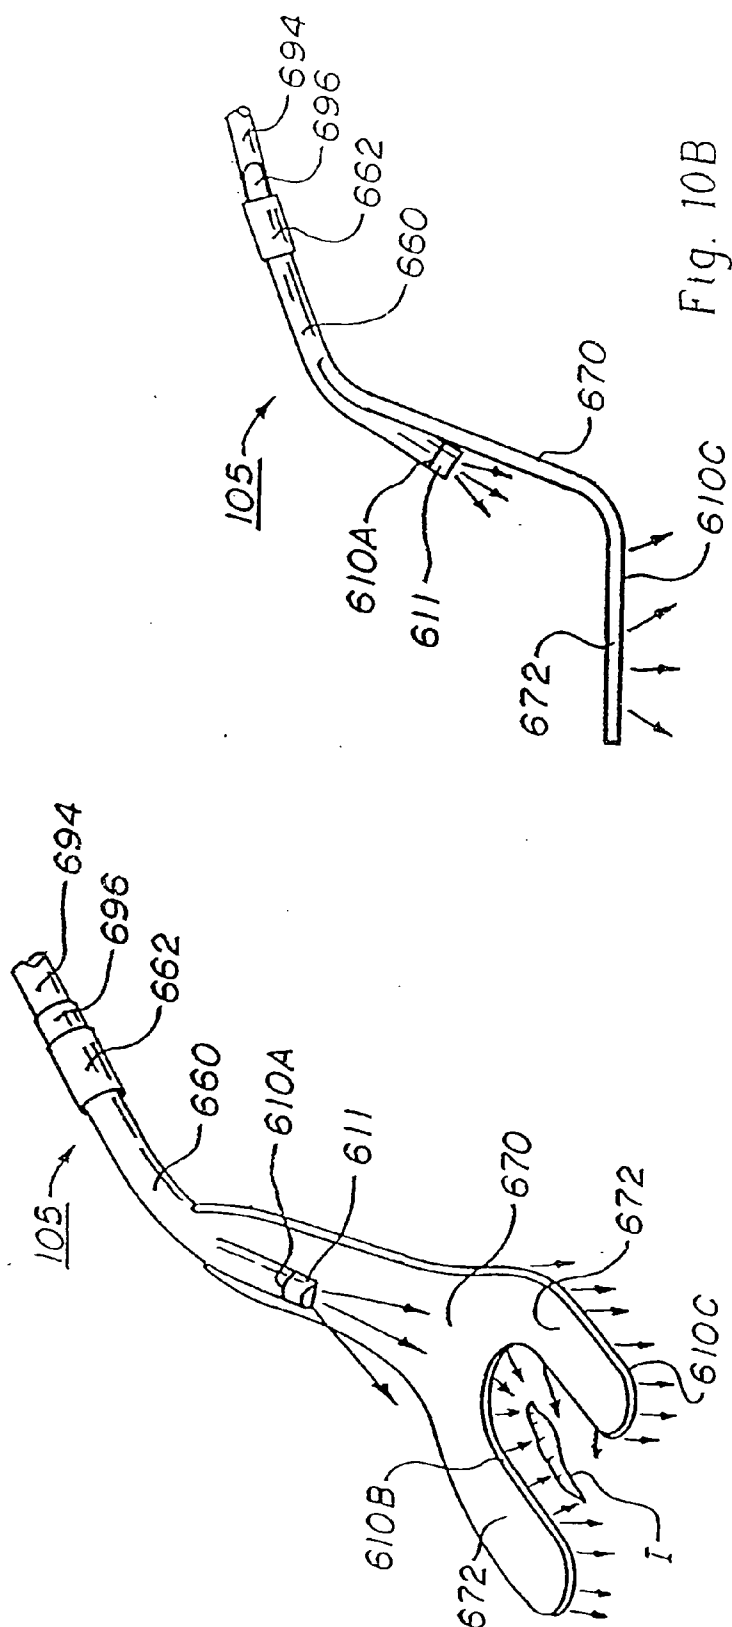


Fig. 8





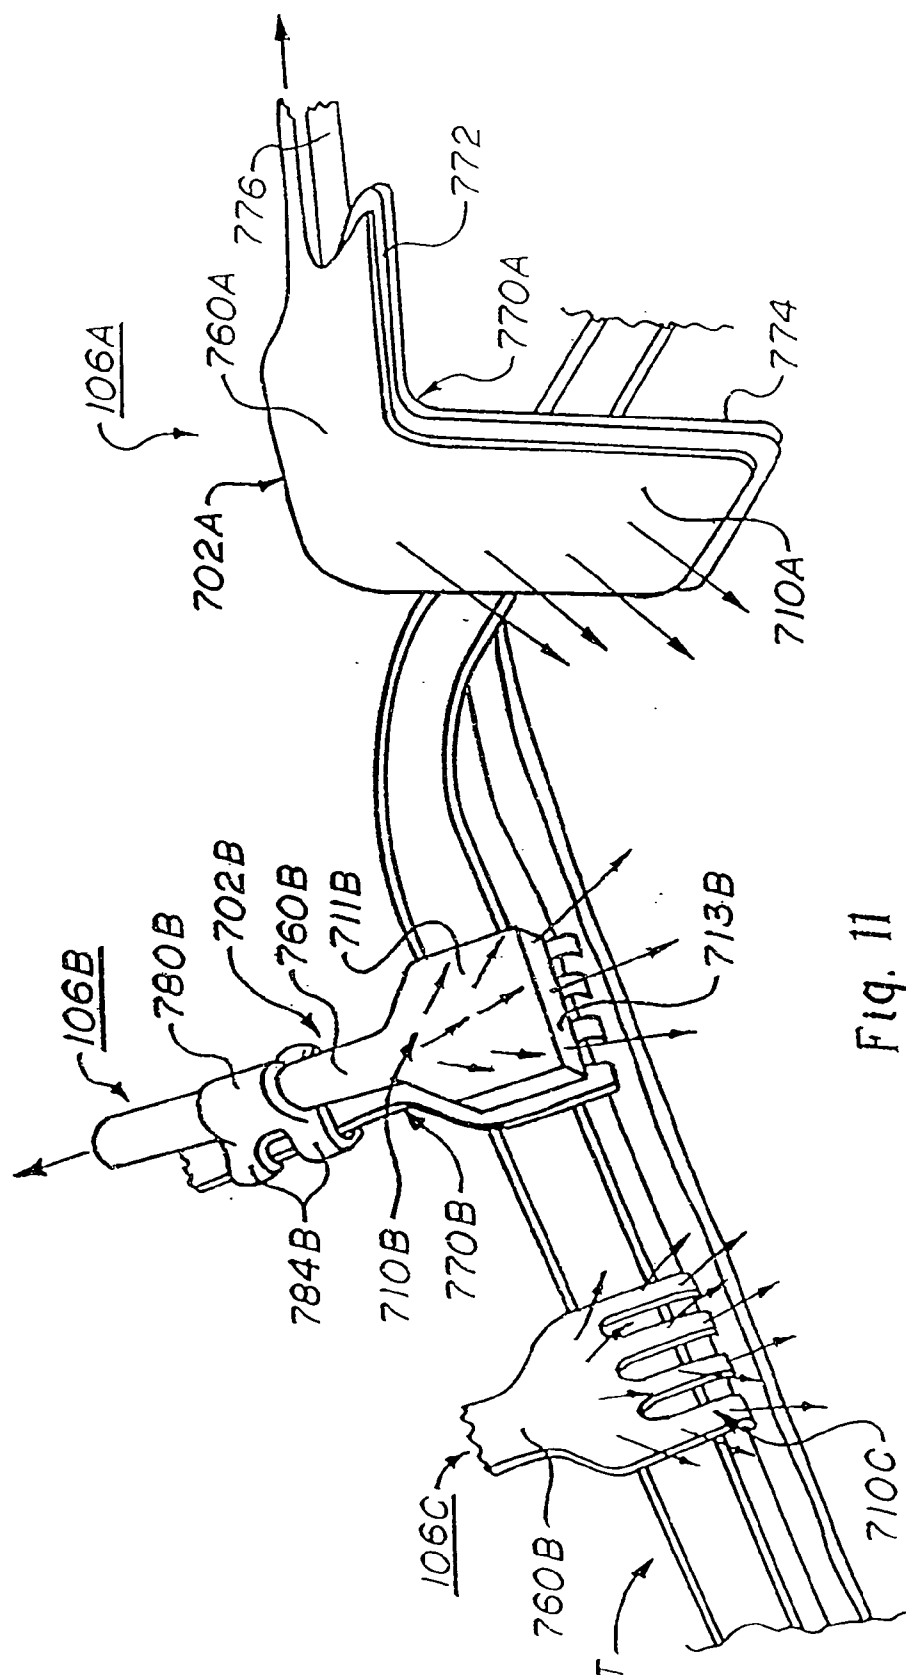


Fig. 11

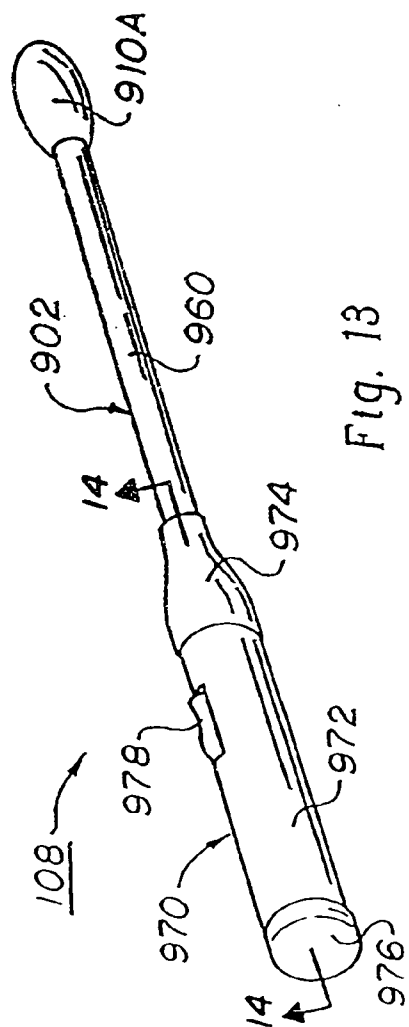


Fig. 13

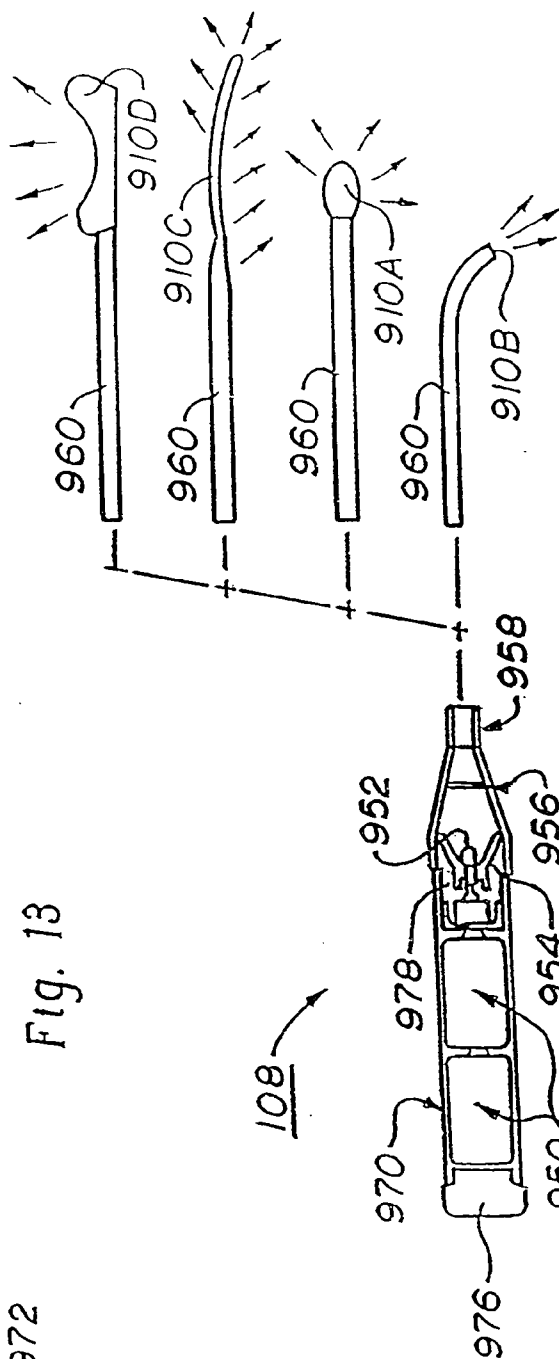
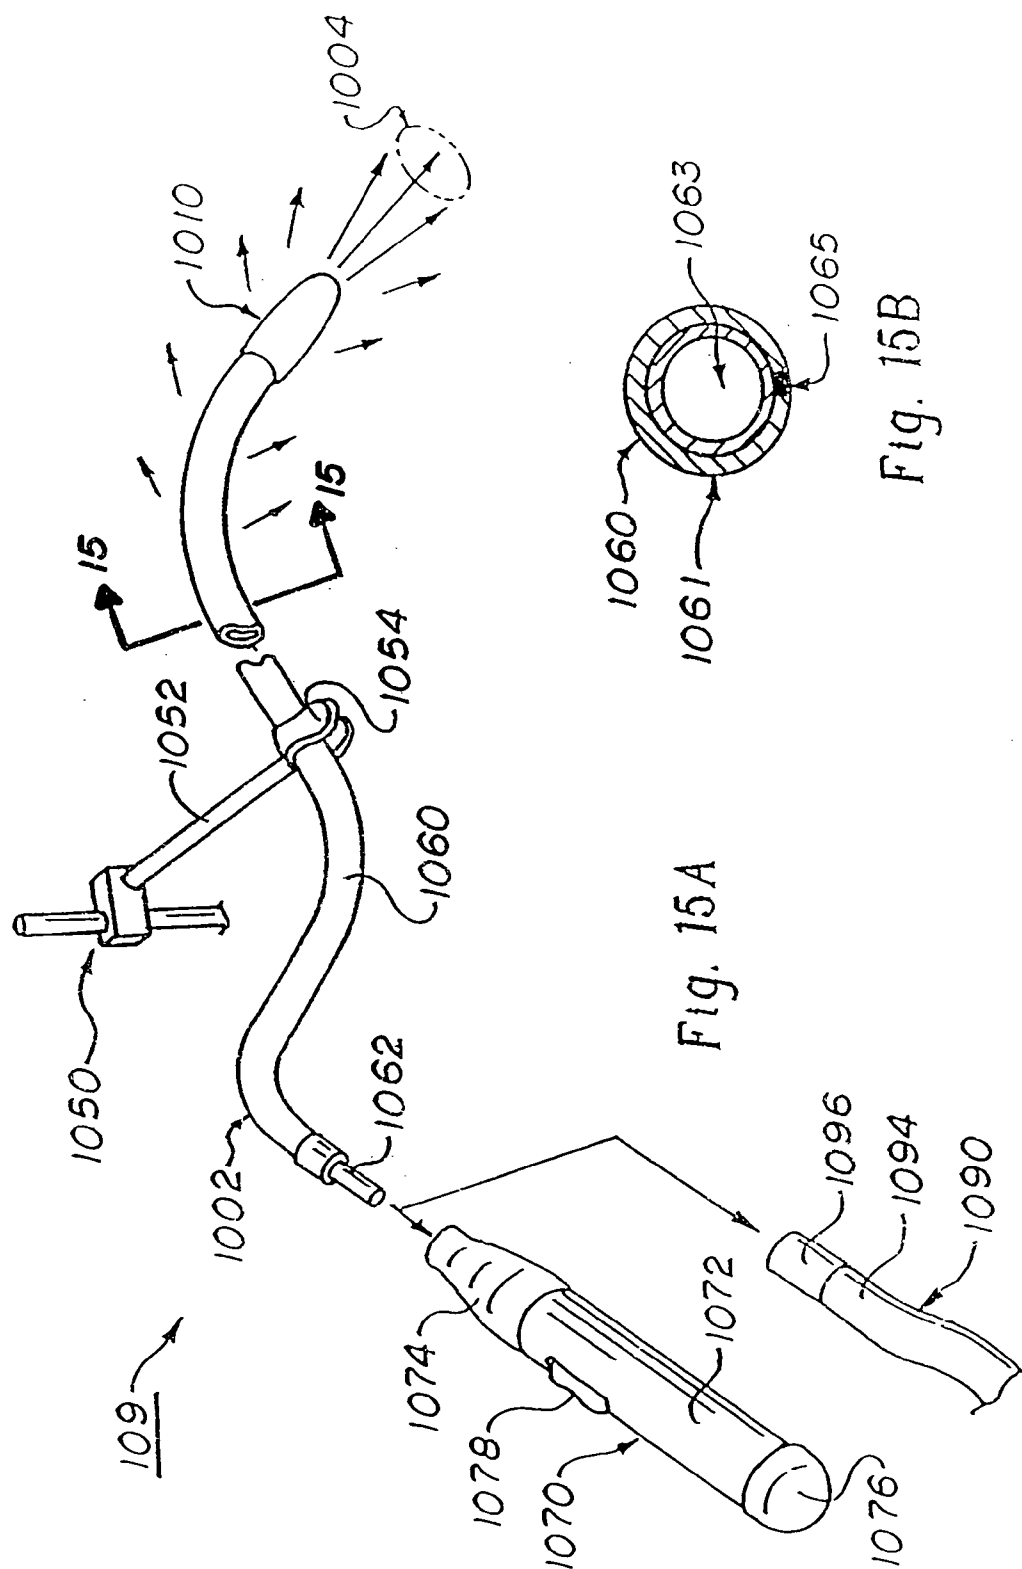
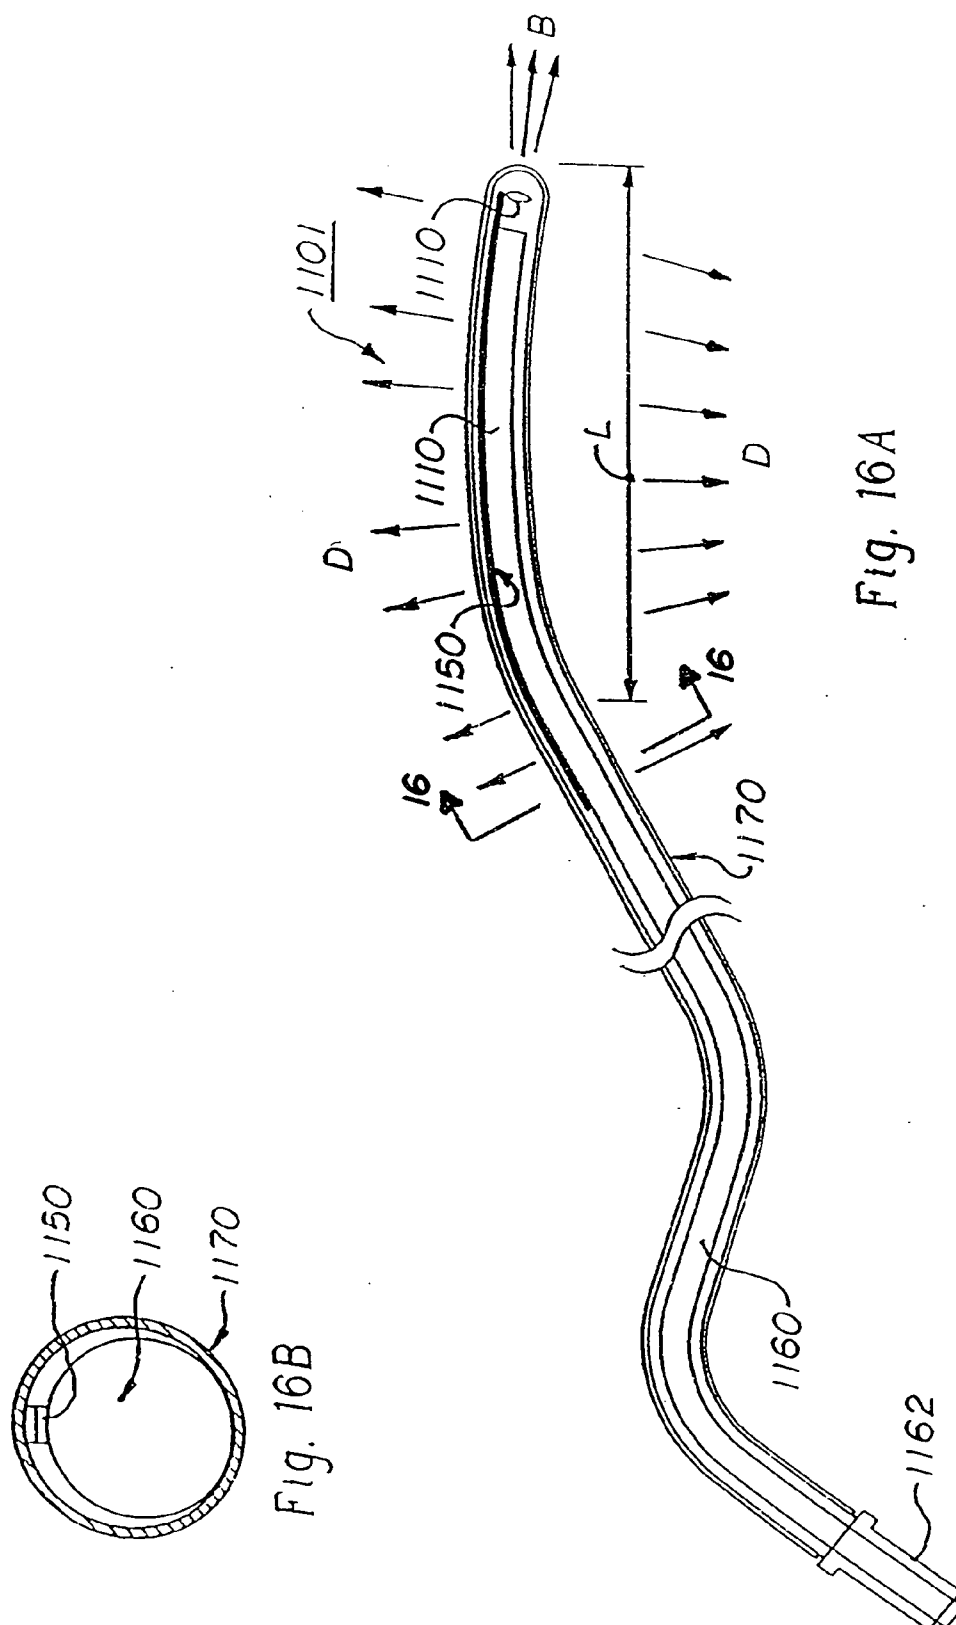


Fig. 14





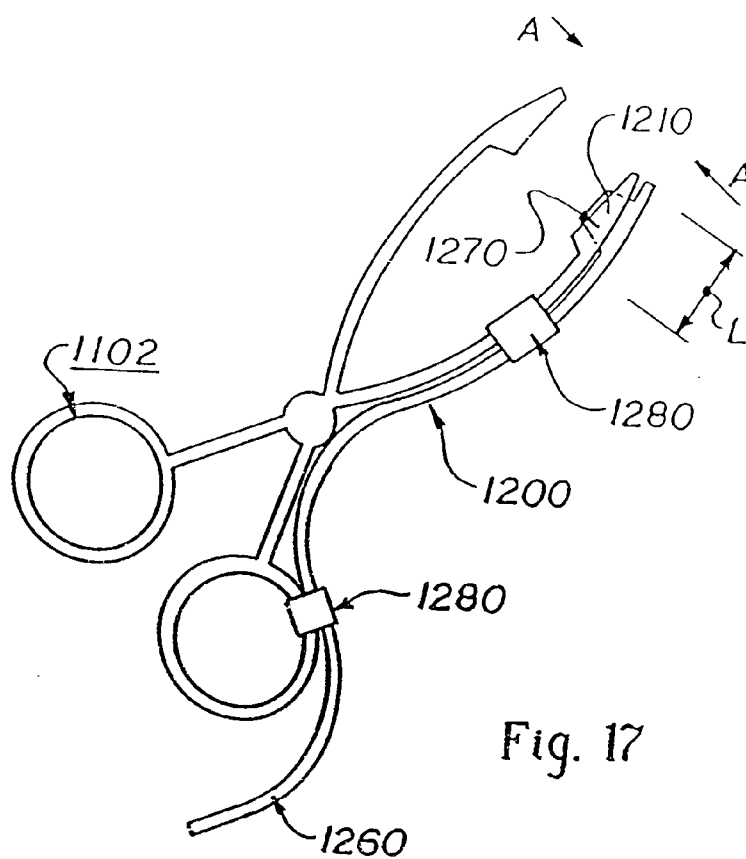


Fig. 17

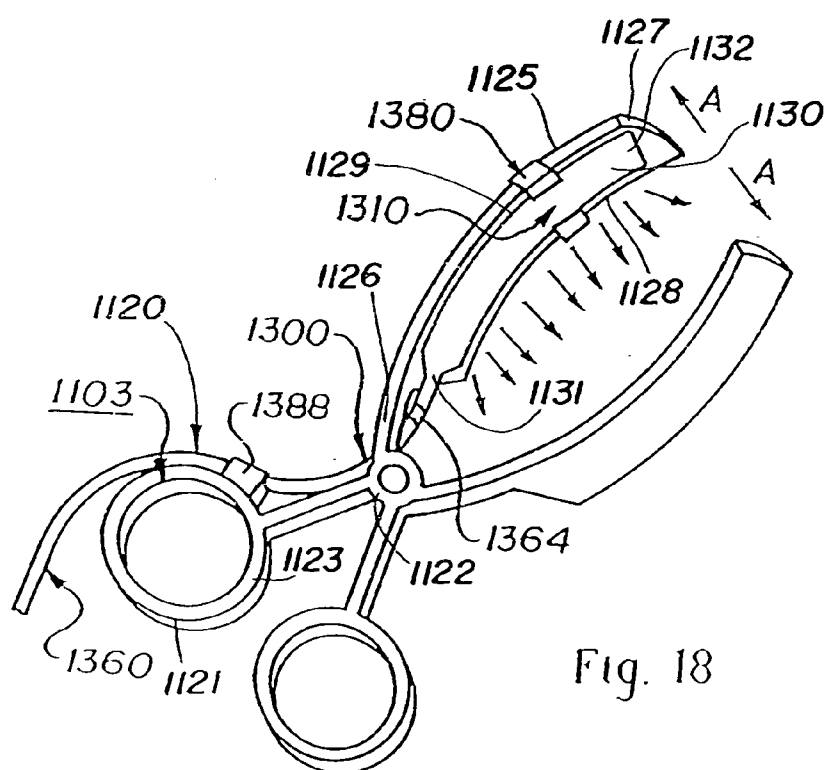


Fig. 18

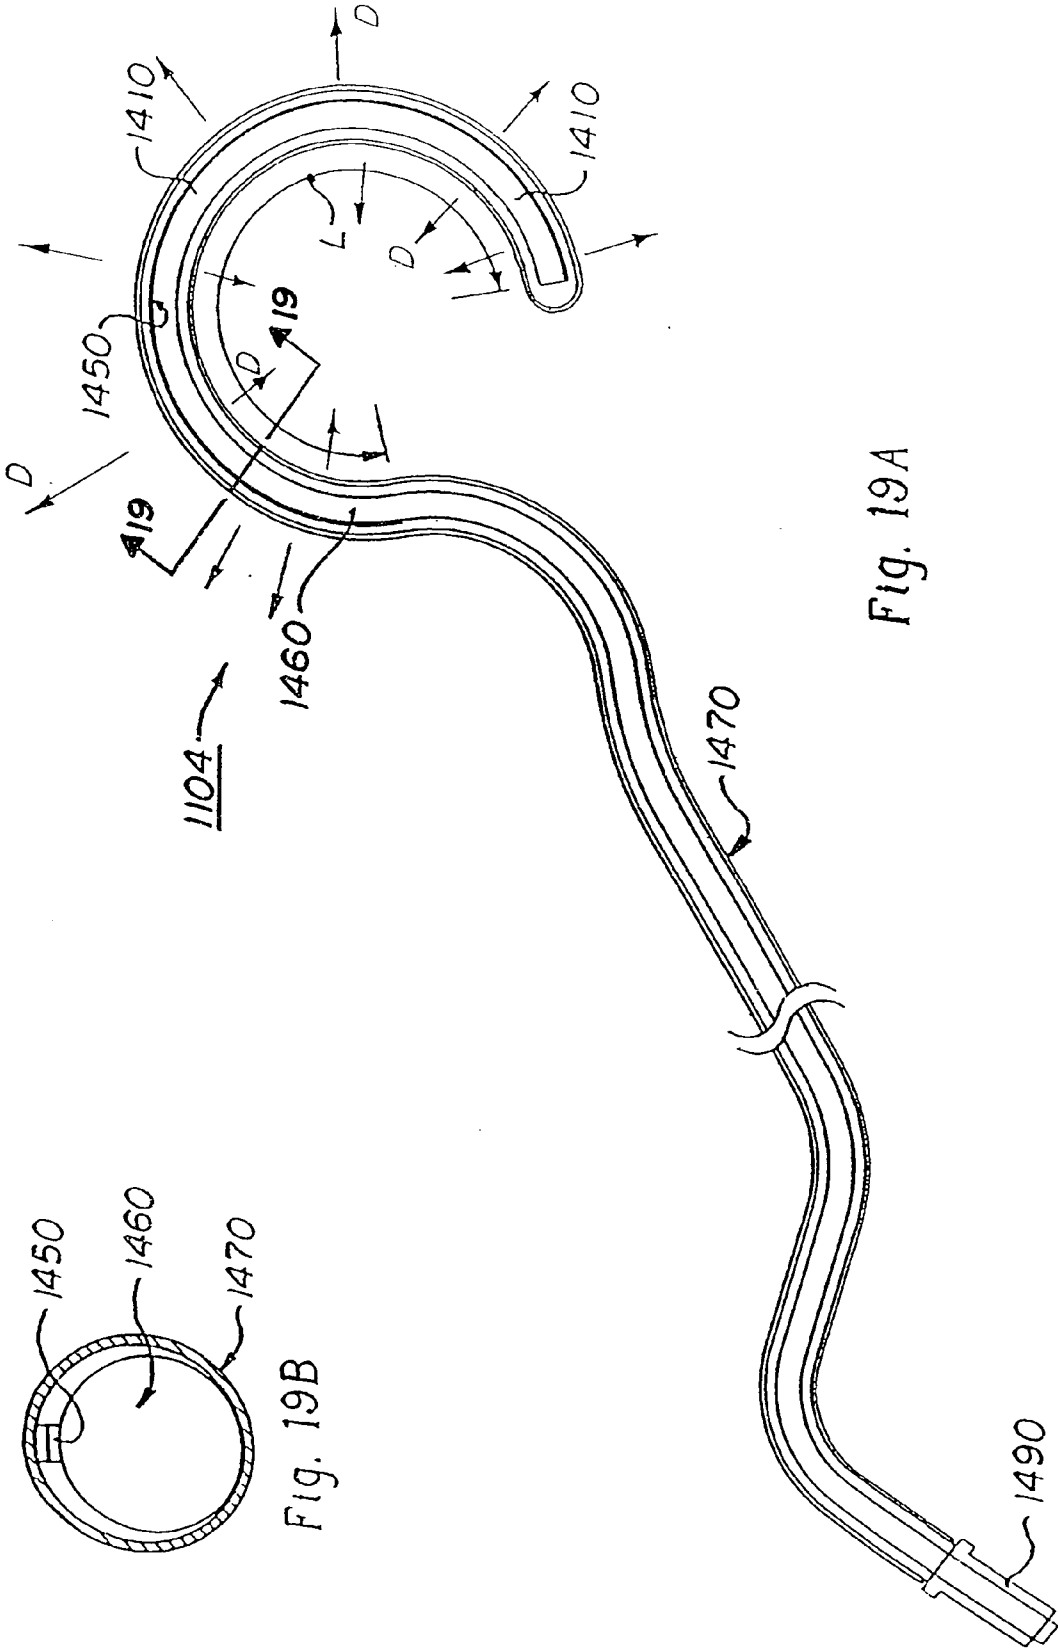


Fig. 19A

Fig. 19B

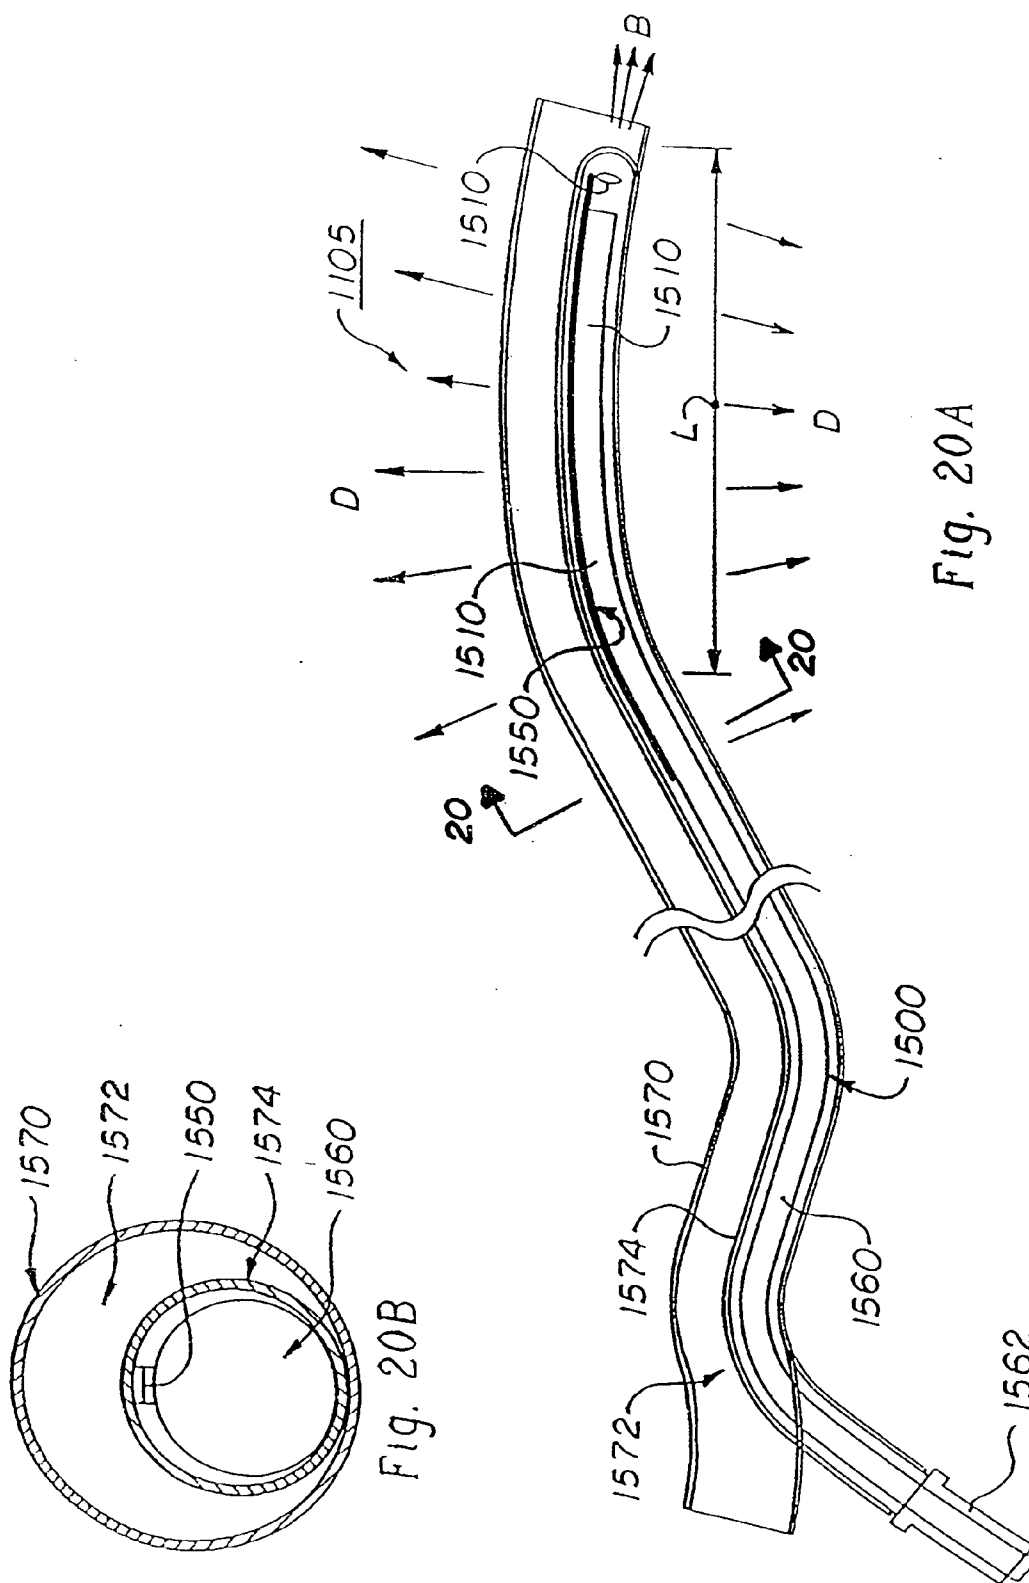


Fig. 20A

Fig. 20B

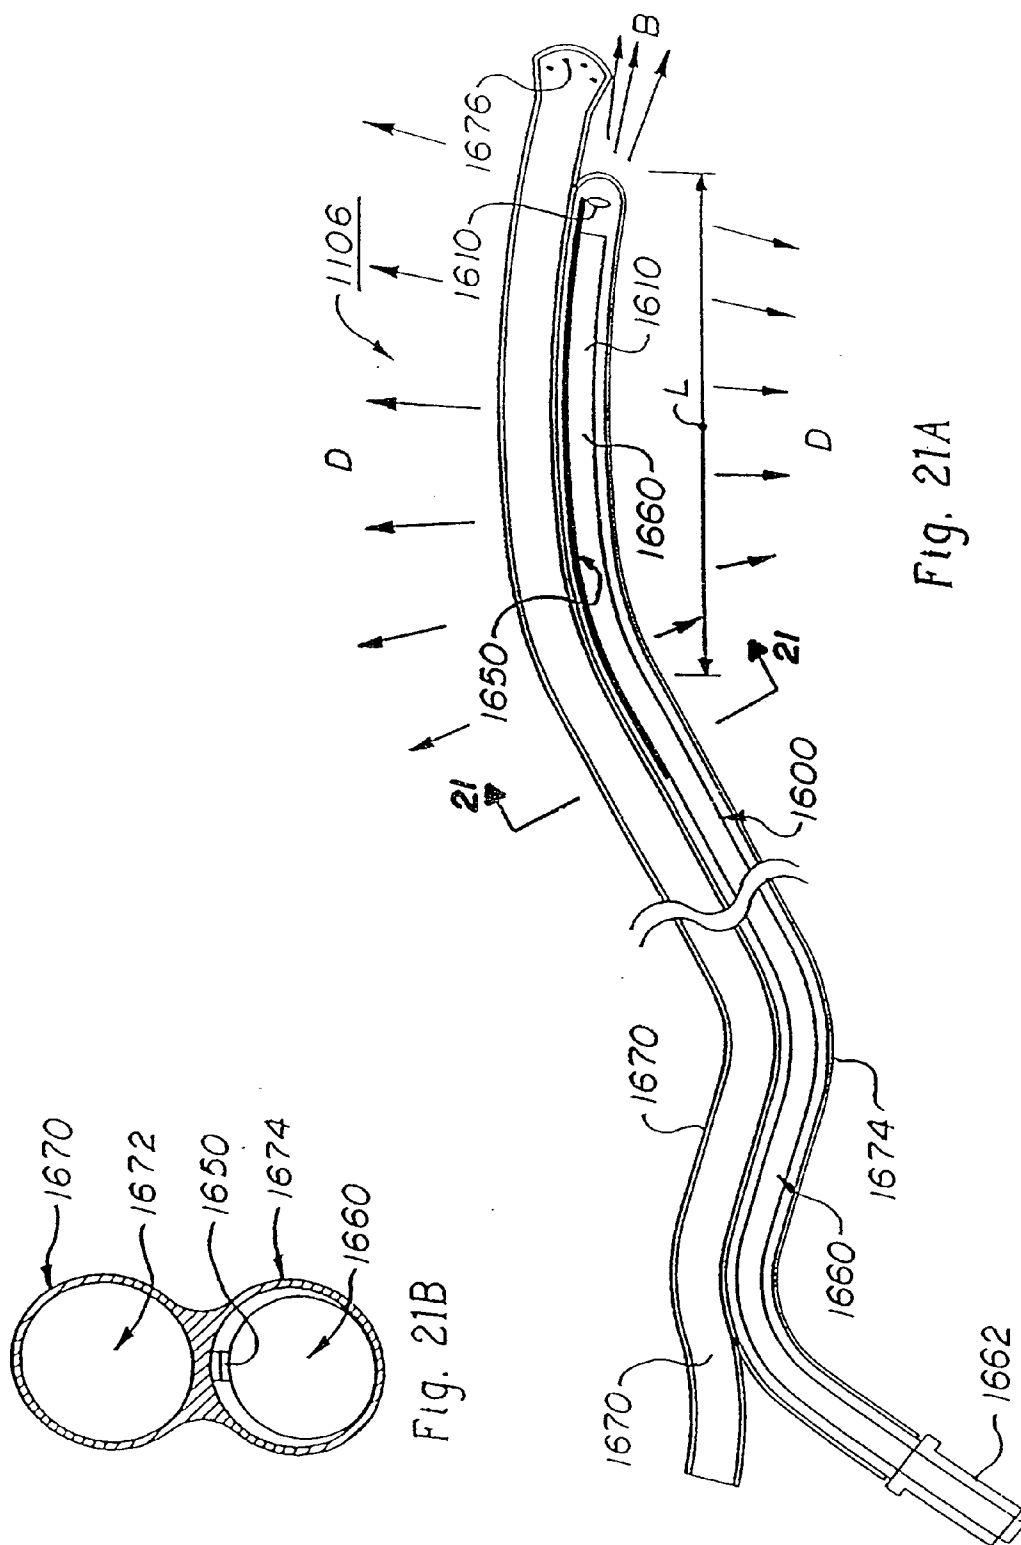
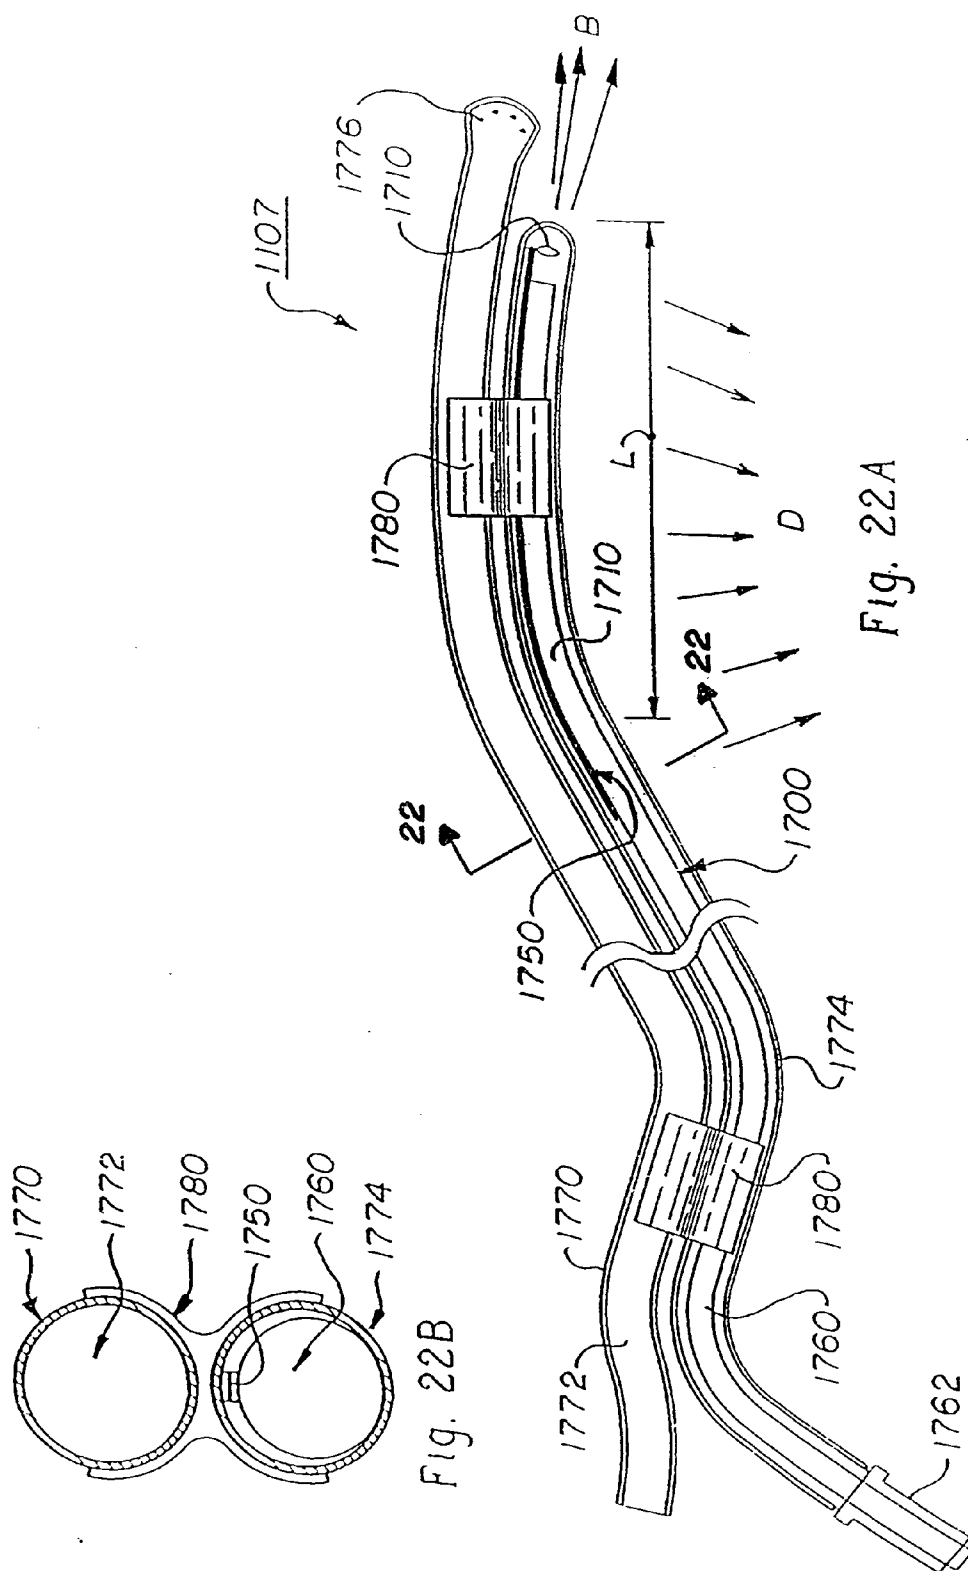


Fig. 21A

Fig. 21B



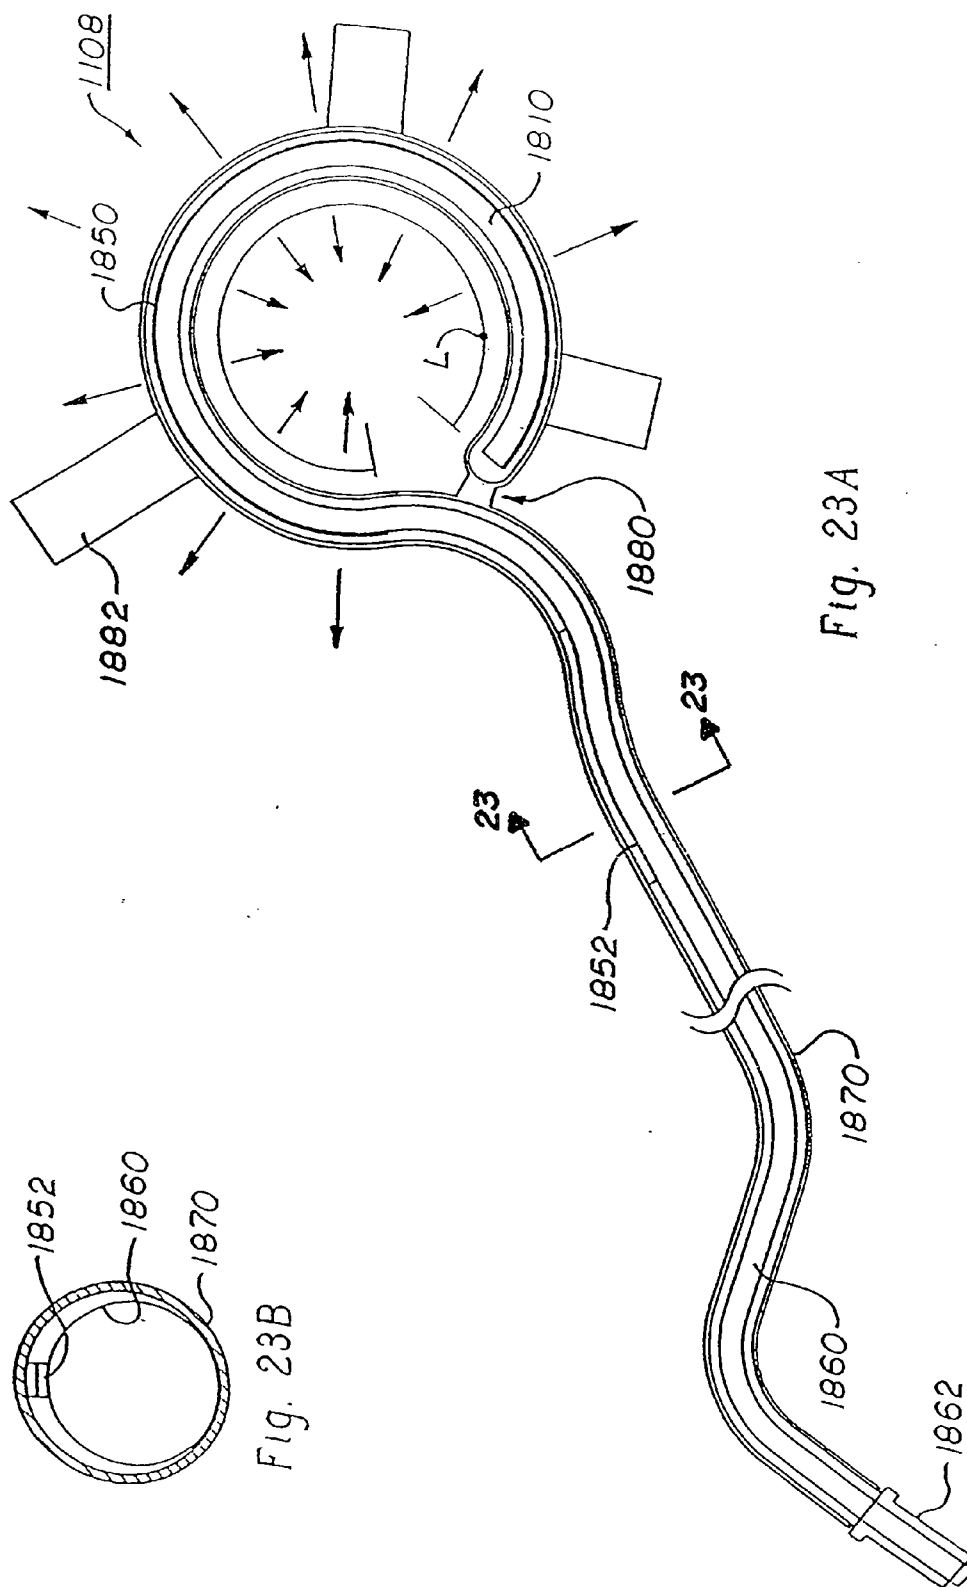
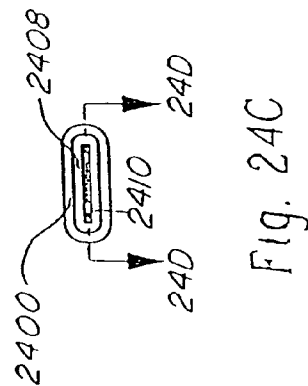
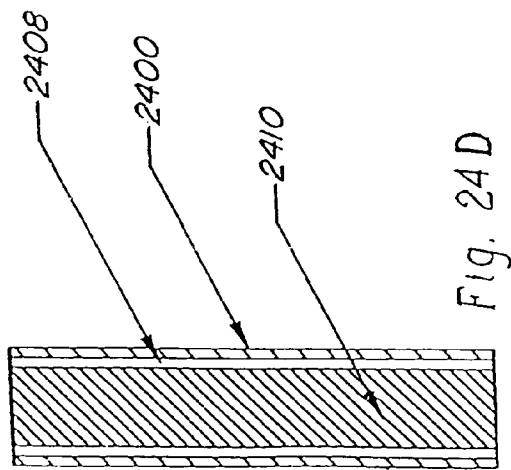
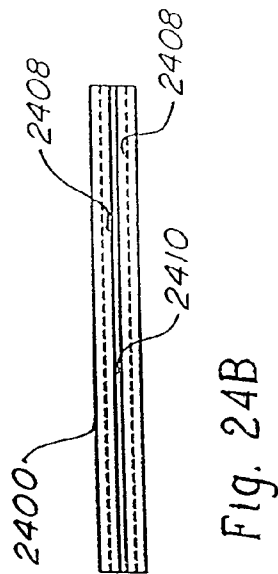
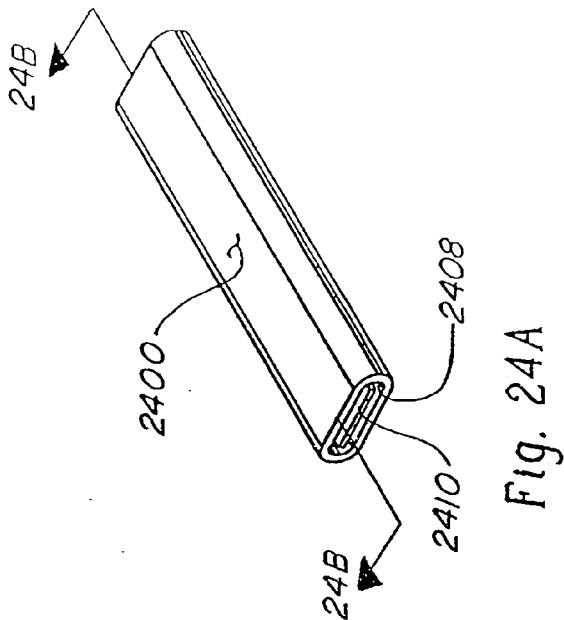
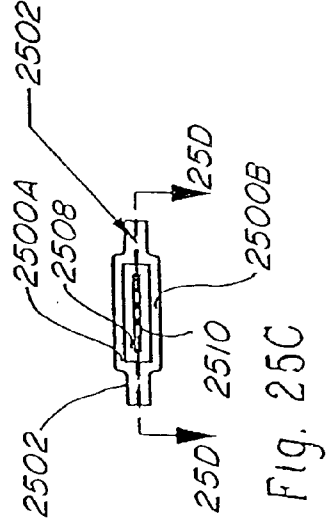
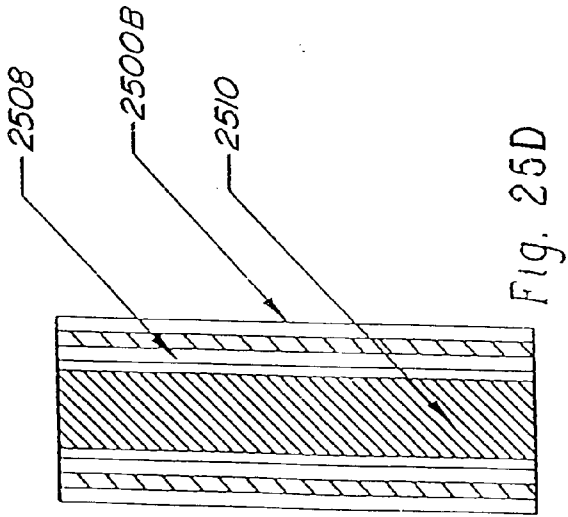
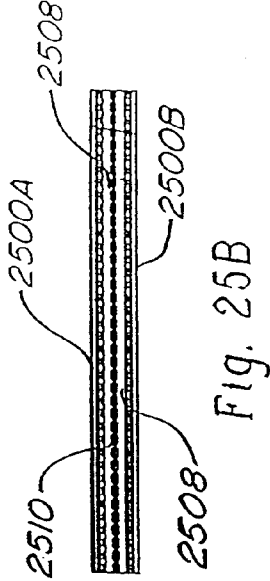
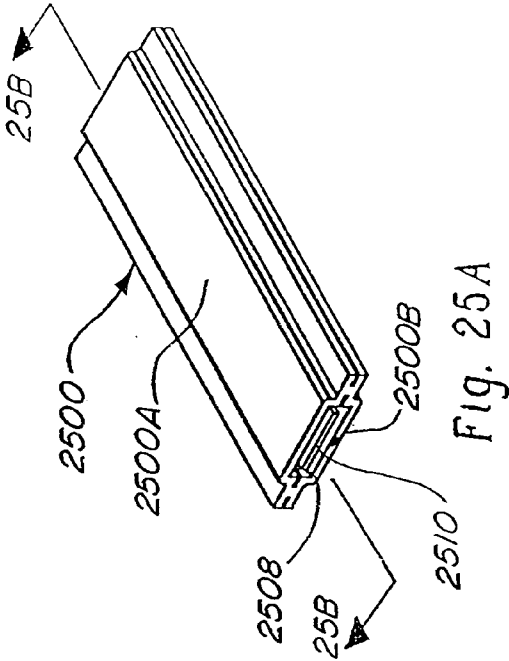


Fig. 23A

Fig. 23B





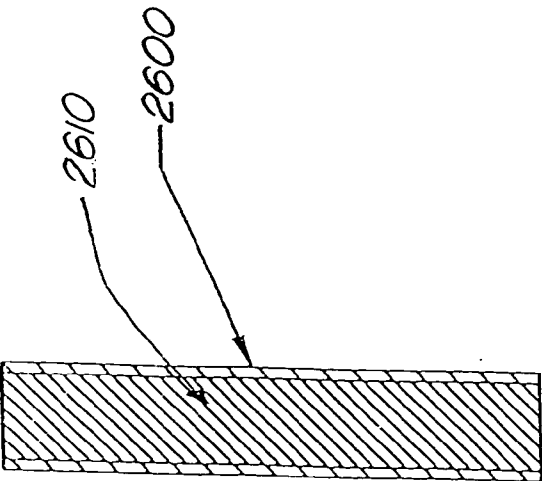
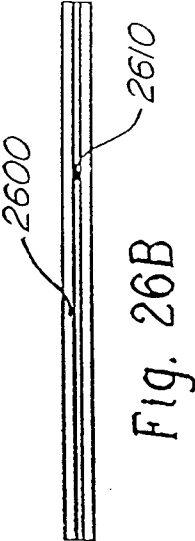
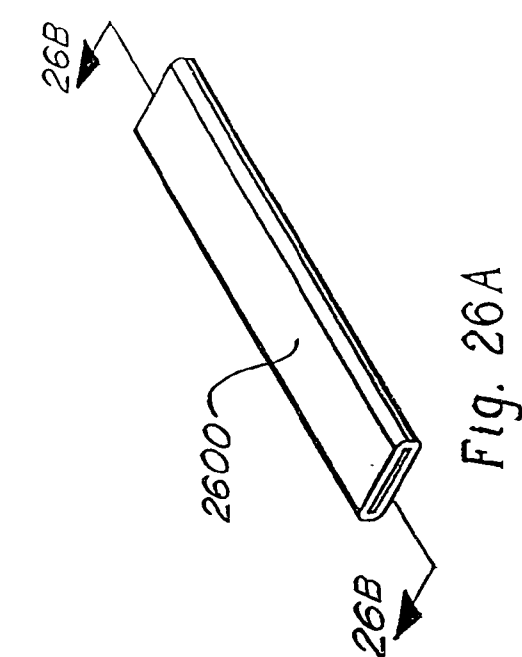


Fig. 26D


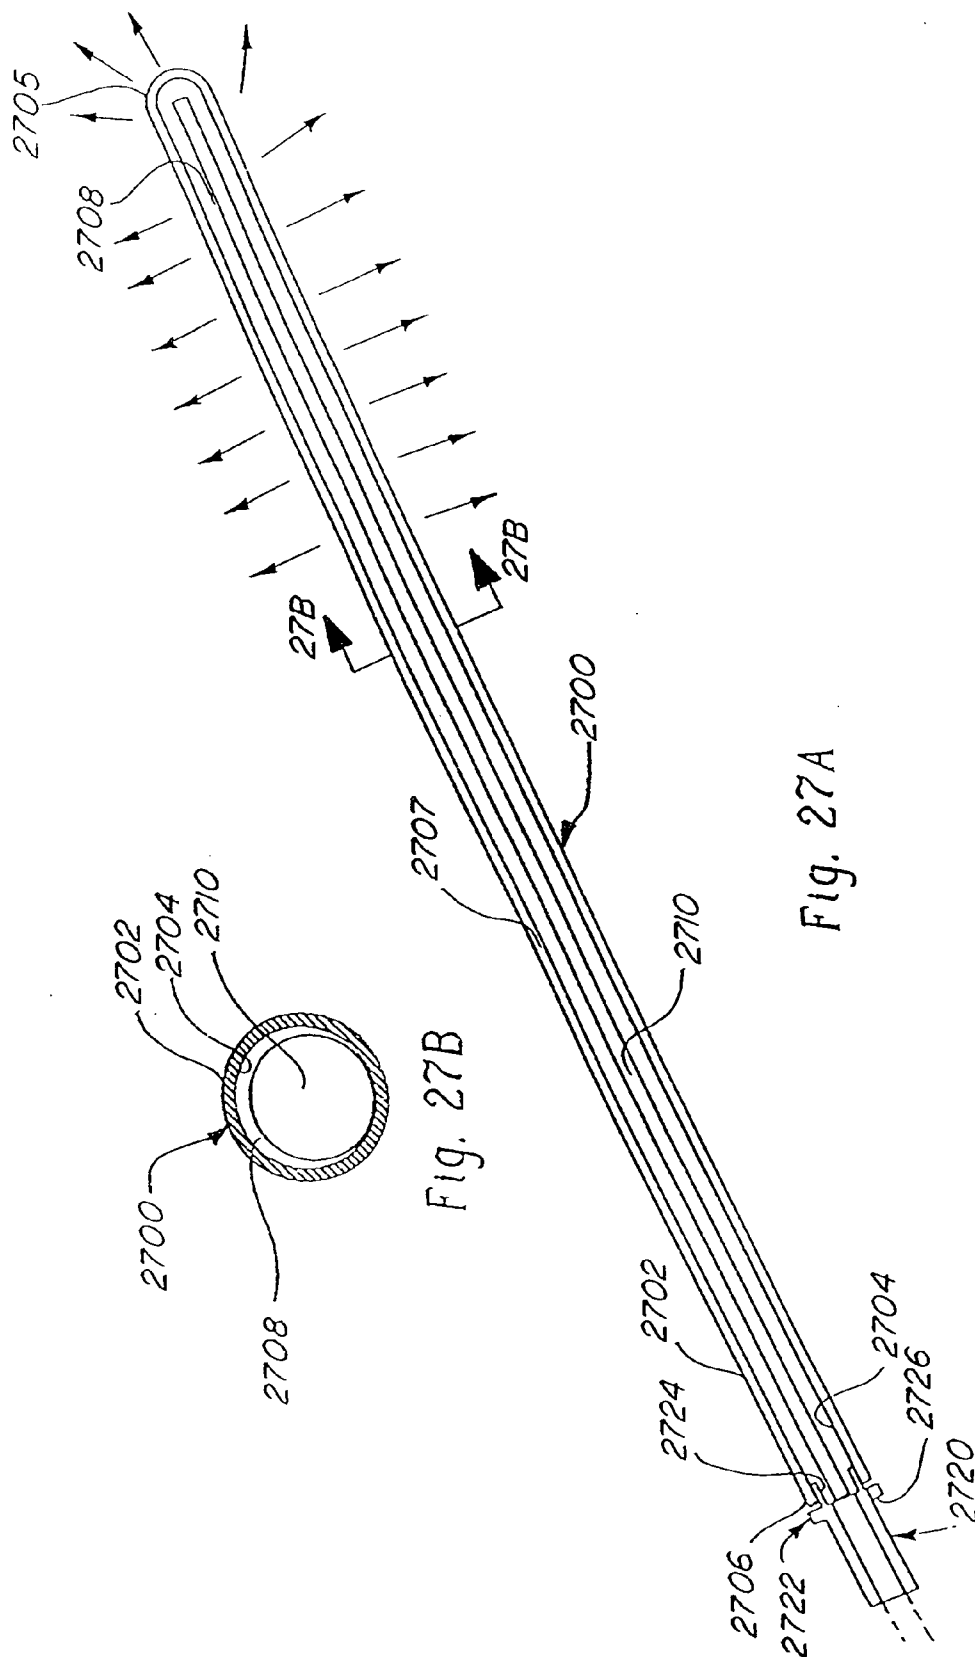
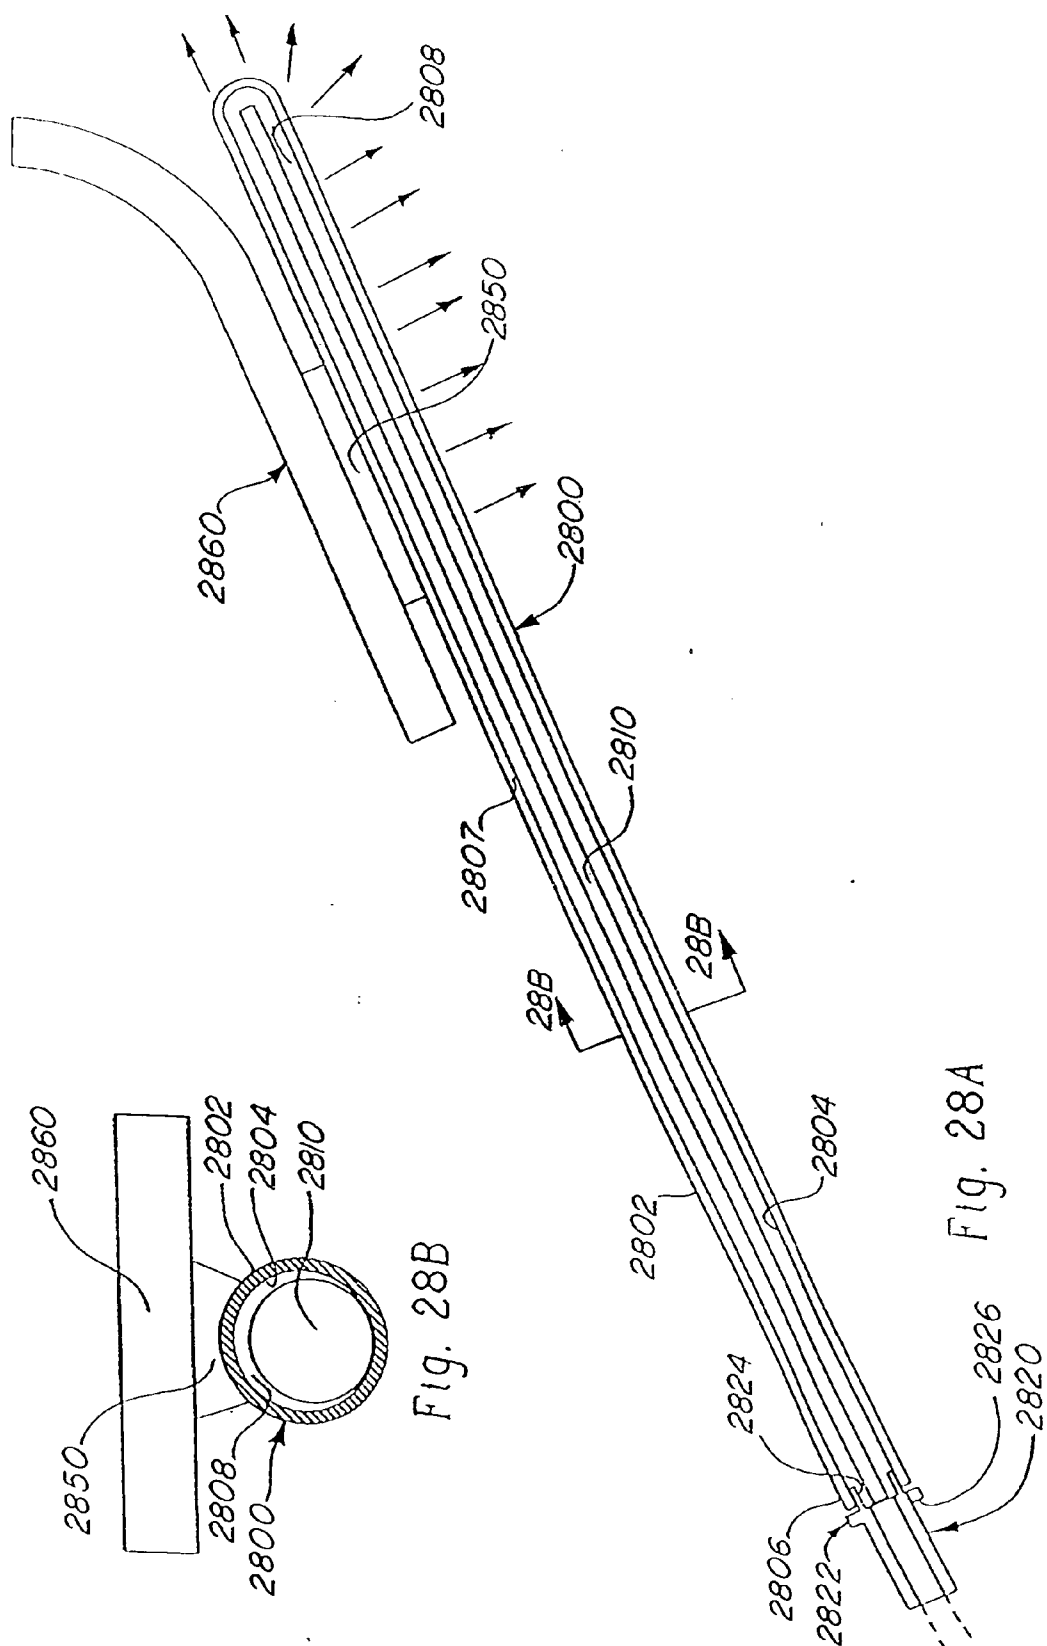
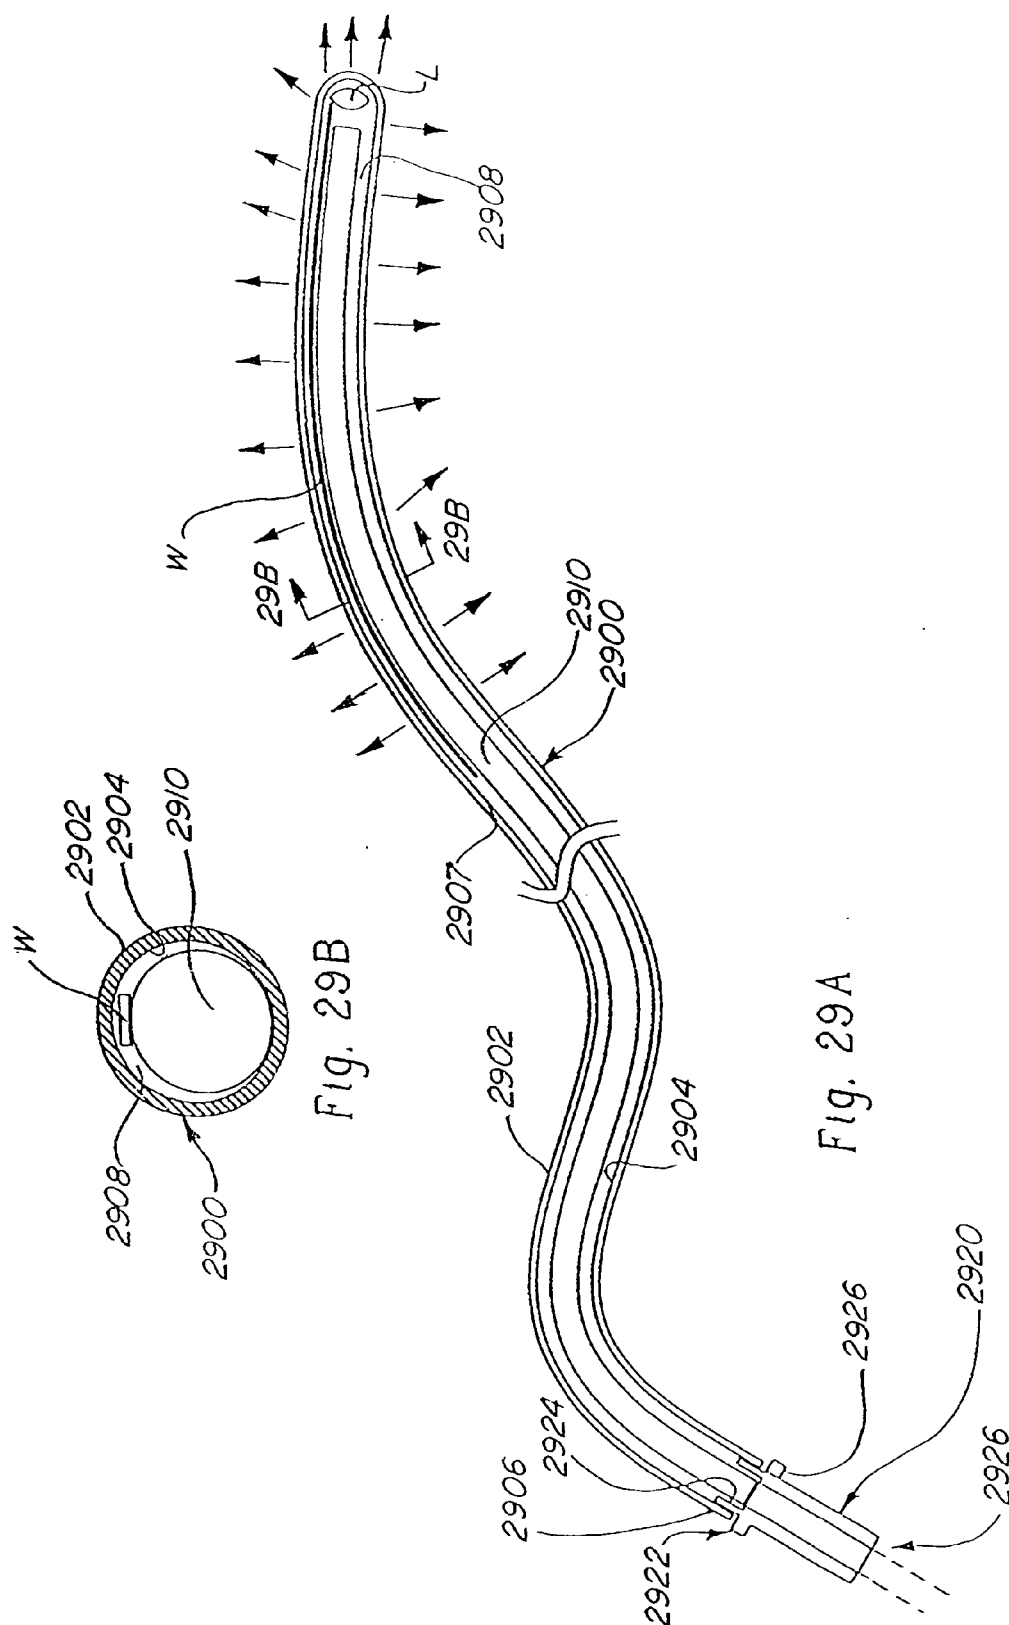
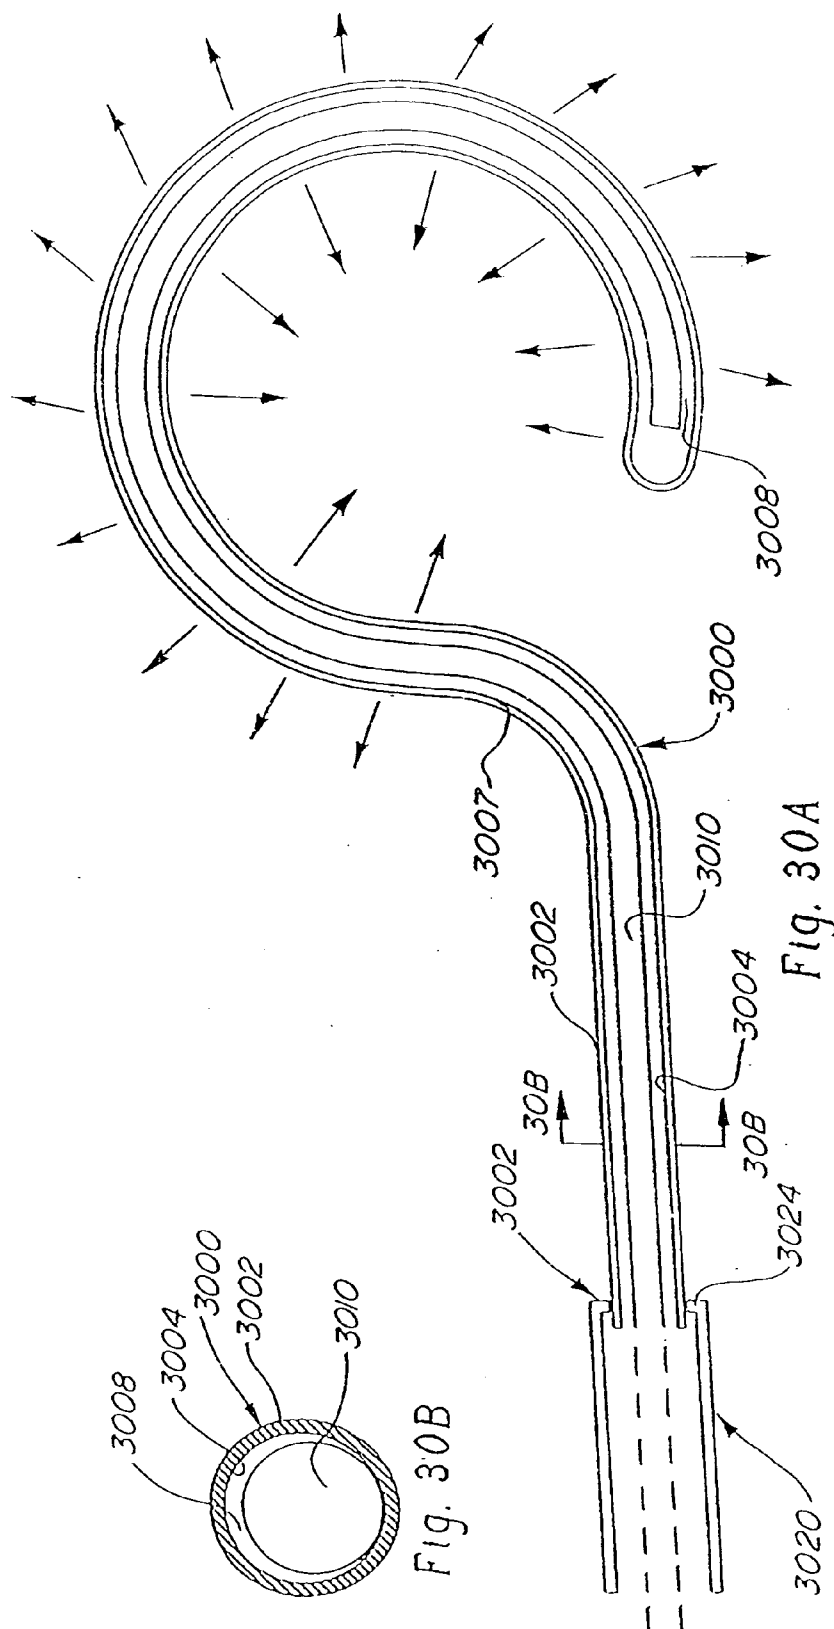


Fig. 26C









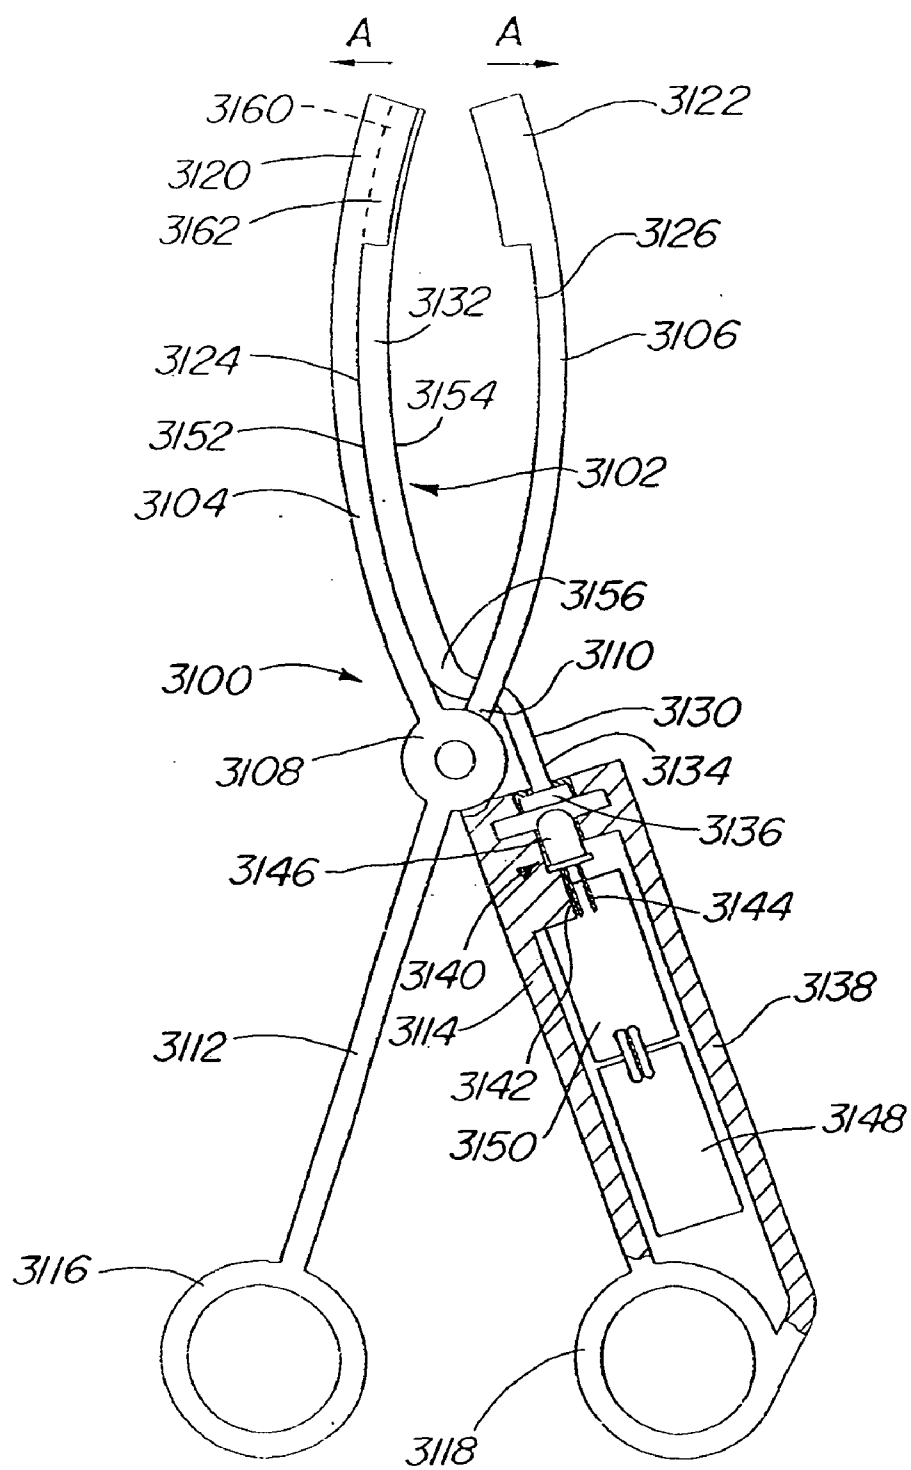


Fig. 31

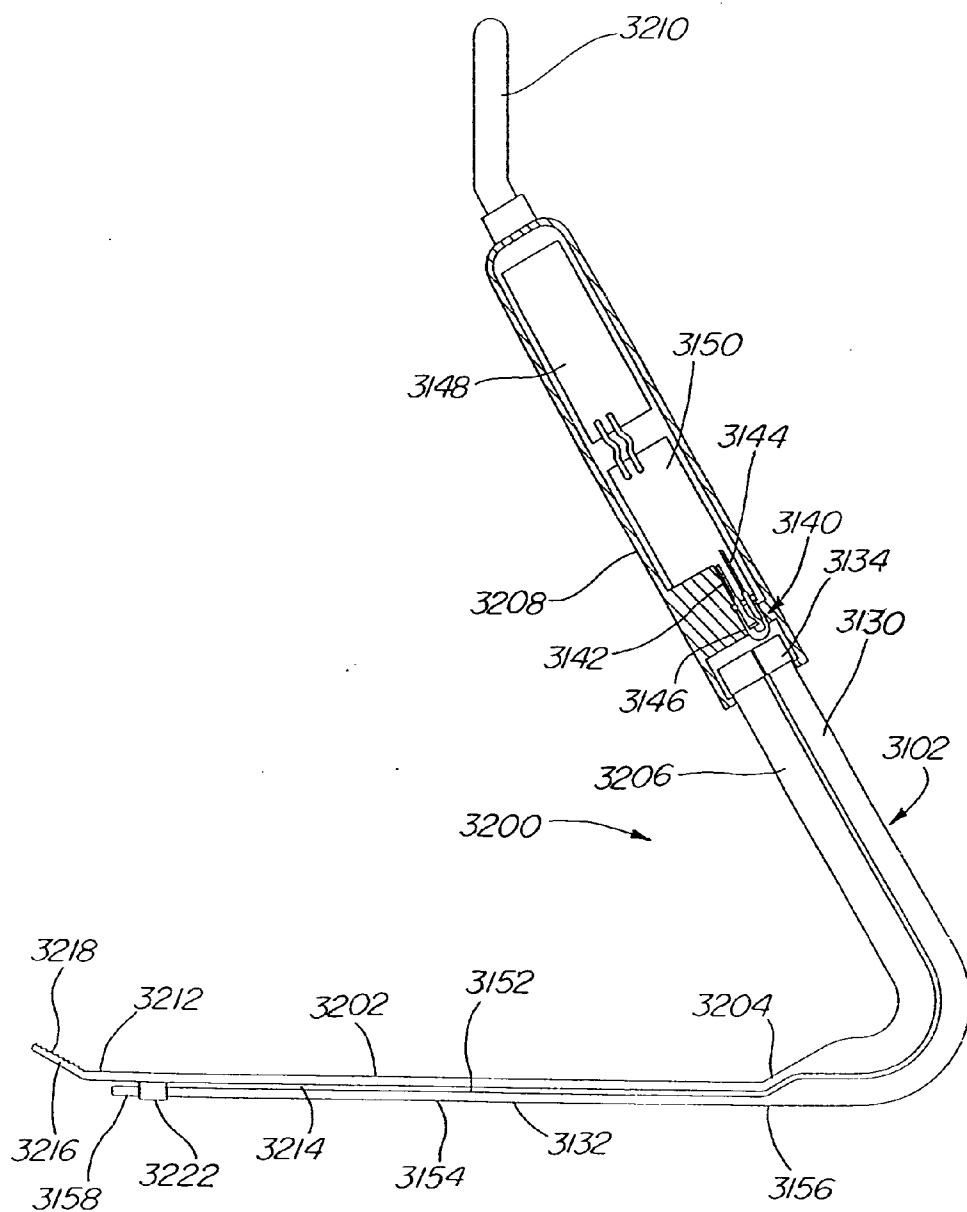


Fig. 32

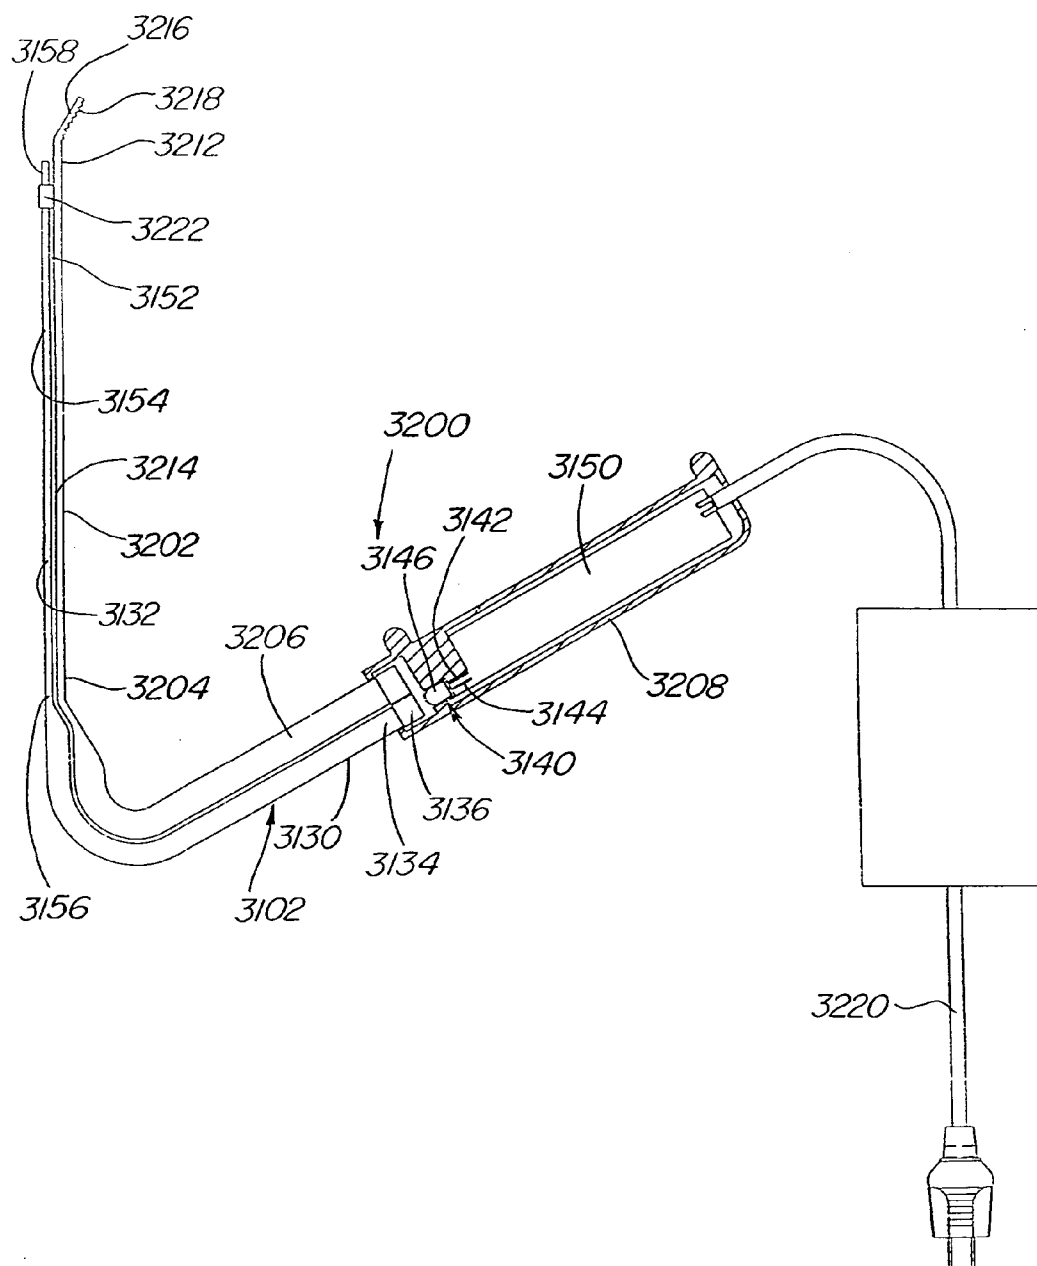


Fig. 33

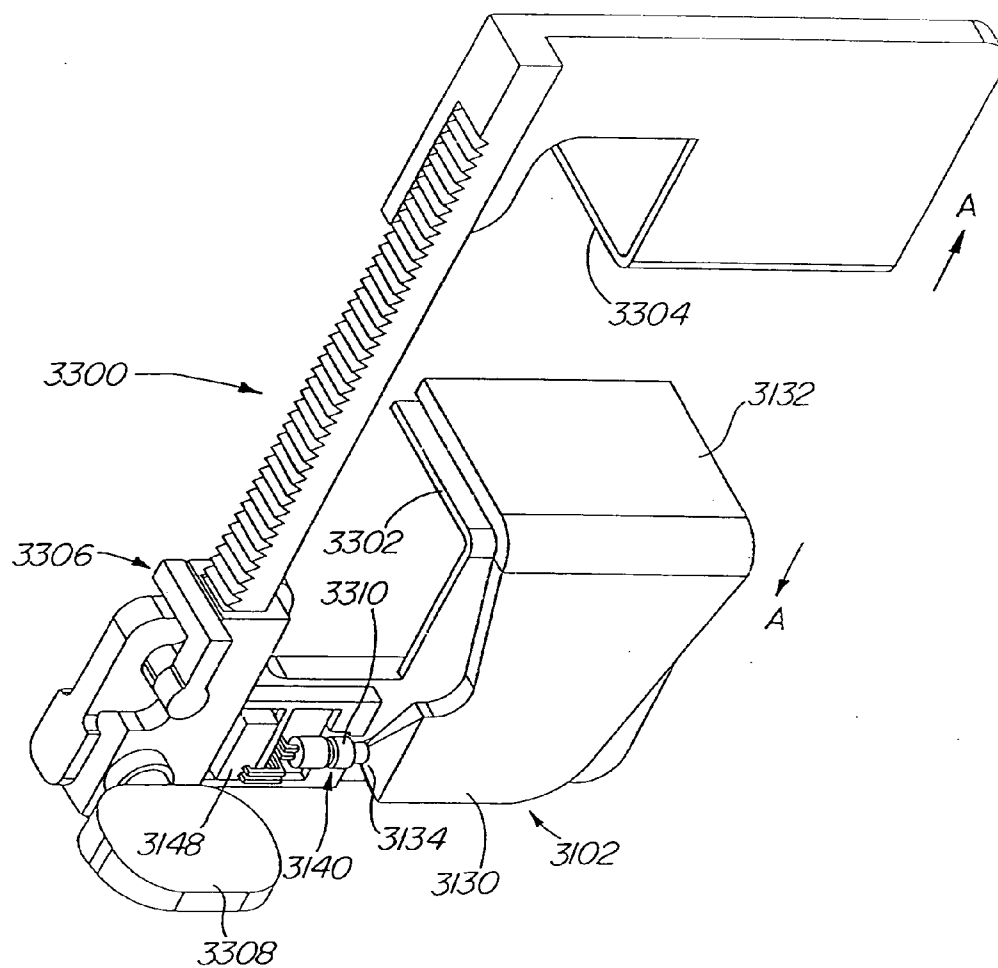


Fig. 34

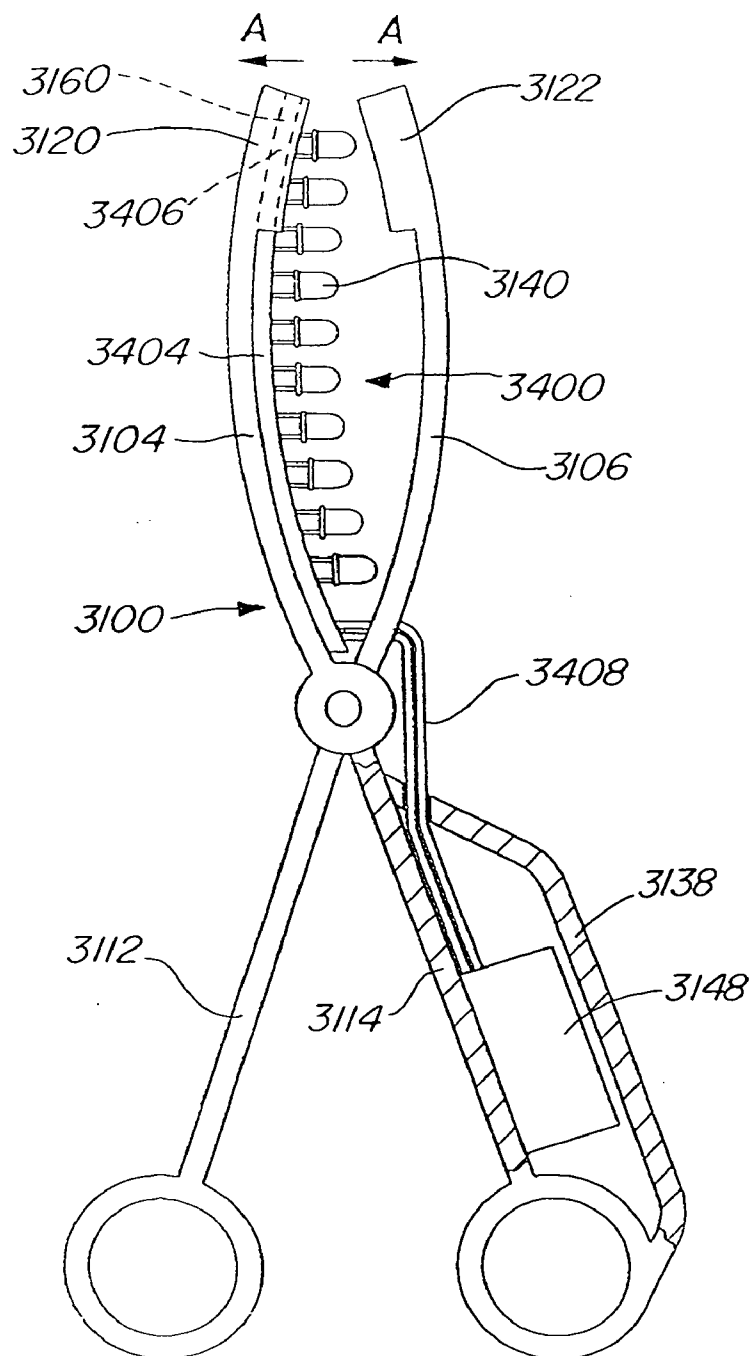


Fig. 35

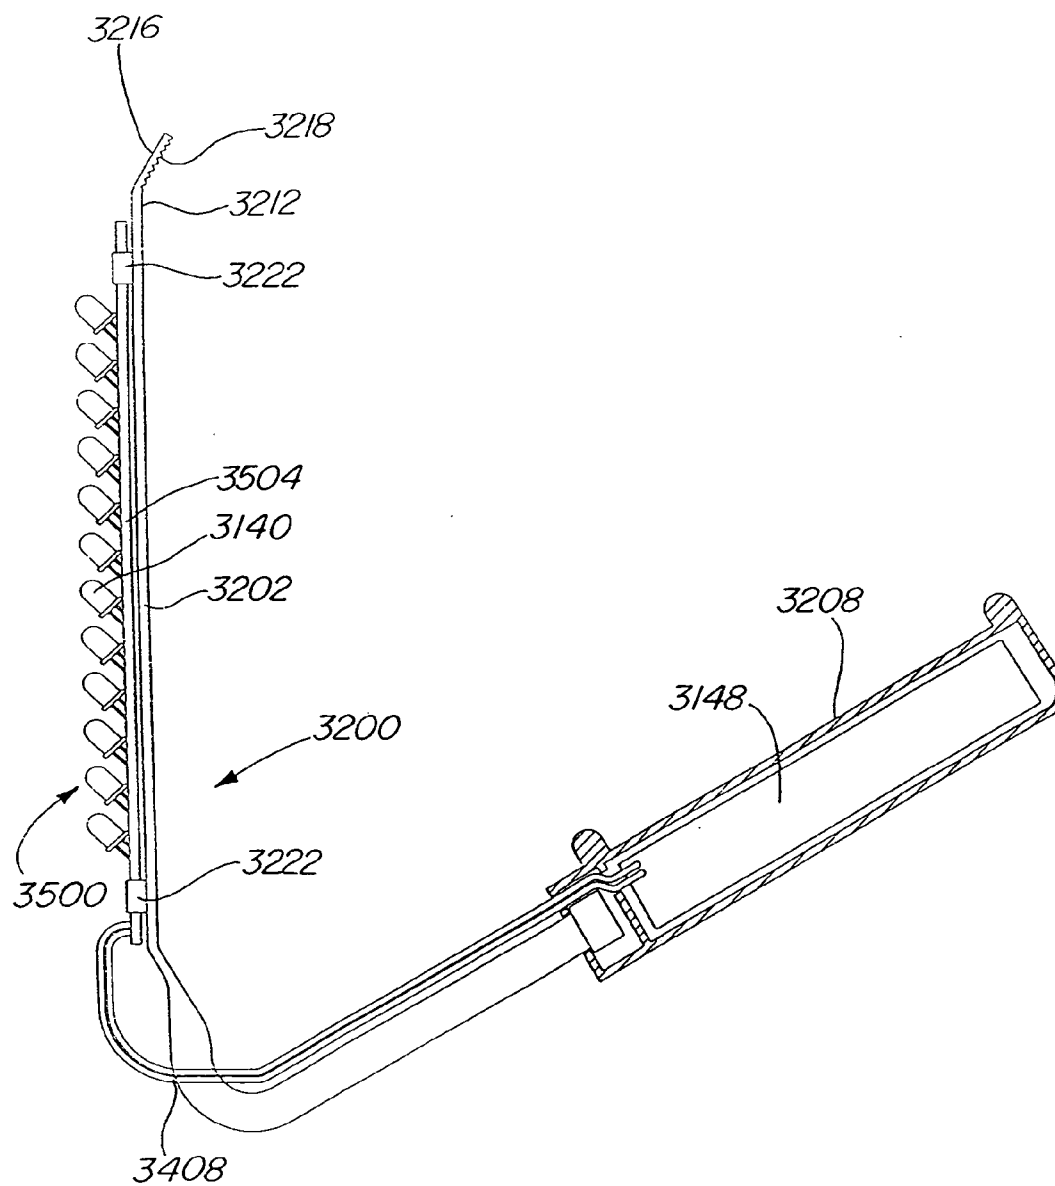


Fig. 36

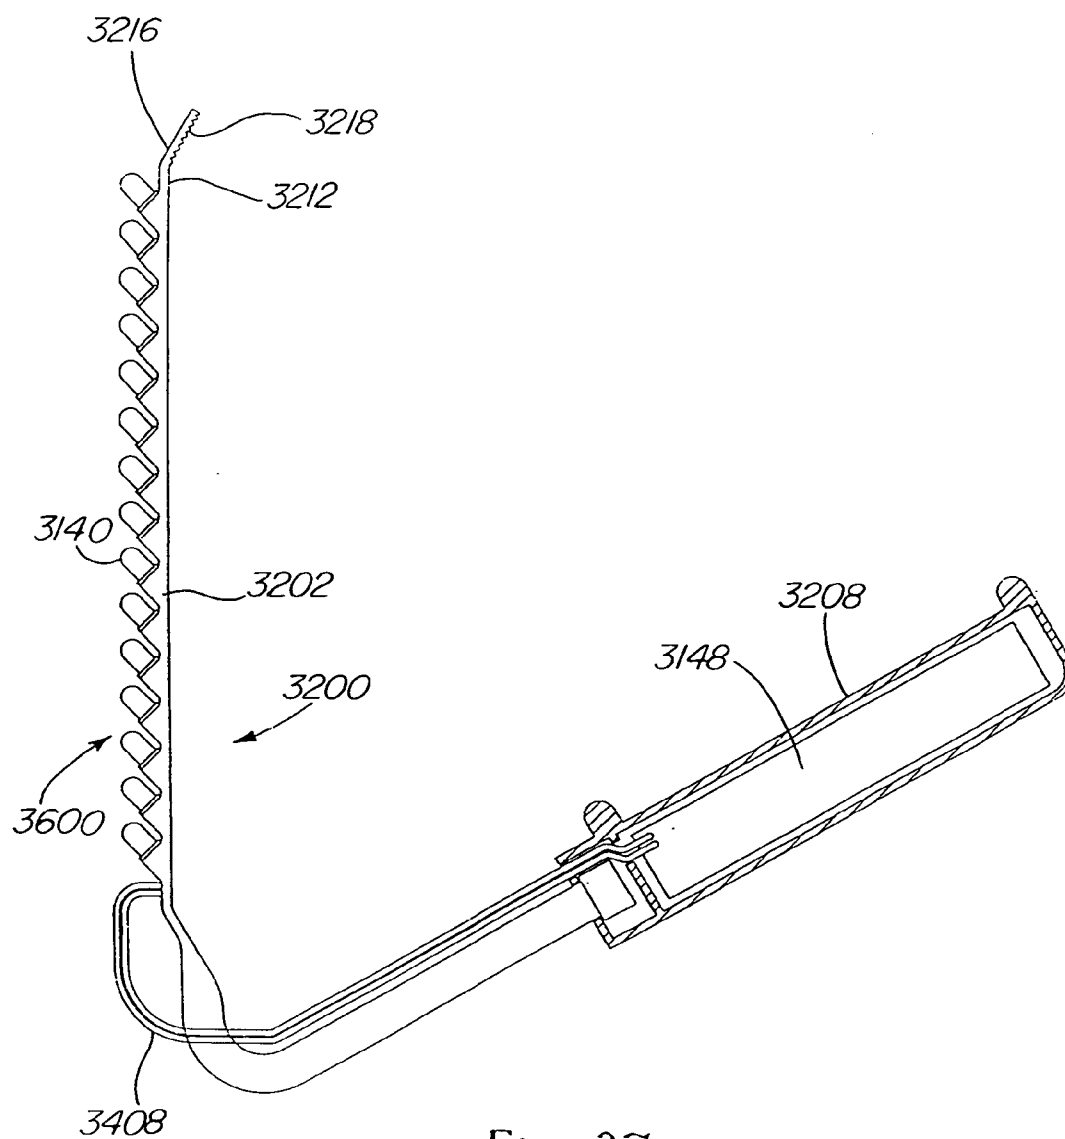


Fig. 37

ILLUMINATED SURGICAL RETRACTOR

RELATED APPLICATIONS

[0001] The present invention is a division of U.S. application Ser. No. 10/294,291, filed Nov. 14, 2002, which is a continuation-in-part of U.S. application Ser. No. 09/735,104, filed Dec. 12, 2000 (now U.S. Pat. No. 6,504,985), which is a continuation of U.S. application Ser. No. 09/120,406, filed Jul. 22, 1998 (now U.S. Pat. No. 6,185,356), which is a continuation-in-part of U.S. application Ser. No. 08/886,666, filed Jul. 2, 1997 (now abandoned). The contents of these applications are herein incorporated by reference.

FIELD OF INVENTION

[0002] The present invention relates generally to a surgical instrument that includes a light delivery system for providing illumination for the instrument.

BACKGROUND OF THE INVENTION

[0003] While light delivery systems are generally known, prior art light delivery systems are not easily adapted for use in connection with functional instruments such as surgical instruments of various types. In this respect, current light delivery systems do not provide optimal illumination for a variety of desired lighting conditions. Moreover, current light delivery systems are costly to replace, and are thus not well suited for conditions which necessitate that the light delivery system be disposable, such as where sterilization is desired.

[0004] The present invention overcomes these and other disadvantages of prior art light delivery systems.

SUMMARY OF THE INVENTION

[0005] According to the present invention, there is provided a surgical instrument including particularly a retractor having a light delivery system for providing illumination for the retractor.

[0006] In accordance with one aspect of the invention, the light delivery system is adapted for attachment to a surgical instrument.

[0007] In accordance with another aspect of the invention, the light delivery system is adapted for integration with a surgical instrument.

[0008] In accordance with another aspect of the invention, the light delivery system is disposable or reusable.

[0009] In accordance with another aspect of the invention, the light delivery system is suitably configured in numerous shapes and sizes.

[0010] In accordance with another aspect of the invention, the light delivery system is quickly and easily attached to and detached from an associated surgical instrument.

[0011] In accordance with another aspect of the invention, the light delivery system may include a light emitter that locally varies the intensity of emitted light and provides directional control of the emitted light.

[0012] In accordance with another aspect of the invention, the light delivery system may include an array of lights attached to a retractor blade or to a support in the shape of

an elongated blade that extends along the length of the retractor blade for illuminating the retractor blade along all or a portion of the length thereof.

[0013] Still other aspects and advantages of the invention will become apparent to those skilled in the art upon the reading and understanding of the following detailed description, accompanying drawings and appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] In the annexed drawings:

[0015] **FIG. 1** is an enlarged perspective view of a portion of the light emitter shown in **FIG. 4A**;

[0016] **FIG. 2** is an enlarged transverse section through the light emitter shown in **FIG. 1**;

[0017] **FIG. 3A** is an enlarged plan view of a portion of a light emitter, showing one form of pattern of light extracting deformities on the light emitter;

[0018] **FIGS. 3B-3D** are enlarged schematic perspective views of a portion of a light emitter showing other forms of light extracting deformities formed in or on the light emitter;

[0019] **FIG. 4A** is a perspective view of a light delivery system, wherein the light delivery system is attachable to a suction/blower device;

[0020] **FIG. 4B** is a perspective view of the light delivery system shown in **FIG. 4A**, as attached to the suction/blower device;

[0021] **FIG. 4C** is a perspective view of an alternative embodiment of the attachment means for the light delivery system;

[0022] **FIG. 5A** is a perspective view of a suction/blower device having an integrated light delivery system;

[0023] **FIG. 5B** is an enlarged cross-sectional view taken along line 5B-5B of **FIG. 5A**;

[0024] **FIG. 5C** is an alternative embodiment of the cross-sectional view taken along line 5B-5B of **FIG. 5A**;

[0025] **FIG. 6** is a perspective view of another type of suction/blower device having an integrated light delivery system;

[0026] **FIG. 7** is a perspective view of yet another type of suction/blower device having an integrated light delivery system;

[0027] **FIG. 8** is a perspective view of an electrosurgical pencil including the light delivery system of the present invention;

[0028] **FIG. 9A** is a perspective view of a transillumination tray including the light delivery system of the present invention;

[0029] **FIG. 9B** is a cross-sectional view taken along line 9B-9B of **FIG. 9A**, with a vein/artery located in the transillumination tray;

[0030] **FIG. 10A** is a perspective view of a stabilizer including an integrated light delivery system;

[0031] **FIG. 10B** is a side view of the stabilizer shown in **FIG. 10A**;

[0032] FIG. 11 is a perspective view of a plurality of retractors including a light delivery system;

[0033] FIG. 12 is a top view of a forceps including an integrated light delivery system;

[0034] FIG. 13 is a perspective view of a multi-purpose lighting device including a light delivery system;

[0035] FIG. 14 is a sectional view of the multi-purpose lighting device taken along line 14-14 of FIG. 13;

[0036] FIG. 15A is a perspective view of a lighting device including a light delivery system;

[0037] FIG. 15B is a sectional view of the lighting device taken along line 15-15 of FIG. 15A.

[0038] FIG. 16A is a perspective view of a “rope” lighting device;

[0039] FIG. 16B is a cross-sectional view of the lighting device taken along line 16-16 of FIG. 16A;

[0040] FIG. 17 is a top view of a trans-illuminating forceps including an attachable light delivery system;

[0041] FIG. 18 is a perspective view of a trans-illuminating retractor including an attachable light delivery system;

[0042] FIG. 19A is a perspective view of a spring-formed “rope” lighting device;

[0043] FIG. 19B is a cross-sectional view of the lighting device taken along line 19-19 of FIG. 19A;

[0044] FIG. 20A is a perspective view of a smoke evacuation tube having an integrated light delivery system;

[0045] FIG. 20B is a cross-sectional view of the smoke evacuation tube taken along line 20-20 of FIG. 20A;

[0046] FIG. 21A is a perspective view of a suction tube having an integrated light delivery system;

[0047] FIG. 21B is a cross-sectional view of the suction tube taken along line 21-21 of FIG. 21A;

[0048] FIG. 22A is a perspective view of a suction tube having an attachable light delivery system;

[0049] FIG. 22B is a cross-sectional view of the suction tube taken along line 22-22 of FIG. 22A;

[0050] FIG. 23A is a perspective view of a ring-shaped “rope” lighting device;

[0051] FIG. 23B is a cross-sectional view of the lighting device taken along line 23-23 of FIG. 23A;

[0052] FIG. 24A is a perspective view of a protective cover applied to a light distributor, in accordance with one embodiment of the present invention;

[0053] FIG. 24B is a cross-sectional view of the protective cover, taken along line 24B-24B of FIG. 24A;

[0054] FIG. 24C is an end view of the protective cover shown in FIG. 24A;

[0055] FIG. 24D is a cross-sectional view of the protective cover, taken along line 24D-24D of FIG. 24C;

[0056] FIG. 25A is a perspective view of a protective cover applied to a light distributor, in accordance with another embodiment of the present invention;

[0057] FIG. 25B is a cross-sectional view of the protective cover, taken along line 25B-25B of FIG. 25A;

[0058] FIG. 25C is an end view of the protective cover shown in FIG. 25A;

[0059] FIG. 25D is a cross-sectional view of the protective cover, taken along line 25D-25D of FIG. 25C;

[0060] FIG. 26A is a perspective view of a protective cover applied to a light distributor, in accordance with yet another embodiment of the present invention;

[0061] FIG. 26B is a cross-sectional view of the protective cover, taken along line 26B-26B of FIG. 26A;

[0062] FIG. 26C is an end view of the protective cover shown in FIG. 26A;

[0063] FIG. 26D is a cross-sectional view of the protective cover, taken along line 26D-26D of FIG. 26;

[0064] FIG. 27A is a cut-away view of a protective cover according to another embodiment of the present invention as applied to a light rod;

[0065] FIG. 27B is a cross-sectional view of the protective cover taken along line 27B-27B of FIG. 27A;

[0066] FIG. 28A is a cut-away view of a protective cover as applied to a light rod with attached retractor blade;

[0067] FIG. 28B is a cross-sectional view of the protective cover taken along line 28B-28B of FIG. 28A;

[0068] FIG. 29A is a cut-away view of a protective cover according to another embodiment of the present invention as applied to a rope light;

[0069] FIG. 29B is a cross-sectional view of the protective cover taken along line 29B-29B of FIG. 29A;

[0070] FIG. 30A is a cut-away view of a protective cover according to another embodiment of the present invention as applied to a ring light;

[0071] FIG. 30B is a cross-sectional view of the protective cover taken along line 30B-30B of FIG. 30A;

[0072] FIG. 31 is a plan view, partly in section, of a retractor including an attachable light delivery system;

[0073] FIG. 32 is a side elevation view, partly in section, of a retractor including an attachable light delivery system;

[0074] FIG. 33 is a side elevation view, partly in section, of a retractor including an attachable light delivery system;

[0075] FIG. 34 is a perspective view of a retractor including an attachable light delivery system;

[0076] FIG. 35 is a plan view, partly in section, of a retractor including an attachable light delivery system;

[0077] FIG. 36 is a side elevation view, partly in section, of a retractor including an attachable light delivery system; and

[0078] FIG. 37 is a side elevation view, partly in section, of a retractor including an attachable light delivery system.

DETAILED DESCRIPTION OF THE INVENTION

[0079] Referring now to the drawings wherein the showings are for the purposes of illustrating exemplary embodi-

ments of the invention only and not for purposes of limiting same, **FIGS. 4A and 4B** illustrate a suction/blower device **100** having an externally mounted light delivery system **2**. **FIG. 4A** shows a light delivery system **2** detached from suction/blower device **100**, while **FIG. 4B** shows light delivery system **2** attached to suction/blower device **100**. It should be appreciated that device **100** can take many forms including a surgical instrument or a conventional hand tool, as will be illustrated below.

[0080] Light delivery system **2** is generally comprised of a light emitter **10**, a light distributor **60**, and an attachment means **80**. Light emitter **10** focuses light of varying intensity in a predetermined direction or pattern. As a result, an associated viewing field is illuminated with a predetermined light characteristic. Light distributor **60** (e.g., optic light pipe) transmits light from a light source **90** to light emitter **10**. Attachment means **80** provides a support structure for coupling light delivery system **2** to device **100**. In this regard, attachment means **80** may include tabs, hooks or the like.

[0081] Light emitter **10** is comprised of a transparent or translucent light emitting material of any suitable type, including acrylic, polycarbonate, glass, epoxy, resins or the like. Emitter **10** may be substantially flat, suitably curved, may be formed of single or multiple layers, and may have different thicknesses and shapes. Moreover, emitter **10** may be flexible, or rigid, and may be made out of a variety of compounds. It should also be appreciated that emitter **10** may be hollow, filled with liquid, air, or be solid, and may have holes or ridges formed therein.

[0082] Means for directing light in desired directions and patterns, and providing various light intensity levels will now be described with reference to **FIGS. 1 and 2**, which show a section B of light emitter **10**. Light extracting formations including deformities, disruptions, coatings, patterns or lenses, may be provided on one or more selected light surface areas **20** on one or more sides **21** or edges **23** of emitter **10**. As used herein, the term light extracting formation is to mean any change in the shape or geometry of the surface and/or coating or surface treatment that causes a portion of the light to be emitted. **FIG. 3A** schematically shows one such light surface area **20** on which a pattern of light extracting deformities or disruptions **22** is provided. The pattern of light extracting deformities or disruptions **22** shown in **FIG. 3A** includes a variable pattern which breaks up the light rays such that the internal angle of reflection of a portion of the light rays will be great enough to cause the light rays either to be emitted out of emitter **10** through the side or sides on which the light extracting deformities or disruptions **22** are provided or reflected back through the emitter **10** and emitted out the other side thereof.

[0083] Light extracting formations can be produced in a variety of manners, for example, by providing a painted pattern, an etched pattern, a machined pattern, a printed pattern, a hot stamped pattern, a molded pattern, a curved surface (i.e., lens), a diffraction grating, a prismatic surface or the like on selected light surface areas **20** of emitter **10**. An ink or printed pattern may be applied for example by pad printing, silk screening, ink jet, heat transfer film process or the like. The deformities or disruptions may also be printed on a sheet or film which is used to apply the deformities or disruptions to light surface area **20**. This sheet or film may

become a permanent part of emitter **10** for example by attaching or otherwise positioning the sheet or film against one or both sides of the emitter light surface area similar to the sheet or film **24** shown in **FIGS. 1 and 2** in order to produce a desired effect.

[0084] By varying the density, opaqueness or translucence, shape, depth, color, area, index of refraction, diffraction grating, or type of light extracting formations, the light output of emitter **10** can be controlled. The light extracting formations may be used to control the direction and/or percent of light emitted from any area of emitter **10**. For instance, less and/or smaller size deformities **22** may be placed on emitter **10** in areas where less light output is wanted. Conversely, a greater percentage of and/or larger deformities **22** may be placed on emitter **10** in areas where greater light output is desired.

[0085] Varying the percentages and/or size of deformities **22** in different areas of emitter **10** is necessary in order to provide a uniform light output distribution. For example, the amount of light traveling through light emitter **10** will ordinarily be greater in areas closer to the light source than in other areas further removed from the light source. A pattern of light extracting deformities **22** may be used to adjust the light variances within the emitter, for example, by providing a denser concentration of light extracting deformities with increased distance from the light source thereby resulting in a more uniform light output distribution from light emitter **10**. The deformities **22** may also be used to control the output ray angle distribution of the emitted light to suit a particular application.

[0086] It should be appreciated that other light extracting formations are suitably provided in addition to or in lieu of the patterns of light extracting deformities **22** shown in **FIG. 3A**. As indicated above, other light extracting formations including lenses, prismatic surfaces, depressions or raised surfaces of various shapes using more complex shapes in a mold pattern may be molded, etched, stamped, thermoformed, hot stamped or the like into or on one or more surface areas (e.g., sides and edges) of the light emitter. Lenses (e.g., pillow lenses) can be used to provide diffuse light (by spreading light rays) and directional light (by focusing light rays). **FIGS. 3B and 3C** show areas **26** on which prismatic surfaces **28** or depressions **30** are formed in the emitter surface area, whereas **FIG. 3D** shows prismatic or other reflective or refractive surfaces **32** formed on the exterior of the emitter surface area. The prismatic surfaces, depressions or raised surfaces will cause a portion of the light rays contacted thereby to be emitted from the light emitter. Also, the angles of the prisms, depressions or other surfaces may be varied to direct the light in different directions to produce a desired light output distribution or effect, or to project a spot image or pattern of light to a specific area or region. Moreover, the reflective or refractive surfaces may have shapes or a pattern with no specific angles to reduce moire or other interference effects. In addition, the light rays emitted from the emitter may provide generally shadowless or homogenous light. In this regard, the emitter may simultaneously illuminate a 3-D object from a plurality of sides.

[0087] As best seen in the cross-sectional view of **FIG. 2**, a back reflector **34** (including trans reflectors) may be attached or positioned against one side of the panel member

14 of FIG. 1 using a suitable adhesive 36 or other method in order to improve light output efficiency of light emitter 10 by reflecting the light emitted from that side back through the panel for emission through the opposite side. Additionally, a pattern of light extracting deformities 22, 28, 30 and/or 32 may be provided on one or both sides of the light emitter in order to change the path of the light so that the internal critical angle is exceeded and a portion of the light is emitted from one or both sides of the light emitter. Moreover, a transparent film, sheet or plate member 24 may be attached or positioned against the side or sides of the emitter from which light is emitted using a suitable adhesive 36 or other method in order to produce a desired effect.

[0088] Member 24 may be used to further improve the uniformity of the light output distribution. For example, member 24 may be a colored film, a diffuser, or a label or display, a portion of which may be a transparent overlay that may be colored and/or have text or an image thereon.

[0089] If adhesive 36 is used to adhere the back reflector 34 and/or film 24 to the emitter, the adhesive is preferably applied only along the side edges of the emitter, and if desired the end edge opposite light transition areas, but not over the entire surface area or areas of the emitter because of the difficulty in consistently applying a uniform coating of adhesive to the panel. Also, the adhesive changes the internal critical angle of the light in a less controllable manner than the air gaps 40 (see FIG. 2) which are formed between the respective surfaces of the emitter and the back reflector 34 and/or member 24 when only adhered along the peripheral edges. Additionally, longer emitters are achievable when air gaps 40 are used. If adhesive were to be used over the entire surface, the pattern of deformities could be adjusted to account for the additional attenuation in the light caused by the adhesive.

[0090] The light emitter disclosed herein may be used for a great many different applications including for example LCD back lighting or lighting in general, decorative and display lighting, automotive lighting, dental lighting, phototherapy, photodynamic therapy, or other medical lighting, membrane switch lighting, and sporting goods and apparel lighting or the like. Also the emitter may be formed such that the deformities are transparent without a back reflector. This allows the emitter to be used such that the application is viewed through the transparent emitter.

[0091] The light that is transmitted by light distributor 60 to light emitter 10 may be emitted along the entire length of light emitter 10 or from one or more light output areas along the length of the panel as desired to produce a desired light output distribution to fit a particular application.

[0092] Light distributor 60 is a formed light conduit adapted to propagate light therethrough via internal reflection. In the embodiment illustrated in FIG. 4A and 4B, light distributor 60 takes the form of an optic light pipe. Light distributor 60 includes an interface 64 and a connecting member 62. Interface 64 interfaces light distributor 60 with light emitter 10. Connecting member 62 facilitates connection of light distributor 60 with light source 90 (described below). It should be appreciated that light distributor 60, light emitter 64, and light source 90 may be formed as one unitary member without interface 64 and connecting member 62.

[0093] Light source 90 may take many forms as will be discussed below. In the embodiment of the present invention

shown in FIGS. 4A and 4B, light source 90 is generally comprised of a generator 92 and a cable 94. Generator 92 may be, for example, a 300 Watt Xenon light source. Cable 94 includes a connecting member 96, which mates with connecting member 62 of light distributor 60.

[0094] It should be appreciated that light source 90 illustrated in FIGS. 4A and 4B is shown solely for the purpose of illustrating an embodiment of the present invention. In this respect, light source 90 may also be of other suitable types including, an arc lamp, an incandescent bulb (which also may be colored, filtered or painted), a lens end bulb, a line light, a halogen lamp, a light emitting diode (LED), a chip from an LED, a neon bulb, a fluorescent tube, a laser or laser diode, or any other suitable light source. For example, light source 90 may take the form of any of the types disclosed in U.S. Pat. Nos. 4,897,771 and 5,005,108, the entire disclosures of which are incorporated herein by reference. Additionally, the light source may be a multiple colored LED, or a combination of multiple colored radiation sources in order to provide a desired colored or white light output distribution. For example, a plurality of colored lights such as LEDs of different colors (red, blue, green) or a single LED emitting a selected spectrum may be employed to create white light or any other colored light output distribution by varying the intensities of each individual colored light.

[0095] Attachment means 80 is suitably molded as an integral part of light distributor 60 (FIG. 4A), attaches to both the light distributor and the associated device (FIG. 4C), or forms a part of device 100. In the embodiment shown in FIG. 4A and 4B, attachment means 80 is fixed to light distributor 60, wherein gripping means 84 are provided for attaching light delivery system 2 to device 100. Attachment means 80 allows light delivery system 2 to be easily and conveniently attached to and detached from suction/blower device 100. As a result, light delivery system 2 is easily replaced where sterilization is required.

[0096] In the embodiment shown in FIG. 4C, one form of attachment means 80 includes engagement means 82 and 84 for fixing light delivery system 2 to a device. In this respect, engagement means 82 are engageable with light distributor 60, while engagement means 84 are engageable with a portion of the device. It should be appreciated that engagement means 82 and/or engagement means 84 are suitably integral with light distributor 60 and the device, respectively. However, in the case where convenient replacement of light delivery system 2 is desired (e.g., when sterilization is required) engagement means 82 and/or engagement means 84 will preferably provide for convenient removal of light delivery system 2 from the device. For instance, in the embodiment shown in FIGS. 4A and 4B, engagement means 84 takes the form of a clamp, which allows for simple attachment and detachment of light delivery system 2 from device 100. It should be appreciated that engagement means 82 and 84 may take the form of other suitable fastening members including cables, snaps, clips, tabs, adhesives, and the like.

[0097] Device 100 includes a tube 70 having a tip portion 76. Tip portion 76 is comprised of a plurality of openings 78, which are in communication with tube 70. Light emitter 10 is suitably dimensioned to receive tip portion 76, when light delivery system 2 is attached to device 100 (FIG. 4B). It

should be noted that light emitter **10** is suitably formed to provide diffuse light in directions transverse to the longitudinal axis of device tip portion **76**, and to provide direct light in a direction generally parallel to the longitudinal axis of tip portion **76**. As indicated above, the direct light provides maximum illumination on the material being suctioned or blown. At the same time, the diffuse light provides sufficient, but not over bright, illumination of the area surrounding the material being suctioned or blown. As a result, the user's vision of the material being suctioned or blown is not impaired.

[0098] Other embodiments of the present invention will now be described with reference to **FIGS. 5-22**, which illustrate a variety of different surgical instruments and hand tools which are used in conjunction with the light delivery system of the present invention.

[0099] Referring now to **FIG. 5A**, there is shown a suction/blower device **101A**. Device **101A** is a surgical instrument typically used to remove material (e.g., fluid or tissue) from a surgeon's field of view. In this respect, device **101A** suction or blows the obscuring material. Device **101A** is generally comprised of a light emitter **110**, a light distributor **160** and air passageway(s) **170**. Light distributor **160** includes a connecting member **162** dimensioned to receive a mating connecting member **196** from cable **194**. Cable **194** is connected to a light source (not shown).

[0100] It is important to note that light distributor **160** not only carries light to light emitter **110**, but also provides a support structure for suction/blower device **101A**. In this respect, light distributor **160** includes a light distribution member **161**, which is constructed of a rigid material and formed into a suitable shape for a user to conveniently hold device **101A**. Light distribution member **161** transmits light and defines passageway(s) **170**. Passageway(s) **170** are generally tubular hollow channels formed along the length of light distributor **160**. **FIGS. 5B and 5C** illustrate two different embodiments for light distributor **160**. Passageway(s) **170** provides a conduit for air, or other gas or fluid. Light distributor **160** also includes an outer layer **163**. Outer layer **163** may take the form of a heat-shrunk film, coating or tubing. Outer layer **163** provides a protective layer for light distribution member **161**. Similarly, an inner layer (not shown) may line the inner surface of light distribution member **161**. The outer and inner layers protect the internal light propagation from impairment (e.g., blood or other materials that can cause light loss). It should be appreciated that light distributor **160** may be constructed of a plurality of walls of varying thickness. The walls may take the form of a film, coating or tubing. Moreover, the film, coating or tubing may extend along the full length of light distributor **160**, or only along a portion thereof.

[0101] A connector **172** is provided to receive a mating connector from a hose **174**. Hose **174** is connected to a vacuum generating means (not shown), where device **101A** is used for suction, or is connected to a blower means (not shown), where device **101A** is used for blowing. Light emitter **110** is located at the tip end of device **101A**, and surrounds passageway(s) **170**. Light emitter **110** is suitably formed to provide diffuse light in directions transverse to the longitudinal axis of device **101A**, and to provide direct light in a direction generally parallel to the longitudinal axis of device **101A**. In this way, the direct light provides maximum

illumination on the material being suctioned or blown. At the same time, the diffuse light provides sufficient, but not over bright, illumination of the area surrounding the material being suctioned or blown. As a result, the user's vision of the material being suctioned or blown is not impaired.

[0102] It should be appreciated that light distributor **160** and light emitter **110** form an integral part of the suction/blowing device **101A**, and thus eliminate the need for an external lighting device mounted to the suction/blowing device, a lighting device mounted elsewhere in an operating room, or a hand held lighting device.

[0103] **FIG. 6** illustrates an alternative embodiment of suction/blower device **101A**. Suction/blower device **101B** is similar in many respects to suction/blower device **101A**; however, light emitter **110** and light distributor **160** are disposable in this embodiment. In this respect, suction/blower **101B** is generally comprised of a light emitter **110**, a rigid body member **150**, a light distributor **160** having a fixed portion **160A** and a detachable portion **160B**, and a tube **170**. Body member **150** is constructed of a rigid material (e.g., plastic) and formed into a suitable shape for a user to conveniently hold device **101B**. Body member **150** surrounds fixed portion **160A** of light distributor **160**. Fixed portion **160A** includes a connecting member **162**. Fixed portion **160A** and detachable portion **160B** are connected at interface **166**. A hollow channel is formed along the length of portions **160A** and **160B** to provide tube **170**. Light emitter **110** is optionally detachable from light distributor **160** at interface **166**.

[0104] It should be appreciated that suction/blower device **101B** has the advantage of having a detachable light emitter **110** and light distributor **160**. This allows for convenient replacement of the portions of device **101B** which may require sterilization. As a result, only an inexpensive and small portion of device **101B** is disposed, thus saving the expense of replacing the entire suction/blower device **101B**.

[0105] **FIG. 7** illustrates another suction/blower device **102**. Device **102** is generally comprised of a light emitter **310**, a light distributor **360** and a tube **370**. Light distributor **360** has a connecting member **362** dimensioned to receive a mating connecting member **396** from cable **394**. Cable **394** is connected to a light source (not shown). It is important to note that light distributor **360** not only carries light to light emitter **310**, but also provides a support structure for suction/blower device **102**. In this respect, light distributor **360** is constructed of a rigid material and formed into a suitable shape for a user to conveniently hold device **102**. In addition, a hollow channel is formed along the length of light distributor **360** to provide tube **370**. Light distributor **360** is preferably formed of an inexpensive plastic material. Tube **370** includes a connector **372**, dimensioned to receive a mating connector from a hose **374**. Hose **374** is connected to a vacuum generating means (not shown), where device **102** is used for suction, or is connected to a blower means (not shown), where device **102** is used for blowing. Light emitter **310** is located at tip **368** of light distributor **360**, and surrounds tube **370**. Light emitter **310** is suitably formed to provide diffuse light in directions transverse to the longitudinal axis of tip **368**, and to provide direct light in a direction generally parallel to the longitudinal axis of tip **368**. In this way, the direct light provides maximum illumination on the material being suctioned or blown. At the same time, the

diffuse light provides sufficient, but not over bright, illumination of the area surrounding the material being suctioned or blown. As a result, the user's vision of the material being suctioned or blown is not impaired.

[0106] It should be appreciated that light distributor **360** is easily and conveniently attached to and detached from cable **394** and hose **374**. As a result, light delivery system **202** is easily replaced where sterilization is required.

[0107] **FIG. 8** illustrates an electrosurgical pencil device **103**. Electrosurgical pencil device **103** is used to destroy tissue by burning the tissue with a cauterizing tip. Device **103** is generally comprised of a light emitter **410**, a light distributor **460** and a cauterizing tip **470**. Light distributor **460** has a connecting member **462** dimensioned to receive a mating connecting member **496** from a cable **494**. Cable **494** is connected to a light source (not shown). It is important to note that light distributor **460** not only conducts light to light emitter **410**, but also provides a support structure for device **103**. In this respect, light distributor **460** is constructed of a rigid material and formed into a suitable shape for a user to conveniently hold device **103**. In addition, a channel is formed along the length of light distributor **460** to provide a passageway for electrical conductor **474**. Electrical conductor **474** connects to cauterizing tip **470**, to provide power thereto. Light emitter **410** is suitably formed to provide diffuse light in directions transverse to the longitudinal axis of tip **470**, and to provide direct light in a direction generally parallel to the longitudinal axis of tip **470**. In this way, the direct light provides maximum illumination on the material being cauterized. At the same time, the diffuse light provides sufficient, but not over bright, illumination of the area surrounding the material being cauterized. As a result, the user's vision of the material being cauterized is not impaired.

[0108] Referring now to **FIG. 9A**, there is shown a transillumination tray **104** for illuminating a bodily structure (e.g., vein, artery, finger, or small organ). Tray **104** is generally comprised of a light distributor **560** and a light emitter **510**. Light distributor **560** includes a connecting member **562** dimensioned to receive a mating connecting member **596** from a cable **594**. Cable **594** is connected to a light source (not shown). It is important to note that light distributor **560** not only conducts light to light emitter **510**, but also provides a support base for tray **104**. In this respect, light distributor **560** is constructed of a rigid material and formed into a suitable shape for receiving a generally U-shaped light emitter **510**. Light emitter **510** is shaped to receive a bodily structure, and thoroughly illuminate it. In this respect, light is emitted in all directions from the surface of light emitter **510**. **FIG. 9B** illustrates a cross-sectional view of tray **104** with a vein/artery **570** located on tray **104** for examination. Light emitter **510** illuminates an obstruction **572** in vein/artery **570**.

[0109] **FIGS. 10A and 10B** show a stabilizer device **105** including the light delivery system of the present invention. Stabilizer device **105** is generally comprised of light emitters **610A**, **610B** and **610C**, and a light distributor **660**. Light distributor **660** includes a central portion **670**, arm portions **672**, and connecting member **662**. Connecting member **662** is dimensioned to receive a mating connecting member **696** from a cable **694** (such as a light pipe). Cable **694** is connected to a light source (not shown). It is important to

note that light distributor **660** not only carries light to light emitters **610A**, **610B** and **610C**, but also provides a support structure for stabilizer device **105**. In this respect, light distributor **660** is constructed of a rigid material and formed into a suitable shape for a user to conveniently hold device **102**. Light emitters **610A**, **610B** and **610C** provide different lighting conditions. In this respect, light emitter **610A** may include a lens **611** for providing direct focused light on incision work area **I**. Light emitter **610B** is formed along the periphery defined by central portion **670** and arm portions **672**. Light emitter **610B** provides indirect diffuse light for incision work area **I**. Light emitter **610C** is formed along the lower edge (i.e., bottom) of central portion **670** and arm portions **672**. Light emitter **610C** may provide indirect diffuse light or glowing light for transillumination of a bodily structure.

[0110] It should be appreciated that in an alternative embodiment, stabilizer device **105** may be suitably arranged to attach (e.g., using a clip or other attachment means) to a metal stabilizer having the same general shape as stabilizer device **105**. In this regard, the strength of the material forming stabilizer device **105** may not be sufficient for a particular application. Accordingly, the metal stabilizer provides the desired strength.

[0111] Referring now to **FIG. 11**, there is shown retractor devices **106A**, **106B** and **106C** for retracting body structure **T** (which may include, bodily tissue, bone, organs or the like). Retractor device **106A** is comprised of a retractor member **770A** and a light delivery system **702A**. Retractor member **770A** includes a horizontal portion **772**, a vertical portion **774**, and a support member **776**. Support member **776** is arranged between horizontal portion **772** and a rigid mount (not shown). Light delivery system **702A** is mounted to the front face of vertical portion **774**, and includes a light distributor **760A** and a light emitter **710A**. Light distributor **760A** bends to follow the general shape of retractor member **770A**, and receives light from a light source (not shown). A suitable adhesive may be used to attach light delivery system **702A** to vertical portion **774**. Light emitter **710A** provides diffuse or directional light into the work area.

[0112] Retractor device **106B** is generally comprised of a retractor member **770B** and a light delivery system **702B**. Retractor member **770B** is a rake retractor having a plurality of prongs. Light delivery system **702B** includes an attachment member **780B**, light distributor **760B**, and light emitter **710B**. Attachment member **780B** has engagement means **784B** for attaching light delivery system **702B** to retractor member **770B**. Light distributor **760B** receives light from a light source (not shown). Light emitter **710B** includes a top portion **711B** and a side portion **713B**. Light emitter **710B** provides diffuse or directional light into the work area.

[0113] Retractor device **106C** is a rake retractor formed of a translucent material (e.g., plastic). Retractor device **106C** includes light distributor **760B** and light emitter **710C**. The light distributor **760B** and light emitter **710C** form the structural member of retractor device **106C**.

[0114] Referring now to **FIG. 12**, there is shown an illuminated forceps **107** having an integrated light delivery system. Forceps **107** is generally comprised of light distributors **860** and light emitters **810**. Each light distributor **860** includes a pair of arms **870** and a pair of connecting members **862**. Connecting members **862** connect to mating

connecting members **896** of light source cables **894**. Cables **894** connect to a light source (not shown). Light emitters **810** form the gripping surfaces of arms **870**, and provide focused or diffuse light. It should be appreciated that light emitters **810** may provide light for inspection, as well as transillumination. In the case of inspection, the light is used to inspect a work area before proceeding with a further operation. With regard to transillumination, the light may be used to examine a bodily structure. For instance, a vein may be transilluminated to identify a blood clot before clamping and cutting.

[0115] **FIGS. 13 and 14** show a multi-purpose lighting device **108**. Device **108** is generally comprised of a light delivery portion **902** and a handle portion **970**. Light delivery portion **902** includes a light distributor **960** and a light emitter **910A**. Handle portion **970** includes a central housing **972**, a connecting member **974** and an endcap **976**. As shown in **FIG. 14**, handle portion **970** houses a power source **950** (e.g., batteries), a light source **952** (e.g., light bulb), a reflector **954**, a light filter **956** and a switch means **978**. Reflector **954** reflects the light generated by light source **952**. Light filter **956** filters the reflected light before it exits through the open end of connecting member **974**. Light source **952** is turned on and off by switch means **978**. It should be noted that endcap **976** may include a contact member for completing a circuit for powering light source **952**.

[0116] It should be appreciated that connecting member **974** is dimensioned to receive a light distributor **960**, as best seen in **FIG. 14**. Accordingly, a variety of different types of light delivery portions **902** can be used in combination with handle portion **970**, wherein handle portion **970** provides a light source. For instance, light delivery portion **902** may include a light emitter **910A** in the form of an illuminated ball (**FIG. 13**). The surface of the ball may be covered with cotton to form an illuminated cotton swab suitable for obtaining a culture. Alternatively, light delivery portion **970** may include a light emitter **901B** in the form of an end light (**FIG. 14**), a light emitter **910C** in the form of an illuminated tongue depressor (**FIG. 14**), and a light emitter **910D** in the form of a transillumination tray (**FIG. 14**), similar to tray **104**, described above. Through the use of a variety of attachable light delivery portions **902**, device **108** serves a wide range of functions. The light delivery portion or a sleeve fitting over the light delivery portion may be disposable for convenient reuse.

[0117] It should be appreciated that the light delivery portions shown in **FIG. 13 and 14** are shown solely for the purpose of illustrating an embodiment of the present invention. In this respect, other types of light delivery portions, serving functions similar to those of the illustrated embodiments, are also contemplated. Moreover, it should be appreciated that the portable light source housed in the handle portion may be suitably replaced by a remote light source (e.g., see **FIG. 4A**), with a light pipe for conveying the light therefrom.

[0118] Referring now to **FIG. 15A**, there is shown a lighting device **109**, which functions as a flexible and formable "trouble light." Lighting device **109** is generally comprised of a light delivery portion **1002** and a handle portion **1070**. Light delivery portion **1002** includes a light distributor **1060** and a light emitter **1010**. Light distributor

1060 includes a connecting member **1062** for connecting light distributor **1060** to handle portion **1070**. It should be noted that in an embodiment of the present invention, light distributor **1060** is flexible. As seen in the cross-sectional view of **FIG. 15B**, light distributor **1060** is comprised of a light pipe member **1063**, a translucent or colored outer sheath **1061** and a formable wire **1065**. Formable wire **1065** allows light distributor **1060** to be bent or positioned in a suitable manner. Light emitter **1010** is detachable from light distributor **1060** to provide a variety of multi-purpose light emitters. In the embodiment shown in **FIG. 15A**, light emitter **1010** takes the form of a glowing tip, which is rotatable to alter the focus, size or light intensity of lighted area **1004**.

[0119] Handle portion **1070** is similar to handle portion **970**, described above. In this regard, handle portion **1070** includes a central housing **1072**, connecting member **1074**, endcap **1076**, and a switch means **1078**. Handle portion **1070** houses a light source and a power source. It should be appreciated that handle portion **1070** is suitably replaced by a light pipe **1090** of conventional light source. Light pipe **1090** includes a cable **1094** and a mating connecting member **1096**, which mates with connecting member **1062**.

[0120] Device **109** may optionally include a rigid support member **1050** to keep light distributor **1060** from changing positions. Support member **1050** includes an arm **1052** and clamp **1054**. Clamp **1054** engages with light distributor **1060**.

[0121] Referring now to **FIG. 16A**, there is shown a formable "rope" lighting device **1101**, which is similar to the lighting device shown in **FIGS. 15A and 15B**. Lighting device **1101** is generally comprised of a light distributor **1160** and light emitters **1110**. Light distributor **1160** includes a connecting member **1162** for connecting light distributor **1160** to a light source (not shown). It should be noted that in an embodiment of the present invention, light distributor **1160** is formed of a flexible optic light guide. As seen in the cross-sectional view of **FIG. 16B**, a protective outer sleeve **1170** covers light distributor **1160**. Outer sleeve **1170** is preferably formed of a translucent or transparent material. An optional formable wire **1150** extends between light distributor **1160** and outer sleeve **1170**, to permit lighting device **1101** to hold its shape once bent to a suitable position. Light emitters **1110** provide diffuse light D along length L, in addition to a focused beam of light B at the free end of lighting device **1101**. It should be noted that an optional lens may be provided at the free end of lighting device **1101** to focus light B from light emitters **1110** in a desired pattern.

[0122] Referring now to **FIG. 17**, there is shown a transilluminating pickup or forceps **1102** having an attachable light delivery system **1200**. Arrows A illustrate the direction in which forceps **1102** is movable. Light delivery system **1200** is generally comprised of a light distributor **1260** and a light emitter **1210**. Light distributor **1260** includes connecting members (not shown) for connecting light delivery system **1200** to a light source (not shown). Light distributor **1260** preferably takes the form of an optic light guide cable, which may be either rigid or flexible. Attachment members **1280** connect light distributor **1260** to forceps **1102**. In an embodiment of the present invention, attachment members take the form of clips. An opening **1270** is formed at the tip end of one arm of forceps **1102**. Opening **1270** is dimen-

sioned to receive light emitter **1210**. Light emitter **1210** provides light along length **L**. It should be appreciated that a second opening **1270** may be formed in the second arm of forceps **1102**, in order to receive a second light emitter.

[0123] Referring now to **FIG. 18**, there is shown a trans-illuminating retractor **1103** having an attachable light delivery system **1300**. Arrows **A** illustrate the directions in which retractor **1103** is movable. Light delivery system **1300** is generally comprised of a light distributor **1360** and a light emitter **1310**. Light distributor **1360** includes connecting members (not shown) for connecting light delivery system **1300** to a light source (not shown). Light distributor **1360** preferably takes the form of an optic light guide cable, which may be either rigid or flexible. A connector **1364** is provided to connect and interface light distributor **1360** with light emitter **1310**. Attachment members **1380** and **1388** connect light delivery system **1300** to forceps **1103**. In an embodiment of the present invention, attachment member **1380** takes the form of a clip. Light emitter **1310** extends along the inner surface of the retractor arms.

[0124] The retractor **1103** shown in **FIG. 18** includes a handle **1120** having opposite ends **1121** and **1122** and a gripping surface **1123** for contact with the hand of a user.

[0125] A retractor arm **1125** is in the shape of an elongated blade having a planar lengthwise dimension and a generally curved cross-sectional shape as shown. The distal end **1126** of the retractor arm **1125** is connected to the handle end **1122**. Extending between the distal end **1126** and the proximal end **1127** of the retractor blade **1125** is a blade inner surface **128**.

[0126] Light emitter **1310** is also in the shape of an elongated blade and extends along the length of the retractor blade **1125** for illuminating the retractor blade along all or a portion of the length thereof as shown. The retractor blade **1125** also acts as a back reflector for the light emitter blade **1310**, which has inner and outer surfaces **1129** and **1130** extending between its distal and proximal ends **1131** and **1132**.

[0127] Both the retractor blade **1125** and light emitter blade **1310** extend at an angle with respect to the handle **1120**. The distal end **1131** of the light emitter **1310** defines an illumination input end portion to which the connector **1364** is coupled to optically couple the light emitter to a light source for emission of the light from the light emitter to illuminate the retractor blade along all or a portion of the length thereof as schematically shown in **FIG. 18**.

[0128] **FIGS. 19A and 19B** illustrate a spring-formed “rope” lighting device **1104**. Lighting device **1104** is generally comprised of a light distributor **1460** and a light emitter **1410**. Light distributor **1460** interfaces with a self-contained miniature light source unit **1490**. Light source unit **1490** includes a light source (e.g., LED, incandescent light, laser diodes or the like) and a power source (e.g., a button battery cell or the like). The miniaturization and portability of light source unit **1490** allows lighting device **1104** to be arrangeable within a bodily structure, such as a body cavity. Alternatively, a remote light source may substitute for self-contained light source unit **1490**. It should be noted that in an embodiment of the present invention, light distributor **1460** is formed of a flexible optic light guide. As best seen in the cross-sectional view of **FIG. 19B**, a protective outer

sleeve **1470** covers light distributor **1460**. Outer sleeve **1470** is preferably formed of a translucent or transparent material. A spring **1450** extends between light distributor **1460** and outer sleeve **1470**. Spring **1450** may be formed of a material which allows it to return to its original shape after being compressed. Accordingly, spring **1450** has a “memory”, which allows for advantageous use of lighting device **1104**, as will be described below. Light emitter **1410** provides diffuse light **D** along length **L**.

[0129] It should be appreciated that while lighting device **1104** is shown with a generally round cross-sectional area, lighting device **1104** may have a cross-sectional area of other shapes, including a square and octagon.

[0130] Lighting device **1104** finds particularly advantageous use as a means for holding a cavity open during a surgical procedure. In this regard, lighting device **1104** is compressed (i.e., squeezed) and inserted through an opening into a cavity (e.g., a heart chamber). When the compressive force is removed from lighting device **1104**, the “memory” of spring **1450** causes the device to return to its original shape (i.e., spring open). As a result, the cavity opening is conveniently held open during further surgical procedures. It should be appreciated that spring **1450** may be suitably shaped to fit a particular application.

[0131] **FIGS. 20A and 20B** illustrate a smoke evacuation tube **1105** having an integrated light delivery system **1500**. Light delivery system **1500** is generally comprised of a light distributor **1560** and light emitters **1510**. Light distributor **1560** includes a connecting member **1562** for connecting light distributor **1560** to a light source (not shown). Light distributor **1560** is preferably formed of a flexible optic light guide. As best seen in the cross-sectional view of **FIG. 20B**, a protective outer sleeve **1574** covers light distributor **1560**. Outer sleeve **1574** is preferably formed of a translucent or transparent material. An optional formable wire **1550** extends between light distributor **1560** and outer sleeve **1574**, to allow smoke evacuation tube **1105** to hold its shape once arranged in a desired position. Light emitters **1510** provide diffuse light **D** along length **L**, in addition to a beam of light **B**. It should be noted that an optional lens may be provided at the free end of smoke evacuation tube **1105** to focus light **B** from light emitter **1510** in a desired pattern.

[0132] A hollow tube **1570** forms an evacuation chamber **1572** for removing smoke. As best seen in **FIG. 20B**, hollow tube **1570** surrounds and connects to outer sleeve **1574**. Hollow tube **1570** is preferably formed of a translucent or transparent material. It should be appreciated that in an alternative embodiment, sleeve **1574** and tube **1570** are suitably arranged adjacent to each other.

[0133] **FIGS. 21A and 21B** illustrate a suction tube **1106** having an integrated light delivery system **1600**. Light delivery system **1600** is generally comprised of a light distributor **1660** and light emitters **1610**. Light distributor **1660** includes a connecting member **1662** for connecting light distributor **1660** to a light source (not shown). Light distributor **1660** is preferably formed of a flexible optic light guide. As best seen in the cross-sectional view of **FIG. 21B**, a protective outer sleeve **1674** covers light distributor **1660**. Outer sleeve **1674** is preferably formed of a translucent or transparent material. An optional formable wire **1650** extends between light distributor **1660** and outer sleeve **1674**, to permit suction tube **1106** to hold its shape once

arranged in a desired position. Light emitters **1610** provide diffuse light D along length L, in addition to a focused beam of light B. It should be noted that an optional lens may be provided at the free end of suction tube **1106** to focus light B from light emitter **1610** in a desired pattern. A hollow tube **1670** forms a suction chamber **1672** for suctioning smoke and other materials. A nozzle **1676** is formed at the free end of hollow tube **1670**. As best seen in **FIG. 21B**, hollow tube **1670** is arranged adjacent and connected to outer sleeve **1674**. Hollow tube **1670** is preferably formed of a translucent or transparent material.

[0134] **FIGS. 22A and 22B** illustrate a suction tube **1107** having an attachable light delivery system **1700**. Light delivery system **1700** is generally comprised of a light distributor **1760** and light emitters **1710**. Light distributor **1760** includes a connecting member **1762** for connecting light distributor **1660** to a light source (not shown). Light distributor **1760** is preferably formed of a flexible optic light guide. As best seen in the cross-sectional view of **FIG. 22B**, a protective outer sleeve **1774** covers light distributor **1760**. Outer sleeve **1774** is preferably formed of a translucent or transparent material. An optional formable wire **1750** extends between light distributor **1760** and outer sleeve **1774**, to permit suction tube **1107** to hold its shape once arranged in a desired position. Light emitters **1710** provide diffuse light D along length L, in addition to a beam of light B. It should be noted that an optional lens may be provided at the free end of suction tube **1107** to focus light B from light emitter **1710** in a desired pattern.

[0135] A hollow tube **1770** forms a suction chamber **1772** for suctioning smoke and other materials. A nozzle **1776** is formed at the free end of hollow tube **1670**. Hollow tube **1770** is preferably formed of a translucent or transparent material. Attachment members **1780** connect hollow tube **1770** to outer sleeve **1774**. In one embodiment, attachment member **1780** takes the form of a clip having a pair of gripping members respectively dimensioned to receive hollow tube **1770** and sleeve **1774** (**FIG. 22A**). However, it should be appreciated that attachment member **1780** may take other suitable forms.

[0136] Referring now to **FIG. 23A**, there is shown a ring-shaped “rope” lighting device **1108**. Lighting device **1108** is generally comprised of a light distributor **1860** and light emitters **1810**. Light distributor **1860** includes a connecting member **1862** for connecting light distributor **1860** to a light source (not shown). It should be noted that in an embodiment of the present invention, light distributor **1860** is formed of a flexible optic light guide. As seen in the cross-sectional view of **FIG. 23B**, a protective outer sleeve **1870** covers light distributor **1860**. Outer sleeve **1870** is preferably formed of a translucent or transparent material. A custom-formed spring temper wire **1850** extends between light distributor **1860** and outer sleeve **1870**. Wire **1850** may be compressed and will return to its original shape. Light emitter **1810** provides light along length L. A fastener **1880** is provided to hold lighting device **1108** in a desired shape. Fastener **1880** may take many suitable forms, including a mechanical fastener or adhesive (e.g., glue). A secondary wire **1852** is provided along a portion of light distributor **1860**. Wire **1852** may be malleable or spring temper. Tabs **1882** hold lighting device **1108** in a desired location, and can also be used to retract tissue during a surgical procedure. In one embodiment, tabs **1882** take the form of adhesive tape.

[0137] As indicated above, a protective outer sleeve may cover a light transmitting member (e.g., light distributor or light emitter). The purpose of this protective cover is to prevent (1) contaminants (such as blood, body tissue, dirt, oil, grease, paint, etc.); (2) other components (such as adhesive pads, labels, hooks, etc.); or (3) any other material or structure that can cause attenuation, from directly contacting the light transmitting member and preventing proper operation thereof. In this regard, the protective cover allows light to pass through the light transmitting member with minimal disturbance to internal reflection of light traveling therethrough. When contaminants or components are in direct contact with the light transmitting member, they interfere with the proper internal reflection within the light transmitting member. In particular, the angle of reflection of light traveling through the light transmitting member is changed. In the case where there is no air gap, or virtually no air gap between the contaminant/components and the surface of the light transmitting member, optical energy of the light propagating through the light transmitting member (e.g., originating from a 300 Watt light source) is absorbed by the contaminant. As a result, the temperature of the contaminant will increase, possibly to an undesirable level.

[0138] It should be noted that the term “cover” as used herein refers to materials providing a film, skin, boundary layer, coating, and the like. Specific examples of suitable materials are discussed below.

[0139] Referring now to **FIGS. 24A-24D**, there is shown a first exemplary embodiment of the protective cover. Protective cover **2400** surrounds a light transmitting member **2410** (e.g., a flexible or rigid light pipe). As best seen in **FIGS. 24B-24D**, an air interface or gap **2408** is maintained between light transmitting member **2410** and cover **2400**. It should be appreciated that the air interface or gap may be microscopic (e.g., a couple of microns) to avoid interference with internal reflection. In this regard, reflections occur at the interface of light transmitting member **2410** and air gap **2408**. Cover **2400** may be applied to light transmitting member **2410** in a variety of suitable ways, including but not limited to molding, vacuum forming, heat shrinking, and the like.

[0140] **FIGS. 25A-25D** illustrate another embodiment of the protective cover. Protective cover **2500** is generally comprised of a first cover portion **2500A** and a second cover portion **2500B**, which surround light transmitting member **2510**. As best seen in **FIGS. 25B-25D**, an air interface or gap **2508** is maintained between light transmitting member **2510** and cover **2500**. Cover portions **2500A** and **2500B** are bonded together at interface **2502** to form a unitary protective cover **2500** (**FIG. 25C**). For instance, glue, a heat seal, or the like are suitable for bonding the cover portions **2500A**, **2500B**.

[0141] In the embodiment shown in **FIGS. 26A-26D**, the cover takes the form of a coating **2600** that is applied to the surface of light transmitting member **2610**. Coating **2600** provides an appropriate index of refraction to maintain a desired internal reflection. The coating **2600** may take many suitable forms, including but not limited to optical coatings with an appropriate index of refraction, and Teflon®. It will be appreciated that in this embodiment there is no air interface or gap.

[0142] The protective cover may be comprised of materials taking a number of suitable forms, including but not

limited to glass, plastic, shrink film (e.g., Reynolon® shrink film packaging), thin-wall PVC heat shrinkable tubing, metal (e.g., aluminum), cardboard, and the like. The wall thickness of the shrinkable tubing is typically in the range of 0.0002 inches to 0.012 inches. Suitable shrinkable tubing is available from Advance Polymers, Incorporated and RJI International Corporation. Where a heat shrinkable tubing is used, the tubing is fit over the light transmitting member and heat is applied, to shrink the tubing around the light transmitting member.

[0143] It should be appreciated that the protective cover may be formed of a translucent, transparent, opaque, or reflective material, or combinations thereof. Thus, a lighting device may include a protective cover that allows some portions of the light transmitting member to emit light or “glow”, while preventing other portions of the light transmitting member from emitting light or “glowing”. For example, the protective cover may be suitably configured with an opaque section corresponding to one side of a light transmitting member, and with a transparent or translucent section corresponding to the other side of the light transmitting member. In addition, a reflective material may be used as a back-deflector to reflect light as it is traveling through the light transmitting member. Furthermore, it should be appreciated that the protective cover may be formed of a material which diffuses light passing there-through. The protective covering may be formed of a material that is generally rigid or generally flexible. Some materials may have a “memory”, so that when the protective cover is manually bent and then released, it does not retain its deformed state. Other materials may not have a “memory” and thus will not spring back to their original shape 10 after deformation. It should be noted that materials lacking a memory can be effectively used as a means for positioning and supporting a generally flexible light transmitting member.

[0144] Referring now to FIGS. 27A and 27B, there is shown a protective cover 2700 according to another embodiment of the present invention, as applied to a light transmitting member 2710. Protective cover 2700 has a generally tubular shape, and includes an outer surface 2702 and an inner surface 2704. In addition, protective cover 2700 has a closed end 2705 and an open end 2706, with a central body portion 2707 extending therebetween. Closed end 2705 covers the distal end of light transmitting member 2710. Open end 2706 is dimensioned to receive a connector member 2720, which is described below. An air interface or gap 2708 is maintained between protective cover 2700 and light transmitting member 2710.

[0145] In the embodiment shown in FIGS. 27A and 27B, light transmitting member 2710 takes the form of a “light rod” which emits light at the distal end of the light transmitting member. In this respect, light emitters form a part of the light transmitting member 2710, along a portion of the distal end, to emit light in a manner appropriate for a particular application.

[0146] Connector member 2720 is attached to light transmitting member 2710, and provides an interface 2722 for attaching protective cover 2700. Interface 2722 includes a generally cylindrical engagement wall 2724 and a circular flange 2726. In an embodiment, the outer surface of engagement wall 2724 mates with inner surface 2704 of protective

cover 2700. For instance, mating threads may be formed on the outer surface of engagement wall 2724 and inner surface 2704. Alternatively, the outer diameter of engagement wall 2724 may be dimensioned to press-fit within protective cover 2700. Circular flange 2726 acts as a stop to prevent over-tightening of connector member 2720 within protective cover 2700. In this respect, the front surface of circular flange 2726 engages with the front surface of open end 2706 of protective cover 2700.

[0147] Protective cover 2700, in cooperation with connector member 2720, seals a portion of light transmitting member 2710 from contact with contaminants. In an embodiment, the portion of the light transmitting member 2710 protected from contaminants will include a portion that emits light on a work area, and is the portion most likely to make contact with contaminants. Protective cover 2700, in combination with connector member 2720, encloses a portion of light transmitting member 2710.

[0148] FIGS. 28A and 28B show a protective cover 2800 that surrounds a light transmitting member 2810, and takes the same form as protective cover 2700. In this regard, protective cover 2800 has a generally tubular shape, and includes an outer surface 2802 and an inner surface 2804. In addition, protective cover 2800 has a closed end 2805 and an open end 2806, with a central body portion 2807 extending therebetween. Closed end 2805 covers the distal end of light transmitting member 2810. Open end 2806 is dimensioned to receive a connector member 2820, which is described below. An air interface or gap 2808 is maintained between protective cover 2800 and light transmitting member 2810.

[0149] In the embodiment shown in FIGS. 28A and 28B, light transmitting member 2810 also takes the form of a “light rod” which emits light at a distal end thereof.

[0150] Connector member 2820 is attached to light transmitting member 2810, and provides an interface 2822 for attaching protective cover 2800. Interface 2822 includes a generally cylindrical engagement wall 2824 and a circular flange 2826. In an embodiment, the outer surface of engagement wall 2824 mates with inner surface 2804 of protective cover 2800. Circular flange 2826 acts as a stop to prevent over-tightening of connector member 2820 within protective cover 2800. In this respect, the front surface of circular flange 2826 engages with the front surface of open end 2806 of protective cover 2800.

[0151] In the embodiment shown in FIGS. 28A and 28B, an attachment member 2850 attaches an accessory device 2860 to the lighting device. Attachment member 2850 can take a variety of suitable forms, including adhesive tape, Velcro fasteners, clips, hooks, tabs, clamps, snaps and the like. Moreover, it should be understood that attachment member 2850 may be an integral part of protective cover 2800. In this regard, protective cover 2850 may suitably include molded clips, hooks, tabs or the like, for attachment of an accessory device. Accessory device 2860 can also take a variety of suitable forms, including a medical instrument. In FIGS. 28A and 28B, accessory device 2860 takes the form of a retractor blade.

[0152] Since attachment member 2850 is separated from light transmitting member 2810 by protective cover 2800 and air interface or gap 2808, it does not interfere (or minimizes interference) with the propagation of light

through light transmitting member **2810** via internal reflection. Consequently, attachment member **2850** does not cause the same problems that are caused by contaminants in direct contact with light transmitting member **2810**.

[0153] FIGS. 29A and 29B show a protective cover **2900** that is similar in many respects to protective covers **2700** and **2800**, described above. Protective cover **2900** surrounds a light transmitting member **2910**. In this regard, protective cover **2900** has a generally tubular shape, and includes an outer surface **2902** and an inner surface **2904**. In addition, protective cover **2900** has a closed end **2905** and an open end **2906**, with a central body portion **2907** extending therebetween. Closed end **2905** covers the distal end of light transmitting member **2910**, and includes an optional lens **L** for focusing the light emitted therethrough in a desired pattern. Open end **2906** is dimensioned to receive a connector member **2920**, which is described below. An air interface or gap **2908** is maintained between protective cover **2900** and light transmitting member **2910**.

[0154] In the embodiment shown in FIGS. 29A and 29B, light transmitting member **2910** also takes the form of a formable rope light which emits light at the distal end thereof. Light transmitting member **2910** is generally flexible. Accordingly, a malleable wire **W** is provided to hold the shape of light transmitting member **2910** in a desired orientation. Since light transmitting member **2910** is generally flexible, protective cover **2900** is also formed of a flexible material in this embodiment of the invention. For instance, protective cover **2900** may be formed of a flexible PVC material, which will flex along with light transmitting member **2910**.

[0155] Connector member **2920** is bonded to light transmitting member **2910**, and provides an interface **2922** for attaching protective cover **2900**. Interface **2922** includes a generally cylindrical engagement wall **2924** and a circular flange **2926**. In an embodiment, the outer surface of engagement wall **2924** mates with inner surface **2904** of protective cover **2900**. Circular flange **2926** acts as a stop to prevent over-tightening of connector member **2920** within protective cover **2900**. In this respect, the front surface of circular flange **2926** engages with the front surface of open end **2906** of protective cover **2900**.

[0156] Referring now to FIGS. 30A and 30B, there is shown a protective cover **3000** that surrounds a light transmitting member **3010**, and takes a form similar to protective covers **2700**, **2800** and **2900**. In this regard, protective cover **3000** has a generally tubular shape, and includes an outer surface **3002** and an inner surface **3004**. In addition, protective cover **3000** has a closed end **3005** and an open end **3006**, with a central body portion **3007** extending therebetween. Closed end **3005** covers the distal end of light transmitting member **3010**. Open end **3006** is dimensioned to receive a connector member **3020**, which is described below. An air interface or gap **3008** is maintained between protective cover **3000** and light transmitting member **3010**.

[0157] In the embodiment shown in FIGS. 30A and 30B, light transmitting member **3010** takes the form of a generally rigid "ring light" which emits light at a distal end thereof.

[0158] Connector member **3020** is attached to light transmitting member **3010**, and provides an interface **3022** for attaching protective cover **3000**. Interface **3022** includes a

generally circular engagement wall **3024**. In an embodiment, the inner surface of engagement wall **3024** mates with outer surface **3002** of protective cover **3000**.

[0159] Referring now to FIG. 31, there is shown an illuminated surgical retractor **3100** having an attachable light delivery system **3102**. Retractor **3100** may include a pair of retractor arms **3104**, **3106** pivotally connected together at their distal ends **3108**, **3110**. Attached to their distal ends are respective handle portions **3112**, **3114** which when moved toward one another, cause the retractor arms **3104**, **3106** to move in the direction of the arrows **A**. Each handle portion may include a gripping surface **3116**, **3118** intermediate its ends for gripping by the hand of a user.

[0160] Retractor arms **3104**, **3106** may be in the shape of elongated blade portions each having proximal ends **3120**, **3122** remote from their distal ends and from their handle portions. Extending between the distal and proximal ends of each retractor blade is a blade inner surface **3124**, **3126**.

[0161] Light delivery system **3102** is generally comprised of a light distributor **3130** and a light emitter **3132**. Light distributor **3130** may take the form of an optical light guide cable.

[0162] The distal end **3134** of light distributor **3130** may be removably connected by connecting member **3136** to housing **3138** integral with one of the handle portions **3112**, **3114**. Housing **3138** may contain a light source **3140** which preferably comprises a solid-state light source (e.g., a light emitting diode (LED) including an organic light emitting diode (OLED) and a polymer light emitting diode (PLED)) but may also comprise an incandescent lamp or halogen lamp if desired.

[0163] Housing **3138** may be made of metal or other suitable heat conductive material to provide a heat sink for light source **3140** which may be thermally coupled to the housing by providing contact between the housing and one of the light source leads **3142**, **3144** and also with the body **3146** of the light source as schematically shown in FIG. 31.

[0164] A power source **3148**, which may be a battery or fuel cell that is replaceable or rechargeable, may also be housed within housing **3138**. The light source leads **3142**, **3144** may be connected to a printed circuit board **3150** within housing **3138** which may act as an interface between light source **3140** and power source **3148**.

[0165] Light emitter **3132** may either be a flexible or rigid transparent light guide, and may have a gradient pattern of printed dots or light extracting deformities on at least one surface thereof for causing light to be emitted from at least a portion of the light guide in the manner previously described in connection with other disclosed embodiments. Light emitter **3132** may also be in the shape of an elongated blade extending along the length of one of the retractor blades **3104** for illuminating the retractor blade **3104** along all or a portion of the length thereof. The light extracting deformities may also be arranged to direct light away from a user's eyes and toward a viewing area in proximity of the retractor blade **3104**.

[0166] Both the retractor blade **3104** and light emitter blade **3132** may extend at an angle with respect to the associated handle portion **3112**. The connecting member **3136** of light distributor **3130** defines an illumination input

end portion which may be optically coupled to light source **3140** for optically coupling the light emitter **3132** to the light source.

[0167] Retractor blade **3104** may also act as a back reflector for light emitter blade **3132** which has inner and outer surfaces **3152**, **3154** extending between its distal and proximal ends **3156** and **3158**. A slot or opening **3160** may be provided in the proximal end **3162** of retractor blade **3104** for sliding receipt of the proximal end **3120** of light emitter **3132**. It should be appreciated that a second slot or opening may also be formed in the tip of the other retractor blade **3106** in order to receive a second light emitter if desired.

[0168] FIGS. 32 and 33 show other illuminated surgical retractors **3200** having an attachable light delivery system **3102** similar to the light delivery system shown in FIG. 31. However, in these embodiments, the retractor **3200** only includes one elongated retractor blade **3202**. Extending at an acute angle from the distal end **3204** of retractor blade **3202** is an end mount **3206**. End mount **3206** may be used to removably attach retractor blade **3202** to a handle portion or other support **3208** which may have a mounting post **3210** protruding therefrom as shown in FIG. 32.

[0169] Extending between the distal and proximal ends **3204** and **3212** of retractor blade **3202** is a blade inner surface **3214**. An angled or hooked tip **3216** may be provided at the proximal end **3212** of retractor blade **3202** for retaining or gripping tissue. Tip **3216** may also have serrations **3218** as shown.

[0170] Light delivery system **3102** is generally comprised of light distributor **3130** and light emitter **3132**. Light distributor **3130** may take the form of an optical light guide cable having its distal end **3134** removably attached to one end of support **3208** which may house light source **3140** for directing light into the light distributor **3130** in the manner previously described. Support **3208** may also provide a heat sink for light source **3140** in a manner similar to that shown in FIG. 31, and may house a power source **3148** such as a battery or fuel cell that is replaceable or rechargeable. Alternatively light source **3140** may be powered by providing the retractor **3200** with a power cord **3220** as schematically shown in FIG. 33 for plugging into an electrical outlet (not shown). In either case, the leads **3142** and **3144** of light source **3140** may be connected to a printed circuit board **3150** within support **3208** which may act as an interface between the light source and the power source.

[0171] Connecting member **3136** of light distributor **3130** defines an illumination input end portion which may be optically coupled to light source **3140** for supplying light from the light source to light emitter **3132**. Light emitter **3132** may also be in the shape of an elongated blade extending along the length of retractor blade **3202**, and may either be a flexible or rigid transparent light guide. A gradient pattern of printed dots or light extracting deformities may be provided on at least one surface of light emitter **3132** for causing light to be emitted from at least a portion thereof for illuminating retractor blade **3202** along all or a portion of the length thereof. Also the light extracting deformities may be arranged to direct light away from a user's eyes and toward a viewing area in proximity of the retractor blade.

[0172] Retractor blade **3202** may act as a back reflector for light emitter blade **3132** which has inner and outer surfaces

3152 and **3154** extending between its distal and proximal ends **3156** and **3158**. Suitable attachment members such as clips **3222** may be used to removably attach light emitter blade **3132** to retractor blade **3202**.

[0173] FIG. 34 shows another illuminated surgical retractor **3300** including a pair of opposed retractor blades **3302** and **3304** having a ratchet or other rod type connection **3306** therebetween for allowing the retractor blades to be moved in the direction of the arrows A upon turning a knob **3308** or the like. One or both retractor blades **3302** and **3304** may be illuminated by a light delivery system **3102** similar to the type previously described, including a light distributor **3130** having an illumination input end portion **3134** that is optically coupled to a light source **3140** and a light emitter **3132** that may either be a flexible or rigid transparent light guide and may have a gradient pattern of printed dots or light extracting deformities on at least one surface thereof for causing light to be emitted from at least a portion of the length thereof. Light emitter **3132** may be in the shape of an elongated blade extending along the length of one of the retractor blades **3302** for illuminating retractor blade **3302** along all or a portion of the length thereof. Also the light extracting deformities may be arranged to direct light away from a user's eyes and toward a viewing area in proximity of the retractor blade.

[0174] Light source **3140** may be contained within a metal housing **3310** that provides a heat sink for light source **3140** by providing contact between housing **3310** and one of the light source leads and with the body of the light source in the manner previously described. A power source **3148** such as a battery or fuel cell that is replaceable or rechargeable may be provided for powering the light source.

[0175] FIG. 35 shows an illuminated surgical retractor **3100** similar to that shown in FIG. 31 having an attachable light delivery system **3400**. Light delivery system **3400** differs from the light delivery systems shown in FIGS. 31-34 in that it comprises an array of lights **3140**, preferably LEDs, attached to a support **3404** in the shape of an elongated blade that extends along the length of one of the retractor blades **3104** for illuminating retractor blade **3104** along all or a portion of the length thereof.

[0176] Light supporting blade **3404** may, for example, be a fiberglass printed circuit board (PCB) having a copper cladding that acts as a heat sink for lights **3140**. A suitable attachment **3160** such as clips or a slot or opening may be provided at the proximal end **3120** of retractor blade **3104** for sliding receipt of the proximal end **3406** of light supporting blade **3404**. It should be appreciated that a second light supporting blade with its own array of lights (LEDs) may also be suitably attached to the other retractor blade **3106**.

[0177] A suitable power source **3148**, which may be a battery or fuel cell that is replaceable or rechargeable, may be housed in a housing **3138** integral with one of the handle portions **3112**, **3114** for powering the array of lights **3140** through a suitable power cord **3408**. One end of power cord **3408** may be connected to power source **3148** and the other end may be removably coupled to light supporting blade **3404** to permit light delivery system **3400** to be removed or replaced as desired.

[0178] FIGS. 36 and 37 show illuminated surgical retractors **3200** similar to those shown in FIGS. 32 and 33 having

light delivery systems **3500** and **3600**. Light delivery systems **3500** and **3600** comprise an array of lights **3140**, preferably LEDs, which may be attached to a support **3504** in the shape of an elongated blade that extends along the length of retractor blade **3202** as shown in **FIG. 36** or attached directly to the retractor blade **3202** as shown in **FIG. 37** for illuminating the retractor blade along all or a portion of the length thereof.

[0179] The light supporting blade **3504** shown in **FIG. 36** may, for example, be a fiberglass PCB having a copper cladding, that acts as a heat sink for lights **3140**. Also, suitable attachment members such as clips **3222** may be provided along the length of retractor blade **3202** for removably attaching light supporting blade **3504** to retractor blade **3202**. Where the lights **3140** are attached directly to retractor blade **3202** as shown in **FIG. 37**, the retractor blade itself may act as a heat sink for the lights.

[0180] In either case, the lights **3140** may be oriented along light supporting blade **3504** or retractor blade **3202** in any desired direction for directing the light away from the user's eyes and toward a viewing area in proximity to retractor blade **3202**.

[0181] A suitable power source **3148**, which may be a battery or fuel cell that is replaceable or rechargeable, may be housed in handle portion or other support **3208** of retractor **3200** for powering the array of lights **3140** through a power cord **3408** suitably coupled to the light supporting blade **3504** of **FIG. 36** or to a wire harness (not shown) inside the retractor blade **3202** of **FIG. 37**.

[0182] The invention has been described with reference to certain embodiments. Various modifications and alterations will occur to others upon a reading and understanding of this specification. In this regard, it should be appreciated that the present application discloses numerous exemplary embodiments of the present invention for the purpose of illustrating the present invention. It is contemplated that the various features shown in each embodiment may be combined in a plurality of ways to form further embodiments of the present invention. It is intended that all such modifications and alterations be included insofar as they come within the scope of the appended claims or the equivalents thereof.

What is claimed is:

1. An illuminated surgical retractor comprising a handle portion, an elongated blade portion having one end con-

nected to said handle portion and another end remote from said handle portion, and an array of lights along at least a portion of a length of said blade portion for illuminating said blade portion.

2. The retractor of claim 1 further comprising a heat sink to which said lights are thermally coupled.

3. The retractor of claim 2 wherein said heat sink includes said blade portion.

4. The retractor of claim 1 wherein said lights are attached directly to said blade portion.

5. The retractor of claim 1 wherein said lights are attached to a support extending along the length of said blade portion.

6. The retractor of claim 5 wherein said support is in the shape of a blade.

7. The retractor of claim 5 wherein said support is a printed circuit.

8. The retractor of claim 5 wherein said support is disposable, further comprising an attachment member for removably attaching said support to said blade portion.

9. The retractor of claim 8 wherein said attachment member includes at least one clip.

10. The retractor of claim 1 wherein said lights are powered by an integral power source.

11. The retractor of claim 10 wherein said power source comprises at least one of a battery and a fuel cell contained within said handle portion.

12. The retractor of claim 1 wherein said lights are oriented along the length of said blade portion for directing light away from a user's eyes and toward a viewing area in proximity to said blade portion.

13. The retractor of claim 1 wherein said handle portion includes a mounting post.

14. The retractor of claim 1 wherein said lights comprise light emitting diodes.

15. The retractor of claim 1 wherein said blade portion is flexible.

16. The retractor of claim 1 wherein said blade portion is rigid.

17. The retractor of claim 1 wherein said array of lights illuminate said blade portion along substantially the entire length thereof.

18. The retractor of claim 1 wherein said blade portion includes an angled tip for retaining or gripping tissue.

19. The retractor of claim 18 wherein said tip is serrated.

* * * * *