

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 October 2006 (19.10.2006)


PCT

(10) International Publication Number  
WO 2006/108548 A1

- (51) **International Patent Classification:**  
H04M 1/02 (2006.01) H04M 1/23 (2006.01)
  - (21) **International Application Number:**  
PCT/EP2006/003120
  - (22) **International Filing Date:** 6 April 2006 (06.04.2006)
  - (25) **Filing Language:** English
  - (26) **Publication Language:** English
  - (30) **Priority Data:**  
05388033.2 11 April 2005 (11.04.2005) EP  
60/673,712 21 April 2005 (21.04.2005) US
  - (71) **Applicant (for all designated States except US):** SONY ERICSSON MOBILE COMMUNICATIONS AB [SE/SE]; S-221 88 Lund (SE).
  - (72) **Inventor; and**
  - (75) **Inventor/Applicant (for US only):** FROHLUND, Stig [SE/SE]; Viktoriagatan 21, S-281 38 Hässleholm (SE).
  - (74) **Agent:** ZACCO DENMARK A/S; Hans Bekkevolds Allé 7, DK-2900 Hellerup (DK).
  - (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
  - (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report

[Continued on next page]

(54) **Title:** SLIDEABLE KEYBOARD FOR AN ELECTRONIC EQUIPMENT

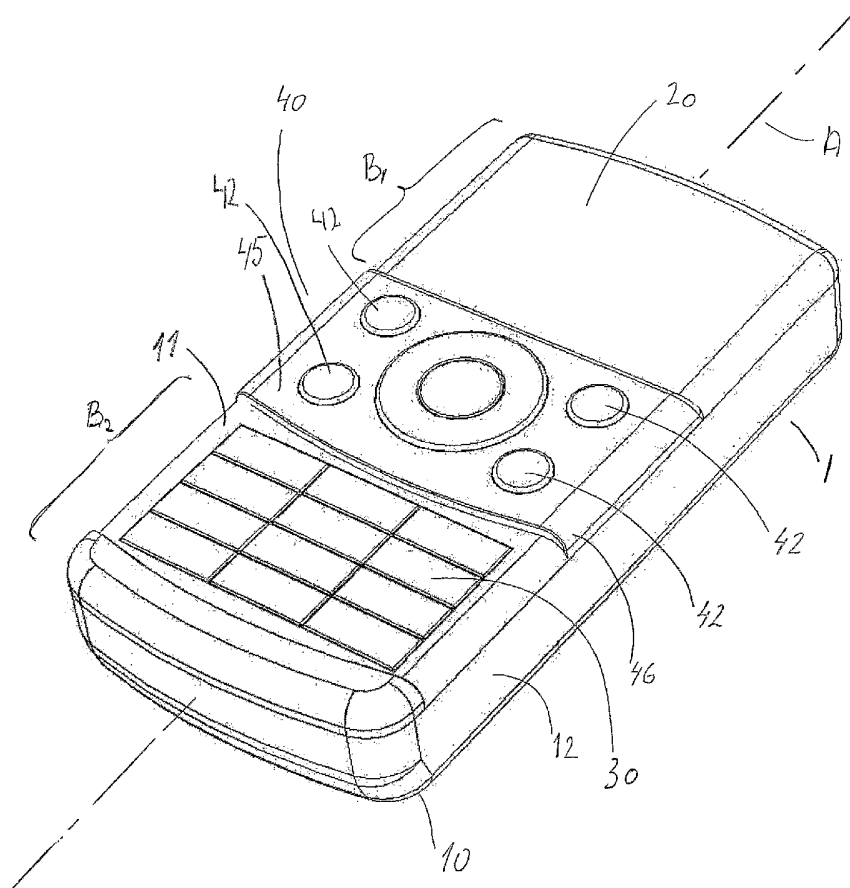

(57) **Abstract:** An electronic equipment (1) comprising a casing (10) having a front surface (11); a display (20); a mechanical keypad (30); and a set (40) of navigation and function/control keys, said display (20) and keypad (30) being arranged adjacent to one another on the front surface (11), the set (40) of navigation and function/control keys, being arranged to be slideably displaced by a user of the electronic equipment (1) to different positions on said front surface (11), including a first position where a section of the display is visible, the entire keypad is visible, and the set and the key pad complement each other; and a second position where the entire display is visible and the set (40) covers the keypad.

WO 2006/108548 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Title**Slideable keyboard for an electronic equipment**

5

Technical field

The invention relates to an electronic equipment comprising a casing having a front surface; a display; a mechanical keypad; and a set of navigation and function/control keys, said display and keypad being arranged adjacent to one another on the front surface.

Related prior art

15 The development process for electronic equipment, such as mobile tele- phones has seen an change in the equipment from rather big, "bulky" and unhandy to ever smaller devices. This development has been made possible by the reduced size of the electronic components that makes the phones work. The length of such mobile phones (the smallest are well below 100 mm  
20 in length) has reached a minimum size where the advantage of small size namely that it can easily be carried in a pocket or the like has been out- weighed by the disadvantage that the handling of a small object is difficult.

25 There is thus a need to provide an electronic device with a big display, and an easy-to-use keypad, which still fit in a pocket.

Many devices are known in the art that tries to fulfill this need. Examples are clamshell-type and jackknife-type mobile phones that are small phones that  
30 fit in the pocket but can be opened in order to provide an increased surface for placing displays that are large enough to display information and keypads

with keys that can be hit with normal size fingers. Another example is the slide-type mobile telephone, represented, e.g. by GB 2 393 066 A, having display and keypad parts slideably arrange with respect to each other. These mobile telephones serves the purpose of increasing the size of the outer surface of the telephone but renders the devices more susceptible to damage and wear because the openable parts can easily be twisted with respect to each other. Also some of these devices can be difficult to use because the orientation of the parts with respect to each other may require the turning of the device in order to use certain features or combinations of features.

10

Common to the clamshell, jackknife, and slide phones is that they by their nature are thicker than a traditional stick phone, since they must comprise two casing parts. Compared to the stick-phones they all have a longer distance between the keys and the display. The clamshell type typically has the navigation device and soft keys situated in one casing part and the display in the other casing part of the phone. Between the parts there is usually a bulky hinge-mechanism. This makes the connection between the soft keys and the display harder to understand for the user. Soft keys are keys that by being pressed evoke some function that is related to a state or situation of the mobile phone. The consequence of pressing a soft key therefore varies from situation to situation. Usually the present function of the soft key is displayed in the display. Therefore it is advantageous that the soft keys are situated close to the display. With the jack knife and the slide type phones there is also a high "step up" from the main key pad usually situated in a lower part, and the navigation device usually situated in an upper casing part. The electrical connection between the two casing parts for all the above types needs to be quite complex and expensive due to the fact that the LCD and acoustic components are positioned in the upper casing part and the logic circuits in the lower casing part.

30

From the United States patent application US 2003/0112225 A1 a mobile telephone having a large touch screen display virtually covering the entire front surface of the device is known. Over the touch screen display a slideable key pad is arranged on a series of lamellae. These lamellae can be slid  
5 like a Venetian blind from the front surface of the device to the back side of the device. This device increases the useful area of the front of the device, but has a series of disadvantages. The use of a touch screen in a display requires that additional films are applied at least in those areas of the display where the touch function needs to be applied. This reduces the display qual-  
10 ity in those areas. Further, the lamellae that need to be slideable round the back of the device, take up a lot of space inside the phone, such that the phone needs to be made larger, in order for the phone to support the usual functionalities of such a device. Further, due to the lamellae on the back side of the phone the use of the back surface area of the phone for functional fea-  
15 tures is severely limited or made impossible. Also, the lamellae having to be turned from the front surface to the back surface of the phone constitutes a rather complex mechanical construction, where there is a considerable risk that the lamellae get stuck, during the sliding process. The buttons on the lamellae work by touching on an area of the touch screen. This however  
20 does not apply in the situation where the lamellae are completely withdrawn.

#### Object of the invention

25 It is an object of the present invention to provide an electronic equipment that overcomes the problems of the prior art. It is a further object of the invention to provide an alternative electronic equipment that allows a large display and an easy to use keyboard, and which still fits in the pocket of a user.

### Summary of the invention

The object of the invention is achieved by an electronic equipment comprising a casing having a front surface; a display; a keypad comprising alphanumerical keys; and a set of navigation and function/control keys, the display  
5 and the keypad being arranged adjacent to one another on the front surface, wherein the set of navigation and function/control keys, is arranged to be slideably displaced along an axis A of the casing by a user of the electronic equipment to different positions on said front surface, including a position  
10 where sections of the front surface are visible on both sides of the set of navigation and function/control keys in a direction along axis A.

Thereby an alternative electronic device is obtained that overcomes the problems of the prior art. It is robust to accidental blows to the equipment, since  
15 no parts of the set of navigation and function/control keys needs to protrude beyond the front surface. Further, it allows the set of navigation and function/control keys to be in close contact with the front surface 11 which increases the robustness. Furthermore, a very simple, and thus reliable and durable mechanical connection between the casing and the set of navigation  
20 and function/control keys is obtained. It is further obtained that the set of navigation and function/control keys and the numerical keypad can be brought into a position where they complement each other in order to perform operations of the electronic equipment where the functions of each of these parts are needed and another position where only the set of navigation and  
25 function/control keys are available and complement an enlarged display area to perform operations of the electronic equipment such as games, image editing/manipulation, etc. A large display area can thus be provided on e.g. a stick type mobile phone, along with a keypad that is large enough to handle, without compromising the quality of the image in the display.

In an embodiment of the invention the set of navigation and function/control keys, can be slideably displaced between a first position where a section of the display is visible, the entire keypad on the front surface is visible, and the set of navigation and function/control keys and the key pad complement each other; and a second position where the entire display is visible and the set of navigation and function/control keys covers the keypad.

In a preferred embodiment the keypad is a mechanical keypad comprising buttons that are displaceable with respect to the front surface in a direction perpendicular thereto. Thereby, a tactile response is provided.

The set of navigation and function/control keys may be arranged on a plate shaped element.

Preferably first sliding means are arranged on the plate shaped element, said first sliding means being adapted for cooperation with second sliding means on the casing.

In an embodiment said first sliding means are arranged on a bottom surface of the plate shaped element, and said second sliding means are arranged on the front surface of the casing.

In another embodiment of the invention the plate shaped element further comprises flanges arranged perpendicular to the plate shaped element, said flanges extending to partly cover the side surfaces of the casing, and said first sliding means are arranged on said flanges cooperating with second sliding means on the side surfaces of the casing.

Preferably the above mentioned sliding means form a tongue and groove type connection.

In a preferred embodiment the plate shaped element is biased towards said first and second positions.

5 The above mentioned bias may be provided by a spring arranged on a side surface of said casing being adapted for abutment against parts of the plate shaped element.

In all of the above mentioned embodiments the electronic equipment may preferably be a mobile telephone.

10

It should be emphasized that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

15

The term electronic equipment includes portable radio communication equipment. The term portable radio communication equipment, which herein after is referred to as a mobile radio terminal, includes all equipment such as mobile telephones, pagers, communicators, i.e. electronic organizers, smart-  
20 phones or the like.

#### Description of the drawings

25 The invention will be described in detail in the following with reference to the drawings in which

- Fig. 1 is a perspective view of an electronic equipment with a slideable keyboard in a first terminal position; and

30

- Fig. 2 is a perspective view of the electronic equipment shown in Fig. 1 with a slideable keyboard in a second terminal position.

## 5 Detailed description of embodiments of the invention

Referring firstly to fig. 1, showing an electronic equipment 1 in the form of a mobile telephone of the so called stick-type, the electronic equipment 1 comprises a casing 10 having an upper or front surface 11, a display 20 provided  
10 in the upper surface 11, and a keypad 30 also provided in the upper surface 11. The keypad 30 and the display 20 are arranged adjacent to each other in the upper surface 11. On the back side of the electronic equipment 1 opposite to the upper surface 11, a lid (not shown) may provide access to batteries, SIM-cards etc. Also, the back side may be provided with additional func-  
15 tionalities such as cameras, extra displays, infrared ports, etc.

Further, in Fig. 1 it is shown that a set 40 of navigation and function/control keys is provided on a plate shaped element 45 that is arranged over the front or upper surface 11 of the casing 10. The plate shaped element 45 with the  
20 set 40 of navigation and function/control keys thus constitutes an upper key pad different from and separate from the lower or main keypad 30 provided in the upper surface 11 of the casing 10.

The set 40 of navigation and function/control keys provided on the plate  
25 shaped element 45 comprises at least one navigation device 41 in the form of a rocker-key, a track pen, a track ball or the like adapted for navigating a pointer or similar marker in the display 20. The set 40 of navigation and function/control keys may further comprise a few control/function keys 42, preferably four keys 42 for use as soft keys, clear-key and back-key. Alternatively  
30 or additionally, the set 40 of navigation and function/control keys may also comprise a set of special buttons for controlling music or pictures/films, e.g.

forward/rewind, pause/play buttons or the like. Furthermore, as an alternative or as an addition, the set 40 of navigation and function/control keys may also comprise a set of game control buttons.

5 The lower or main keypad 30 provided integrated in the front surface 11 of the casing 10 preferably comprises the numerical keys, i.e. 0-9, +, #, and \* - keys, etc. Thus the set 40 of navigation and function/control keys and the keypad 30 complements each other in forming a full keyboard traditionally found on electronic equipment 1, such as stick-type mobile telephones and  
10 such.

In one embodiment of the invention the keypad 30 can be arranged on the front surface 11 of the casing 10 in a separate display, not shown, i.e. separate from the main display 20, as a touch screen. In an alternative embodi-  
15 ment the entire front surface 11 of the casing 10 is covered by a display in which at least a section thereof is provided with means such that this section may function as a touch screen keypad. However, in a preferred embodiment the key pad 30 is a mechanical keypad comprising actual physical buttons in the sense that they are displaceable with respect to the front surface in a di-  
20 rection perpendicular thereto.

The plate shaped element 45, and thereby the set 40 of navigation and function/control keys, is slideably arranged over the front or upper surface 11 of the casing 10, such that it is slideable in a plane parallel to said upper sur-  
25 face 11, and such that the sliding plate shaped element 45 can be moved between two terminal positions on the front surface of the casing part.

Thus the plate shaped element 45 is arranged to be slideably displaced along an axis A of the casing 10 by a user of the electronic equipment 1 to  
30 different positions on said front surface 11, including a position where sec-

tions  $B_1$ ,  $B_2$  of the front surface 11 are visible on both sides of the set 40 of navigation and function/control keys in a direction along axis A.

In Fig. 1 the set 40 of navigation and function/control keys on the plate shaped element 45 is shown in a first position where it covers a section of the display 20, and a section,  $B_1$ , of the front surface 11, i.e. the remaining part of the display 20, is visible above the plate shaped element 45, and a section  $B_2$  of the front surface 11, i.e. the numerical main/lower keypad 30, is visible below the plate shaped element 45.

10

In Fig. 2 the set 40 of navigation and function/control keys on the plate shaped element 45 is shown in a second terminal position where it covers the keypad 30, making the entire display visible for the user, exposing to the user, the section of the display 20 that was hidden in the first terminal position. In the embodiment shown, the plate shaped element 45 is essentially the same size as the key pad 30, such that the plate shaped element 45 covers the entire keypad 30. However, in alternative embodiments the plate shaped element may cover a smaller area than the keypad 30, thus leaving parts of the keypad visible and/or accessible to the user.

20

In the first terminal position, where the display 20 is partially hidden under the slideable plate shaped element 45, and the keypad 30 is accessible to the user, the electronic equipment 1 may advantageously be used for making phone calls to receivers with telephone numbers not stored in a phone book (which is a typical feature of such an electronic device 1, especially if the device is a mobile telephone), or for writing SMS. For such activities it is not important to have access to the entire display.

25

In the second terminal position, where the entire display 20 is visible to the user, and the slideable plate shaped element 45 covers the keypad 30, the electronic equipment 1 may advantageously be used for activities where a

30

large display is expedient, e.g. finding a telephone number stored in a phone book of the equipment, playing games stored in the equipment, or viewing pictures or pages on the internet. For these activities the numerical keys are of less importance, and the set 40 of navigation and function/control keys are  
5 adequate.

The plate shaped element 45 is in the embodiment shown provided with flanges 46 that extend in a direction perpendicular to the plate shaped element 45 and to cover a part of a side surface 12 of the casing 10, on each  
10 side thereof. The flanges 46 are preferably provided with sliding means (not shown) that is adapted for cooperating with sliding means (not shown) on the side surfaces 12 of the casing, e.g. a tongue and groove arrangement or the like. Such a tongue and groove like arrangement may be provided by a T-shaped protrusion on the flanges 46 of the plate shaped element 45, said  
15 protrusion cooperating with corresponding elongate recesses on the casing 10.

Alternatively, the casing 10 and the slideable plate shaped element 45 may be provided with corresponding sliding means on the bottom of the plate shaped element 45 and on the front surface 11 of the casing.  
20

Thus, the plate shaped element 45 and consequently the set 40 of navigation and function/control keys is slideable only over the front surface 11 of the casing 10. Consequently, the back side of the electronic equipment 1 can be  
25 utilized for placing functional features, e.g. cameras.

The sliding means on the casing 10 is provide with stops, such that the movement of the plate shaped element 45 cannot be extended such that the plate shaped element 45 extends beyond the front surface 11 of the casing.  
30 Thus, no parts of the plate shaped element 45 can unintentionally be twisted

with respect to the casing 10 and thus the electronic equipment 1 is less susceptible to damage as compared to e.g. slide-type telephones.

The electronic equipment 1 may be provided with a spring, not shown, on  
5 each side surface 12 of the casing 10, such that the movement of the plate shaped element 45 with the set 40 of navigation and function/control keys between the first and second terminal positions is spring loaded. The spring is preferably a circular spring located such that it may abut parts of the plate shaped element 45 or the flanges 46 thereon, in such a manner that when  
10 pushing/sliding the set 40 of navigation and function/control keys from the first terminal position towards the second terminal position the spring force of the spring counteracts the movement in the sliding direction until the plate shaped element 45 is slid half way between the first and the second terminal positions, and then after reaching the half way position the spring force acts  
15 in the sliding direction. Thus, a mechanism is provided that will urge the plate shaped element 45 to be positioned in either of the terminal positions shown in Figs. 1 and 2 respectively. Other spring types may provide the same kind of functionality, e.g. coil or leaf springs. Alternatively, magnets can be used to provide this functionality as well. Thus, a set of mutually attracting magnets  
20 can be arranged at each end of the plate shaped element 45 or flange 46 and on the casing at positions close to either of the terminal positions shown in Figs. 1 and 2, respectively. Alternatively, one set of mutually repulsing magnets may be applied, one situated on the plate shaped element 45 and one on the casing 10, arranged such that the repulsion will force the plate shaped element to either of the terminal positions shown in Figs. 1 and 2. In  
25 a further alternative embodiment this function may be provided by a resiliency and shape of the plate shaped element 45 and/or the flanges in cooperation with abutment against the casing 10, e.g. by providing the flanges and casing with opposed arc shaped forms. In yet an alternative embodiment  
30 the position of the plate shaped element 45 on the front surface 11 of the

casing 10 may be controlled by an electric motor controlled by the logic circuit provide in the casing 10.

## Claims

1. An electronic equipment (1) comprising

- a casing (10) having a front surface (11);
- 5 - a display (20);
- a keypad (30) comprising alphanumerical keys; and
- a set (40) of navigation and function/control keys,

said display (20) and keypad (30) being arranged adjacent to one another on the front surface (11), **characterized in** that the set (40) of navigation and function/control keys, is arranged to be slideably displaced along an axis (A) of the casing (10) by a user of the electronic equipment (1) to different positions on said front surface (11), including a position where sections (B<sub>1</sub>, B<sub>2</sub>) of the front surface (11) are visible on both sides of the set (40) of navigation and function/control keys in a direction along axis (A).

15

2. An electronic equipment (1) according to claim 1, **characterized in** that the set (40) of navigation and function/control keys, can be slideably displaced between

- a first position where a section of the display (20) is visible, the entire keypad (30) on the front surface (11) is visible, and the set (40) of navigation and function/control keys and the keypad (30) complement each other; and
- 20 - a second position where the entire display is visible and the set (40) of navigation and function/control keys covers the keypad (30).

25

3. An electronic equipment (1) according to claim 1, **characterized in** that the keypad (30) is a mechanical keypad comprising buttons that are displaceable with respect to the front surface (11) in a direction perpendicular thereto.

30

4. An electronic equipment (1) according to any of claims 1-3, **characterized in** that the set (40) of navigation and function/control keys are arranged on a plate shaped element (45).
- 5 5. An electronic equipment (1) according to claim 4, **characterized in** that first sliding means are arranged on the plate shaped element (45), said sliding means being adapted for cooperation with second sliding means on the casing (10).
- 10 6. An electronic equipment (1) according to claim 5, **characterized in** that said first sliding means are arranged on a bottom surface of the plate shaped element (45), and in that said second sliding means are arranged on the front surface 11 of the casing.
- 15 7. An electronic equipment (1) according to claim 5, **characterized in** that the plate shaped element (45) further comprises flanges (46) arranged perpendicular to the plate shaped element (45), said flanges extending to cover partly side surfaces (12) of the casing (10), and in that said first sliding means are arranged on said flanges (46) cooperating with second sliding  
20 means on the side surfaces (12) of the casing (10).
8. An electronic equipment (1) according to any of the claims 5-7, **characterized in** that said sliding means form a tongue and groove type connection.
- 25 9. An electronic equipment (1) according to any of the claims 4-8, **characterized in** that the plate shaped element (45) is biased towards said first and second positions.
- 30 10. An electronic equipment (1) according to claim 9, **characterized in** that said bias is provided by a spring arranged on a side surface (12) of said cas-

ing (10) and is adapted for abutment against parts of the plate shaped element (45).

11. An electronic equipment (1) according to any of the previous claims 1-10,  
5 **characterized in** that the electronic equipment (1) is a mobile telephone.

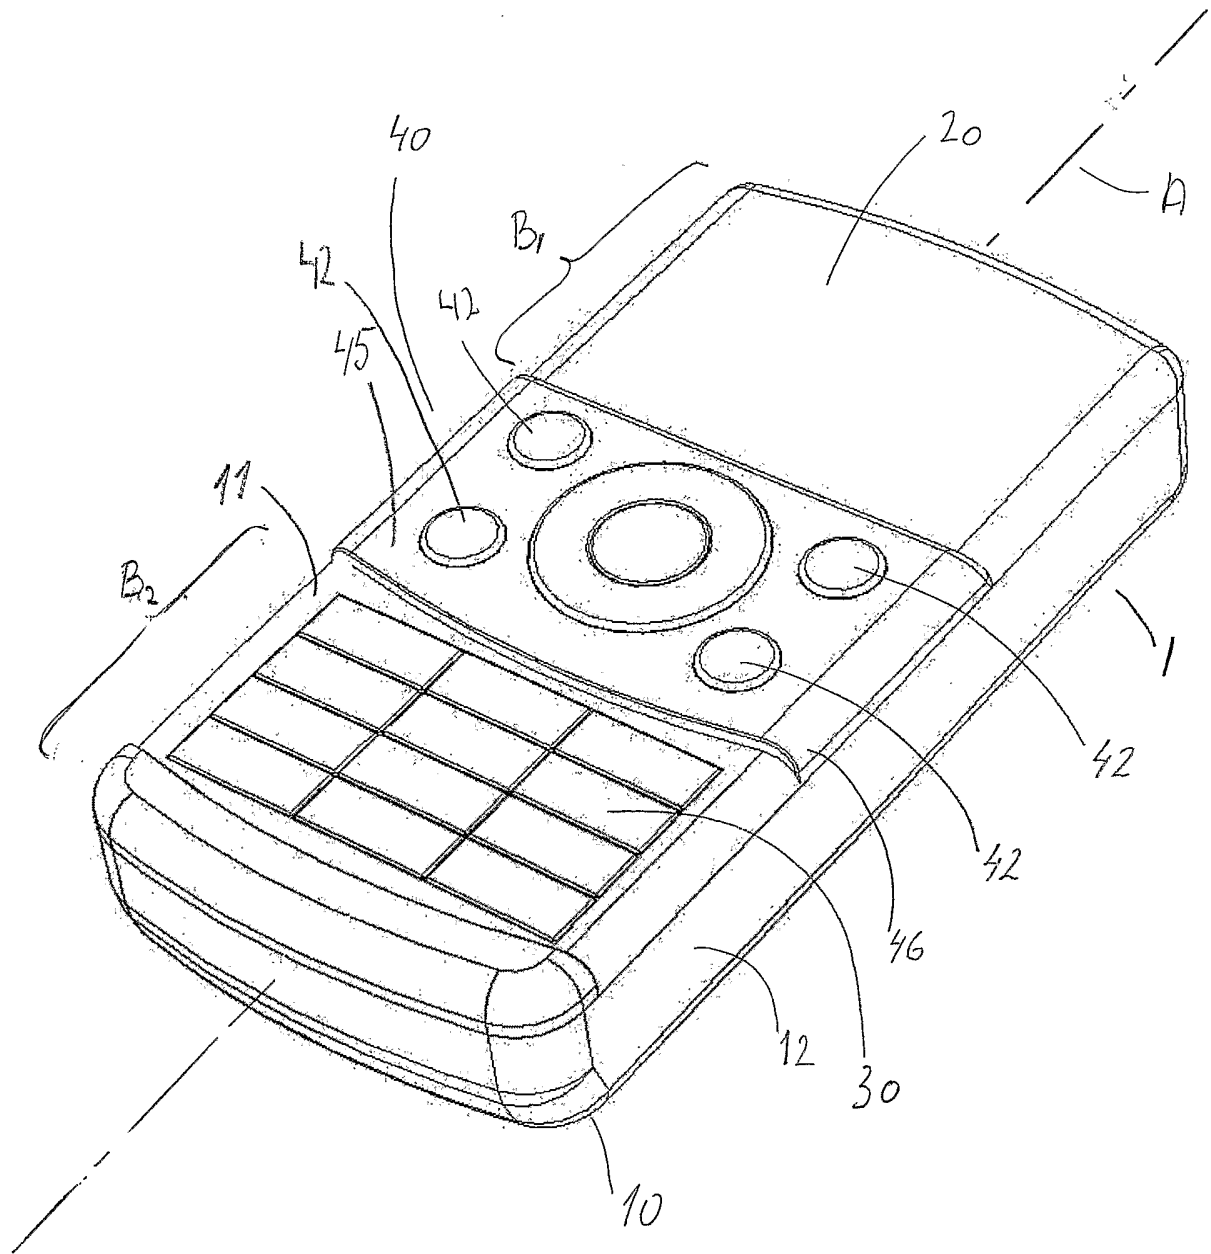


Fig. 1

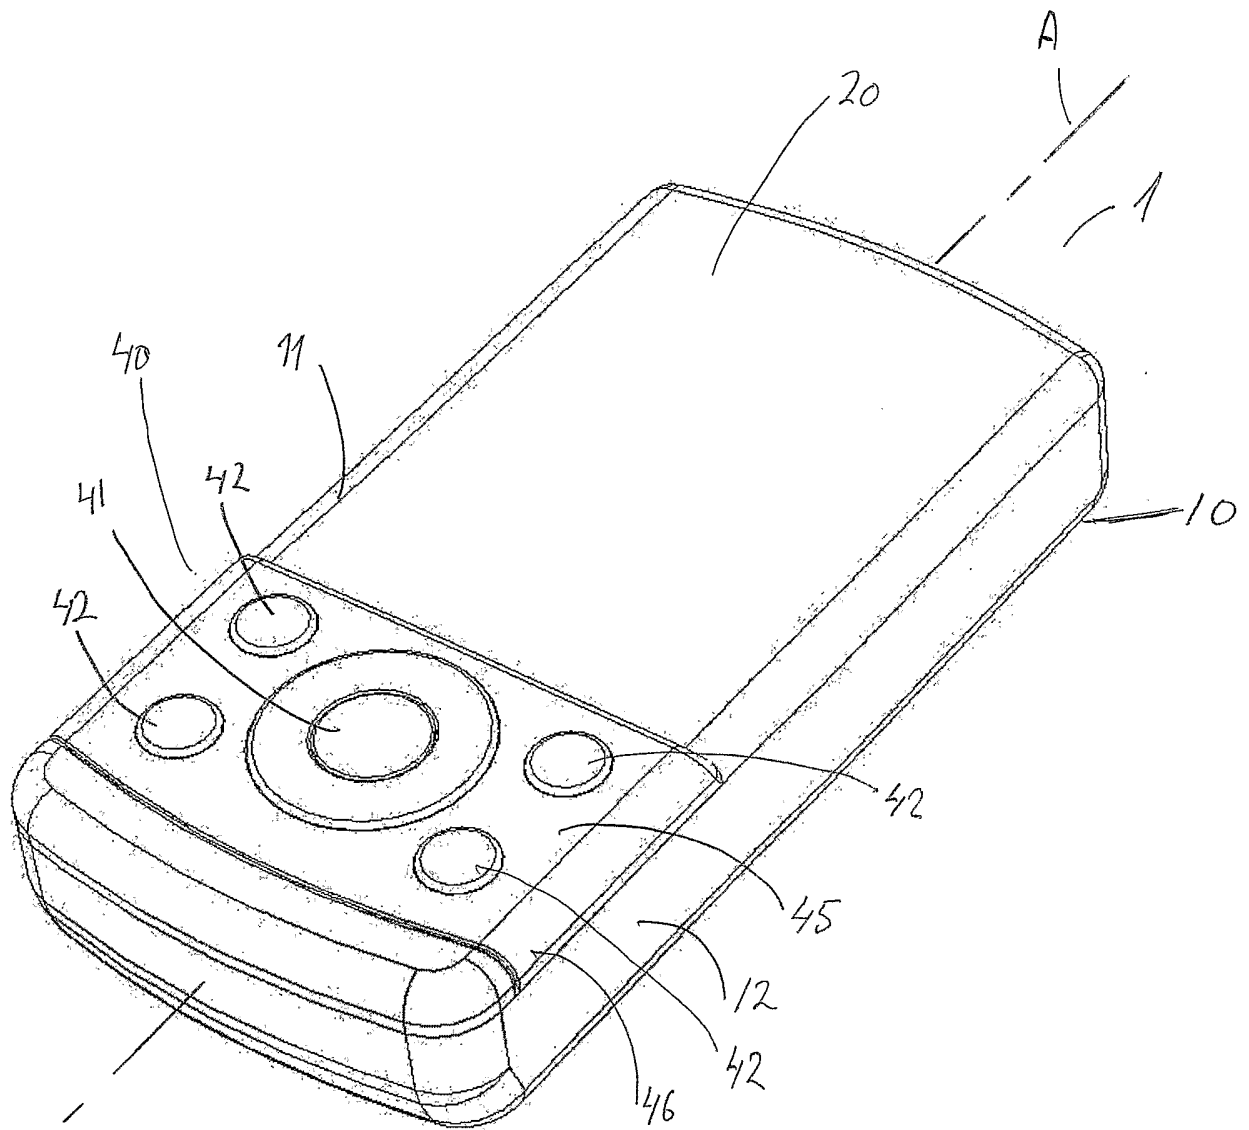


Fig 2

## INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2006/003120

## A. CLASSIFICATION OF SUBJECT MATTER

INV. H04M1/02

ADD. H04M1/23

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04M G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 298 888 A (TELEFONAKTIEBOLAGET L M ERICSSON) 2 April 2003 (2003-04-02) paragraphs [0015], [0016] paragraphs [0022] - [0024]; figure 3	1, 2, 4, 5, 11
A	EP 0 804 009 A (MITSUBISHI DENKI KABUSHIKI KAISHA) 29 October 1997 (1997-10-29) column 14, line 34 - column 15, line 13; figures 1, 2 column 38, line 23 - column 39, line 19; figures 47-49	1
A	US 6 842 626 B1 (KUBO TETSUYA ET AL) 11 January 2005 (2005-01-11) column 3, lines 29-37; figure 1	1, 3, 11

 Further documents are listed in the continuation of Box C. See patent family annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

20 June 2006

Date of mailing of the international search report

27/06/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

de Biolley, L

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2006/003120

Patent document cited in search report	A	Publication date	Patent family member(s)	Publication date
EP 1298888	A	02-04-2003	NONE	
EP 0804009	A	29-10-1997	CN 1177268 A	25-03-1998
			CN 1592323 A	09-03-2005
			JP 3606498 B2	05-01-2005
			JP 10042022 A	13-02-1998
			US 6009338 A	28-12-1999
US 6842626	B1	11-01-2005	GB 2357929 A	04-07-2001
			JP 2001119457 A	27-04-2001