



(51) International Patent Classification:
F21V 7/00 (2006.01)

(21) International Application Number:
PCT/US2010/048401

(22) International Filing Date:
10 September 2010 (10.09.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/559,006 14 September 2009 (14.09.2009) US

(71) Applicant (for all designated States except US): **COOPER TECHNOLOGIES COMPANY** [US/US]; 600 Travis St., Suite 5600, Houston, TX 77002 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RONG, Wei** [CN/US]; 107 Sauterne Way, Peachtree City, GA 30269 (US). **KELLER, Joseph** [US/US]; 6 Clydesdale Court, Tinton Falls, NJ 07701 (US). **KOSICH, Joseph** [US/US]; 80 Flint Road, South Toms River, NJ 08757 (US). **PIERZ, Crystal** [US/US]; 3 Bucknell Dr., Hazlet, NJ 07730 (US).

(74) Agent: **SOPHIR, Eric L.**; King & Spalding LLP, Attn : Ip Docketing / Eric L. Sophir, 1100 Louisiana St., Suite 4000, Houston, TX 77002-5213 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: OPTICALLY EFFICIENT NOTIFICATION DEVICE FOR USE IN LIFE SAFETY CEILING STROBE APPLICATIONS

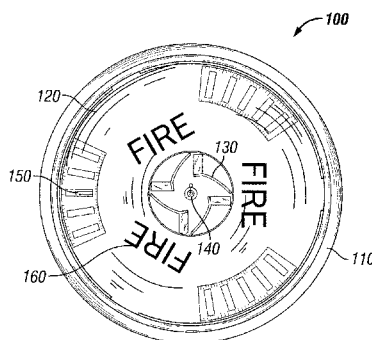


FIG. 1A

(57) Abstract: A ceiling notification device has a housing; a reflector unit mounted to the housing; a lens positioned over the reflector unit; and a lamp in the center of the reflector unit along the central axis. The reflector unit has a base, a plurality of reflective fins, and a surface portion. The base has a curved surface that is symmetrical about a central axis. The plurality of reflective fins each has a first fin portion extending from the base and a second fin portion extending from the base and the first fin portion, the second fin portion having an inner surface and an outer surface, wherein the inner surface is exposed to the central axis. The surface portion extends from the base and positioned between the first fin portion and an edge of the base and is angled toward an inner surface of the second fin portion.

OPTICALLY EFFICIENT NOTIFICATION DEVICE FOR USE IN LIFE SAFETY CEILING STROBE APPLICATIONS

TECHNICAL FIELD

[0001] The present application relates generally to a notification device for use in life safety ceiling strobe applications.

BACKGROUND

[0002] Life safety systems include notification devices positioned on walls and ceilings, as required by law. These notification devices can include a horn for an audible alert and/or a strobe for a visual alert. Notification devices draw energy to illuminate a strobe in a life safety application, such as a fire alarm or other signaling device. A notification device can be mounted on a surface, e.g., a wall or a ceiling, and aimed at the floor. The notification device has a reflector with internal reflecting surfaces to reflect light toward the specified space. The reflector can also have some external secondary reflector elements mounted on the reflector body.

[0003] Notification devices for the hearing impaired are governed by standards that require a polar light distribution off-axis at any given rated candela. In order to achieve the standard, the notification device must produce a minimum output at specified angles off-axis. For example, for a notification device to be rated at 177 candela, UL 1971 requires that the strobe has specific light intensities at viewing angles ranging from zero to 90 degrees off axis. UL 1971 requires a polar light distribution pattern to enhance the likelihood of alerting hearing impaired individuals throughout an area. The light intensity is measured in a horizontal and vertical direction and at viewing angles ranging from zero to +90 degrees and zero to -90 degrees. In one example, the UL polar distribution requires a percentage of the candela output at specific angles off-axis, e.g., five degrees off-axis requires an output of 90% of the rated on-axis value. So a 15 candela strobe is required to output 13.5 candela at five degrees off-axis.

[0004] It is desirable to use less energy, but the light output of the strobe must meet the requisite standards to achieve underwriting. As a result, the amount of energy is limited by the minimum required light output. The amount of current drawn by the notification device can be affected by various aspects of its configuration, including reflector design, electrical efficiency, lamp efficiency, efficiency of a metalized coating used for high

reflectance, and the efficiency of the lens. It is desirable to adjust the properties of the notification device so that less current is needed to power the notification device while maintaining a required amount of light output.

SUMMARY

[0005] A notification device described herein can draw a lower current by providing a more efficient reflector configuration. The optically efficient reflector is generally a circular reflector having four symmetrical quadrants. The reflector is designed to be positioned on a ceiling and provide sufficient light output in each of the requisite directions, as required by the UL 1971 standard. For example, a notification device described herein can provide a 177 candela output using a 2.5 J flashtube lamp.

[0006] In one embodiment, a notification device comprises a housing configured to be installed on a ceiling; a reflector unit mounted to the housing; a lens coupled to the housing and positioned over the reflector unit; and a lamp positioned in the center of the reflector unit along the central axis. The reflector unit comprises a base, a plurality of reflective fins, and a surface portion. The base has a curved surface that is symmetrical about a central axis extending through the base. The plurality of reflective fins each comprise a first fin portion extending from the base and a second fin portion extending from the base and the first fin portion, the second fin portion having an inner surface and an outer surface, wherein the inner surface is exposed to the central axis. The surface portion extends from the base and positioned between the first fin portion and an edge of the base, wherein the surface portion is angled toward an inner surface of the second fin portion.

[0007] In another embodiment, a reflector unit for distributing light comprises a base, a plurality of reflective fins, and a surface portion. The base has a curved surface that is symmetrical about a central axis extending through the base. The plurality of reflective fins each comprise a first fin portion extending from the base and a second fin portion extending from the base and the first fin portion, the second fin portion having an inner surface and an outer surface, wherein the inner surface is exposed to the central axis. The surface portion extends from the base and positioned between the first fin portion and an edge of the base, wherein the surface portion is angled toward an inner surface of the second fin portion.

[0008] These and other aspects, objects, and features of the invention will become apparent to those having ordinary skill in the art upon consideration of the following detailed

description of exemplary embodiments exemplifying the best mode for carrying out the invention as presently perceived.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] The objects and advantages of the invention will become apparent from the following detailed description of preferred embodiments thereof in connection with the accompanying drawings in which like numerals designate like elements and in which:

[0010] **Figure 1a** is a frontal side view of a notification device according to an exemplary embodiment.

[0011] **Figure 1b** is a side view of a notification device according to an exemplary embodiment.

[0012] **Figure 2a** is a perspective view of a reflector unit according to an exemplary embodiment.

[0013] **Figure 2b** is a frontal side view of a reflector unit according to an exemplary embodiment.

[0014] **Figure 2c** is a side view of a reflector unit according to an exemplary embodiment.

[0015] **Figure 2d** is a rear side view of a reflector unit according to an exemplary embodiment.

[0016] **Figure 3** is a cross-sectional view of a reflector unit according to an alternative exemplary embodiment.

[0017] **Figure 4a** shows a frontal view of a notification device according to an exemplary embodiment.

[0018] **Figure 4b** shows a side view of a notification device according to an exemplary embodiment.

DETAILED DESCRIPTION

[0019] The present invention may be better understood by reading the following description of non-limitative embodiments with reference to the attached drawings wherein like parts of each of the several figures are identified by the same reference characters.

[0020] The notification device described herein can be adapted for operation under any one or combination of standards, such as UL 1971, and can be installed in different

locations, such as a corridor, a sleeping room, or a non-sleeping room. Although the exemplary embodiments describe a notification device configured for a ceiling, it is intended that the notification device can be configured for use on a wall.

[0021] Referring to **FIGS. 1a** and **1b**, a notification device **100** for ceiling installation is shown. Notification device **100** has a housing **110** that can be mounted using a mounting plate to attach to a back box installed in a ceiling to provide any necessary electrical and mechanical connections. In this exemplary embodiment, housing **110** is shown to be round, but housing **110** can have any shape, e.g., rectangular. Mounting plate **110a** attaches to housing **110** on the back side of the housing **100** that couples to the ceiling and can be used to secure and/or remove the housing **110** to the ceiling.

[0022] As shown in this exemplary embodiment, a lens **120** extends substantially across the face of the housing **110** and can extend substantially to the perimeter of the housing **110**. A lens **120** extending substantially across the housing **110** can have a smoother contour to enhance optical performance. Light is more likely to pass straight through a flat surface than a curved surface. This configuration of the lens **120** can also give the appearance of a lower profile.

[0023] The lens **120** can cover the optical elements, such as a reflector unit **130** and a lamp **140**, and horn elements, such as a speaker or piezo **150**. Lettering or a graphic, such as "FIRE" **160** can be printed on the device **100**. The lens **120** can cover the FIRE **160** to protect it from tampering. When using a lens that is colored or translucent, however, it may be desirable to locate the FIRE **160** outside of the lens **120**. The housing **110** can also include a light intensity selector, which can be adjusted from the rear of the device **100**, that has a window for viewing the selected intensity of the lamp in candela units. In order to prevent tampering, the candela intensity window (not shown) can also be placed under the lens **120**. This lens configuration allows flexibility in locating the candela window within the lens perimeter to provide protection and good visibility. Near the piezo **150**, the lens **120** has a series of apertures that align with the openings in the fascia for the piezo **150**. In one embodiment, the lens **120** can wrap around each of the slot shown for piezo **150**. As a result, sound from the piezo **150** is not distorted, inhibited, or obstructed by the lens **120**. Although the lens **120** can be configured to entirely cover the piezo **150**, it can be desirable to not cover the piezo **150** to allow for better sound distribution.

[0024] Alternatively, the lens can cover only the optical elements. Referring to **FIGS. 4a** and **4b**, a notification device **400** is shown having a housing **410** and a lens **420**. The lens **420** is configured to cover the optical elements, such as the reflector unit **430**. A

piezo **450** is not covered by the lens **420**. Instead, the piezo can be positioned behind louvers **460**. The louvers **460** are a plurality of narrow slots that can optionally be adjustable. In the particular embodiment shown, the piezo **450** is a circular shape and overlaps with a circular shape created by the lens **420**. As a result, the lens **420** can be configured to extend around, but not over, the piezo **450**.

[0025] In an exemplary embodiment, the lens can be made from a polycarbonate material for improved mechanical protection and flame retardant characteristics. The lens can be made of a transparent or opaque material. The lens can also have a color or hue, such as red, green blue, amber, or clear. In another embodiment, the lens can be transparent in only the area positioned over the optical elements, whereby the lens would still allow a complete light distribution pattern.

[0026] A reflector unit is installed in the housing and protected by the lens. In the exemplary embodiment described herein, the reflector has four symmetrical quadrants, though it is intended that the configuration can have more or less symmetrical segments, or the reflector unit can be designed so that it is not symmetrical. The reflector unit can be manufactured using a vacuum metalized injection-molded polycarbonate with UV resistant and scratch resistant lacquer.

[0027] Referring to **FIG. 2**, a perspective view of a reflector unit **200** is shown. Reflector unit **200** has two tabs **210a**, each having a flange **210b** at a distal end. Reflector unit **200** also has two tabs **210c**. The tabs **210a** can be inserted into a recess in the printed circuit board for securing the reflector unit **200** to the printed circuit board.

[0028] The reflector unit **200** has a base **220** having a substantially parabolic or freeform curvature shape that is symmetric about a central axis extending through the reflector unit, wherein the central axis is perpendicular to the plane of the ceiling. In one exemplary embodiment, the widest part of the base **220** at an edge **220e** has a diameter of approximately 1 to 2 inches. For example, the base **220** can have a diameter of about 1.9 inches. The base **220** has a continuously smooth, specular surface that is designed to reflect a significant portion of direct light from a lamp to illuminate both the vertical and horizontal planes. The base **220** has an upper portion **220a** and a lower portion **220b**, each having a different curvature. The lower portion **220b** forms a cavity that directs light from the lamp to the center of the reflector unit. The cavity can also double the intensity of the illumination effect on both horizontal and vertical planes. The base **220** can be installed in a housing whereby the edge **220e** aligns with an exposed surface of the housing.

[0029] A lamp **230** is positioned in the center of the base **220** and extends in a direction along the central axis. The base **220** has a hole **220c** and a notch **220d** to accommodate the lamp **230** as well as any wires for connecting the lamp **230** to a circuit board (not shown), which can be positioned on the other side of the reflector unit **220**. In connecting the lamp **230**, a first electric connection points and solders to the circuit board beneath the reflector. A second electrical connection is connected to the other end of the lamp **230**, threads through the notch **220d**, and is coupled to the circuit board. A third electrical connection is attached to the middle of the lamp **230** and threaded through the hole **220c** along with the lamp **230**. The third electrical connection remains underneath the reflector. As shown in this exemplary embodiment, lamp **230** is a vertical flash tube that can be rated at 2.5 J. The lamp **230** can be a Xenon flashtube or any other suitable light source.

[0030] Four reflective fins **240** extend from the base **220** and in a direction parallel to the central axis. The reflective fins **240** have a first fin portion **240a** and a second fin portion **240b**. The first fin portion **240a** is substantially planar and extends from the lower portion **220b** of base **220** to a position that is proximate the edge **220e** of the upper portion **220a**. First fin portion **240a** directs light at about 45 degrees between the horizontal and vertical planes. Each second fin portion **240b** directs light from about 25 to 90 degrees along the horizontal and vertical planes in one of the four quadrants. As shown in **FIG. 2b**, light reflected from the first fin portion **240a** is about 47 degrees from the light reflected from the second fin portion **240b**. In the exemplary embodiment, referring to **FIG. 2b**, the first fin portion **240a** is angled at about 79 degrees from a horizontal plane.

[0031] The second fin portion **240b** extends from the first fin portion **240a** substantially toward the edge of the base **220**. The second fin portion **240b** is slightly curved and extends away from the first fin portion **240a** in a direction such that an inner surface of the reflective fin **240** substantially faces the lamp **230**. As shown in **FIG. 2b**, the second fin portion **240b** extends about 56 degrees about the central axis. The combination of the four reflective fins **240** substantially surrounds the lamp **230**.

[0032] In an exemplary embodiment, the fins **240** can extend about 1 inch, as measured from the plane of an edge **220e** of the base **220**. The reflective fins **240** can extend from the base **220** to a plane **260** parallel to the ceiling and perpendicular to the central axis. In an alternative embodiment, the reflective fins **240** extend further along the central axis and decrease in length as the reflective fins **240** extend radially outwards. As shown in the cross-sectional view of a reflector unit **300** in **FIG. 3**, reflective fins **340** can have an upper edge **340c** in the form of a parabolic curve or have other curvature. In this embodiment, the fins

340 can extend about 1 inch near the central axis, but do not extend as much near an edge **320e** of the base **320**.

[0033] Four reflective surface portions **250** extend from the upper portion **220a** of the base **220** in a direction generally along the central axis. A first end **250a** of the surface portion **250** abuts the first fin portion **240a**. The surface portion **250** tapers to a second end **250b** substantially at the edge **220e** of the base **220**. An upper surface **250c** of the surface portion **250** is tilted towards an inner surface of the second fin portion **240b**. Referring to the exemplary embodiment shown in **FIG. 3**, a surface portion **350** is tilted at about 31 degrees. The surface portion **250** directs a secondary reflection from second fin portion **240b** to about 25 degrees on the horizontal and vertical planes. The base **220** directs light along the central axis and up to about 25 degrees in all directions.

[0034] When the lamp **230** is illuminated, the light from the lamp **230** reflects off the base **220**, the first fin portion **240a**, and the second fin portion **240b**, as well as in the direction of the floor and walls of a specified space. Light reflects from the first fin portion **240a** and the second fin portion **240b** to the base **220** and the surface portion **250**, as well as in the direction of the floor and walls. The surface portion **250** also directs light toward the floor and walls. As a result, the notification device can achieve the polar light distribution pattern required by UL 1971.

[0035] The notification device incorporating this reflector has a greater optical efficiency than a conventional strobe having a 177 candela output. The efficiency allows for a reduction in power needed to operate the lamp. This reduction in lamp wattage translates into a lower current rating for the appliance. While a conventional 177 candela strobe may need to expend as much as 4.5 J of electrical energy for the strobe to meet the UL 1971 requirements for 150 candela and 177 candela settings, the notification device described herein can achieve the UL 1971 standard with only 2.5 J of energy expended by the flashtube at both 150 candela and 177 candela, which is almost a doubling in optical efficiency. Rather than using two separate models of notification devices for low candela (e.g., 15, 30, 75, and 95 candela) and high candela (e.g., 150 and 177 candela), a single notification device described herein can be used in all ceiling applications from about 15 to 177 candela output. For example, the notification device can be set via a switch to 15, 30, 60, 75, 95, 115, 150, and 177 candela.

[0036] Because the notification device allows for a lower energy flash-tube, high and low intensity strobes can use the same lower energy flash tube and can therefore be combined into one unit. This reduces cost as the lower energy tube is not as expensive as the higher

energy one and it also reduces the number of product models or variations, i.e., Stock Keeping Units (“SKU”) reduction. As a result, customers only need to purchase one type of notification device, eliminating any confusion or mistaken purchases of the wrong device. Also, managing one model is easier for distribution and stocking purposes.

[0037] Although the exemplary embodiment recites a 177 candela output, it is intended that the reflector unit can be configured for other candela outputs, such as 110 candela. The light output can be adjusted electrically by lowering or raising the energy to the lamp from about 0.6 J to about 2.5 J. The configuration of the reflector unit can be adjusted to affect the amount of reflected light from the lamp, such as reducing the size of the base for a lower light distribution, reconfiguring the base to accommodate a larger lamp, or increasing or decreasing the surface area of any component, such as by varying the size of the upper and/or lower portions of the base.

[0038] Therefore, the present invention is well adapted to attain the ends and advantages mentioned as well as those that are inherent therein. The particular embodiments disclosed above are illustrative only, as the present invention may be modified and practiced in different but equivalent manners apparent to those having ordinary skill in the art having the benefit of the teachings herein. While numerous changes may be made by those having ordinary skill in the art, such changes are encompassed within the spirit and scope of this invention as defined by the appended claims. Furthermore, no limitations are intended to the details of construction or design herein shown, other than as described in the claims below. It is therefore evident that the particular illustrative embodiments disclosed above may be altered or modified and all such variations are considered within the scope and spirit of the present invention as defined by the claims below. The terms in the claims have their plain, ordinary meaning unless otherwise explicitly and clearly defined by the patentee.

CLAIMS

What is claimed is:

1. A notification device comprising:
 - a housing configured to be installed on a ceiling;
 - a reflector unit mounted to the housing, the reflector unit comprising:
 - a base having a curved surface, wherein the curved surface is symmetrical about a central axis extending through the base;
 - a plurality of reflective fins, wherein each reflective fin comprises:
 - a first fin portion extending from the base; and
 - a second fin portion extending from the base and the first fin portion, the second fin portion having an inner surface and an outer surface, wherein the inner surface is exposed to the central axis; and
 - a surface portion extending from the base and positioned between the first fin portion and an edge of the base,
 - wherein the surface portion is angled toward an inner surface of the second fin portion;
 - a lens coupled to the housing and positioned over the reflector unit; and
 - a lamp positioned in the center of the reflector unit along the central axis.
2. The notification device according to claim 1, wherein the base comprises an upper portion and a lower portion, wherein the upper portion and the lower portion each have a different curvature.
3. The notification device according to claim 1, wherein the reflective fins extend further near the central axis than at the edge of the base.
4. The notification device according to claim 1, wherein an upper edge of the reflective fins extend to a plane perpendicular to the central axis.

5. The notification device according to claim 1, wherein the second fin portion is curved.
6. The notification device according to claim 1, wherein the plurality of reflective fins comprises four reflective fins.
7. The notification device according to claim 1, wherein the surface portion substantially tapers from the first fin portion to the edge of the base based upon the curvature of the upper portion of the base.
8. The notification device according to claim 1, wherein the lamp is a 2.5 J flashtube.
9. The notification device according to claim 1, wherein the base, reflective fins, and surface portion are reflective.
10. The notification device according to claim 1, wherein the notification device is configured to provide a 177 candela output with a 2.5 J lamp.
11. The notification device according to claim 1, wherein the lens extends to a perimeter of the housing.
12. The notification device according to claim 11, further comprising a horn element, wherein the lens has at least one aperture positioned substantially over the horn element.
13. The notification device according to claim 11, further comprising a horn element, wherein the lens does not extend over the horn element and wherein the horn element is positioned behind a plurality of louvers.

14. A reflector unit for distributing light, the reflector unit comprising:
- a base having a curved surface,
 - wherein the curved surface is symmetrical about a central axis extending through the base, and
 - wherein the base is configured to accommodate a lamp;
 - a plurality of reflective fins, wherein each reflective fin comprises:
 - a first fin portion extending from the base; and
 - a second fin portion extending from the base and the first fin portion, the second fin portion having an inner surface and an outer surface, wherein the inner surface is exposed to the central axis; and
 - a surface portion extending from the base and positioned between the first fin portion and an edge of the base,
 - wherein the surface portion is angled toward an inner surface of the second fin portion.
15. The reflector unit according to claim 14, wherein the base comprises an upper portion and a lower portion, wherein the upper portion and the lower portion each have a different curvature.
16. The reflector unit according to claim 14, wherein the reflective fins extend further near the central axis than at the edge of the base.
17. The reflector unit according to claim 14, wherein an upper edge of the reflective fins extend to a plane perpendicular to the central axis.
18. The reflector unit according to claim 14, wherein the second fin portion is curved.

19. The reflector unit according to claim 14, wherein the plurality of reflective fins comprises four reflective fins.
20. The reflector unit according to claim 14, wherein the surface portion substantially tapers from the first fin portion to the edge of the base based upon the curvature of the upper portion of the base.
21. The reflector unit according to claim 14, wherein the base, reflective fins, and surface portion are reflective.
22. The reflector unit according to claim 14, wherein each of the plurality of reflective fins extend about 56 degrees about the central axis.
23. The reflector unit according to claim 14, wherein the reflector unit is configured to provide a 177 candela output with a 2.5 J lamp.

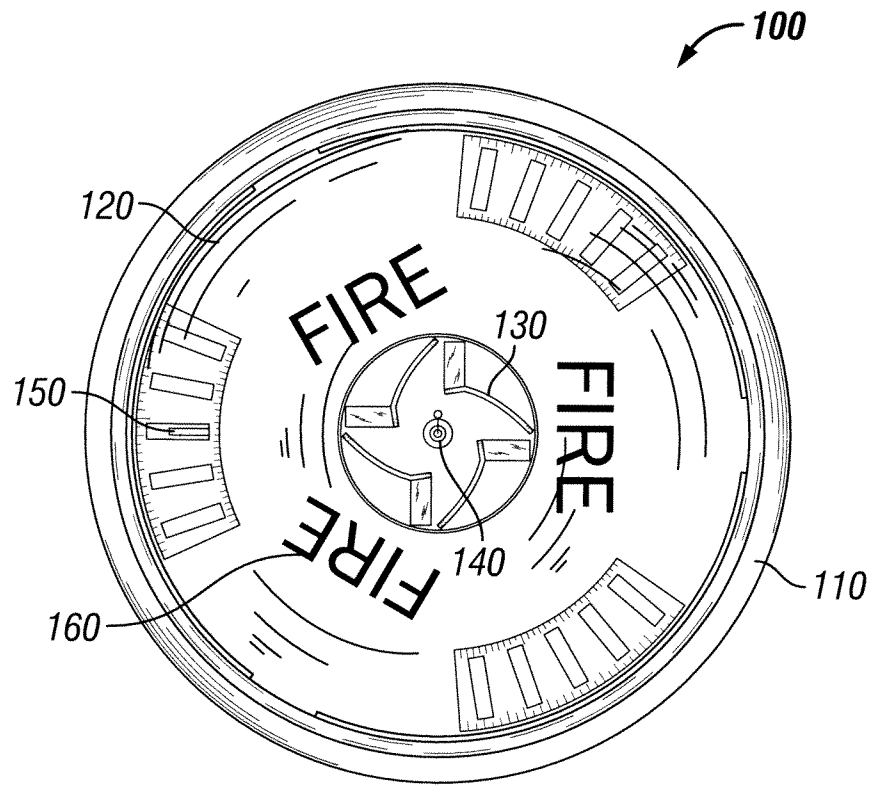


FIG. 1A

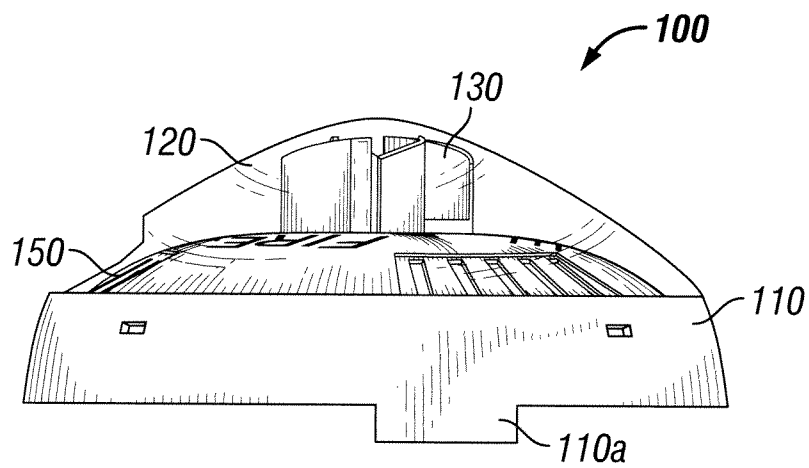
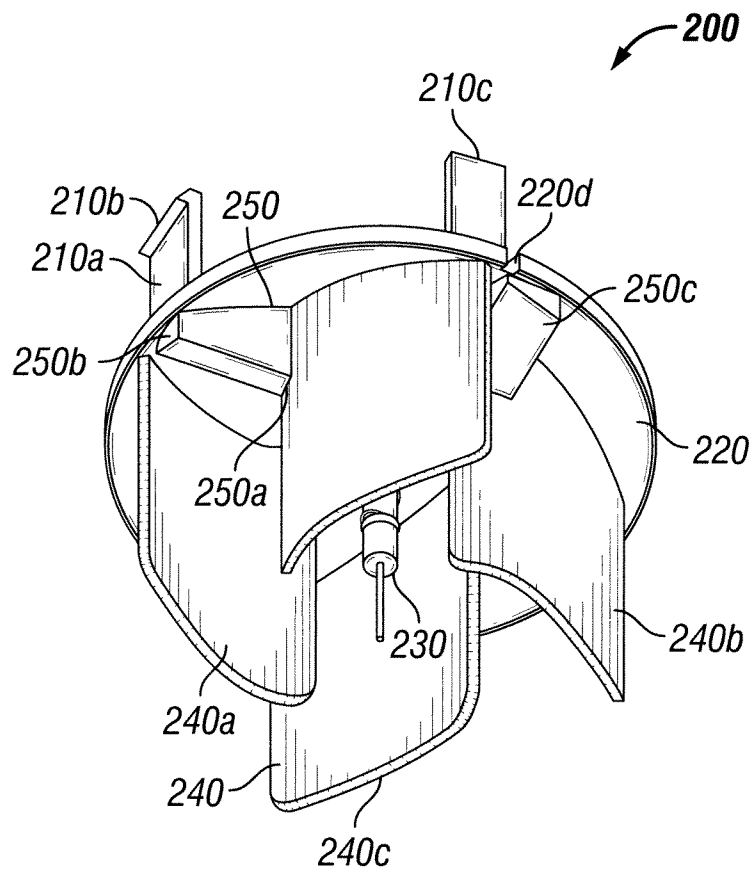


FIG. 1B

**FIG. 2A**

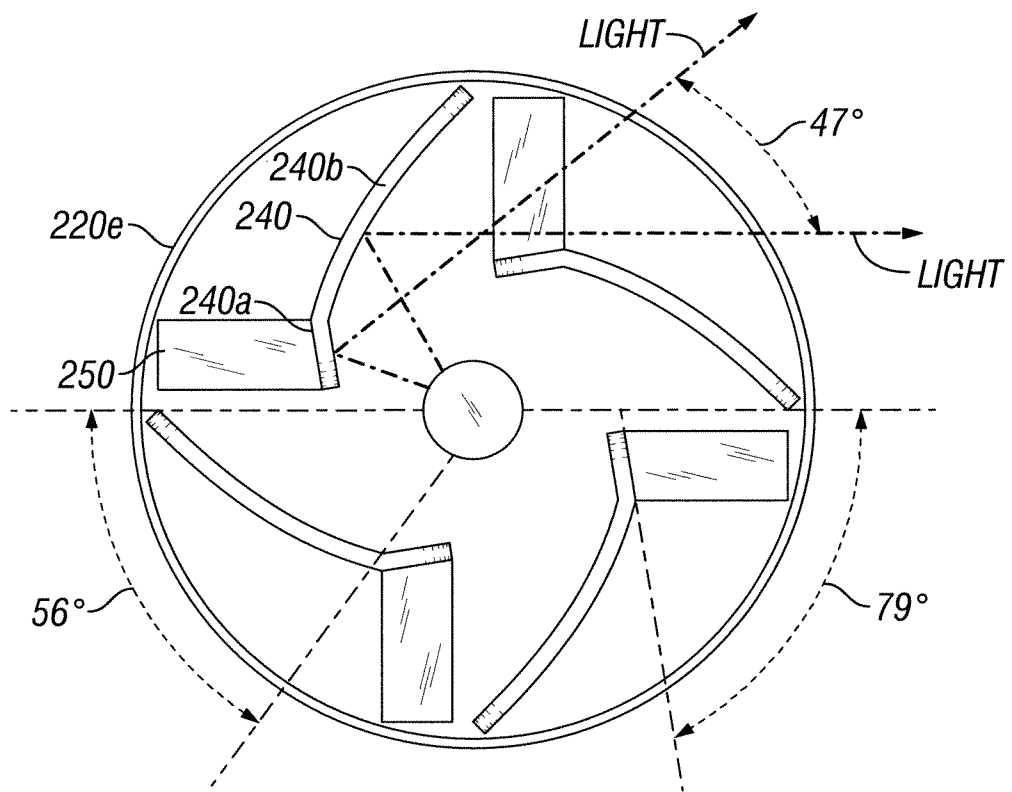


FIG. 2B

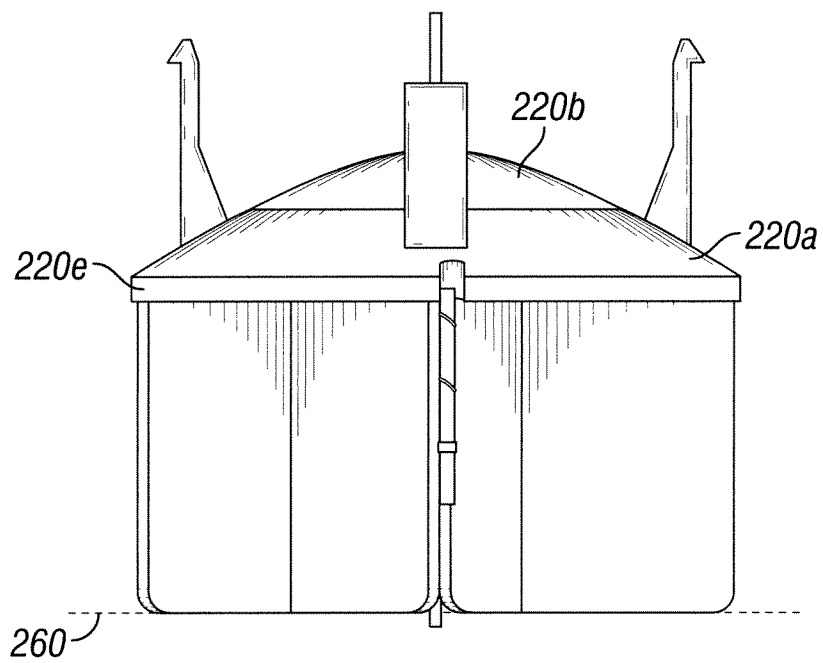


FIG. 2C

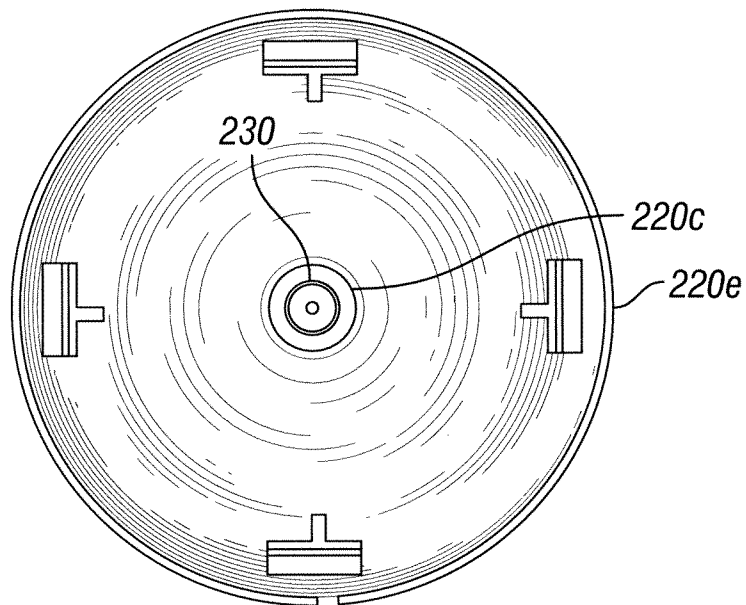


FIG. 2D

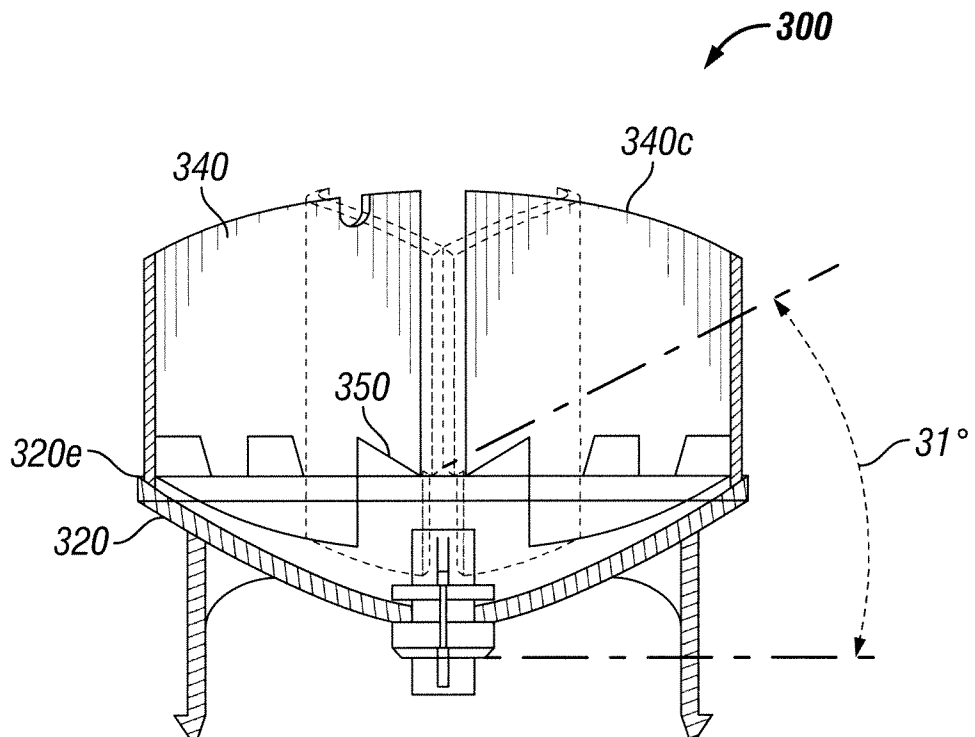


FIG. 3

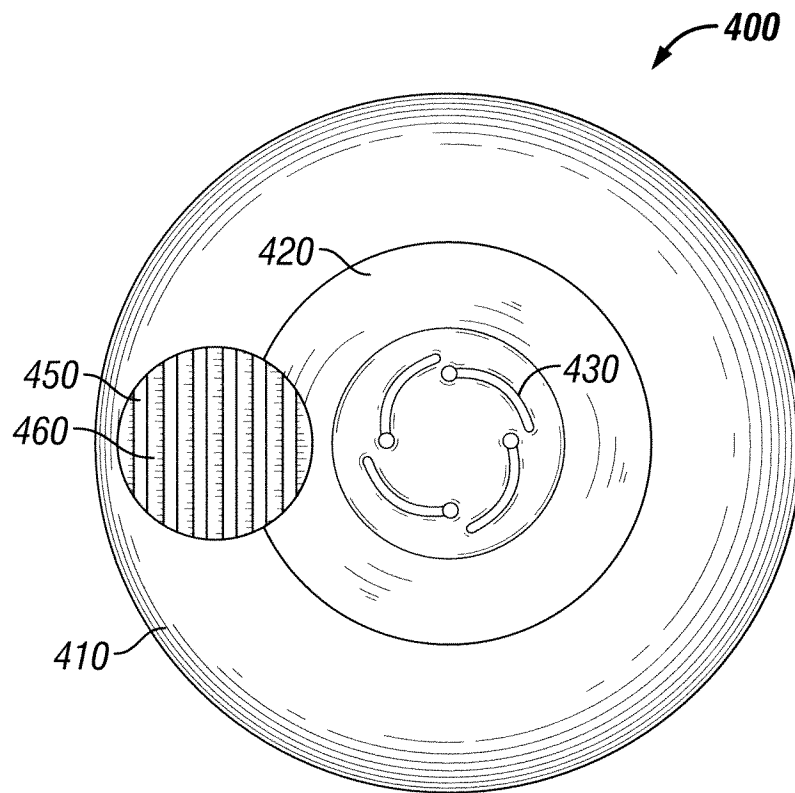


FIG. 4A

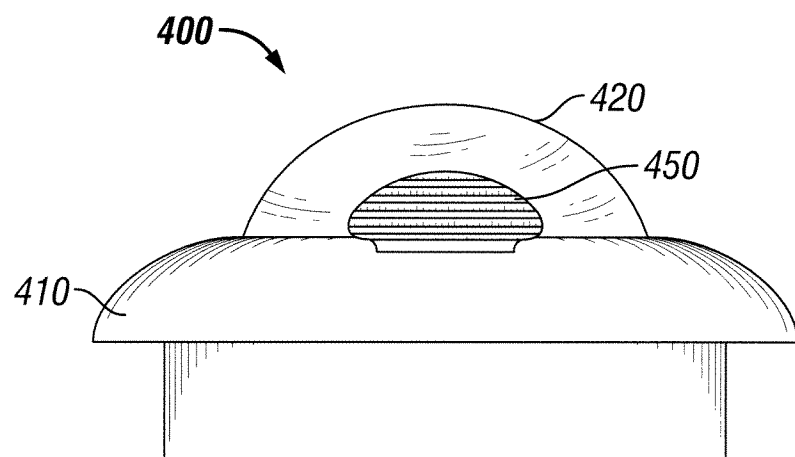


FIG. 4B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2010/048401

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - F21V 7/00 (2010.01)

USPC - 362/297

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - F21V 7/00, F21V 7/04 (2010.01)

USPC - 340/331, 691.1, 693.9; 362/297, 398, 301, 346

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

USPTO EAST System (US, USPG-PUB, EPO, DERWENT), Google Scholar

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2002/0085374 A1 (ANDERSON) 04 July 2002 (04.07.2002) entire document	1-23
Y	US 2006/0203493 A1 (BROWER et al) 14 September 2006 (14.09.2006) entire document	1-23
Y	US 2,905,863 A (MARTIN et al) 22 September 1959 (22.09.1959) entire document	8
Y	US 5,684,467 A (HUR) 04 November 1997 (04.11.1997) entire document	12, 13
Y	US 6,158,869 A (BARNES) 12 December 2000 (12.12.2000) entire document	12
Y	US 4,837,559 A (GREEN) 06 June 1989 (06.06.1989) entire document	13

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 October 2010

Date of mailing of the international search report

03 NOV 2010

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774