

(19)



(11)

EP 4 563 234 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
04.06.2025 Bulletin 2025/23

(51) International Patent Classification (IPC):
B04B 1/20 (2006.01)

(21) Application number: **23213455.1**

(52) Cooperative Patent Classification (CPC):
B04B 1/20; B04B 2001/2083

(22) Date of filing: **30.11.2023**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC ME MK MT NL
NO PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA
Designated Validation States:
KH MA MD TN

(72) Inventor: **MADSEN, Bent**
2820 GENTOFTE (DK)


(74) Representative: **Alfa Laval Attorneys**
Alfa Laval Corporate AB
Group Patent
P.O. Box 73
221 00 Lund (SE)

(71) Applicant: **Alfa Laval Corporate AB**
221 00 Lund (SE)

(54) A DECANTER CENTRIFUGE FOR SEPARATING FEED MATERIAL

(57) The present invention relates to a circular base for a decanter centrifuge. The base is configured to be accommodated at one longitudinal end of a rotatable bowl. The base defines an inner surface configured to face an interior of the bowl, a radial direction extending outwardly from a centre point of the base and a longitudinal direction extending perpendicular to the radial

direction. The base comprises a bearing surface being centrally located at the inner surface of the base and extending about the centre point of the base, a feed inlet for introducing a flowable material into the bowl, and a light phase outlet. The light phase outlet comprises a weir edge defining in normal use a level of the light phase in the bowl.

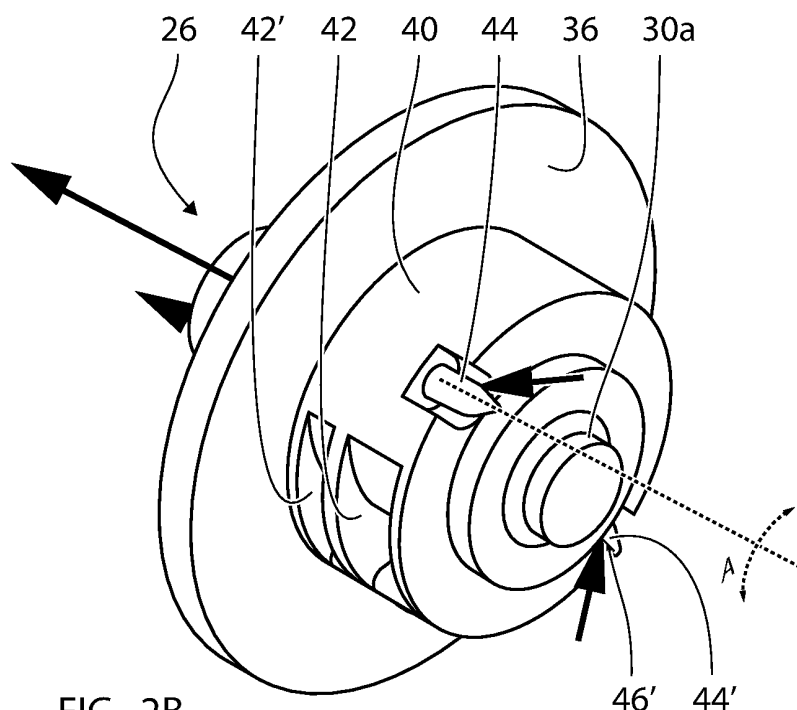**FIG. 2B****EP 4 563 234 A1**

Description

[0001] The present invention relates to a circular base for a decanter centrifuge, a decanter centrifuge and a method of operating a decanter centrifuge.

Introduction

[0002] Centrifugal based methods, and in particular decanter centrifuges, can be used for separating the oil and fat from the residual solids and liquids when extracting oil and/or fat from oil containing plant- or animal items. In most conventional applications of oil extraction from oil-containing plant- or animal items, such as fish oil extraction, oil from food waste and vegetable oil extraction and in particular corn oil extraction from corn seeds/whole stillage, the solids of the plant- or animal items are removed in a first separation stage, leaving a residue of liquids. The liquids mainly consist of water and oil/fat. The oil/fat is separated from the water in a second separation stage after the solids have been removed.

[0003] By using the above technique, some oil/fat will inevitably be trapped in the compacted solids cake. This oil/fat is considered to be lost as it is not easily recoverable even by resuspension of the solids.

[0004] It has therefore been suggested to remove the oil already in the first separation stage using a two-phase decanter and leaving a residue of solids and liquids. In this way a higher oil yield and a cleaner oil can be obtained.

[0005] WO 2010/142299 A1 relates to a decanter centrifuge having a conveyor hub with a tubular steel body with an inner core made of a material such as carbon fibre reinforced epoxy.

[0006] WO 2020/109135 A1 relates to a method of producing a low-fat product from a starting material made of a fat and/or oil containing plant- or animal item. The method comprises extracting a greater part of the extractable oil and/or fat originally contained in the plant- or animal item using a first decanter and leaving a residue of solids and liquids.

[0007] US 7156801 relates to a decanter centrifuge comprising a conveyor screw with one or more flights and having a nominal transport speed varying along the longitudinal axis. The nominal transport speed depends in a non-linear way on the screw pitch.

[0008] DE 102019102623 describes a centrifugal decanter for products that are difficult to de-oil, such as olive pulp, must be mixed particularly intensively so that all or even a residual liquid/residual moisture that is still contained in the solid can be separated more easily. The screw used having two radially offset helices extending over the cylindrical region of the drum and the worm with the same or different winding directions and/or different pitches, so that a radially outer first screw thread and a radially inner second screw thread are formed, so that a part of the suspension to be processed when the drum and screw rotates through the second radially - in relation

to the axis of rotation - further inward helix or in conveyed in the radially inner screw flight in a different direction and/or in the same direction and/or at a different speed than at the same time another part of the suspension that is located in the area of the radially further outer helix or the radially outer screw flight.

[0009] US 20150209804 describes an apparatus comprising an outer drum, an inner drum, an activation spiral and a heavy-material discharging spiral.

[0010] EP 0868217 discloses a decanter centrifuge having several blades arranged to convey axially in the outer drum sludge having settled on the inside of this drum.

[0011] EP 2130607 B1 relates to a decanter centrifuge having the inlet arranged at an end of the casing opposite the end in which the opening for expelling the solid phase is arranged.

[0012] DE 2651657 relates to a centrifugal decanter having a clear fluid discharge between the inlet and the solids outlet.

[0013] US 3268159 relates to a centrifugal decanter in which the feed zone is closer to large end hub than both conveyor bearings.

[0014] JP 62106856 relates to a centrifugal decanter in which the solids and liquids discharge are on the same side.

[0015] US 3494472 relates to a centrifugal separator in the form of a sieve drum.

[0016] US 7022061 describes a centrifugal separator with power recovery discharge pipes for the light phase.

[0017] US 9089852 describes a centrifugal decanter mentioning that the solid discharge port may be oriented at an angle to the radial to achieve an energy-saving repulse effect.

[0018] WO 2012/062337 A2 relates to a centrifugal separator comprising an outlet housing being rotatable around an adjustment axis.

[0019] DE 10 2020 129 478 A1 relates to a conveyor screw body having web elements.

[0020] EP 0506835 B1 relates to a decanter centrifuge having at least one bearing of the conveyor supported at the free end of a trunnion.

[0021] EP 0602766 B1 relates to a decanter centrifuge having a central hub having radially projecting support ribs.

[0022] EP 2440335 A1 relates to a decanter centrifuge having conveyor screw comprising a hub with a cylindrical part and a generally conical part, the two parts being interconnected by broad mutually spaced ribs extending in the longitudinal direction.

[0023] EP 2926911 B1 relates to a decanter centrifuge having a centrifuge worm which is mounted at one of its axial end areas by means of a connecting flange.

[0024] EP 3177403 B1 relates to a decanter centrifuge having individual openings in the cylindrical section of the screw hub.

[0025] WO 2021122878A1 relates to a decanter centrifuge having, at least in the inlet area, a screw hub with

an open wall structure.

[0026] WO 2021122884A1 relates to a decanter centrifuge having a transverse disk for stabilizing the worm hub construction.

[0027] WO 2022096734A1 relates to a centrifuge screw having rods between at least two winding sections. The rods are formed completely or almost completely spaced.

[0028] WO 2022096739A1 relates to a screw hub for a centrifuge screw having in the longitudinal direction having at least sections of an open wall structure.

[0029] WO 2022096745A1 relates to a centrifuge screw having an open wall structure. The open wall structure extending at most over a length of 50% of the total length of the cylindrical longitudinal section.

[0030] US 8841469 relates to a method of recovering oil from corn by adding a chemical additive.

[0031] When separating the oil and fat already in the first separation stage, it is necessary to allow the solids sufficient time to release the oil/fat. It is therefore an object of the present invention to provide technologies for increasing the release of oil from the feed and in particular the oil trapped in the solids of the feed.

Summary of the invention

[0032] The object of the present invention is in a first aspect achieved by a circular base for a decanter centrifuge, the base being configured to be accommodated at one longitudinal end of a rotatable bowl of the decanter centrifuge, the base defining an inner surface configured to face an interior of the bowl, a radial direction extending outwardly from a centre point of the base and a longitudinal direction extending perpendicular to the radial direction, the base comprising:

a bearing surface for a conveyor screw, the bearing surface being centrally located at the inner surface of the base and extending about the centre point of the base,
a feed inlet for introducing a flowable material into the bowl of the decanter centrifuge, the flowable material comprising a light phase and a heavy phase, and
a first light phase outlet for receiving the light phase from the bowl of the decanter centrifuge, the first light phase outlet comprising a first weir edge defining in normal use a level of the light phase in the bowl.

[0033] The circular base is used for closing off the decanter centrifuge at the large end hub and provide a bearing surface for the conveyor screw of the decanter centrifuge. The bowl has one or more light phase outlet provided in the circular base at the longitudinal end of the bowl. The heavy phase outlet is located at the opposite longitudinal end of the bowl. The feed in the present case is oil containing plant- or animal items, such as fish oil extraction, oil from food waste and vegetable oil extraction and in particular corn oil extraction from corn

seeds/whole stillage. The light phase in the present case is a substantially clean fat/oil in liquid phase separated from the feed, whereas the heavy phase is a residue of the feed being a mixture of other liquids and solids, mainly water and solids.

[0034] In conventional decanters, the feed inlet located in the core of the conveyor screw for introducing the feed into the bowl at a location substantially in the middle between the light phase outlet and the heavy phase outlet. However, it has surprisingly been found out that by introducing the flowable material close to the large end hub, the solids will have a longer retention time in the bowl and the release of oil/fat from the solid material will be larger compared to having the feed inlet between the light phase outlet and the heavy phase outlet.

[0035] It should be understood that the centre point means the point on the base corresponding to the axis of rotation of the bowl when is use, the longitudinal direction being parallel to the axis of rotation and the radial direction being perpendicular to the longitudinal direction. The expression "level" refers to a distance in the radial direction from the centre point. In use the bowl rotates causing the feed inside the bowl to separate in a heavy phase and light liquid phase having a surface at a level, which is slightly above the level of the weir edge thereby providing a pressure head driving the light phase out of the bowl through the weir. The weir edge is defined as the point where no information can be transmitted through the discharged medium back into the separation volume inside the decanter. "Information" is anything that can affect the light phase level.

[0036] According to a further embodiment of the first aspect, the light phase outlet is provided in an outlet housing, the outlet housing being cylindrical and protruding in the longitudinal direction from the inner surface.

[0037] The outlet can be provided in a specific outlet housing for being able to optimally position the weir edge in the bowl.

[0038] According to a further embodiment of the first aspect, the outlet housing defining an adjustment axis extending parallel to the longitudinal direction, the outlet housing being rotatable around the adjustment axis.

[0039] In this way the position of the weir edge, and thereby the level of the light phase, can be adjusted by rotating the outlet housing about the adjustment axis.

[0040] According to a further embodiment of the first aspect, the outlet housing being spaced apart from centre point of the base.

[0041] The light phase outlet should be located at a radial distance from the axis of rotation to be able to separate the light phase from the heavy phase and define a level of the light phase in the bowl. In use the heavy phase will accumulate near the bowl wall, whereas the light phase will accumulate at a radial distance from the axis of rotation.

[0042] According to a further embodiment of the first aspect, the outlet housing being at least partially cylindrical and extending in the direction of the adjustment axis,

the weir edge being parallel to the adjustment axis .

[0043] In this way the weir edge will be parallel to the light phase surface during use for a well-defined level of the light phase in the bowl.

[0044] According to a further embodiment of the first aspect, the base comprising one or more further outlet housings for receiving the light phase from the inner space together with the first outlet housing, the one or more further outlet housings being substantially identical to the first outlet housing.

[0045] To better distribute the outflow from the bowl more than one outlet housing preferably can be used, such as two or three outlet housings.

[0046] According to a further embodiment of the first aspect, the feed inlet and the bearing surface being located on a cylindrical trunnion protruding in the longitudinal direction from the inner surface of the base.

[0047] There is a tendency for the conveyor screw to deflect and bend during use. This is due to vibrations induced into the conveyor screw by the rotation of the conveyor screw and the bowl. The vibrations induced by the rotation of the conveyor has a frequency corresponding to the rotation of the conveyor screw, i.e. a higher rotational speed of the conveyor screw will induce a higher frequency vibration into the conveyor screw. To avoid resonance effects in the conveyor screw, it must be ensured that the frequency of the vibrations due to the rotation of the conveyor screw will not be at or near the eigenfrequency of the conveyor screw. Resonance effects in the conveyor screw may cause excessive bending stress on the conveyor screw. This problem increases for longer conveyor screws, where the distance between the conveyor bearings is longer, since the bending rigidity decreases when the length of the conveyor screw increases. As the bending rigidity decreases, the eigenfrequency of the conveyor screw decreases, thus the eigenfrequency decreases with increasing length of the conveyor screw. By having the bearing surface protruding into the bowl, the distance between the conveyor bearings can be reduced and the bending stress on the conveyor bearing due to the length of the decanter bowl will be reduced.

[0048] According to a further embodiment of the first aspect, the outlet housing is located on the cylindrical trunnion.

[0049] In this way, the outlet housing can be positioned to extend from the cylindrical trunnion without interfering with the flow around the cylindrical trunnion.

[0050] According to a further embodiment of the first aspect, the weir edge of the light phase outlet extends further away from the inner surface in the longitudinal direction than the feed inlet.

[0051] To allow the feed inlet to be located as close as possible to the inner surface, the light phase outlet can extend further away from the inner surface in the longitudinal direction than the feed inlet. This will allow the feed to enter the bowl close to the inner surface and thereby increase the retention time of the heavy phase in

the bowl.

[0052] According to a further embodiment of the first aspect, the feed inlet defines an inlet opening facing in the radial direction, the feed inlet further comprising deflectors for causing the feed to flow substantially in a tangential direction relative to the opening.

[0053] In this way, the feed will have a rotational momentum when entering the bowl, allowing the heavy phase to settle more quickly at the outer wall of the bowl.

[0054] According to a further embodiment of the first aspect, the bearing surface is located further away from the inner surface in the longitudinal direction than the feed inlet.

[0055] To allow the feed inlet to be located as close as possible to the inner surface, the bearing surface can be located further away from the inner surface in the longitudinal direction than the feed inlet. This will allow the feed to enter the bowl close to the inner surface and thereby increase the retention time of the heavy phase in the bowl.

[0056] The object of the present invention is in a second aspect achieved by a decanter centrifuge comprising bowl rotating in use in a direction of rotation around an axis of rotation, the bowl comprising a base according to any of the preceding embodiments of the first aspect at one end of the bowl in the axis of rotation and a heavy phase outlet at an opposite end of the bowl in the axis of rotation, the longitudinal direction of the base coinciding with the axis of rotation.

[0057] The decanter centrifuge according to the second aspect can preferably be used together with the base according to the first aspect. The heavy phase outlet is located at an opposite end of the bowl relative to the light phase outlet and the feed inlet.

[0058] The object of the present invention is in a third aspect achieved by a method of operating a decanter centrifuge according to the second aspect, wherein the method comprising continuously introducing a flowable material into the bowl via the feed inlet while rotating the bowl about the axis of rotation thereby separating the flowable material into a light phase and a heavy phase and allowing the light phase to flow out of the bowl via the first light phase outlet and the heavy phase to flow out via the heavy phase outlet.

[0059] The method according to the third aspect can preferably be used together with the decanter centrifuge according to the second aspect.

[0060] According to a further embodiment of the third aspect, the flowable material is introduced at a rate higher than 75m³/h and the bowl is rotating to apply a g-force of at least 3000 G at the bowl wall.

[0061] A high rotational speed can be applied causing a high g-force to act on the flowable material. This will separate as much oil/fat from the solids of the heavy phase as possible and/or allow a high flow rate,

[0062] According to a further embodiment of the third aspect, the light phase is an oil and the heavy phase is a mixture of water and solids.

[0063] The oil/fat is discharged at the light phase outlet whereas other liquids, i.e. water, is discharged together with the solids at the heavy phase outlet.

Brief description of the drawings

[0064]

FIG. 1A is a side view of a decanter centrifuge according to the present invention.
 FIG. 1B is a side view of a decanter centrifuge according to the present invention.
 FIG. 2A is a perspective view of a circular base according to the present invention.
 FIG. 2B is a perspective view of the base showing the discharge of the light phase.
 FIG. 2C is a perspective view of the base from the rear side showing the discharge.
 FIG. 3A is a perspective view of the base showing the inflow of the flowable material.
 FIG. 3B is a perspective cutaway view of the base showing the trunnion interior.
 FIG. 3C is a perspective view of the base from the rear side showing the inflow.
 FIG. 4A is a perspective view of the conveyor screw.
 FIG. 4B is a perspective view of the conveyor screw.

Detailed description of the drawings

[0065] Fig. 1A is a side view of a decanter centrifuge 10 according to the present invention. The decanter centrifuge 10 comprises a rotatable bowl 12 and a conveyor screw 14. The bowl 12 has a cylindrical part 12a and a conical part 12b. The conveyor screw 14 has a corresponding cylindrical part 14a and conical part 14b. The bowl 12 is rotated by a drive motor 16a and the conveyor screw 14 is rotated by a back drive motor 16b. The back drive motor 16b is typically connected via a gearbox (not shown). An inlet 18 is provided for introducing the feed into the decanter centrifuge 10. The bowl 12 comprises a heavy phase outlet 20 at a small end hub 22 at the conical part 12b of the bowl 12 and a light phase outlet 24 at a base 26 forming a large end hub at the cylindrical part 12a of the bowl 12.

[0066] The conveyor screw 14 comprises a central body 28 extending in a longitudinal direction between a first bearing surface 30a at the cylindrical part 14a and a second bearing surface 30b at the conical part 14b. The conveyor screw 14 comprises a first flight 32 being attached to the central body 28. The first flight 32 extends over both the cylindrical part 14a and the conical part 14b of the conveyor screw 14. The first flight 32 extending to an inner wall 12c of the bowl 12 and defines a pitch angle being less than 20°. The present embodiment further comprises a second flight 34 not extending to the inner wall 12c of the bowl 12 and defining a pitch angle being greater than 30°. The pitch angle is here calculated by the expression: $\text{Pitch angle} = \text{ATAN}(\text{Pitch}/\pi \cdot (\text{Bowl dia-}$

meter))). The second flight 34 does not extend to the inner wall 12c and extends over only the cylindrical part 14a of the conveyor screw 14. The base 26 comprising a trunnion 40 which encompasses feed inlets 42 42' for the feed and the bearing surface 30a for the conveyor screw 14. The feed inlets 42 42' communicating with the inlet 18. The trunnion 40 also comprises at outlet housings 44 extending into the bowl 12 for transporting the light phase from the bowl 12 to the light phase outlet 24.

[0067] Fig. 1B is a side view of a decanter centrifuge 10 according to the present invention showing the inlet and outlet flows. The feed is introduced via the inlet 18 as shown by the arrow. The feed can be a crushed oil-containing plant- or animal item such as crushed corn seeds. The feed enters the bowl 12 via feed inlets 42 42'. The feed is separated into a slurry fraction and an oil fraction by centrifugal forces from the rotation of the bowl 12. The slurry fraction is a mixture of solids and water. The slurry fraction forms a heavy phase and is conveyed by the conveyor screw 14 and is discharged at the heavy phase outlet 20 as shown by the arrow. The oil fraction forms a light phase which is discharged via the outlet housings 44 and light phase outlet 24 as shown by the arrow. The slurry fraction being heavier than the oil fraction and will thus flow outwards and accumulate at the inner wall 12c of the bowl 12, the oil fraction being lighter than the slurry fraction and will thus flow inwards and accumulates near the central body 28. The first flight 32 collects the slurry fraction and conveys it towards the heavy phase outlet 20 of the bowl 12, whereas the second flight 34 being able to scrape and spread out the slurry fraction.

[0068] FIG. 2A is a perspective view of a circular base 26 according to the present invention. The base 26 comprises an inner surface 36 facing the interior of the bowl (not shown here) and an outer surface (not visible here) being opposite the inner surface 36 and facing the outside of the bowl. The base 26 comprising the trunnion 40 which constitutes a cylindrical element positioned about a centre point C of the base 26 protruding in a longitudinal direction L from the inner surface 36 of the base 26 into the bowl.

[0069] The trunnion 40 comprising a bearing surface 30a for the conveyor screw and feed inlets 42 42' for introducing feed (not shown) into the bowl. The bearing surface 30a being located further away in the longitudinal direction L from the inner surface 36 than the feed inlets 42 42' and encircles the centre point C. The bearing surface 30a being spaced apart from the centre point C in a radial direction r. The radial direction r being perpendicular to the longitudinal direction L. The feed inlets 42 42' is located more spaced apart in radial direction r from the centre point C than the bearing surface 40. In the present embodiment, two feed inlets 42 and 42' are provided, whereby the feed inlet 42 is the main feed inlet and the feed inlet 42' is an overflow inlet used during temporary high inflows.

[0070] The trunnion 40 further comprising the outlet housing 44. The outlet housing 44 being at least partially

cylindrical and extending from the base 26 through the trunnion 40 in the longitudinal direction L into the bowl. The outlet housing 44 is located spaced apart in radial direction r from the centre point C, typically further spaced apart from the centre point C than the bearing surface 30a. In the present embodiment, the screw flight 34 ends at the outlet housing 44. Further, in the present embodiment two outlet housings 44 and 44' are provided spaced apart by 180 degrees about the centre point C.

[0071] The light phase being oil/fat. During use, the light phase flows inwardly due to centrifugal forces and enters one of the outlet housings 44 44' as shown by the arrows. The light phase enters the outlet housing 44 44' via a light phase opening 46. (Only the light phase opening 46' of the outlet housing 44' is visible in the present view, however, the outlet housing 44 has an identically configured light phase opening). The light phase opening 46 defines a weir edge extending in parallel with the first adjustment axis of the outlet housing 44 44' and defining in normal use a level of the light phase within the bowl. In the present embodiment, the outlet housing 44 44' has a cylindroconical shape having the light phase opening 46' in a conically shaped part of the outlet housing 44 for a smoother flow.

[0072] FIG. 2B is a perspective view of the base showing the discharge of the light phase. The light phase enters the outlet housings 44 44' at a radial distance from the centre point C. The radial distance of the opening 46 (and thereby the weir) from the centre point C can be adjusted by rotating the outlet housing 44 44' about an adjustment axis A. In this way the level of the light phase within the bowl can be adjusted. In use the bowl (not shown) rotates causing the feed (not shown) inside the bowl to separate in a heavy phase (not shown) and light liquid phase having a surface at a level, which is slightly above the level of the weir edge thereby providing a pressure head driving the light phase out of the bowl through the opening 46 and the outlet housing 44.

[0073] FIG. 2C is a perspective view of the base from the rear side showing the outer surface 36' and the discharge of the light phase as shown by the arrows. The outlet housing 44 extends to the outer surface 36' of the base 26 and defines an outlet 48 at the outer surface 36' of the base 26 for ejecting the light phase. The outlet housing 44 can be adjusted about the adjustment axis A from the outside.

[0074] FIG. 3A is a perspective view of the base showing the inflow of the flowable material. The flowable material is introduced centrally in the longitudinal direction and flows out in the radial direction into the bowl (not shown) via the feed inlets 42 42'.

[0075] FIG. 3B is a perspective cutaway view of the base 26 showing the interior of the trunnion 40. As can be seen the flowable material is deflected by deflectors 50 from flowing in the longitudinal direction to a direction substantially corresponding to the tangential direction of the rotation of the bowl (not shown). In this way, less time within the bowl is needed to accelerate the flowable

material to the bowl rotation speed, and the separation can therefore be more efficient.

[0076] FIG. 3C is a perspective view of the base from the rear side showing the inlet 18. The inlet is centrally in the longitudinal direction.

[0077] Fig. 4A is a perspective view of the conveyor screw 14 according to the present invention. The conveyor screw 14 comprises the first flight 32 and the second flight 34 being attached to the central body 28. The first flight 32 extends over both the cylindrical part 14a and the conical part 14b of the conveyor screw 14 and defines a pitch angle being less than 20° for being able to collect the slurry fraction and convey it towards the heavy phase outlet of the bowl. The second flight 34 extends in the longitudinal direction along the cylindrical portion of the conveyor screw 14 only. The first flight 32 and the second flight 34 being at least partially intertwined.

[0078] Both the first flight 32 and the second flight 34 has the same winding direction, however, the second flight 34 defining a pitch angle being more than 30° for scraping and spreading out the slurry at the inner surface of the bowl. The second flight 34 extends to a smaller outer perimeter than the first flight 32 for the slurry to be spread out on the inner surface of the bowl. This will allow more oil to be released from the slurry.

[0079] The conveyor screw 14 is further provided with a baffle plate 60 between the cylindrical part 14a and the conical part 14b for preventing oil from flowing towards the heavy phase outlet of the bowl. The conveyor screw 14 is further provided with a third flight 52 extending to a smaller outer perimeter than the second flight 34. The purpose of the third flight 52 is to define an oil channel 54 between the second flight 34 and the third flight 52 to allow the oil to flow towards the light phase outlet of the bowl.

[0080] The first flight 32 comprises gaps 56 for allowing the second flight 34 and the third flight 52 to pass through. The first flight 32 is slightly offset at the gaps 56 to scrape any slurry which would otherwise be missed due to the gaps 56. The conveyor screw 14 further comprises a cage structure 58 extending from the first bearing surface 30a away from the second bearing surface 30b for carrying the first screw 32 beyond the first bearing surface 32a.

[0081] The present conveyor screw 14 also includes an additional fourth flight 34' and fifth flight 52' which essentially correspond to the second flight 34 and third flight 52, respectively, albeit being 180° phase shifted. In this way there will be an additional oil channel 54' and two spread-out effects on the slurry for each turn of the conveyor screw 14.


[0082] The present view also shows the base 26 being attached to the first bearing surface 30a during use. The base 28 comprises the feed inlet 42 42' and the outlet housing 44.


[0083] Fig. 4B is a perspective view of the conveyor screw 14 according to the present invention when the base 26 is connected to the first bearing surface 30a. The


central body 28 being free from any fluid openings between the first bearing surface 30a and the second bearing surface 30b for increasing the structural stability and stiffness of the conveyor screw 14.




Claims


1. A circular base for a decanter centrifuge, the base being configured to be accommodated at one longitudinal end of a rotatable bowl of the decanter centrifuge, the base defining an inner surface configured to face an interior of the bowl, a radial direction extending outwardly from a centre point of the base and a longitudinal direction extending perpendicular to the radial direction, the base comprising:
 - a bearing surface for a conveyor screw, the bearing surface being centrally located at the inner surface of the base and extending about the centre point of the base,
 - a feed inlet for introducing a flowable material into the bowl of the decanter centrifuge, the flowable material comprising a light phase and a heavy phase, and
 - a first light phase outlet for receiving the light phase from the bowl of the decanter centrifuge, the first light phase outlet comprising a first weir edge defining in normal use a level of the light phase in the bowl.
2. The base according to any of the preceding claims, wherein the first light phase outlet is provided in an outlet housing, the outlet housing being cylindrical and protruding in the longitudinal direction from the inner surface.
3. The base according to claim 2, wherein the outlet housing defining an adjustment axis extending parallel to the longitudinal direction, the outlet housing being rotatable around the adjustment axis.
4. The base according to claim 3, wherein the outlet housing being spaced apart from centre point of the base.
5. The base according to any of the claims 3-4, wherein the outlet housing being at least partially cylindrical and extending in the direction of the adjustment axis, the weir edge being parallel to the adjustment axis.
6. The base according to any of the claims 2-5, wherein the base comprising one or more further outlet housings for receiving the light phase from the inner space together with the first outlet housing, the one or more further outlet housings being substantially identical to the first outlet housing.
7. The base according to any of the preceding claims, wherein the feed inlet and the bearing surface being located on a cylindrical trunnion protruding in the longitudinal direction from the inner surface of the base.
8. The base according to claim 7 and any of the claims 2-6, wherein the outlet housing is located on the cylindrical trunnion.
9. The base according to any of the preceding claims, wherein the weir edge of the light phase outlet extends further away from the inner surface in the longitudinal direction than the feed inlet.
10. The base according to any of the preceding claims, wherein the feed inlet defines an inlet opening facing in the radial direction, the feed inlet further comprising deflectors for causing the feed to flow substantially in a tangential direction relative to the opening.
11. The base according to any of the preceding claims, wherein the bearing surface is located further away from the inner surface in the longitudinal direction than the feed inlet.
12. A decanter centrifuge comprising bowl rotating in use in a direction of rotation around an axis of rotation, the bowl comprising a base according to any of the preceding claims at one end of the bowl in the axis of rotation and a heavy phase outlet at an opposite end of the bowl in the axis of rotation, the longitudinal direction of the base coinciding with the axis of rotation.
13. A method of operating a decanter centrifuge according to claim 12, wherein the method comprising continuously introducing a flowable material into the bowl via the feed inlet while rotating the bowl about the axis of rotation thereby separating the flowable material into a light phase and a heavy phase and allowing the light phase to flow out of the bowl via the light phase outlet and the heavy phase to flow out via the heavy phase outlet.
14. The method according to claim 13, wherein the flowable material is introduced at a rate higher than $75\text{m}^3/\text{h}$ and the bowl is rotating to apply a g-force of at least 3000 g_n at the bowl wall.
15. The method according to any of the claims 13-14, wherein the light phase is an oil and the heavy phase is a mixture of water and solids.

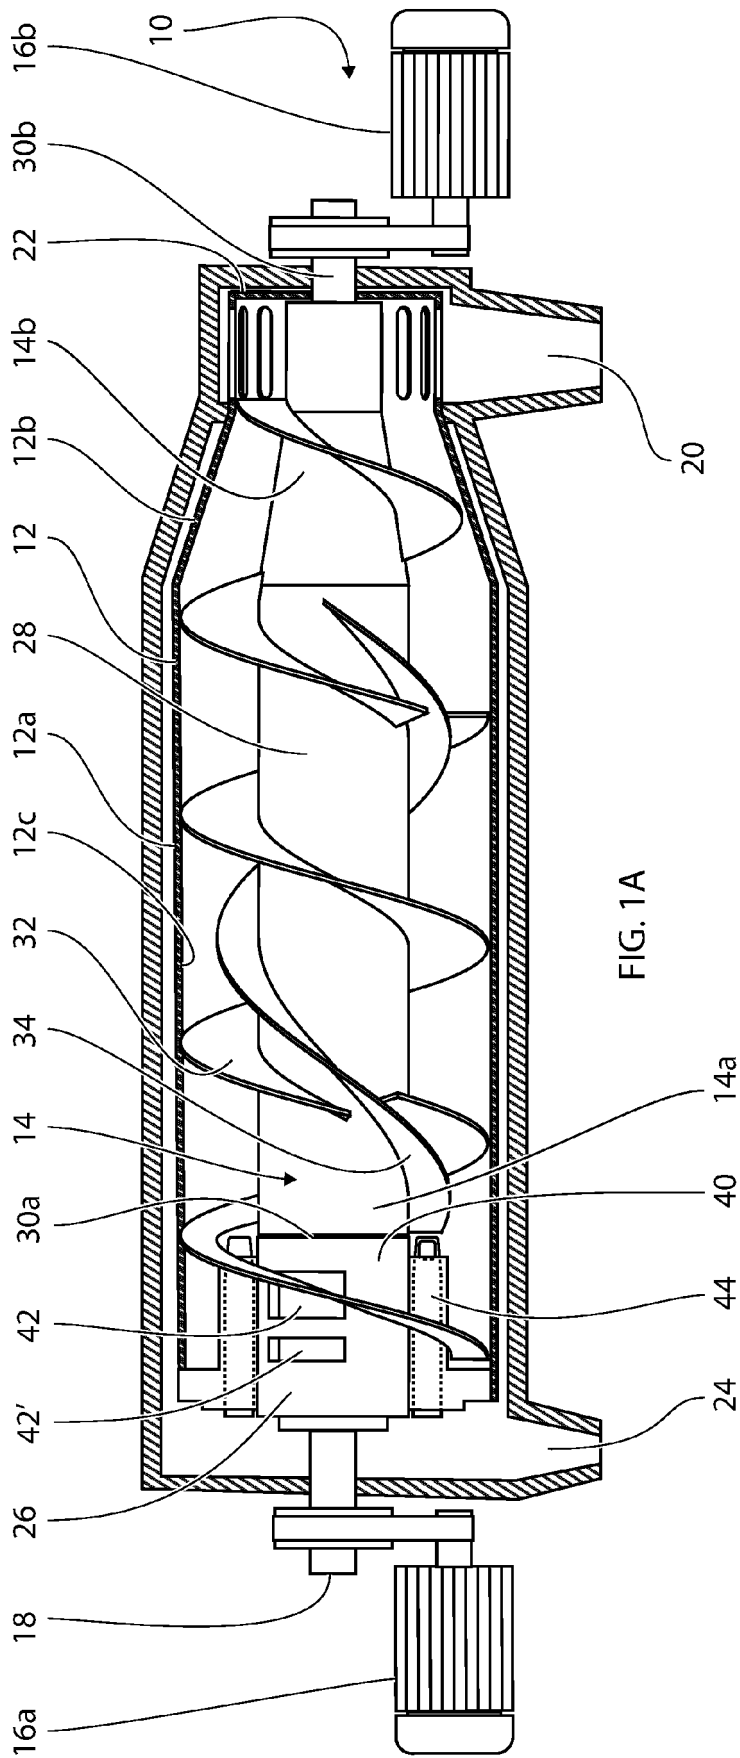

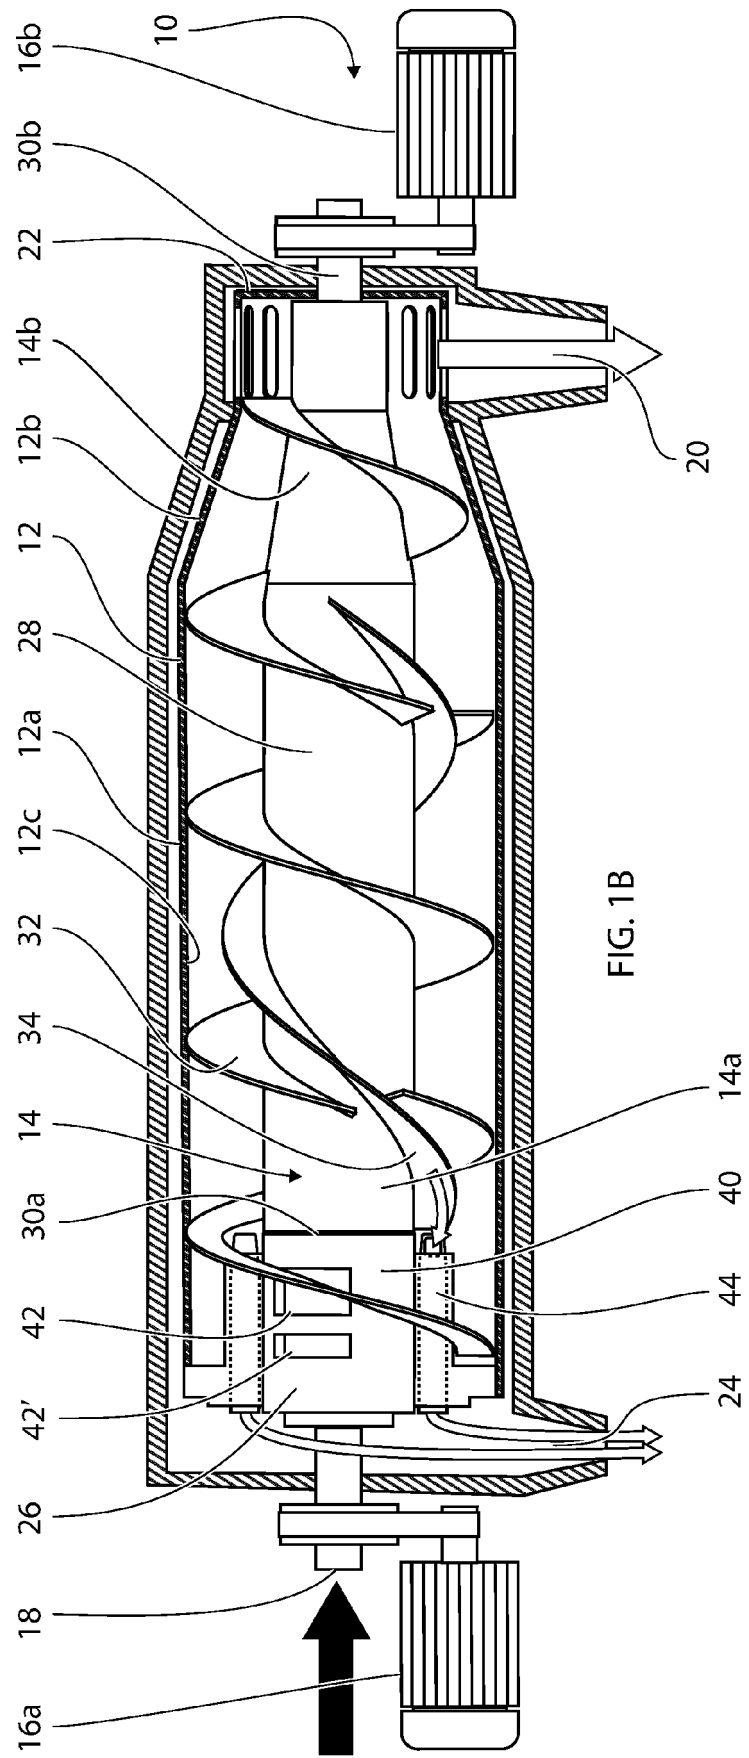

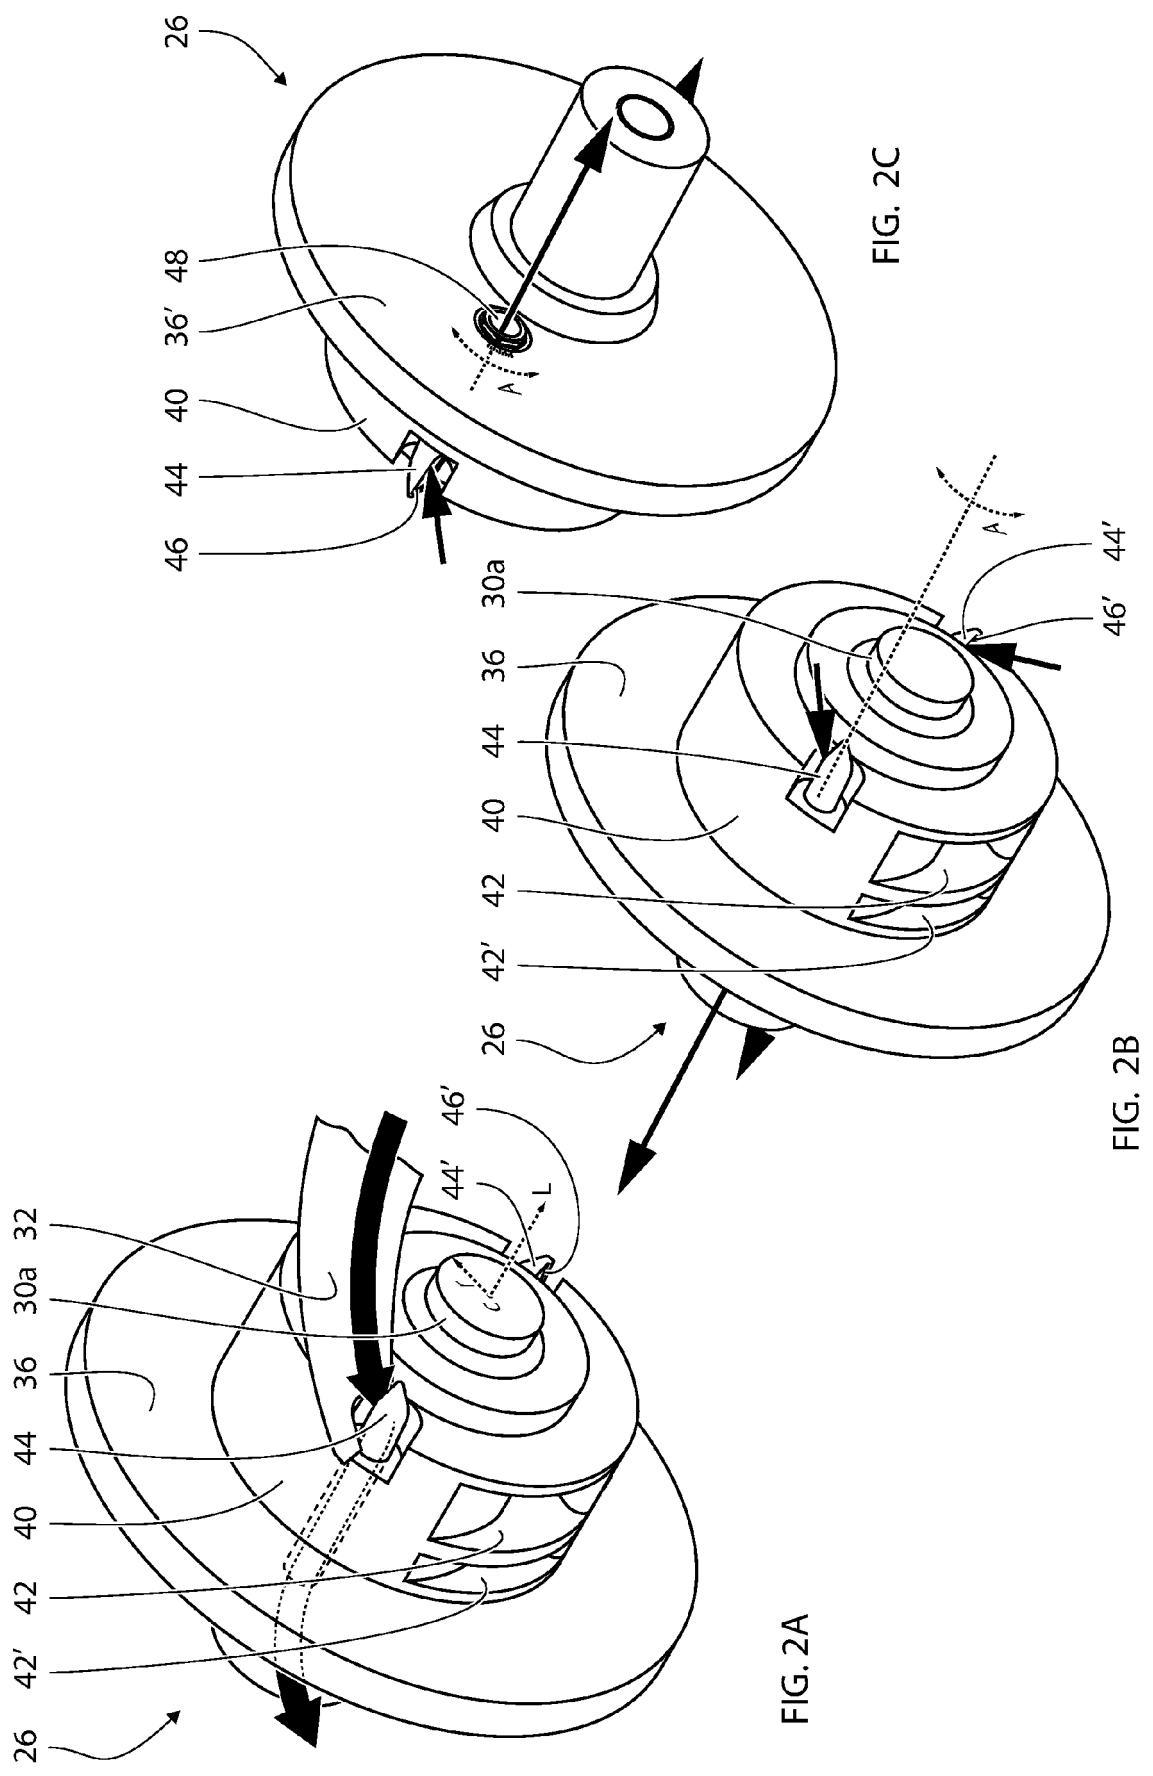

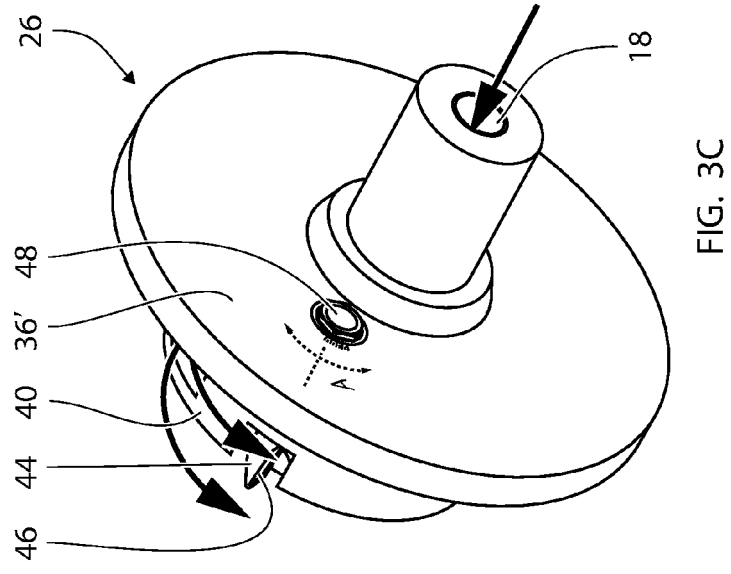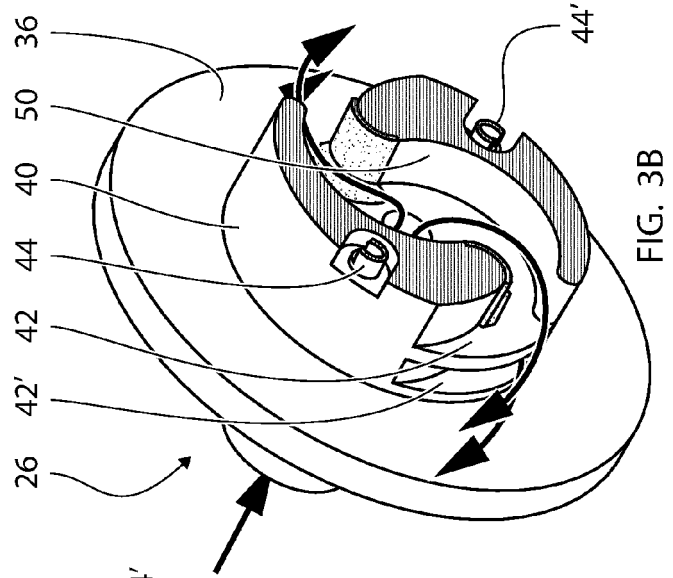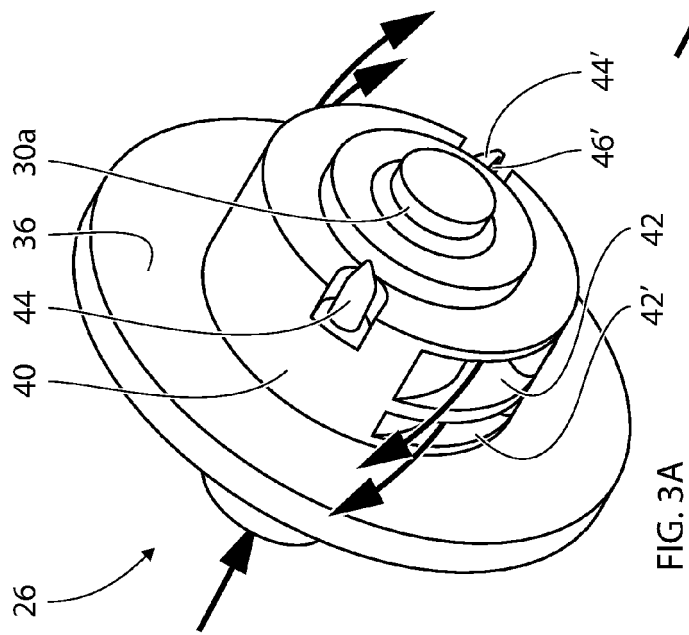

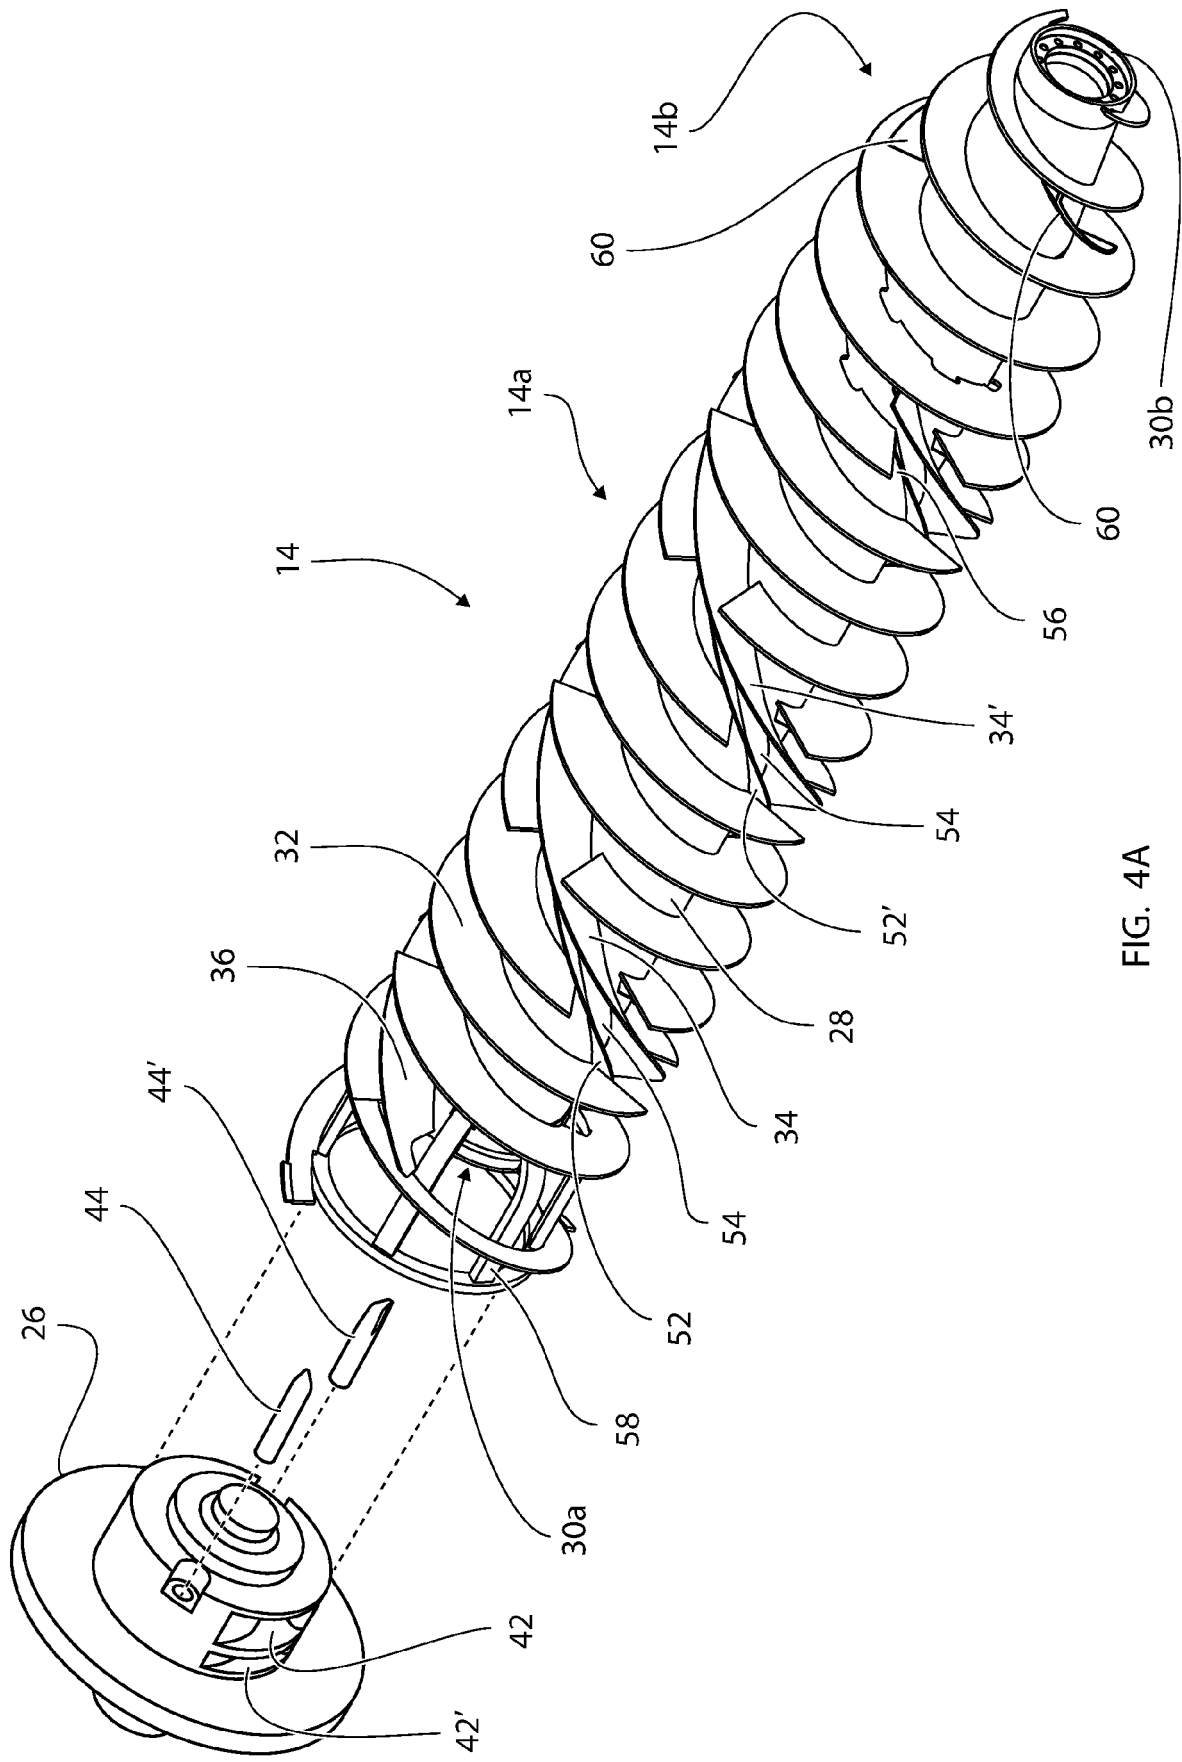

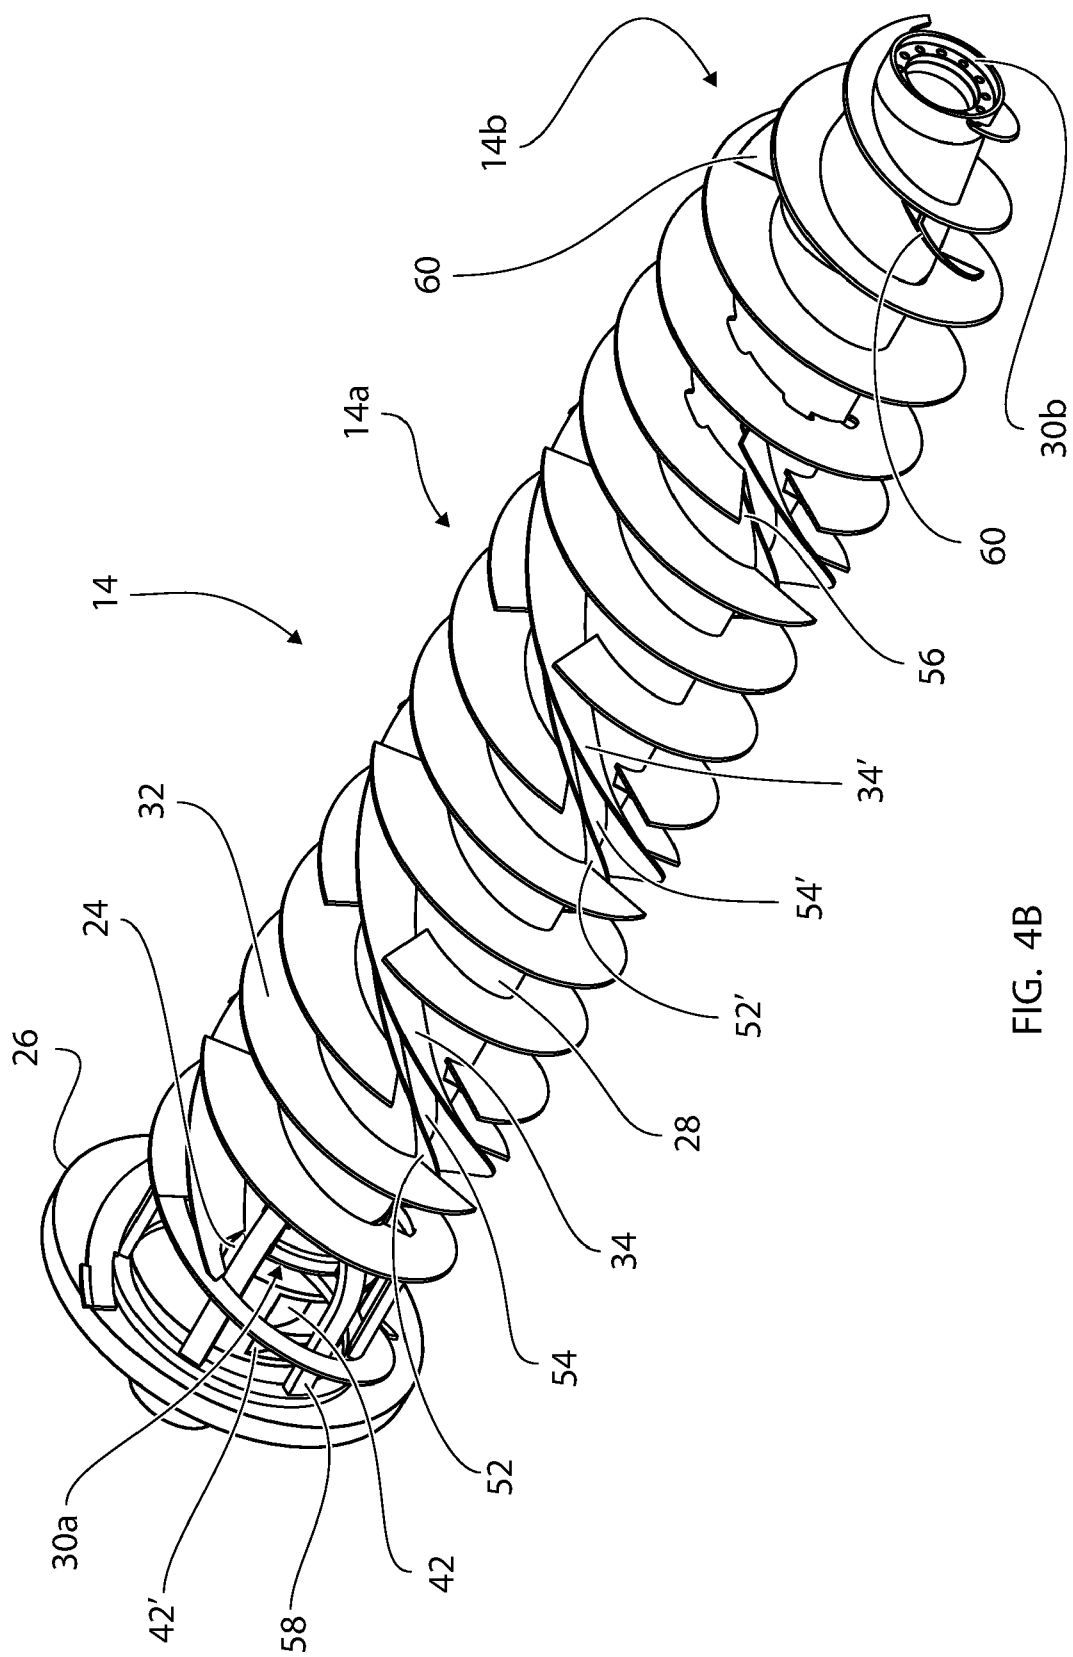


FIG. 4B



EUROPEAN SEARCH REPORT

Application Number

EP 23 21 3455

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	FR 1 392 495 A (VOITH GMBH J M) 19 March 1965 (1965-03-19)	1, 2, 6, 9-15	INV. B04B1/20
A	* page 1, paragraph 1; figures 1-3 * -----	4	
X	GB 1 369 521 A (YAROSLAVTSEV R A SHKOROPAD D E; FAINERMAN I A) 9 October 1974 (1974-10-09)	1, 7, 10-15	
A	* page 2, line 108 - page 3, line 43; figure 1 * -----	4	
X	KR 102 000 530 B1 (BUSUNG CENTRIFUGE CO LTD [KR]) 16 July 2019 (2019-07-16)	1-3, 5, 7, 8, 12-15	
A	* paragraphs [0023] - [0028]; figures 1-3 * -----	4	
A	EP 2 637 795 B1 (ALFA LAVAL CORP AB [SE]) 18 January 2017 (2017-01-18)	1, 13	
	* paragraphs [0036], [0037]; figures 1, 4, 5, 6, 7 * -----		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			B04B
Place of search			Examiner
Munich			Pössinger, Tobias
Date of completion of the search			
28 March 2024			
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone			
Y : particularly relevant if combined with another document of the same category			
A : technological background			
O : non-written disclosure			
P : intermediate document			
T : theory or principle underlying the invention			
E : earlier patent document, but published on, or after the filing date			
D : document cited in the application			
L : document cited for other reasons			
& : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 23 21 3455

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-03-2024

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 1392495	A	19-03-1965	NONE
GB 1369521	A	09-10-1974	NONE
KR 102000530	B1	16-07-2019	NONE
EP 2637795	B1	18-01-2017	AU 2011328569 A1 30-05-2013
		BR 112013010751 A2 02-05-2018	
		CA 2816348 A1 18-05-2012	
		CN 103209767 A 17-07-2013	
		DK 178253 B1 12-10-2015	
		DK 2637795 T3 24-04-2017	
		EP 2637795 A2 18-09-2013	
		HK 1183271 A1 20-12-2013	
		JP 5931894 B2 08-06-2016	
		JP 2013545602 A 26-12-2013	
		KR 20130140775 A 24-12-2013	
		NZ 610065 A 26-09-2014	
		PL 2637795 T3 30-06-2017	
		RU 2534768 C1 10-12-2014	
		SG 190119 A1 28-06-2013	
		US 2013310242 A1 21-11-2013	
		WO 2012062337 A2 18-05-2012	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2010142299 A1 [0005]
- WO 2020109135 A1 [0006]
- US 7156801 B [0007]
- DE 102019102623 [0008]
- US 20150209804 A [0009]
- EP 0868217 A [0010]
- EP 2130607 B1 [0011]
- DE 2651657 [0012]
- US 3268159 A [0013]
- JP 62106856 B [0014]
- US 3494472 A [0015]
- US 7022061 B [0016]
- US 9089852 B [0017]
- WO 2012062337 A2 [0018]
- DE 102020129478 A1 [0019]
- EP 0506835 B1 [0020]
- EP 0602766 B1 [0021]
- EP 2440335 A1 [0022]
- EP 2926911 B1 [0023]
- EP 3177403 B1 [0024]
- WO 2021122878 A1 [0025]
- WO 2021122884 A1 [0026]
- WO 2022096734 A1 [0027]
- WO 2022096739 A1 [0028]
- WO 2022096745 A1 [0029]
- US 8841469 B [0030]