



- (51) **International Patent Classification:**
G06F 19/00 (2011.01) *A61B 19/00* (2006.01)
- (21) **International Application Number:**
PCT/US2013/075115
- (22) **International Filing Date:**
13 December 2013 (13.12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/737,008 13 December 2012 (13.12.2012) US
- (71) **Applicant:** UNIVERSITY OF WASHINGTON
THROUGH ITS CENTER FOR COMMERCIALIZA-
TION [US/US]; 4311 11th Avenue NE, Suite 500, Seattle,
WA 98105 (US).
- (72) **Inventors:** BLY, Randall; 14015 36th Ave. NE, Seattle,
WA 98125 (US). HANNAFORD, Blake; 5634 12th Ave.
NE, Seattle, WA 98105 (US). MOE, Kris, S.; 3879 51st
Ave. NE, Seattle, WA 98105 (US).
- (74) **Agent:** URBAN, Benjamin, M.; McDonnell Boehnen
Hulbert & Berghoff LLP, 300 South Wacker Drive, Suite
3100, Chicago, IL 60606 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** METHODS AND SYSTEMS FOR SELECTING SURGICAL APPROACHES

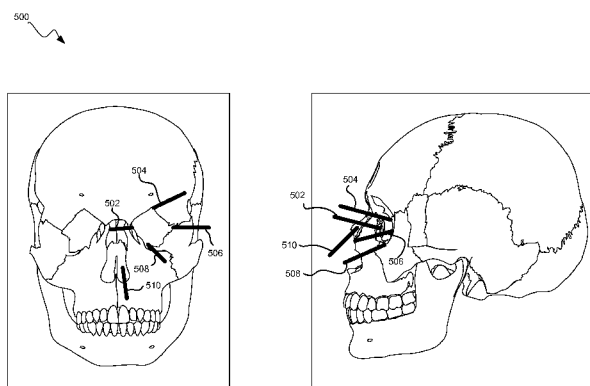


FIG. 5

(57) **Abstract:** Described herein are methods and systems for selecting surgical approaches. One example method involves (1) receiving data indicating (a) one or more surgical target regions and (b) one or more surgical portals; (2) determining a plurality of surgical pathways; (3) determining a plurality of surgical approaches; (4) for each surgical approach in the plurality of surgical approaches, determining at least one approach characteristic, for each determined surgical pathway in the respective surgical approach, determining at least one pathway characteristic, and determining a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic; (5) selecting a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and (6) causing an output device to provide a representation of the selected subset of the plurality of surgical approaches.

METHODS AND SYSTEMS FOR SELECTING SURGICAL APPROACHES

RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Patent Application Serial No. 61,737,008 filed December 13, 2012, entitled *Model for surgical planning, virtual surgery, and surgical rehearsal for craniofacial, sinus, skull base, and neurological surgery applications*, which is incorporated herein in its entirety.

BACKGROUND

[0002] Unless otherwise indicated herein, the materials described in this section are not prior art to the claims in this application and are not admitted to be prior art by inclusion in this section.

[0003] Surgical planning may involve identifying a surgical target or target region, and then selecting a surgical pathway to reach that surgical target. Selection of a particular surgical pathway is often based upon the access that the surgical pathway provides to the surgical target in view of the nearby anatomy. Better access to the surgical target may lead to a better surgical outcome.

[0004] However, better access to a surgical target is not the sole determinant of a successful surgical outcome. Another goal of surgical planning is to reduce collateral damage to the nearby anatomy. Collateral damage may include pathway trauma, which refers to damage incurred by dissection performed to reach the surgical target. In addition, collateral damage may include target trauma, or damage to healthy tissue that is adjacent to the surgical target that occurs when the surgical target is manipulated. The extent of target trauma is often

dictated by the pathology of the surgical target. In contrast, pathway trauma might be reduced by appropriate selection of surgical pathways.

[0005] Selection of surgical pathways may begin with choosing a surgical portal, or opening, in the anatomy that is being operated upon. For example, in skull base surgery, transnasal portals have been identified that may form the entry point of surgical pathways into the skull base. Use of transnasal portals as part of the surgical pathway has led to reduced pathway trauma in some circumstances.

[0006] At the same time, rapid advances in many fields of surgery have led to the identification of new surgical pathways. Additional surgical pathways into the skull base as well as new surgical pathways to other anatomical features are likely to be identified in the future. By extension, the identification of new surgical portals has led to successful surgeries using multiple portals and pathways. Combined surgical approaches have significant potential to reduce collateral damage to healthy tissue.

[0007] However, the number of possible surgical pathways and combinations thereof is extensive. Moreover, because of the inconsistent and unpredictable nature of target pathologies, selection of an appropriate pathway or combination of pathways is often unintuitive. Therefore, a systematic approach to comparing, evaluating, and selecting between surgical approaches may improve surgical outcomes.

SUMMARY

[0008] Described herein are methods and systems for surgical planning. The methods and systems may be employed during surgical planning to assist in selection of one or more surgical approaches. Such methods and systems may involve determining surgical-approach characteristics and surgical-pathway characteristics that can be used to rank various surgical approaches. These surgical approach rankings can aid in selecting an appropriate surgical pathway or combination of pathways for a given surgical target. A representation of the selected surgical pathway or combination of pathways may be provided via one or more output device that may improve access to the surgical target and reduce collateral damage, among other potential benefits.

[0009] In one aspect, a computer-implemented method is provided. The method may involve: (1) receiving data indicating (a) one or more surgical target regions and (b) one or more surgical portals; (2) determining a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals; (3) determining a plurality of surgical approaches, wherein each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway; (4) for each surgical approach in the plurality of surgical approaches, determining at least one approach characteristic, for each determined surgical pathway in the respective surgical approach, determining at least one pathway characteristic, and determining a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic; (5) selecting a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and (6) causing an output device to provide a representation of the selected subset of the plurality of surgical approaches.

[0010] In another aspect, a computing system is provided. The computing system may include: (A) an output device; (B) a physical, non-transitory computer readable medium; and (C) program instructions stored on the physical computer readable medium and executable by at least one processor to cause the computing system to: (1) receive data indicating (a) one or more surgical target regions and (b) one or more surgical portals; (2) determine a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals; (3) determine a plurality of surgical approaches, wherein each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway; (4) for each surgical approach in the plurality of surgical approaches, determine at least one approach characteristic, for each determined surgical pathway in the respective surgical approach, determine at least one pathway characteristic, and determine a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic; (5) select a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and (6) cause an output device to provide a representation of the selected subset of the plurality of surgical approaches.

[0011] In another aspect, a physical, non-transitory computer-readable medium is provided. The physical computer-readable medium may include instructions that are executable by a computing system to cause the computing system to perform functions. The functions include: (1) receiving data indicating (a) one or more surgical target regions and (b) one or more surgical portals; (2) determining a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals; (3) determining a plurality of surgical approaches, wherein

each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway; (4) for each surgical approach in the plurality of surgical approaches, determining at least one approach characteristic, for each determined surgical pathway in the respective surgical approach, determining at least one pathway characteristic, and determining a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic; (5) selecting a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and (6) causing an output device to provide a representation of the selected subset of the plurality of surgical approaches.

[0012] In another aspect, another computer-implemented method is provided. The method may involve: (1) receiving data for a patient indicating (a) one or more surgical target regions within the patient and (b) one or more surgical portals of the patient; (2) determining a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals; (3) determining a plurality of surgical approaches, wherein each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway; (4) for each surgical approach in the plurality of surgical approaches, determining at least one approach characteristic, for each determined surgical pathway in the respective surgical approach, determining at least one pathway characteristic, and determining a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic; (5) selecting a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and (6) causing an output device to provide a representation of the selected subset of the plurality of surgical approaches.

[0013] In another aspect, another computing system is provided. The computing system may include: (A) an output device; (B) a physical, non-transitory computer readable medium; and (C) program instructions stored on the physical computer readable medium and executable by at least one processor to cause the computing system to: (1) receive data for a patient indicating (a) one or more surgical target regions within the patient and (b) one or more surgical portals of the patient; (2) determine a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals; (3) determine a plurality of surgical approaches, wherein each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway; (4) for each surgical approach in the plurality of surgical approaches, determine at least one approach characteristic, for each determined surgical pathway in the respective surgical approach, determine at least one pathway characteristic, and determine a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic; (5) select a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and (6) cause an output device to provide a representation of the selected subset of the plurality of surgical approaches.

[0014] In another aspect, another physical, non-transitory computer-readable medium is provided. The physical computer-readable medium may include instructions that are executable by a computing system to cause the computing system to perform functions. The functions include: (1) receiving data for a patient indicating (a) one or more surgical target regions within the patient and (b) one or more surgical portals of the patient; (2) determining a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or more surgical target

regions and (b) a respective surgical portal of the one or more surgical portals; (3) determining a plurality of surgical approaches, wherein each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway; (4) for each surgical approach in the plurality of surgical approaches, determining at least one approach characteristic, for each determined surgical pathway in the respective surgical approach, determining at least one pathway characteristic, and determining a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic; (5) selecting a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and (6) causing an output device to provide a representation of the selected subset of the plurality of surgical approaches.

[0015] These as well as other aspects, advantages, and alternatives, will become apparent to those of ordinary skill in the art by reading the following detailed description, with reference where appropriate to the accompanying drawings.

BRIEF DESCRIPTION OF THE FIGURES

[0016] Figure 1 shows a simplified block diagram of a computing system, in accordance with an example embodiment.

[0017] Figure 2 shows an illustrative computer-readable medium, in accordance with an example embodiment.

[0018] Figure 3A shows a first part of an illustrative method for selecting surgical approaches.

[0019] Figure 3B shows a second part of the illustrative method for selecting surgical approaches.

[0020] Figure 4 shows an illustrative three-dimensional model of a human skull.

[0021] Figure 5 shows illustrative approach vectors indicating surgical portals within an illustrative three-dimensional model of a human skull.

[0022] Figure 6 shows an illustrative representation of aspects of a surgical pathway.

[0023] Figure 7 shows illustrative surgical pathways and an illustrative anatomical plane within an illustrative three-dimensional model of a human skull.

[0024] Figure 8 shows a chart that provides angles between instruments in a study of fourteen subjects.

[0025] Figure 9 shows a chart that provides angles between instruments and an anatomical plane in the study of fourteen subjects.

[0026] Figure 10 shows an illustrative modular representation of a model of a human skull.

[0027] Figure 11 shows a table of determined approach and pathway characteristics for non-midline surgical target regions in the study of fourteen subjects.

[0028] Figure 12 shows a table of determined approach and pathway characteristics for midline surgical target regions in the study of fourteen subjects.

[0029] Figure 13 shows a plot comparing determined approach characteristics to measured approach characteristics.

[0030] Figure 14 shows a plot comparing determined pathway characteristics to measured approach characteristics.

[0031] Figure 15 shows a table of determined approach and pathway characteristics, and measured approach and pathway characteristics, on four cadavers.

DETAILED DESCRIPTION

[0032] In the following detailed description, reference is made to the accompanying figures, which form a part thereof. In the figures, similar symbols typically identify similar components, unless context dictates otherwise. The illustrative embodiments described in the detailed description, figures, and claims are not meant to be limiting. Other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the subject matter presented herein. It will be readily understood that aspects of the present disclosure, as generally described herein, and illustrated in the figures, can be arranged, substituted, combined, separated, and/or designed in a wide variety of different configurations, all of which are explicitly contemplated herein.

1. Example Architecture

[0033] Figure 1 shows a simplified block diagram of an example computing system 100 in which the present method can be implemented. It should be understood that this and other arrangements described herein are set forth only as examples. Those skilled in the art will appreciate that other arrangements and elements (e.g., machines, interfaces, functions, orders, and groupings of functions, etc.) can be used instead and that some elements may be omitted altogether. Further, many of the elements described herein are functional entities that may be implemented as discrete or distributed components or in conjunction with other components, and in any suitable combination and location. Various functions described herein as being performed by one or more entities may be carried out by hardware, firmware, and/or software. And various functions described herein may be carried out by a processor executing instructions stored in memory.

[0034] As shown in Figure 1, computing system 100 may include processor 102, data storage 104, and communication interface 110, all linked together via system bus, network, or other connection mechanism 112.

[0035] Processor 102 may include one or more general purpose microprocessors and/or one or more dedicated signal processors and may be integrated in whole or in part with communication interface 110. Data storage 104 may include memory and/or other storage components, such as optical, magnetic, organic or other memory disc storage, which can be volatile and/or non-volatile, internal and/or external, and integrated in whole or in part with processor 102. Data storage 104 may be arranged to contain (i) program data 106 and (ii) program logic 108. Although these components are described herein as separate data storage elements, the elements could just as well be physically integrated together or distributed in various other ways. For example, program data 106 may be maintained in data storage 104 separate from program logic 108, for easy updating and reference by program logic 108.

[0036] Communication interface 110 typically functions to communicatively couple computing system 100 to networks. As such, communication interface 110 may include a wired (e.g., Ethernet) and/or wireless (e.g., Wi-Fi) packet-data interface, for communicating with other devices, entities, and/or networks. Computing system 100 may also include multiple interfaces 110, such as one through which computing system 100 sends communication, and one through which computing system 100 receives communication.

[0037] Computing system 100 may also include, or may be otherwise communicatively coupled to, output device 120. Output device 120 may include one or more elements for communicating outputs, for example, one or more graphical displays 122 and/or a speaker. In operation, user interface 120 may be configured to display a graphical user interface (GUI) via graphical display 122, corresponding to use of such a GUI. Output device

120 may additionally or alternatively include a manufacturing machine, such as a printer. In some embodiments, the manufacturing machine may be an additive manufacturing machine 124, also known as a three-dimensional printer. In operation, additive manufacturing machine 124 may be configured to provide one or more three-dimensional representations of the human body, parts thereof, or elements associated with surgery from data representing a three-dimensional model.

[0038] As noted above, in some embodiments, the disclosed methods may be implemented by computer program instructions encoded on a physical, and/or non-transitory, computer-readable storage media in a machine-readable format, or on other non-transitory media or articles of manufacture. Figure 2 is a schematic illustrating a conceptual partial view of an example computer program product that includes a computer program for executing a computer process on a computing system, arranged according to at least some embodiments presented herein.

[0039] In one embodiment, the example computer program product 200 is provided using a signal bearing medium 202. The signal bearing medium 202 may include one or more programming instructions 204 that, when executed by one or more processors may provide functionality or portions of the functionality described herein. In some examples, the signal bearing medium 202 may encompass a computer-readable medium 206, such as, but not limited to, a hard disk drive, a Compact Disc (CD), a Digital Video Disk (DVD), a digital tape, memory, etc. In some implementations, the signal bearing medium 202 may encompass a computer-recordable medium 208, such as, but not limited to, memory, read/write (R/W) CDs, R/W DVDs, etc. In some implementations, the signal bearing medium 202 may encompass a communications medium 210, such as, but not limited to, a digital and/or an analog communication medium (e.g., a fiber optic cable, a waveguide, a wired communications link, a wireless communication link, etc.). Thus, for example, the signal

bearing medium 202 may be conveyed by a wireless form of the communications medium 210. It should be understood, however, that computer-readable medium 206, computer recordable medium 208, and communications medium 210 as contemplated herein are distinct mediums and that, in any event, computer-readable medium 208 is a physical, non-transitory, computer-readable medium.

[0040] The one or more programming instructions 204 may be, for example, computer executable and/or logic implemented instructions. In some examples, a computing system such as the computing system 100 of Figure 1 may be configured to provide various operations, functions, or actions in response to the programming instructions 204 conveyed to the computing system 100 by one or more of the computer readable medium 206, the computer recordable medium 208, and/or the communications medium 210.

2. Example Method

[0041] Figures 3A and 3B show a flowchart depicting functions that can be carried out in accordance with at least one embodiment of an example method. As shown in Figure 3A, method 300 begins at block 302 with a computing system receiving data indicating (a) one or more surgical target regions and (b) one or more surgical portals. At block 304, the computing system determines a plurality of surgical pathways, where each surgical pathway in the plurality of surgical pathways includes (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals. At block 306, the computing system determines a plurality of surgical approaches, where each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway. At block 308, for each surgical approach in the plurality of surgical approaches, the computing system determines at least one approach characteristic. At block 310, for each surgical approach in the plurality of surgical approaches, the computing

system determines, for each determined surgical pathway in the respective surgical approach, at least one pathway characteristic. Turning to Figure 3B, method 300 continues at block 312, where, for each surgical approach in the plurality of surgical approaches, the computing system determines a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic. At block 314, the computing system selects a subset of the plurality of surgical approaches based on the determined surgical approach rankings. At block 316, the computing system causes an output device to provide a representation of the selected subset of the plurality of surgical approaches.

[0042] In some implementations, method 300 may be carried out entirely, or in part, by computing system 100. Other suitable computing systems may be used as well.

a. Receive Data Indicating (A) One or More Surgical Target Regions and (B) One or More Surgical Portals

[0043] At block 302, the computing system receives data indicating (a) one or more surgical target regions and (b) one or more surgical portals. For example, computing system 100 in Figure 1 may receive the data over system bus, network, or other connection mechanism 112. In some embodiments, the computer system may receive the imaging data from a medical imaging machine, such as a magnetic resonance imaging (MRI) machine, a positron emission tomography (PET) machine, or a computed tomography (CT) machine. In other embodiments, the computing system may receive the imaging data from a computing device via a network. In some embodiments, the computing system may receive the imaging data via a transfer from a data storage device, such as a hard disk drive or a USB flash drive. In other embodiments, the computing system may receive the imaging data via a transfer from a data storage medium, such as a CD-ROM disk. Many other examples are possible as well.

[0044] The data indicating the one or more surgical target regions may include data defining the one or more surgical target regions as volumes within a model. In planning for, preparing for, or performing a surgery, data representing a model of one or more anatomical structures may be provided to a computing system. In some embodiments, the data may also define a three-dimensional (3-d) coordinate system. Each of the one or more anatomical structures may include data points that define a respective volume within the three-dimensional coordinate system for each of the one or more anatomical structures. The data points that define volumes in the model may indicate specific sets of coordinates within the 3-d coordinate system, such as one or more (x,y,z) coordinates.

[0045] In some embodiments, each data point in the model may represent a voxel, or volume element. In such embodiments, each coordinate in the 3-d coordinate system may reference a specific voxel. Each voxel may represent a physical volume.

[0046] The anatomical structures may relate to the surgery. For example, the anatomical structures may neighbor a region that may be operated on during surgery. In some embodiments, anatomical structures not related to the surgery may also be provided in the model. Such unrelated anatomical structures may assist in visualization and orientation, among other benefits.

[0047] The data representing the model may be provided via one or more medical images that show one or more images of the human body (or a part thereof). Such medical images may be created using one or more of a variety of medical imaging techniques, such as magnetic resonance imaging MRI, PET, or CT. Other types of medical images are contemplated as well, such as ultrasound, tactile imaging, or photoacoustic imaging, among other possibilities.

[0048] Such medical images may provide 3-d representations of the human body, or the part thereof that has been imaged. The 3-d representations may be translated into the

model of the one or more anatomical structures. A 3-d representation may be provided from a set of medical images, known as a scan. In some embodiments, a three-dimensional (3-d) medical image may be provided by combining multiple two-dimensional (2-d) images as layers to form a three-dimensional image. In other embodiments, the medical imaging machine produces a three-dimensional medical image.

[0049] In some embodiments, the model may indicate a representative human body or part thereof. Such a representative human body or part thereof may be provided by normalizing data from multiple medical images of different patients to form the representative human body or part thereof. In other embodiments, the model may indicate a patient's body or part thereof.

[0050] Figure 4 depicts an illustrative model 400. Model 400 is a three-dimensional representation of a human skull. In Figure 4, the three-dimensional model is depicted as two-dimensional representations presented as front and side views of the three-dimensional model, as shown. Model 400 may be provided by normalizing the data of medical scans of the skulls from multiple subjects having normal skull anatomy. It should be understood that the particular model shown in Figure 4 is set forth for purposes of example and explanation only. Other examples of models exist, and any such models may be within the scope of the example method disclosed herein. For example, the model might include a three-dimensional representation of a human abdomen. The model shown in Figure 4 should not be taken to be limiting.

[0051] The one or more surgical target regions may include a target pathology such as a lesion. In some circumstances, the target pathology may be located within an anatomical location. Such an anatomical location may include a cavity within the body. Additionally or alternatively, the anatomical location may include an anatomical feature. The surgical target region may define a three-dimensional volume within the three-dimensional coordinate

system. For example, the surgical target region may include a brain lesion within the right Meckel's cave, among many other possible examples. Conversely, the surgical target region may include one or more anatomical features that are not currently affected by pathology, but for which surgical manipulation is suggested for other reasons.

[0052] In some embodiments, such a surgical target region may be later manipulated by one or more surgical instruments. In the case where the surgical target region includes a target pathology, manipulation of the surgical target region may be performed to remove the pathology, for example, to remove a lesion. Manipulation of the surgical target region for removal of the lesion may include various techniques such as ablation. However, manipulation of the surgical target region is not necessary to the method described herein.

[0053] In some embodiments, the one or more surgical target regions may include a surgical margin. The surgical margin may define a region that fully or partially surrounds a target pathology that may be excised during the surgery. For example, the surgical margin may be an area of tumor free tissue surrounding a tumor that may be removed along with the tumor.

[0054] For example, the one or more surgical target regions may be located within one or more of the following surgical target locations: pre-chiasmatic, post-chiasmatic, right cavernous sinus, left cavernous sinus, right Meckel's Cave, left Meckel's Cave, right superior orbital fissure, left superior orbital fissure, third ventricle extension, basal cistern extension, and clivus. The aforementioned example surgical target locations are located within the skull. However, one having skill in the art will appreciate that many examples of surgical target regions in locations other than the skull are possible. Moreover, surgical target regions at additional locations within the skull are possible as well. For example, surgical target regions within the chest or abdomen are possible.

[0055] The data indicating the one or more surgical portals may include data defining the one or more surgical portals as volumes within the model. The volumes may include data points at a specific set of coordinates within the 3-d coordinate system, such as one or more (x,y,z) coordinates. The surgical portals may be entry points into the human body. During surgery, surgical instruments may be inserted into the surgical portal. Some surgical portals may be openings, or orifices, into the human body that provide entry points that ease access into the body. The transnasal portal is an example of an opening that provides access into the skull, a part of the body. Other surgical portals may be entry points that ease access into the skull when some part of the human anatomy is displaced. For example, the transorbital and supraorbital portals provide access into the skull when the eye is displaced. Certain surgical portals may be chosen for a particular surgery based on the relative location of the chosen surgical portal to the surgical target region.

[0056] For example, the one or more surgical portals may include one or more of the following surgical portals: right transnasal, left transnasal, right superior lid crease (superior orbit wall), right lateral retrocanthal (lateral orbit wall), right transconjunctival (inferior orbit wall), right precaruncular (medial orbital wall), left superior lid crease (superior orbital wall), left lateral retrocanthal (lateral orbit wall), left transconjunctival (inferior orbital wall), and left precaruncular (medial orbital wall). The aforementioned example surgical portals are located within the skull. However, one having skill in the art will appreciate that many examples of surgical portals in locations other than the skull are possible. For example, the surgical portals may be located on the exterior of the chest or abdomen. Or, as another example, the surgical portals may include the anus. Moreover, surgical portals at additional locations within the skull are possible as well.

[0057] Figure 5 depicts an illustrative model 500 that shows example surgical portals that are indicated by approach vectors 502, 504, 506, 508, and 510. The approach vectors

may aid in visualization of the surgical portals. Each of approach vectors 502, 504, 506, 508, and 510 indicates a surgical portal at one end of the respective approach vector. Approach vector 502 indicates the left precaruncular portal. Approach vector 504 indicates the left superior lid crease portal. Approach vector 506 indicates the left lateral retrocanthal portal. Approach vector 508 indicates the left transconjunctival portal. And, approach vector 510 indicates the left transnasal portal. The approach vectors indicating surgical portals are provide for example only and should not be taken as limiting. Other surgical portals exist but are not shown in this model.

i. *Receiving Data In A Study of Fourteen Subjects*

[0058] In the study, a model of skull base anatomy was provided by normalizing data from 14 CT scans of normal skull base anatomy from 14 patients including eight males and six females ranging in age from 23 to 65. The pituitary gland, internal carotid arteries, cavernous sinuses, optic nerves, and chiasm were defined as three-dimensional volumes in the model.

[0059] Eleven surgical target regions were identified that include: pre-chiasmatic, post-chiasmatic, right cavernous sinus, left cavernous sinus, right Meckel's Cave, left Meckel's Cave, right superior orbital fissure, left superior orbital fissure, third ventricle extension, basal cistern extension, and clivus.

[0060] Ten surgical portals that may provide access to the identified surgical target regions were identified that include: right transnasal, left transnasal, right superior lid crease (superior orbit wall), right lateral retrocanthal (lateral orbit wall), right transconjunctival (inferior orbit wall), right precaruncular (medial orbital wall), left superior lid crease (superior orbital wall), left lateral retrocanthal (lateral orbit wall), left transconjunctival (inferior orbital wall), and left precaruncular (medial orbital wall). The ten surgical portals were defined at the entry point into the skin or nasal vestibule. The transnasal entry points

were defined lateral to the nasal vestibule as limited by the pyriform aperture. The tranorbital portals were defined at the four quadrants of the orbit wall, as noted above as the superior lid crease, lateral retrocanthal, transconjunctival, and precaruncular.

b. Determine Plurality of Surgical Pathways

[0061] At block 304, the computing system determines a plurality of surgical pathways, where each surgical pathway in the plurality of surgical pathways includes (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals. In practice, for each surgical pathway in the plurality of determined surgical pathways, surgical instruments may be inserted into the surgical portal and through the surgical pathway, in order to access the surgical target region. However, insertion of surgical instruments is not a necessary aspect of the method described herein. The plurality of surgical pathways may include various combinations of the one or more surgical portals and the one or more surgical target regions.

[0062] Determining the plurality of surgical pathways may include, for each surgical pathway in the plurality of surgical pathways, determining the data points within the model that define a volume representing the respective surgical pathway that extends from the respective surgical portal to the respective surgical target region. Along the length of each surgical pathway, the area of the cross section of the surgical pathway may be increased or decreased to reflect the available space within the body allowed by neighboring anatomical structures that have been provided in the model. For example, where the surgical pathway includes a transorbital portal, the surgical pathway may narrow at the point along the surgical pathway where the surgical pathway passes the eye, such that the cross section of the volume may narrow at the point along the surgical pathway where the surgical pathway passes the eye.

[0063] As one with skill in the art will appreciate, in some circumstances, tissue may be removed from a surgical pathway to create or widen the pathway for the passage of surgical instruments, among other possible manipulations of the surgical pathway. In some embodiments, removal of tissue may be performed in accordance with a known surgical technique. Each respective surgical pathway may be represented as the surgical pathway appears before or after the removal of tissue to alter the surgical pathway. In further embodiments, the model may assist in planning the removal of tissue to alter the surgical pathway by representing the surgical pathway before and/or after the removal of tissue.

[0064] In some embodiments, the plurality of surgical pathways may include possible combinations of the one or more surgical portals and the one or more surgical target regions. For example, if the one or more surgical portals include three surgical portals (labelled for identification as A, B, & C) and one surgical target region (z), three surgical pathways may be determined (A-z, B-z, & C-z). Or, if there are twenty surgical portals and three surgical target regions, sixty surgical pathways may be determined. In other embodiments, fewer than the total number of possible combinations may be determined.

[0065] Figure 6 depicts an illustration of a surgical pathway 600 that can be understood to extend from a surgical portal to a surgical target region. Figure 6 is a simplified representation for the purpose of example and illustration. Surgical pathway 600 is represented by three polygons having five vertices each that form a three-dimensional volume, as shown. One polygon 602 represents the extent of the surgical portal. The second polygon 604 represents the extent of the surgical target region. The third polygon 606 represents a narrow point in the surgical pathway. Additional or fewer polygons having more or less vertices may be used to represent other surgical pathways. One having skill in the art will appreciate that other techniques for modeling the surgical pathway are possible as well.

c. Determine a Plurality of Surgical Approaches

[0066] At block 306, the computing system determines a plurality of surgical approaches, where each surgical approach in the plurality of surgical approaches includes at least a first determined surgical pathway. In some embodiments, each surgical approach in the plurality of surgical approaches may include a second determined surgical pathway. In other embodiments, each surgical approach in the plurality of surgical approaches may include a plurality of determined surgical pathways.

[0067] Determining each surgical approach in the plurality of surgical approaches may involve choosing an appropriate surgical pathway or combination of surgical pathways for a particular surgery. In some embodiments, determining each surgical approach in the plurality of surgical approaches may involve choosing one or more surgical pathways through which one or more surgical instruments can access the surgical target region for appropriate action in relation to the surgical target region. For example, the particular surgery may involve use of an endoscope for viewing the surgical target region and an instrument for ablation of the surgical target region. In such an example, each surgical approach in the determined plurality of surgical approaches may include a surgical pathway that may accommodate the endoscope and a surgical pathway that may accommodate the instrument for ablation.

[0068] In some embodiments, choosing an appropriate surgical pathway or combination of surgical pathways for a particular surgery may be based on parameters related to the surgery received by the computing system. In some embodiments, the parameters related to the surgery may be stored in a predetermined table. In other embodiments, the parameters related to the surgery may be received as user input from a user, such as a surgeon.

[0069] In some circumstances, there may be multiple appropriate surgical pathways or combinations thereof that may be appropriate for the particular surgery. Therefore, a plurality of surgical approaches may be determined, where each surgical approach includes a surgical pathway or combination of surgical pathways that may be appropriate for the particular surgery.

i. *Determining Surgical Approaches In The Study of Fourteen Subjects*

[0070] In the study, the left cavernous sinus was chosen as the surgical target region. Two surgical instruments were assumed; therefore each surgical approach included two surgical pathways. Eight surgical approaches were determined. The determined surgical approaches are in Table 1, below. Since the target for each surgical pathway is the same, the surgical pathways are identified by their surgical portal.

Table 1: Determined Surgical Approaches

Surgical Approach To Left Cavernous Sinus	Portal of First Determined Surgical Pathway	Portal of Second Determined Surgical Pathway
1	Left transnasal	Right transnasal
2	Right transnasal	Right medial orbit
3	Left transnasal	Right medial orbit
4	Right transnasal	Right superior orbit
5	Left transnasal	Right superior orbit
6	Right transnasal	Left lateral orbit
7	Right medial orbit	Left lateral orbit
8	Right medial orbit	Left medial orbit

d. **Determine At Least One Approach Characteristic**

[0071] At block 308, for each determined surgical approach in the plurality of surgical approaches, the computing system determines at least one approach characteristic. The approach characteristic may be a quantitative quality that may cause a particular surgical approach to be more or less appropriate for the particular surgery. In some embodiments, the approach characteristic may indicate a relationship between two or more surgical pathways.

More particularly, the combination of surgical pathways in the surgical approach may lead to more desirable or less desirable results.

[0072] In some embodiments, one or more surgical approaches in the plurality of surgical approaches may further include a second determined surgical pathway. In such embodiments, the at least one determined approach characteristic may include an angulation between the first determined surgical pathway and the second determined surgical pathway. An angulation may be a characteristic that indicates an angle. As noted above, the surgical pathways may be arranged to permit the insertion of surgical instruments. Where two surgical instruments are used, a relatively small angle, for example, less than 15°, may result in a relatively small working distance between the two surgical instruments if both surgical instruments are each inserted into a respective determined surgical pathway to act in relation to the surgical target region. In some circumstances, a relatively small angle may result in a working distance that is inappropriately small, such that collisions between the two surgical instruments may result when the surgical instruments are inserted into the surgical pathway.

[0073] In some embodiments, the angle between the first determined surgical pathway and the second determined surgical pathway may be calculated using the linear algebraic relationship between two vectors in 3-d space. In such embodiments, the first determined surgical pathway and the second determined surgical pathway may each be approximated by a first and second vector, respectively. The angle between the first determined surgical pathway and the second determined surgical pathway may be calculated using the following relationship:

$$\cos(\theta) = A \cdot B / \|A\| \|B\|$$

where A denotes the first vector, B denotes the second vector, $A \cdot B$ is the scalar product of vectors A and B, and $\|A\|$ denotes the magnitude of vector A.

[0074] To approximate the surgical pathway as a vector, the surgical portal may be approximated as a point in the model. For example, the surgical portal may be approximated as a point with (x,y,z) coordinates. To approximate the surgical portal, the center of the volume defined by the surgical portal may be determined. Similarly, the surgical target region may be approximated as a single point in the model. For example, the surgical target region may be approximated as a point with (x,y,z) coordinates. To approximate the surgical target region, the center of the volume defined by the surgical target region may be determined. When both the surgical portal and the surgical target region are approximated as points in the model, the surgical pathway involving the surgical portal and the surgical target region may be approximated as a vector extending from the point approximating the surgical portal to the point approximating the surgical target region.

[0075] In other embodiments, the approach characteristic may be a qualitative quality that may cause a particular surgical approach to be more or less appropriate for the particular surgery. In some embodiments, a surgical approach that results in inappropriate displacement of or collateral damage to neighboring anatomical structures may be assigned an approach characteristic indicating that qualitative quality. For example, a surgical approach may include a first determined surgical pathway and a second determined surgical pathway where both the surgical pathways include surgical portals involving the same orbit, such as the left superior lid crease and the left precaruncular. Such a surgical approach may involve inappropriate displacement of or damage to the eye or orbit, among other possibilities.

[0076] Figure 7 depicts an illustration of a model of a skull 700, as shown in a side-view. Figure 7 further depicts surgical pathways 702 and 704 extending from a surgical portal to a surgical target region 706. For the purposes of explanation, surgical pathways 702 and 704 are approximated as vectors in Figure 7. Surgical pathway 702 involves the left superior lid crease portal. Surgical pathway 704 involves the left transnasal portal. The calculated

angle between surgical pathway 702 and surgical pathway 704 is 33°, as shown. Surgical pathways 702 and 704 are provided by way of example only, and should not be taken as limiting. Many other examples of surgical pathways are possible.

i. *Determining Approach Characteristics in the Study of Fourteen Subjects.*

[0077] In the study of fourteen subjects, angulations between two surgical pathways in the eight determined surgical approaches were calculated for each of the fourteen subjects. The results are shown in Figure 8. The possible angles between instruments ranged from 13.9° in the case of two transnasal portals, to 58.7° when a combination of medial and lateral orbit portals was involved. In Figure 8, transnasal refers to the left and right transnasal. R to right, L to left, nose to transnasal, MO to medial orbit, and LO to lateral orbit.

e. **Determine At Least One Pathway Characteristic**

[0078] At block 310, for each surgical approach in the plurality of surgical approaches, and for each determined surgical pathway in the respective surgical approach, the computing system determines at least one pathway characteristic. In some embodiments, for each determined surgical pathway, the at least one determined pathway characteristic includes at least one of: (a) a pathway length; (b) an angulation between the determined surgical pathway and an anatomical plane; (c) a volume of the determined surgical pathway; (d) an intersected anatomical structure; or (e) a distance that an anatomical structure is displaced to provide the surgical pathway. In various embodiments, the pathway characteristic may include at least one of, all of, or any combination of (a)-(e). In some embodiments, the pathway characteristic may be a quality that may cause a particular surgical pathway to be more or less appropriate for the particular surgery.

[0079] In some embodiments, the at least one pathway characteristic may include an angulation (or angle) between the determined surgical pathway and an anatomical plane. In

some circumstances, the angle between the particular surgical pathway and a particular anatomical plane may cause that particular surgical pathway to be more or less appropriate for the particular surgery.

[0080] The anatomical plane may include any anatomical plane that may be defined in the model. For example, the anatomical plane may include a midsagittal plane or a skull base plane. In some embodiments, the anatomical plane may be defined by choosing two sets of data points in the 3-d model and then extending a plane between the two sets of data points. For example, where the model defines a skull, the midsagittal plane and the skull base may be defined by choosing data points at the crista galli and the posterior internal occipital protuberance, and between the posterior clinoid processes and the tuberculum sellae, respectively. Though anatomical planes relating to the skull have been provided as examples, anatomical planes related to other portions of the body may be defined as well.

[0081] Returning to Figure 7, Figure 7 further depicts anatomical plane 708. Anatomical plane involves the skull base plane. The calculated angle between anatomical plane 708 and surgical pathway 702 is 16° , as shown. Anatomical plane 708 and surgical pathway 702 are provided by way of example only, and should not be taken as limiting. Many other examples of surgical pathways and anatomical planes are possible.

[0082] In some embodiments, the pathway characteristic may include a pathway length. For each determined surgical pathway in the respective surgical approach, the pathway length may be the distance from the surgical portal to the surgical target region. As noted above, in some embodiments, the surgical pathway may be approximated as a vector. In such embodiments, the pathway length may be the magnitude of the vector. In other embodiments, the length of the pathway may be calculated based on the distance between the point in the surgical portal and the point in the surgical target region that are furthest from one another, among other possible techniques.

[0083] In some circumstances, a shorter pathway length may cause a particular surgical pathway to be more appropriate because a shorter pathway length may cause less pathway trauma. Similarly, a longer pathway length may cause a particular surgical pathway to be less appropriate because a shorter pathway length may cause more pathway trauma.

[0084] In other embodiments, the pathway characteristic may include a volume of the determined surgical pathway. As noted above, in some embodiments, the determined surgical pathway defines a volume in the model. The volume of the surgical pathway may be determined by determining the number of voxels in that define the volume and then multiplying by the physical size that each voxel represents. For example, a voxel may represent a space 1 millimeter (mm) x 1 mm x 1 mm. Therefore, a surgical pathway defining a volume including, for example, 10,000 voxels, may have a volume of 10,000 cubic millimeters (10 cubic centimeters). Other techniques for determining the volume of the determined surgical pathway are possible as well.

[0085] In some embodiments, a larger volume may indicate that a particular surgical pathway is more appropriate. For example, the larger volume may better accommodate surgical instruments. However, in other circumstances, a particular surgical instrument may not require a larger volume. In other circumstances, a smaller volume may indicate that a particular surgical pathway is less appropriate.

[0086] In further embodiments, the volume of the determined surgical pathway may indicate the area of a cross-section. The area of a cross-section of a particular surgical pathway may be determined by calculating the number of voxels that are included in a cross-section of the defined volume of a particular surgical pathway. A larger cross-section may indicate that a particular surgical pathway is more appropriate. For example, the larger cross-section may better accommodate surgical instruments. In other circumstances, a smaller cross-section may indicate that a particular surgical pathway is less appropriate.

[0087] In some embodiments, the pathway characteristic may include an intersected anatomical structure. In some circumstances, intersection of a particular anatomical structure may be inappropriate. For example, a particular surgical pathway that intersects a particular anatomical structure may cause unacceptable damage to that intersected anatomical structure. In such an example, the pathway characteristic that includes an intersected anatomical structure may indicate that the particular surgical pathway is less appropriate.

[0088] In some embodiments, the pathway characteristic may include a distance that an anatomical structure is displaced to provide the surgical pathway. For example, where the model provides a representation of a skull, a surgical pathway may require displacement of the eye to form the surgical pathway involving a transorbital portal. The distance of displacement of the anatomical feature may indicate that a particular surgical approach is more or less appropriate. For example, where the eye is displaced to form the surgical pathway involving the transorbital portal, some extent of displacement of the eye may be appropriate; however, a greater extent of displacement may be inappropriate.

i. *Determining Pathway Characteristics in the Study of Fourteen Subjects.*

[0089] In the study of fourteen subjects, for each of eight determined surgical pathways, an angulation between the respective surgical pathway to the left cavernous sinus with respect to the midsagittal plane was calculated for each of the fourteen subjects. The results are shown in Figure 9. The range of possible angles between the pathway and the plane was approximately 60°. In Figure 9, R refers to right, L to left, nose to transnasal, MO to medial orbit, SO to superior orbit, and LO to lateral orbit.

ii. *Determining Additional Approach and Pathway Characteristics in the Study of Fourteen Subjects.*

[0090] In the study of fourteen subjects, approach and pathway characteristics for additional surgical target regions located within the skull were determined. Figure 11 presents

approach and pathway characteristics for non-midline surgical targets regions including the cavernous sinus, Meckel's cave, and the superior optic fissure. The symmetric surgical approach combinations for each surgical target region were averaged. For example, the approach and pathway characteristics from the left transnasal and right medial orbit surgical approach to reach a left side surgical target region were averaged with the right transnasal and left medial orbit surgical approach to reach a right side surgical target region.

[0091] Figure 12 presents approach and pathway characteristics for midline surgical targets regions including the prechiasmatic, postchiasmatic, third ventricle, basal cistern, and clivus. Like the non-midline surgical target regions, the symmetric surgical approach combinations for each surgical target region were averaged.

f. Determine A Surgical Approach Ranking

[0092] Turning to Figure 3B, method 300 continues with block 312, where, for each surgical approach in the plurality of surgical approaches, the computing system determines a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic. As noted above, the approach characteristics and pathway characteristics may cause particular surgical approaches and surgical pathways of the particular surgical approaches to be more or less appropriate. These approach characteristics and pathway characteristics may be used to determine a surgical approach ranking for each determined surgical approach.

[0093] In some embodiments, the determined surgical approaches in the plurality of surgical approaches may be numerically ranked. For example, if there are 100 determined surgical approaches in the plurality of surgical approaches, each determined surgical approaches in the plurality of surgical approaches may be assigned a rank from 1-100.

[0094] In some embodiments, the at least one approach characteristic of each respective surgical approach in the plurality of surgical approaches may be assigned a

numerical value to assist in determining the surgical ranking of each surgical approach. For example, a particular approach characteristic including an angulation between surgical instruments of more than 15 degrees may be assigned a numerical value that indicates a relatively more appropriate surgical approach than another approach characteristic including an angulation between surgical instruments of less than 15 degrees. Similarly, the at least one pathway characteristic of each respective surgical pathway in each respective particular surgical approach in the plurality of surgical approaches may be assigned a numerical value to assist in determining the surgical ranking of each surgical approach. For example, a particular pathway characteristic having a pathway length of 50 mm may be assigned a numerical value that indicates a relatively more appropriate surgical approach than another pathway characteristic including having a pathway length of 100 mm.

[0095] The at least one approach characteristic and the at least one pathway characteristic may be weighted. For example, an approach characteristic including an angulation between surgical instruments of more than 15 degrees may cause a particular surgical approach to have a relatively higher ranking than another approach or pathway characteristic, such as a relatively short pathway length.

[0096] The above techniques for determining a surgical approach ranking are provided for example and explanation only and should not be taken as limiting. One having skill in the art will appreciate that there may be many techniques for ranking surgical approaches each having characteristics that may be used for comparison among surgical approaches.

g. Select A Subset of Plurality of Surgical Approaches

[0097] At block 314, the computing system selects a subset of the plurality of surgical approaches based on the determined surgical approach rankings. In some embodiments, the subset may be the group of surgical approaches used in practice, such as during surgery or in

preparing for surgery. In other embodiments, the subset may be a group from which a user, such as a surgeon, chooses which surgical approaches to use in practice, such as during surgery.

[0098] In some embodiments, the subset of the plurality of surgical approaches may include one surgical approach. For example, the surgical approach in the plurality of surgical approaches with the highest ranking may be selected to be the subset of the plurality of surgical approaches. In some embodiments, the one surgical approach in the subset the plurality of surgical approaches may be used during surgery. The surgery may be virtual or physical.

[0099] In other embodiments, the subset of the plurality of surgical approaches may include more than one surgical approach. For example, the surgical approaches in the plurality of surgical approaches with the five highest rankings may be selected to be the subset of the plurality of surgical approaches. Or, the surgical approaches in the plurality of surgical approaches with the ten highest rankings may be selected to be the subset of the plurality of surgical approaches. The number of surgical approaches in the subset of the plurality of surgical approaches may vary. In some embodiments, that computing system may be configured to include a particular number of surgical approaches in the subset of the plurality of surgical approaches.

i. *Selecting a Subset of the Plurality of Surgical Approaches in the Study of Fourteen Subjects.*

[00100] In the study of fourteen subjects, a subset of surgical approaches was selected, and the selected surgical approaches for each surgical target region were performed on four cadavers. Physical approach and pathway characteristics for each respective surgical approach were measured. The results are presented in Figure 15. Comparisons of the determined approach characteristics versus the physical measurements are shown in Figures

13 and 14. Figure 13 presents the determined angulation (angles) between determined surgical pathways in each surgical approach versus the measured angles in a scatterplot showing standard deviation and measurement error. Similarly, Figure 14 presents the determined pathway length (distance) for each surgical pathway in each surgical approach versus the measured lengths in a scatterplot showing standard deviation and measurement error. Both Figure 13 and Figure 14 show that the determined values were highly correlated to the actual values. Specifically, the determined angulation (angles) between determined surgical pathways in each surgical approach versus the measured angles had an R^2 value of 0.91, and the determined pathway length (distance) for each surgical pathway in each surgical approach versus the measured lengths had an R^2 value of 0.97.

g. Cause Output Device To Provide A Representation Of Selected Subset

[00101] At block 316, the computing system causes an output device to provide a representation of the selected subset of the plurality of surgical approaches. For example, computing system 100 may cause output device 120 to provide a representation of the selected subset of the plurality of surgical approaches.

[00102] In some embodiments, the output device includes a graphical display. In such embodiments, causing the graphical display to provide the representation may involve causing the graphical display to provide a three-dimensional graphical representation of the determined representation. This arrangement may display the three-dimensional graphical representation to the surgeon during the performance or planning of the surgery.

[00103] In other embodiments, the output device includes an additive manufacturing machine. In such embodiments, causing the additive manufacturing machine to make the representation may involve causing the additive manufacturing machine to provide a physical representation of the determined representation.

[00104] In some embodiments, the representation provided by the output device may be modular, such that the representation may include components that may be combined to form the physical representation. In some embodiments, the representation may be disassembled into components. The modular representation may be a physical representation or a graphical representation, among other possibilities.

[00105] In some embodiments, the components may include physical representations of anatomical features. As noted above, the model may be provided by normalizing data from multiple medical images of different patients to form the representative model. Similarly, anatomical features represented within the model may be provided by normalizing data from multiple medical images of different patients. Such anatomical features may be re-used from patient to patient.

[00106] Figure 10 depicts a representation 1000 of a model of a human skull. Representation 1000 is modular such that the model includes components that may be combined to form the representation. Representation 1000 may be a physical representation or a graphical representation, among other possibilities.

[00107] In some embodiments, the computing system determines a surgical plan based on the selected subset of surgical approaches. The surgical plan may be a particular surgical approach used during the surgery. As noted above, the surgery may be surgery on a patient or virtual surgery on a simulated patient. In some embodiments, the computing system may include the highest ranked surgical approach in the subset of surgical approaches in the surgical plan. In other embodiments, the computing system may receive data indicating the appropriate surgical approach to include in the surgical plan. In some embodiments, the data indicating the appropriate surgical approach may be sent from an input device, such as a touchscreen or a mouse and keyboard.

[00108] In some embodiments, the computing system causes a surgical instrument to move based on the selected subset of surgical approaches. For example, the computing system may cause a computer-assisted surgical instrument to move based on the selected subset of surgical approaches. Or, the computing system may cause a robotic surgical instrument to move based on the selected subset of surgical approaches. Such instruments may be configured to act in relation to the surgical target region.

[00109] In some embodiments, the surgical instrument may be coupled to a surgical navigation system. In such embodiments, causing the surgical instrument to move based on the selected subset may involve sending data representing the selected subset of surgical approaches to one or more surgical navigation systems. In some embodiments, the surgical navigation system may be configured to move the surgical instrument based on the data representing the selected subset of surgical approaches. In other embodiments, the surgical navigation system may be configured to prevent movement of surgical instruments based on the data representing the selected subset of surgical approaches. The computing system may also send data representing elements, such as the one or more anatomical structures, in the model to the one or more surgical navigations system.

[00110] In some embodiments, the computing system may cause the representation of the selected set of the plurality of surgical approaches to be displayed on a display of a surgical navigation system. The surgical navigation system may be coupled to an endoscope that provides an image stream. The representation of the selected set of the plurality of surgical approaches may be overlaid (i.e. superimposed) on the image stream. This arrangement may allow the relative position of the endoscope to be compared to the selected set of the plurality of surgical approaches.

[00111] In some embodiments, the surgical instrument may be a virtual instrument. In such embodiments, the surgical instrument may be represented in the model. The surgical

instrument may move within the 3-d coordinate system defined by the model. For example, the surgical instrument may move within the volume defined by the surgical pathway. In some embodiments, the surgical instrument is configured for one or more functions. For example, a drill may be configured to bore holes. A virtual surgical instrument that is configured for one or more functions may be functional within the model. Such an arrangement may simulate surgery or a component thereof.

[00112] In some embodiments, the surgical instrument may be an endoscope. The endoscope may be a physical endoscope or a virtual endoscope. In some embodiments, causing a surgical instrument to move based on the selected subset of surgical approaches may involve causing the endoscope to move based on the selected subset of surgical approaches. When the surgical instrument is a virtual endoscope, causing a surgical instrument to move based on the selected subset of surgical approaches may be referred to as virtual endoscopy. In further embodiments, the output device may be a graphical display, as noted above. The graphical display may provide a representation of the model from the point of view of the endoscope to simulate endoscopy. In some embodiments, the representation may change as the endoscope is moved. For example, the representation may reflect the point of view of the endoscope as the endoscope is moved down a determined surgical pathway.

[00113] In some embodiments, the selected subset of surgical approaches may indicate physical coordinates. The surgical instrument may move according to the physical coordinates. The surgical instrument may move in relation to the determined surgical approach. For example, the surgical instrument may move along the surgical pathway to act in relation to the surgical target region.

[00114] In some embodiments, causing a surgical instrument to move based on the selected subset of surgical approaches involves sending data indicating surgical approach coordinates to a surgical instrument. For example, computing system 100 in Figure 1 may

send the data indicating the selected subset of surgical approaches over system bus, network, or other connection mechanism 112. In such embodiments, the data indicating surgical approach coordinates may be arranged to cause a surgical instrument to move based on the selected subset of surgical approaches. Other examples are possible as well.

[00115] In some embodiments, the computing system causes the output device to provide a pathway protection element based on a determined surgical pathway of the one or more surgical approaches in the selected subset of the plurality of surgical approaches, where the pathway protection element is configured for insertion in the determined surgical pathway. Such an arrangement may reduce the risk of pathway trauma during surgery, in some circumstances. The pathway protection element may be physical, virtual, or graphical, among other possibilities.

[00116] In some embodiments, the pathway protection element may include data indicating one or more lock-ins and/or lock-outs. Lock-outs may indicate regions of the model into which a surgical instrument may be prevented from moving. Lock-ins may indicate regions of the model that a surgical instrument may be prevented from moving out of. For example, a particular surgical pathway may be identified as a lock-in and a particular surgical instrument may be prevented from moving out of that surgical pathway. In some embodiments, anatomical structures in the model may be identified as lock-outs.

[00117] In embodiments when the computing system causes a surgical instrument to move based on the selected subset of surgical approaches, the lock-ins and/or lock-outs may prevent the surgical instrument from moving out of or into particular regions, such as particular anatomical structures. In other embodiments, a warning may be provided when a surgical instrument approaches the boundary of a lock-in or lock-out. In an embodiment, the surgical margin may be a lock-in. For example, a particular surgical instrument used to excise a particular target pathology may be prevented from moving outside of the tumor margin.

This arrangement may guide movement of a surgical instrument. For example, to excise a tumor, the surgeon may move a surgical instrument along borders of the lock-in region. The surgeon's movements may be guided (or limited) by the extent of the lock-in region. This arrangement may reduce the risk of damage to tissues surrounding the target pathology, among other potential benefits.

[00118] In some embodiments, the computing system may receive data representing a performed surgery. The data representing the performed surgery may include data indicating movement of one or more surgical instruments used during the surgery. In some embodiments, the data may also include the position, acceleration, and velocity of surgical instruments used during the surgery.

[00119] In some embodiments, the computing system may determine one or more surgical performance parameters based on the data indicating the performed surgery. The surgical performance parameters may include, for example, time duration of the surgery, a number of surgical instruments used during the surgery, a number of surgical pathway violations, and a number of warnings provided during the surgery. The data indicating the performed surgery and/or the surgical performance parameters may be stored by the computing system, a remote server, or by another type of storage device. In some embodiments, the surgical performance parameters from a particular surgery may be used to evaluate the surgery. In further embodiments, surgical performance parameters determined from data received from different performed surgeries may be used to track the surgical performance parameters over time, such as to track the progress of a particular surgeon. In some embodiments, the performed surgery may be assigned a score based on the determined one or more surgical performance parameters.

[00120] In some embodiments, the output device may provide a representation of an implant based on the model. For example, the model may indicate an anatomical structure for

which an implant may be appropriate, such as a fractured bone or an anatomical defect. The representations may be physical or graphical. The provided representation of an implant may be used during the surgery to repair the damaged anatomical structure. For example, a provided physical representation, such as an orbital floor fracture repair implant, may be used at the time of surgery.

3. Conclusion

[00121] While various aspects and embodiments have been disclosed herein, other aspects and embodiments will be apparent to those skilled in the art. For example, with respect to the flow charts depicted in the figures and discussed herein, functions described as blocks may be executed out of order from that shown or discussed, including substantially concurrent or in reverse order, depending on the functionality involved. Further, more or fewer blocks and/or functions may be used and/or flow charts may be combined with one another, in part or in whole.

[00122] The various aspects and embodiments disclosed herein are for purposes of illustration and are not intended to be limiting, with the true scope and spirit being indicated by the following claims. Other embodiments can be utilized, and other changes can be made, without departing from the spirit or scope of the subject matter presented herein.

CLAIMS

We claim:

1. A computer-implemented method comprising:
 - receiving data indicating (a) one or more surgical target regions and (b) one or more surgical portals;
 - determining a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals;
 - determining a plurality of surgical approaches, wherein each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway;
 - for each surgical approach in the plurality of surgical approaches,
 - determining at least one approach characteristic,
 - for each determined surgical pathway in the respective surgical approach, determining at least one pathway characteristic, and
 - determining a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic;
 - selecting a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and
 - causing an output device to provide a representation of the selected subset of the plurality of surgical approaches.
2. The method of claim 1, wherein the output device comprises a graphical display, and wherein causing the graphical display to provide the representation comprises

causing the graphical display to provide a three-dimensional graphical representation of the determined representation.

3. The method of claim 1, wherein the output device comprises an additive manufacturing machine; and wherein causing the additive manufacturing machine to make the representation comprises causing the additive manufacturing machine to provide a physical representation of the determined representation.

4. The method of any of claims 1-3, further comprising:
causing the output device to provide a pathway protection element based on a determined surgical pathway of the one or more surgical approaches in the selected subset of the plurality of surgical approaches, wherein the pathway protection element is configured for insertion in the determined surgical pathway.

5. The method of any of claims 1-4, wherein one or more surgical approaches in the plurality of surgical approaches further comprise a second determined surgical pathway, and wherein the at least one determined approach characteristic comprises an angulation between the first determined surgical pathway and the second determined surgical pathway.

6. The method of any of claims 1-5, wherein, for each determined surgical pathway, the at least one determined pathway characteristic comprises at least one of: (a) a pathway length; (b) an angulation between the determined surgical pathway and an anatomical plane; (c) a volume of the determined surgical pathway; (d) an intersected anatomical structure; or (e) a distance that an anatomical structure is displaced to provide the surgical pathway.

7. The method of any of claims 1-6, further comprising:

causing a surgical instrument to move based on the selected subset of surgical approaches.

8. A computing system comprising:

an output device;

a physical computer readable medium; and

program instructions stored on the physical computer readable medium and executable by at least one processor to:

receive data indicating (a) one or more surgical target regions and (b) one or more surgical portals;

determine a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals;

determine a plurality of surgical approaches, wherein each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway;

for each surgical approach in the plurality of surgical approaches,

determine at least one approach characteristic,

for each determined surgical pathway in the respective surgical approach, determine at least one pathway characteristic, and

determine a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic;

select a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and

cause an output device to provide a representation of the selected subset of the plurality of surgical approaches.

9. The computing system of claim 8, wherein the output device comprises a graphical display, and wherein causing the graphical display to provide the representation comprises causing the graphical display to provide a three-dimensional graphical representation of the determined representation.

10. The computing system of claim 8, wherein the output device comprises an additive manufacturing machine; and wherein causing the additive manufacturing machine to make the representation comprises causing the additive manufacturing machine to provide a physical representation of the determined representation.

11. The computing system of any of claims 8-10, wherein the program instructions are further executable by at least one processor to:

cause an output device to provide a pathway protection element based on a determined surgical pathway of the one or more surgical approaches in the selected subset of the plurality of surgical approaches, wherein the pathway protection element is configured for insertion in the determined surgical pathway.

12. The computing system of any of claims 8-11, wherein one or more surgical approaches in the plurality of surgical approaches further comprise a second determined surgical pathway, and wherein the at least one determined approach characteristic comprises an angulation between the first determined surgical pathway and the second determined surgical pathway.

13. The computing system of any of claims 8-12, wherein, for each determined surgical pathway, the at least one determined pathway characteristic comprises at least one of: (a) a pathway length; (b) an angulation between the determined surgical pathway and an anatomical plane; (c) a volume of the determined surgical pathway; (d) an intersected anatomical structure; or (e) a distance that an anatomical structure is displaced to provide the surgical pathway.

14. The computing system of any of claims 12-13, wherein the program instructions are further executable by at least one processor to:

cause a surgical instrument to move based on the selected subset of surgical approaches.

15. A physical computer readable medium having stored therein instructions executable by a computing system to cause the computing system to perform functions comprising:

receiving data indicating (a) one or more surgical target regions and (b) one or more surgical portals;

determining a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or

more surgical target regions and (b) a respective surgical portal of the one or more surgical portals;

determining a plurality of surgical approaches, wherein each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway;

for each surgical approach in the plurality of surgical approaches,

determining at least one approach characteristic,

for each determined surgical pathway in the respective surgical approach,

determining at least one pathway characteristic, and

determining a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic;

selecting a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and

causing an output device to provide a representation of the selected subset of the plurality of surgical approaches.

16. The physical computer readable medium of claim 15, wherein the output device comprises a graphical display, and wherein causing the graphical display to provide the representation comprises causing the graphical display to provide a three-dimensional graphical representation of the determined representation.

17. The physical computer readable medium of claim 15, wherein the output device comprises an additive manufacturing machine; and wherein causing the additive manufacturing machine to make the representation comprises causing the additive manufacturing machine to provide a physical representation of the determined representation.

18. The physical computer readable medium of any of claims 15-17, further comprising:

causing the output device to provide a pathway protection element based on a determined surgical pathway of the one or more surgical approaches in the selected subset of the plurality of surgical approaches, wherein the pathway protection element is configured for insertion in the determined surgical pathway.

19. The physical computer readable medium of any of claims 15-18, wherein one or more surgical approaches in the plurality of surgical approaches further comprise a second determined surgical pathway, and wherein the at least one determined approach characteristic comprises an angulation between the first determined surgical pathway and the second determined surgical pathway.

20. The physical computer readable medium of any of claims 15-19, wherein, for each determined surgical pathway, the at least one determined pathway characteristic comprises at least one of: (a) a pathway length; (b) an angulation between the determined surgical pathway and an anatomical plane; (c) a volume of the determined surgical pathway; (d) an intersected anatomical structure; or (e) a distance that an anatomical structure is displaced to provide the surgical pathway.

21. The physical computer readable medium of any of claims 15-20, further comprising:

causing a surgical instrument to move based on the selected subset of surgical approaches.

22. A computer-implemented method comprising:

receiving data for a patient indicating (a) one or more surgical target regions within the patient and (b) one or more surgical portals of the patient;

determining a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals;

determining a plurality of surgical approaches, wherein each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway;

for each determined surgical approach in the plurality of surgical approaches,

determining at least one approach characteristic,

for each surgical pathway in the respective surgical approach, determining at least one pathway characteristic, and

determining a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic;

selecting a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and

causing an output device to provide a representation of the selected subset of the plurality of surgical approaches.

23. The method of claim 22, wherein the output device comprises a graphical display, and wherein causing the graphical display to provide the representation comprises causing the graphical display to provide a three-dimensional graphical representation of the determined representation.

24. The method of claim 22, wherein the output device comprises an additive manufacturing machine; and wherein causing the additive manufacturing machine to make the representation comprises causing the additive manufacturing machine to provide a physical representation of the determined representation.

25. The method of any of claims 22-24, further comprising:

causing the output device to provide a pathway protection element based on a determined surgical pathway of the one or more surgical approaches in the selected subset of the plurality of surgical approaches, wherein the pathway protection element is configured for insertion in the determined surgical pathway.

26. The method of any of claims 22-25, wherein one or more surgical approaches in the plurality of surgical approaches further comprise a second determined surgical pathway, and wherein the at least one determined approach characteristic comprises an angulation between the first determined surgical pathway and the second determined surgical pathway.

27. The method of any of claims 22-26, wherein, for each determined surgical pathway, the at least one determined pathway characteristic comprises at least one of: (a) a pathway length; (b) an angulation between the determined surgical pathway and an anatomical plane; (c) a volume of the determined surgical pathway; (d) an intersected anatomical structure; or (e) a distance that an anatomical structure is displaced to provide the surgical pathway.

28. The method of any of claims 22-27, further comprising:

causing a surgical instrument to move based on the selected subset of surgical approaches.

29. A computing system comprising:

an output device;

a physical computer readable medium; and

program instructions stored on the physical computer readable medium and executable by at least one processor to:

receive data for a patient indicating (a) one or more surgical target regions within the patient and (b) one or more surgical portals of the patient;

determine a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals;

determine a plurality of surgical approaches, wherein each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway;

for each determined surgical approach in the plurality of surgical approaches,

determine at least one approach characteristic,

for each surgical pathway in the respective surgical approach, determine at least one pathway characteristic, and

determine a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic;

select a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and

cause an output device to provide a representation of the selected subset of the plurality of surgical approaches.

30. The computing system of claim 29, wherein the output device comprises a graphical display, and wherein causing the graphical display to provide the representation comprises causing the graphical display to provide a three-dimensional graphical representation of the determined representation.

31. The computing system of claim 29, wherein the output device comprises an additive manufacturing machine; and wherein causing the additive manufacturing machine to make the representation comprises causing the additive manufacturing machine to provide a physical representation of the determined representation.

32. The computing system of any of claims 29-31, wherein the program instructions are further executable by at least one processor to:

cause an output device to provide a pathway protection element based on a determined surgical pathway of the one or more surgical approaches in the selected subset of the plurality of surgical approaches, wherein the pathway protection element is configured for insertion in the determined surgical pathway.

33. The computing system of any of claims 29-32, wherein one or more surgical approaches in the plurality of surgical approaches further comprise a second determined surgical pathway, and wherein the at least one determined approach characteristic comprises an angulation between the first determined surgical pathway and the second determined surgical pathway.

34. The computing system of any of claims 29-33, wherein, for each determined surgical pathway, the at least one determined pathway characteristic comprises at least one of: (a) a pathway length; (b) an angulation between the determined surgical pathway and an anatomical plane; (c) a volume of the determined surgical pathway; (d) an intersected anatomical structure; or (e) a distance that an anatomical structure is displaced to provide the surgical pathway.

35. The computing system of any of claims 29-34, wherein the program instructions are further executable by at least one processor to:

cause a surgical instrument to move based on the selected subset of surgical approaches.

36. A physical computer readable medium having stored therein instructions executable by a computing system to cause the computing system to perform functions comprising:

receiving data for a patient indicating (a) one or more surgical target regions within the patient and (b) one or more surgical portals of the patient;

determining a plurality of surgical pathways, wherein each surgical pathway in the plurality of surgical pathways comprises (a) a respective surgical target region of the one or more surgical target regions and (b) a respective surgical portal of the one or more surgical portals;

determining a plurality of surgical approaches, wherein each surgical approach in the plurality of surgical approaches comprises at least a first determined surgical pathway;

for each determined surgical approach in the plurality of surgical approaches,

determining at least one approach characteristic,
for each surgical pathway in the respective surgical approach, determining at least one pathway characteristic, and
determining a surgical-approach ranking based on the determined at least one approach characteristic and the determined at least one pathway characteristic;
selecting a subset of the plurality of surgical approaches based on the determined surgical approach rankings; and
causing an output device to provide a representation of the selected subset of the plurality of surgical approaches.

37. The physical computer readable medium of claim 36, wherein the output device comprises a graphical display, and wherein causing the graphical display to provide the representation comprises causing the graphical display to provide a three-dimensional graphical representation of the determined representation.

38. The physical computer readable medium of claim 36, wherein the output device comprises an additive manufacturing machine; and wherein causing the additive manufacturing machine to make the representation comprises causing the additive manufacturing machine to provide a physical representation of the determined representation.

39. The physical computer readable medium of any of claims 36-38, further comprising:

causing the output device to provide a pathway protection element based on a determined surgical pathway of the one or more surgical approaches in the selected subset of

the plurality of surgical approaches, wherein the pathway protection element is configured for insertion in the determined surgical pathway.

40. The physical computer readable medium of any of claims 36-39, wherein one or more surgical approaches in the plurality of surgical approaches further comprise a second determined surgical pathway, and wherein the at least one determined approach characteristic comprises an angulation between the first determined surgical pathway and the second determined surgical pathway.

41. The physical computer readable medium of any of claims 36-40, wherein, for each determined surgical pathway, the at least one determined pathway characteristic comprises at least one of: (a) a pathway length; (b) an angulation between the determined surgical pathway and an anatomical plane; (c) a volume of the determined surgical pathway; (d) an intersected anatomical structure; or (e) a distance that an anatomical structure is displaced to provide the surgical pathway.

42. The physical computer readable medium of any of claims 36-41, further comprising:

causing a surgical instrument to move based on the selected subset of surgical approaches.

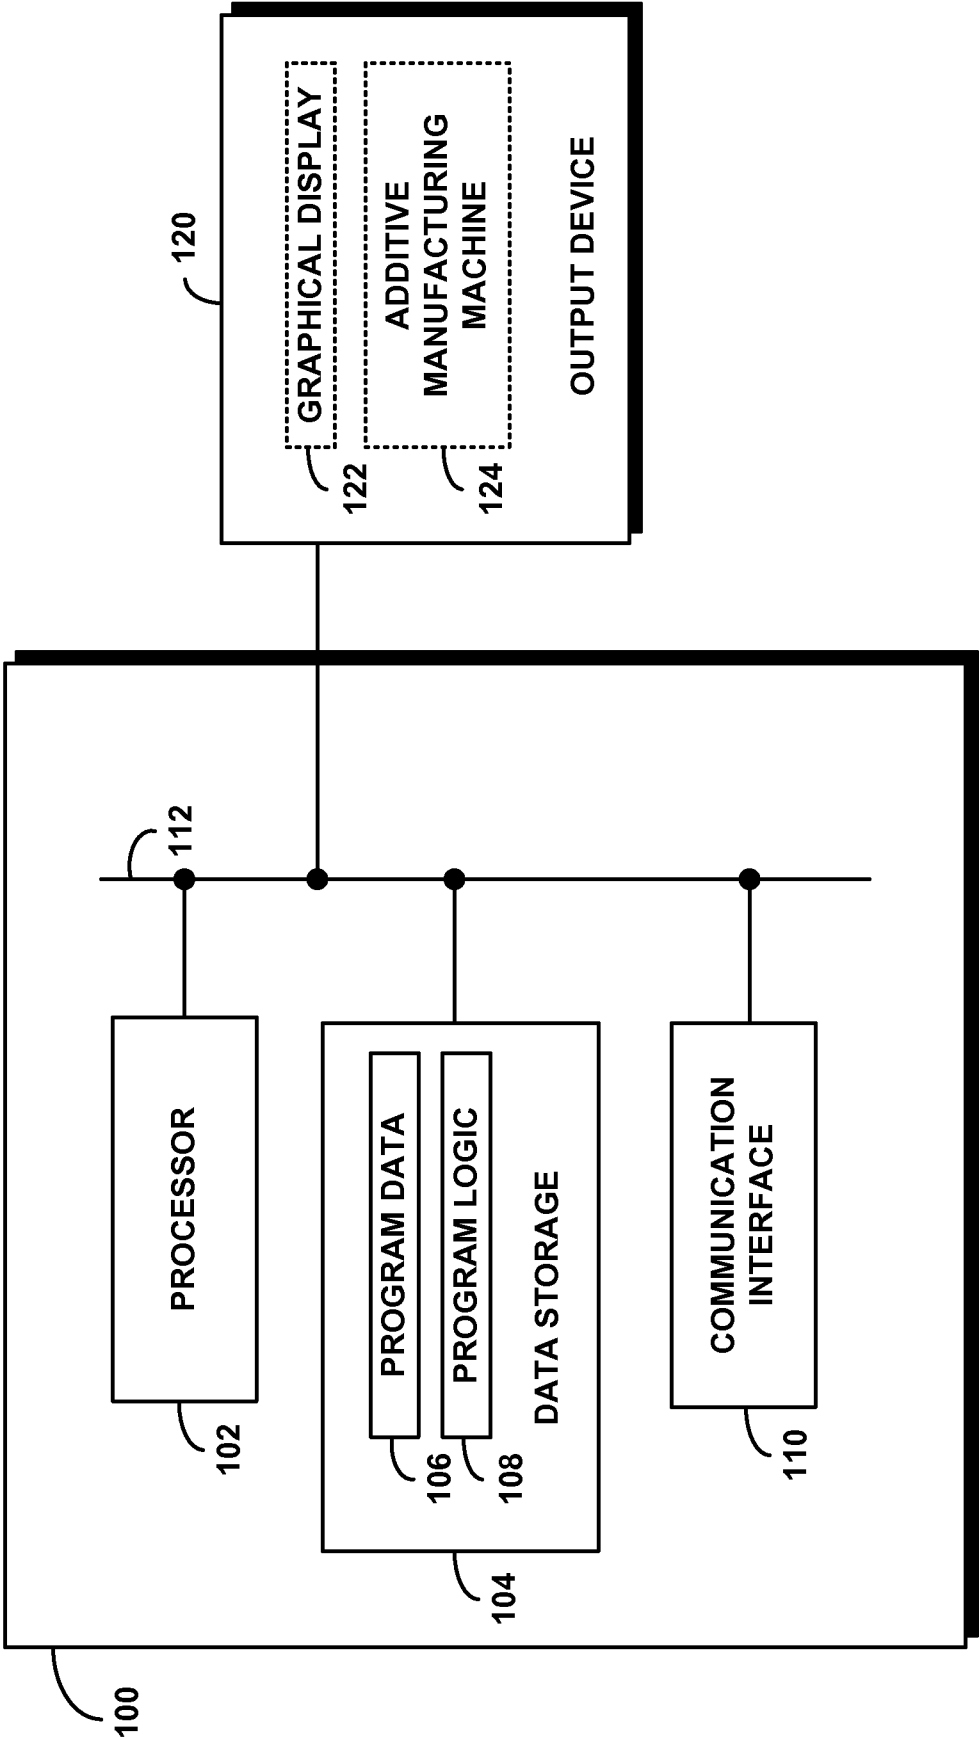


FIG. 1

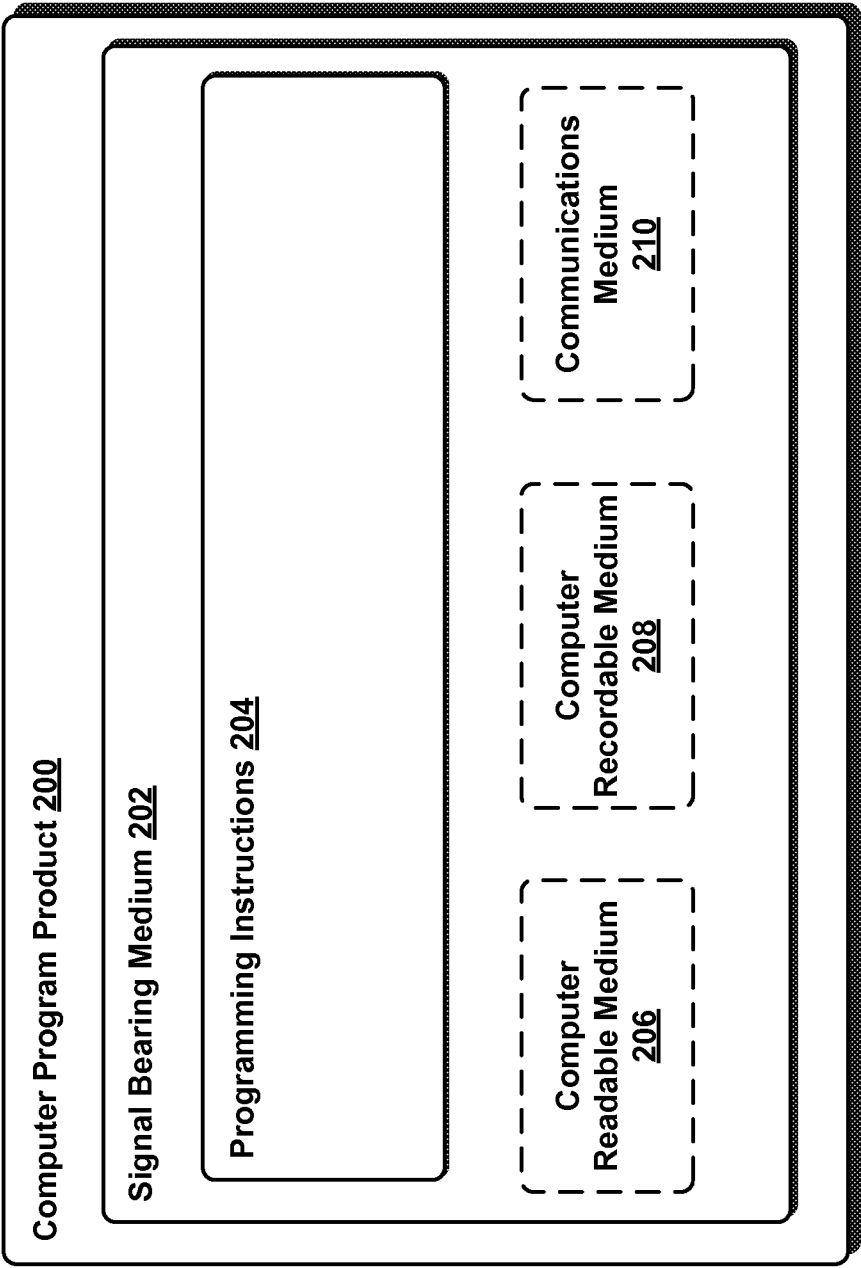


FIG. 2

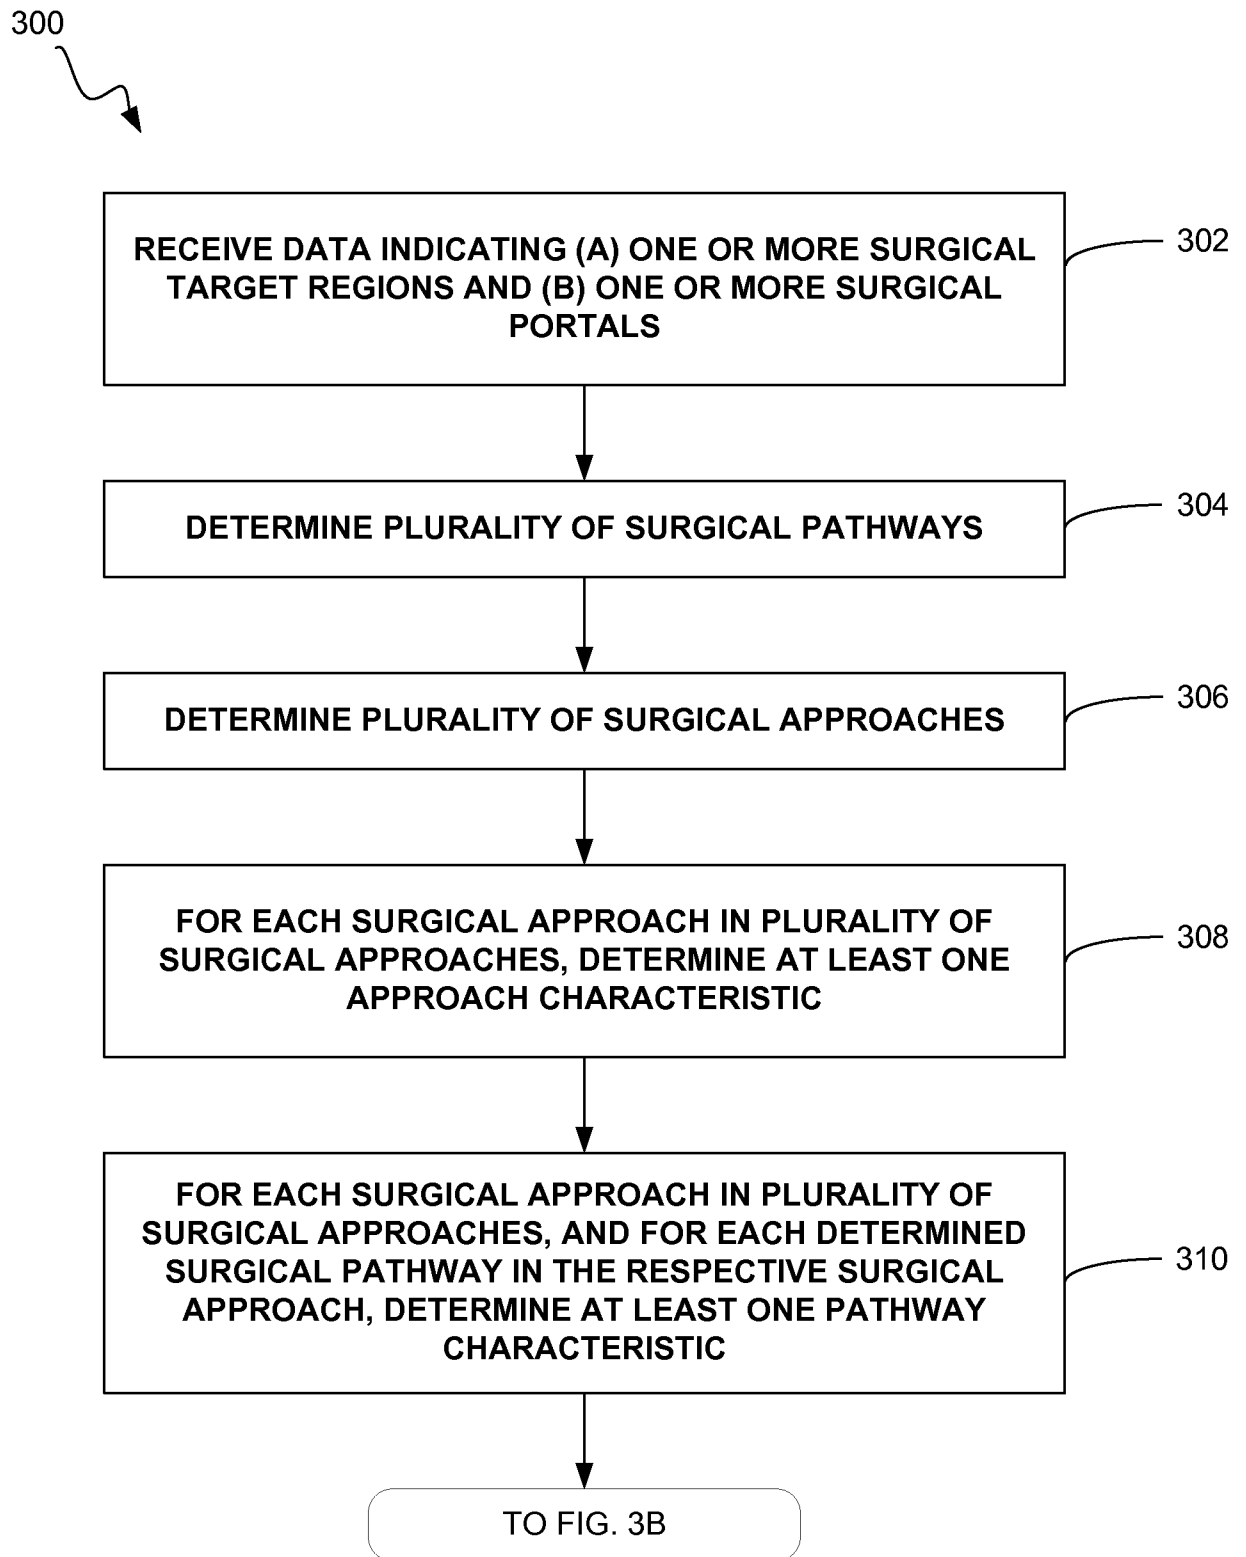


FIG. 3A

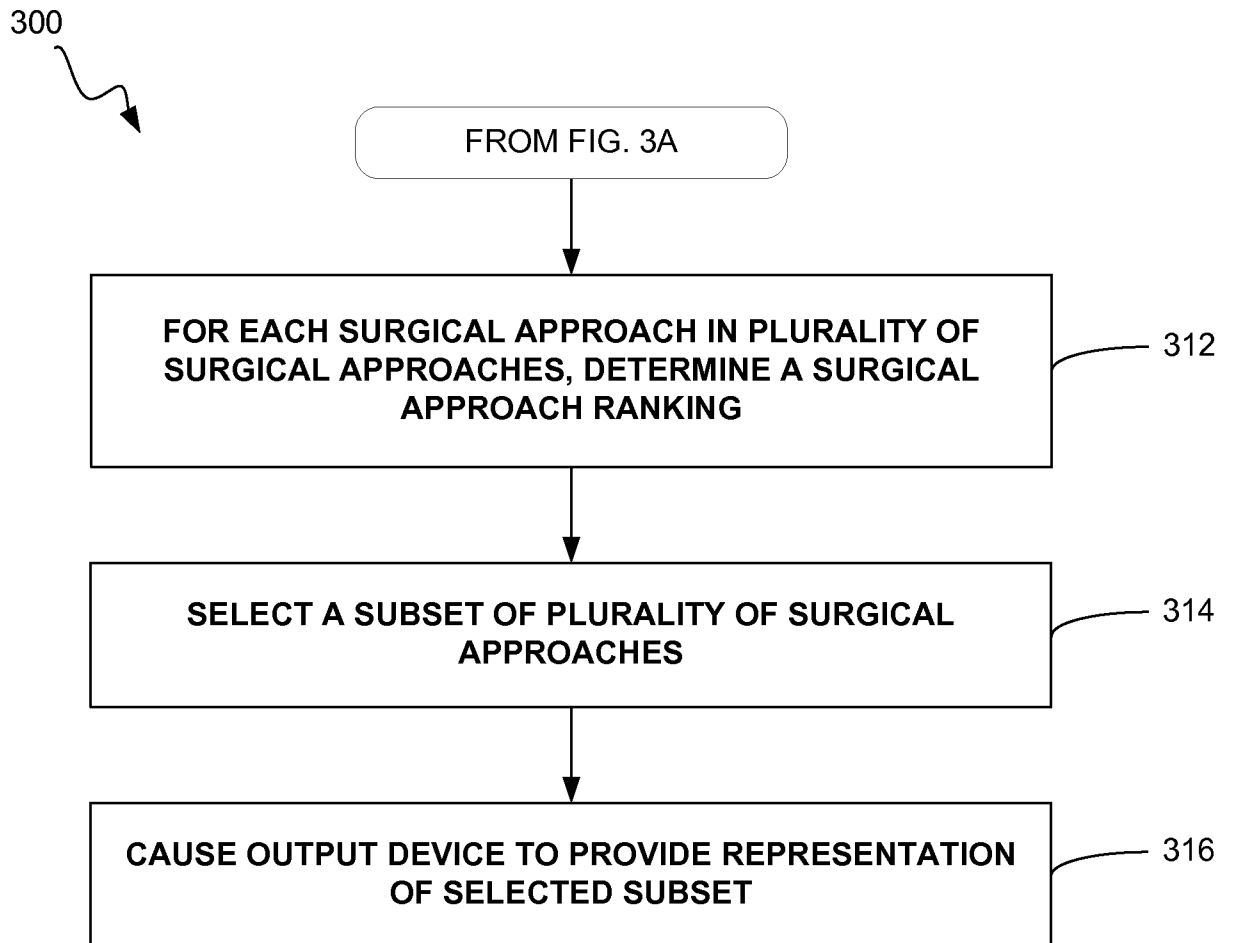


FIG. 3B

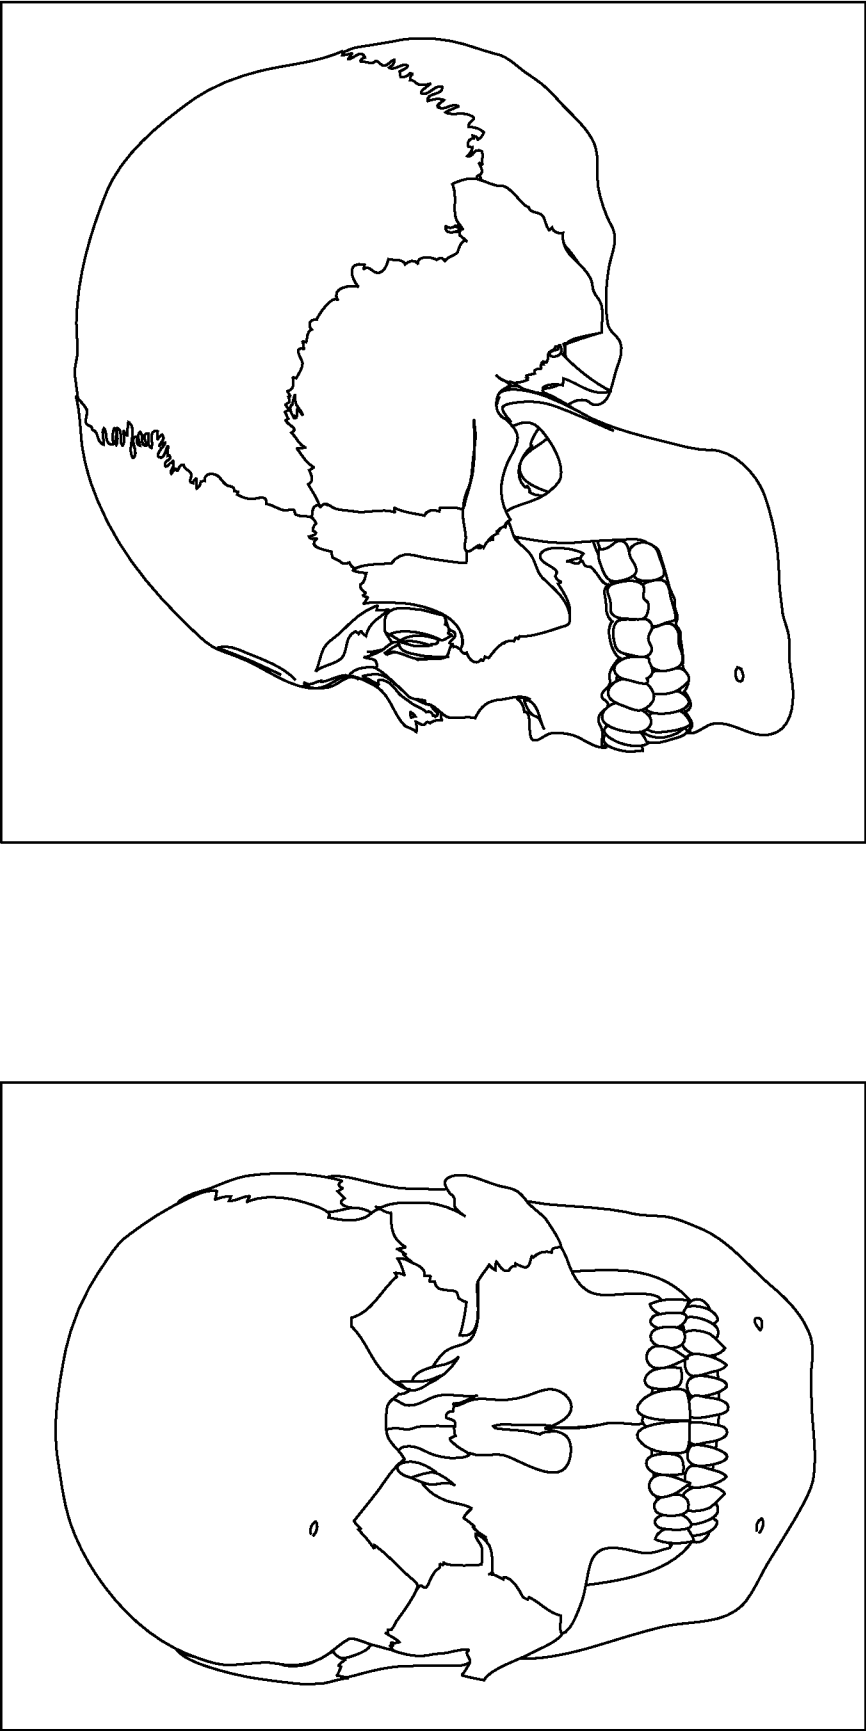


FIG. 4

500 ↗

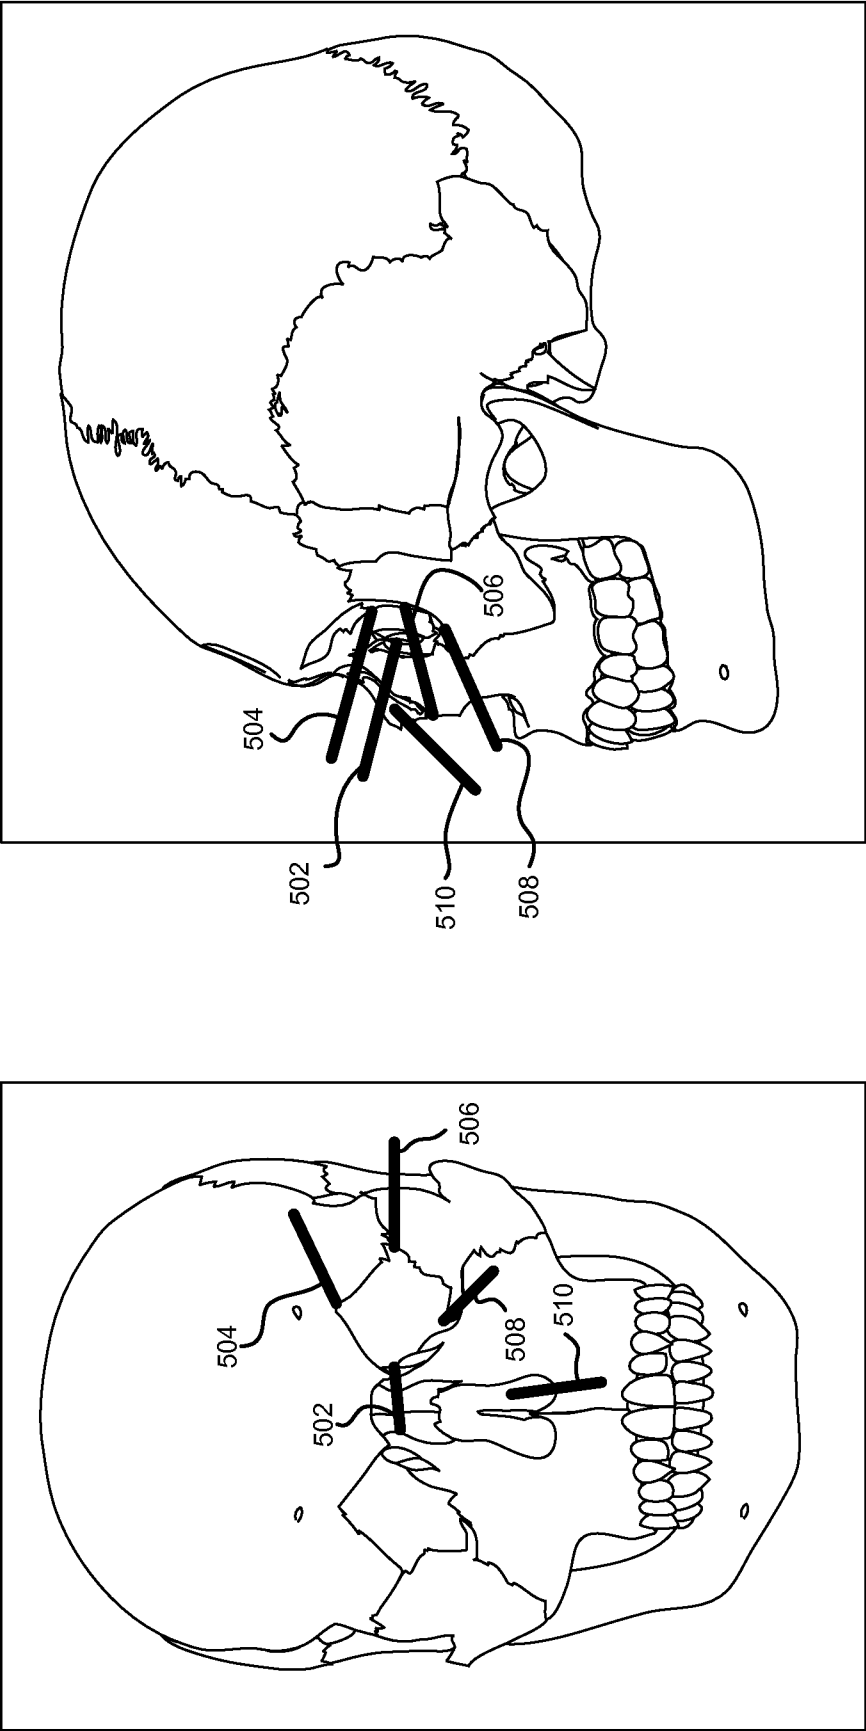


FIG. 5

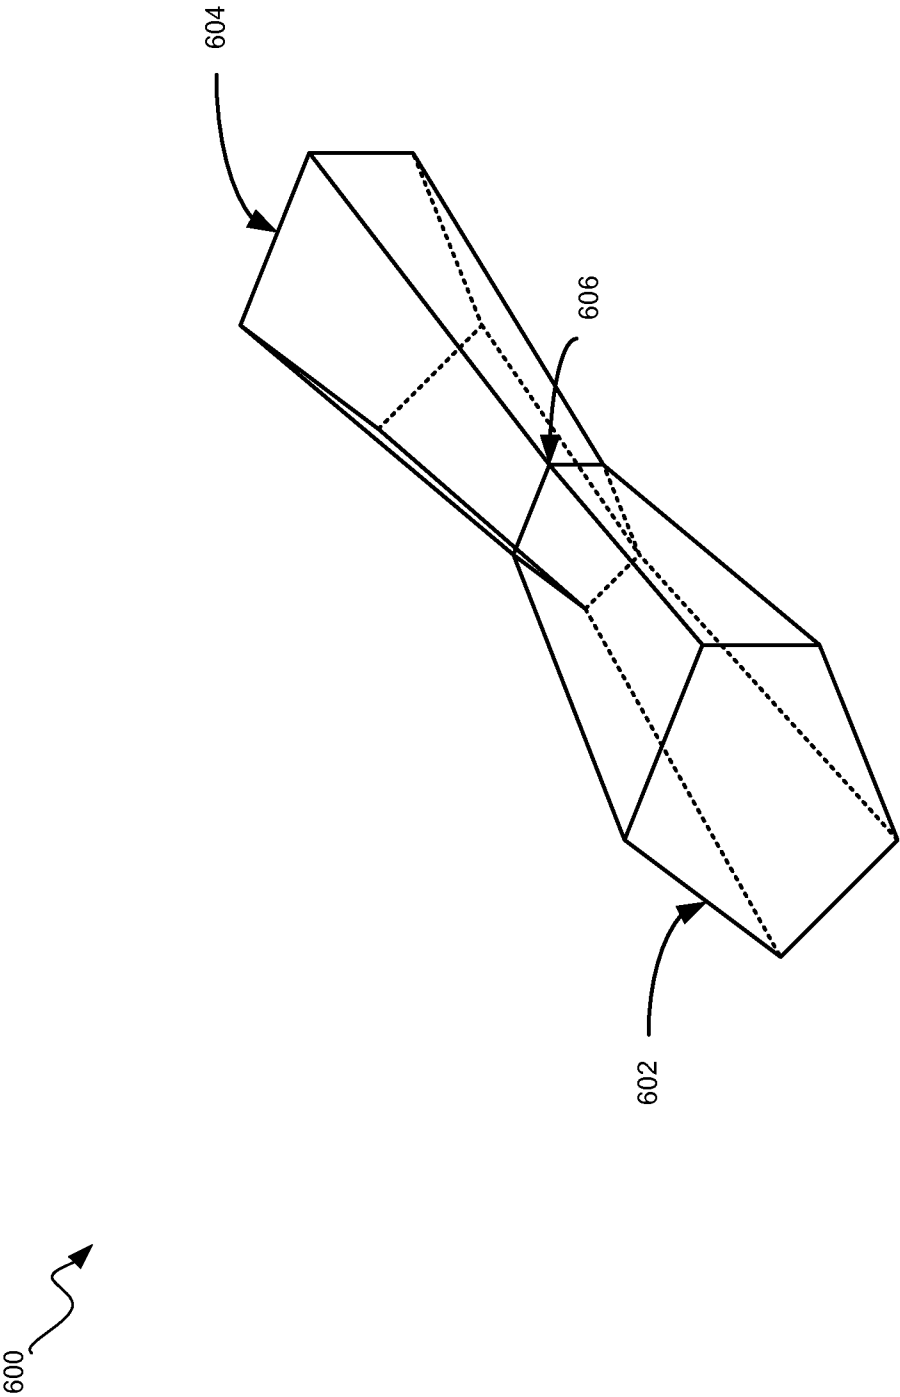


FIG. 6

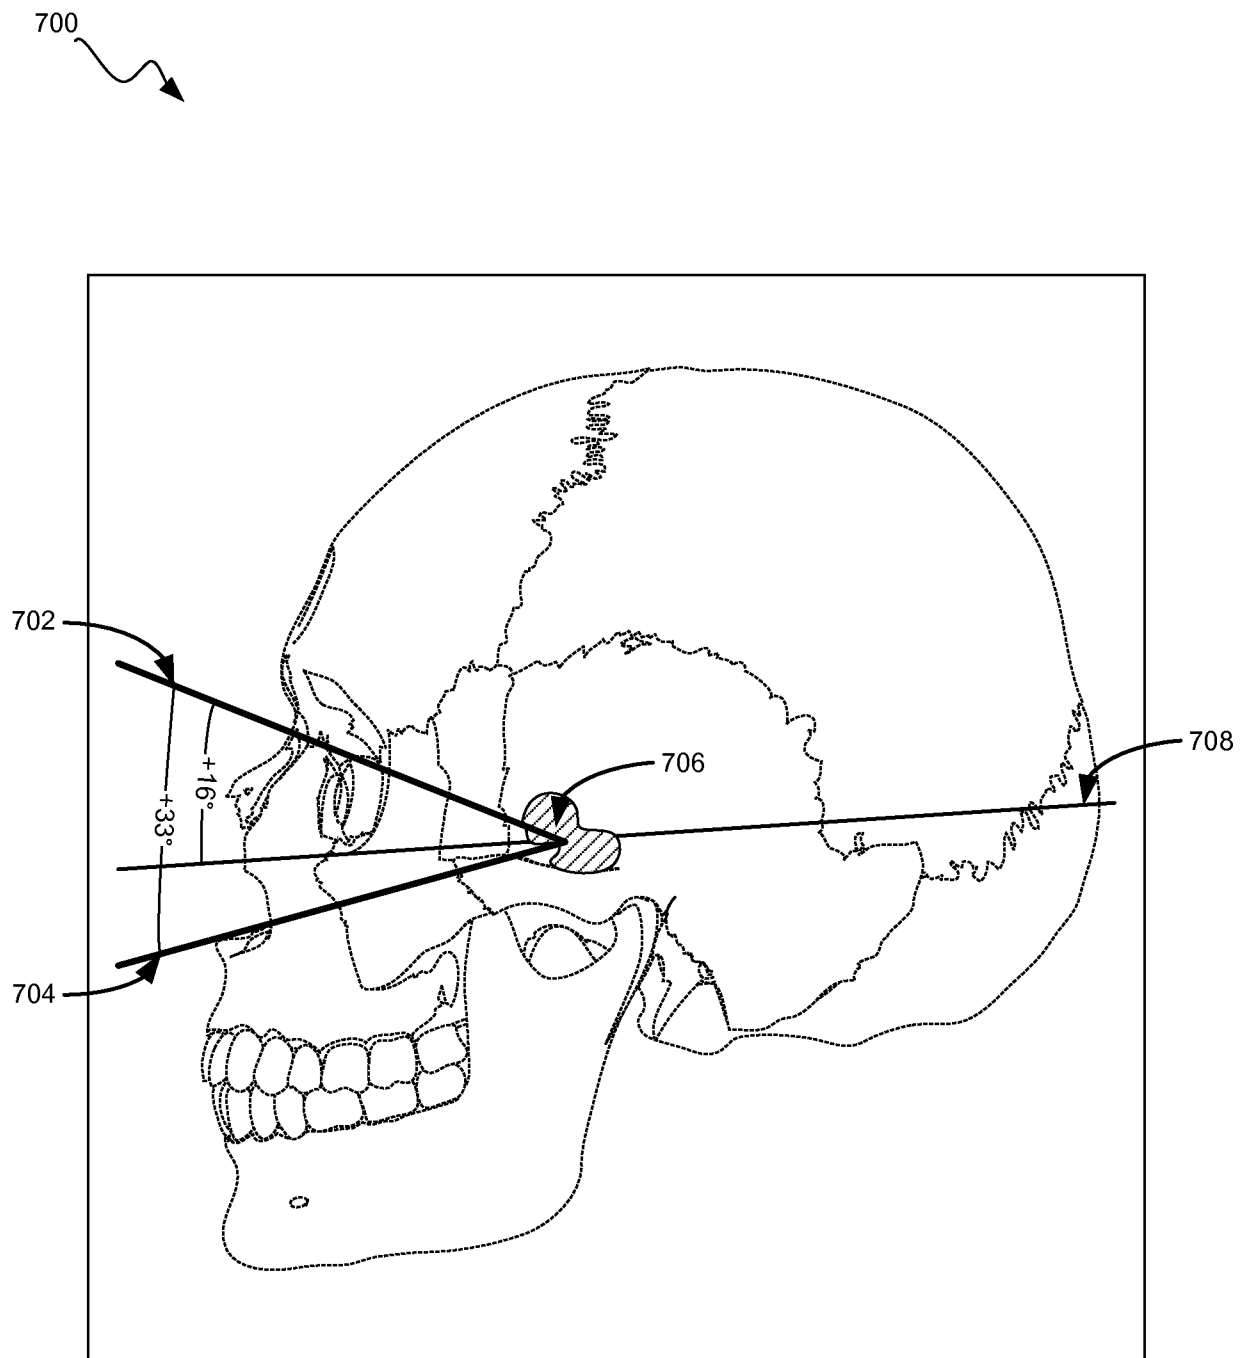


FIG. 7

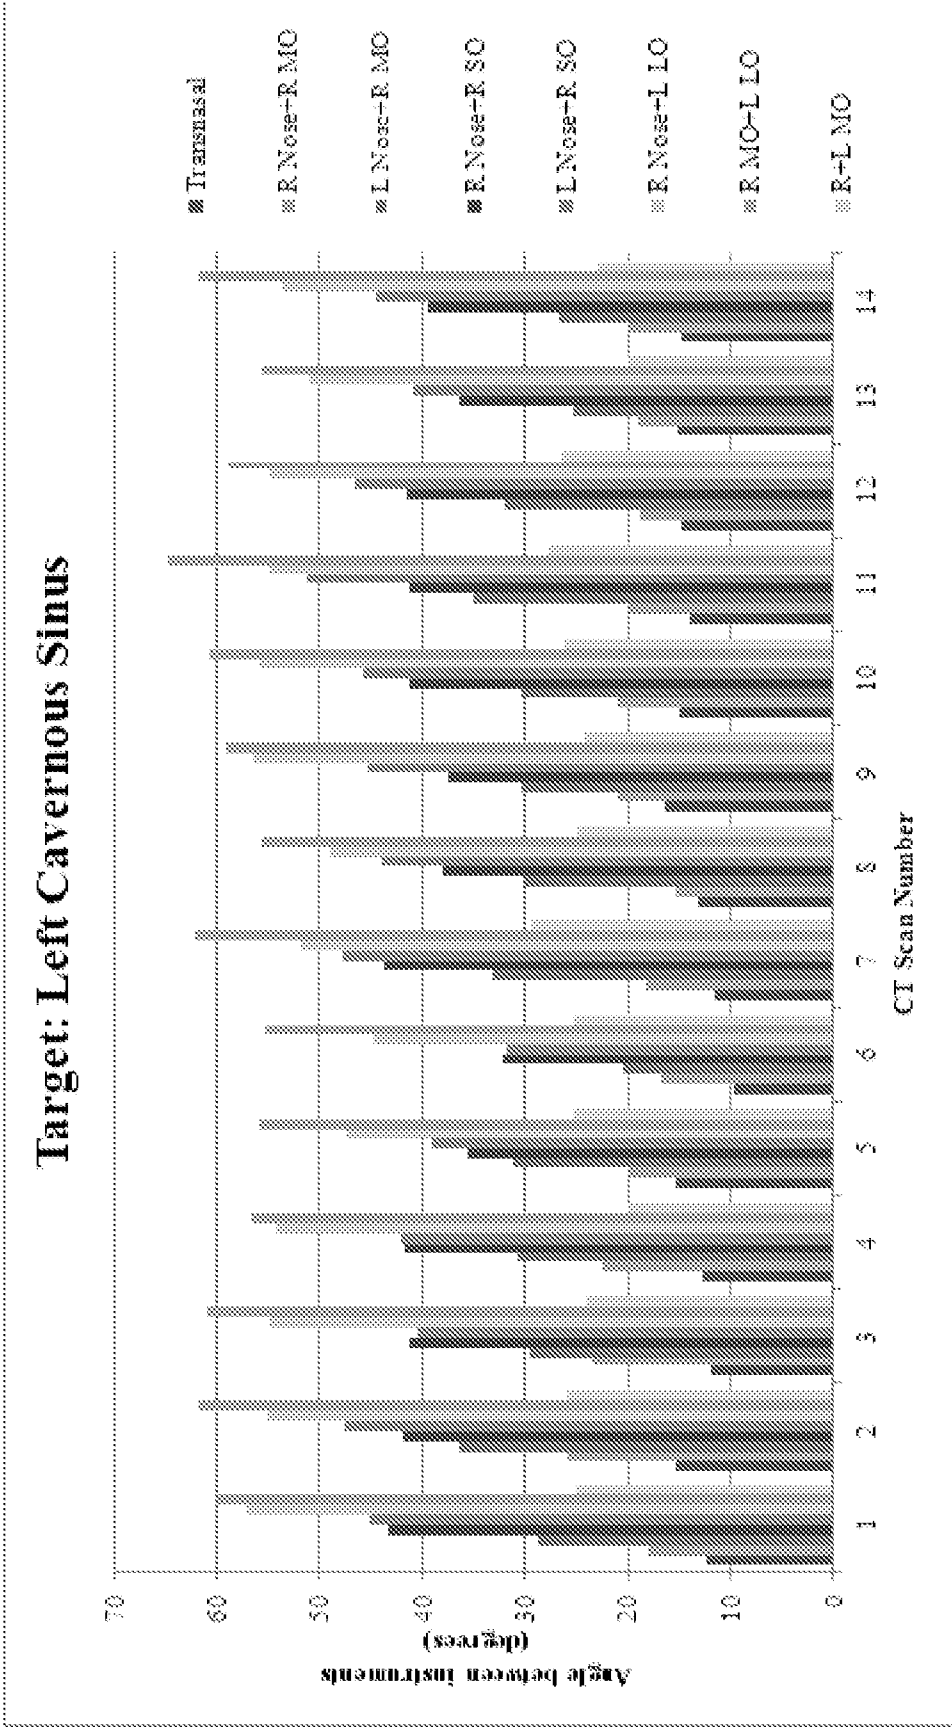


FIG. 8

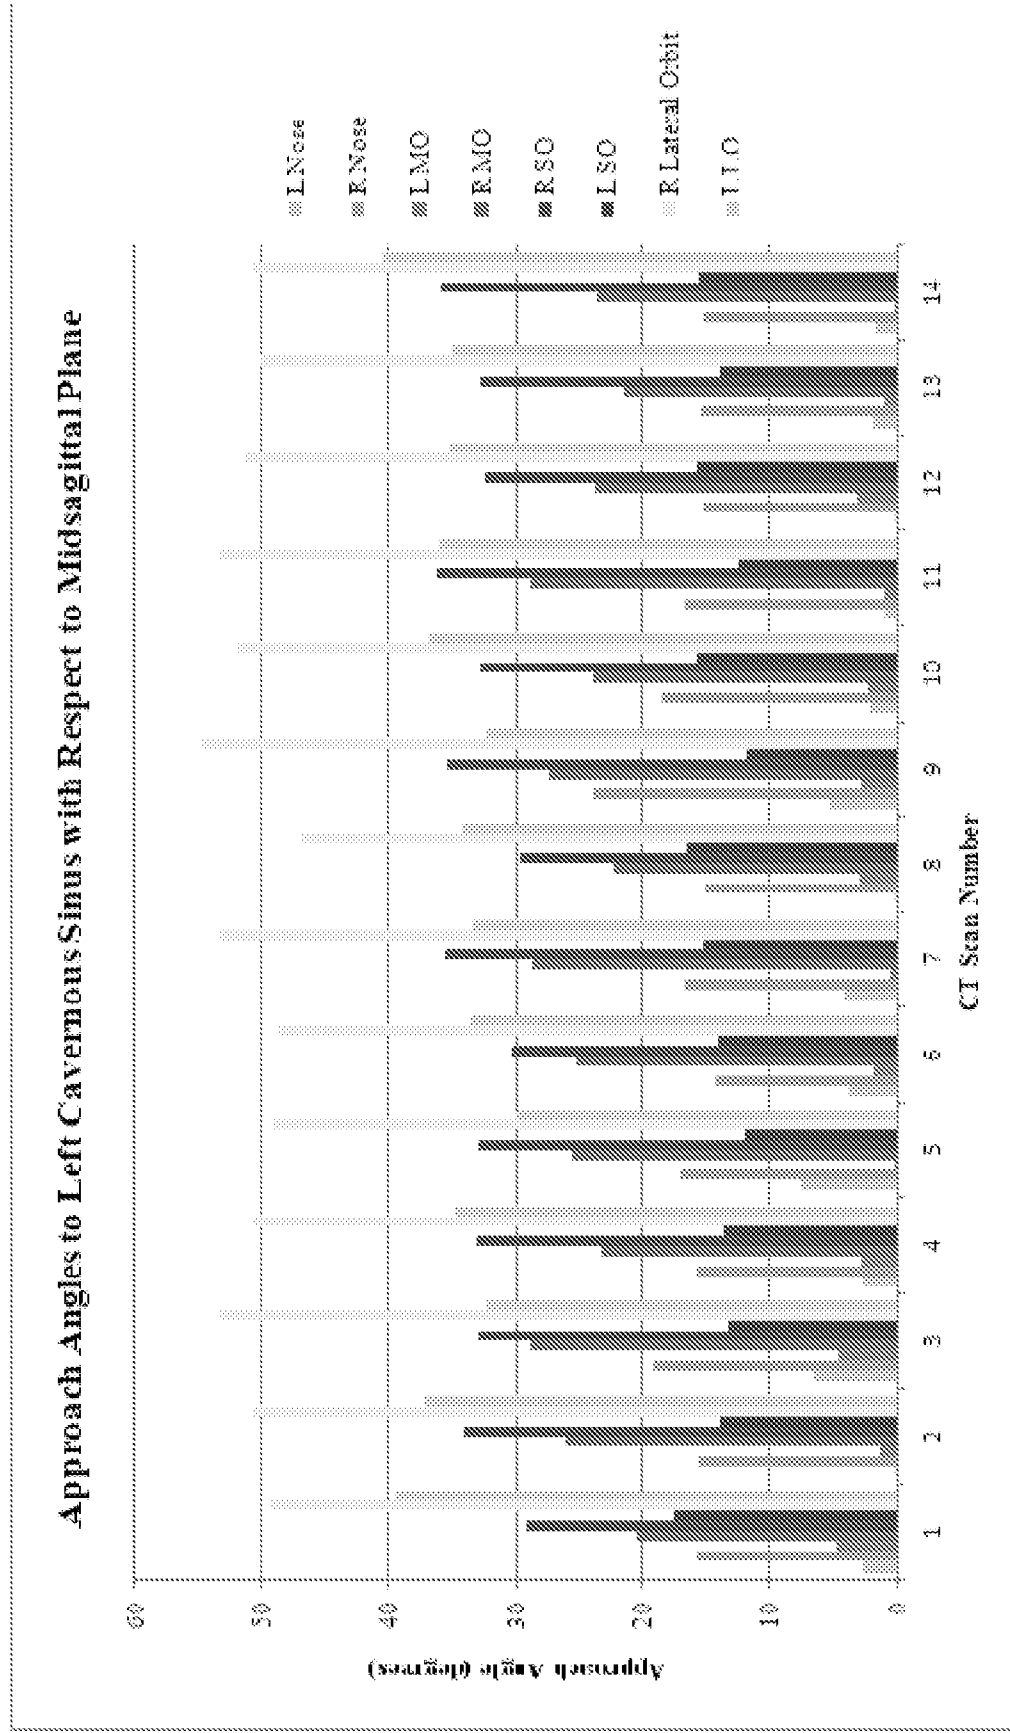


FIG. 9

1000

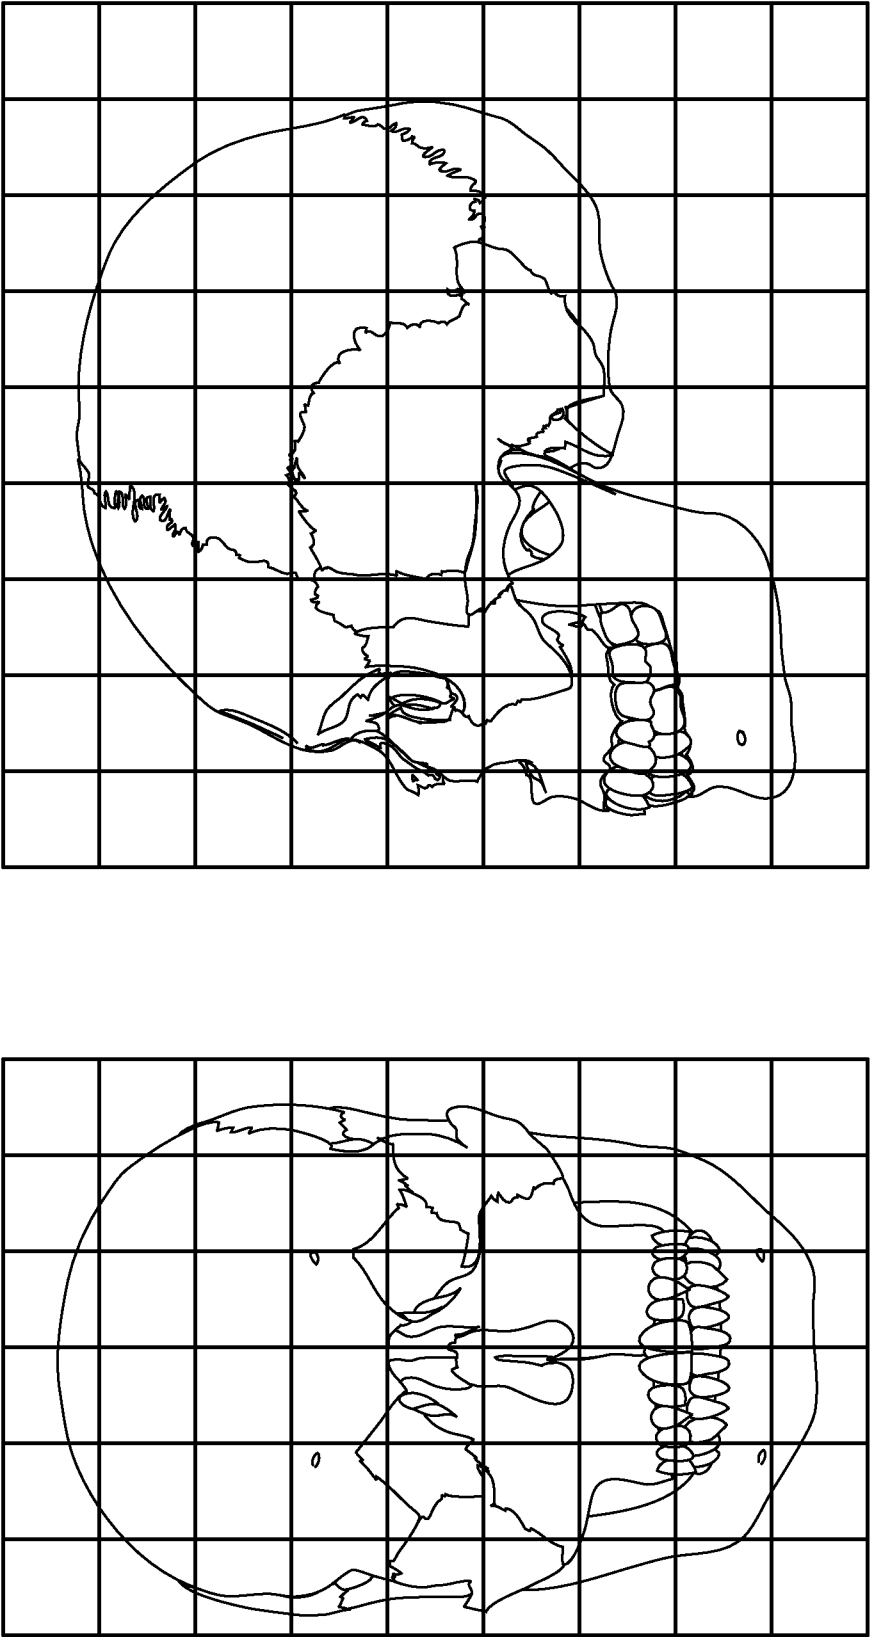


FIG. 10


12/16


Non-midline Target Results		<u>Cavernous Sinus</u>		<u>Meckel's Cave</u>		<u>Superior Optic Fissure</u>	
<u>Angles Between Instruments</u>		Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv
Bilateral Nasal		19.86	(1.88)	14.02	(1.93)	16.21	(2.23)
Contralateral Nasal & ipsilateral Medial Orbit		20.58	(3.63)	22.49	(4.67)	28.98	(5.10)
Ipsilateral Nasal & Contralateral Medial Orbit		29.74	(4.14)	31.83	(4.23)		
Ipsilateral Nasal & Contralateral Superior Orbit		43.77	(4.88)	39.07	(4.86)		
Contralateral Nasal & ipsilateral Lateral Orbit		46.21	(3.12)	53.98	(3.34)	65.85	(3.47)
Contralateral Medial Orbit & ipsilateral Lateral Orbit		58.73	(3.04)	59.97	(2.59)	76.08	(3.42)
Bilateral Medial Orbit		24.89	(2.67)	24.16	(2.64)	31.12	(3.07)
Contralateral Nasal & Contralateral Medial Orbit				25.37	(5.17)		
Contralateral Nasal & ipsilateral Superior Orbit				34.80	(4.61)		
Contralateral Nasal & ipsilateral Inferior Orbit				30.85	(2.46)		
<u>Distance to Target</u>		Distance (mm)	stdv	Distance (mm)	stdv	Distance (mm)	stdv
Contralateral Nasal		99.51	(6.16)	98.02	(6.40)	85.38	(5.76)
Ipsilateral Nasal		95.26	(5.95)	92.93	(6.17)	80.75	(5.84)
Contralateral Medial Orbit		70.35	(3.42)	71.87	(4.19)	57.12	(2.58)
Ipsilateral Medial Orbit		64.29	(3.31)	62.74	(4.46)	47.84	(2.10)
Contralateral Superior Orbit		86.80	(4.23)	90.31	(4.29)	75.69	(3.30)
Ipsilateral Superior Orbit				73.99	(4.54)	60.09	(3.33)
Ipsilateral Lateral Orbit		65.10	(4.14)	59.65	(4.84)	50.46	(4.10)
Contralateral Inferior Orbit				84.03	(3.09)	71.53	(3.80)
Ipsilateral Inferior Orbit				65.89	(4.80)	54.40	(3.90)
<u>Approach Angle with respect to midsagittal plane</u>		Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv
Contralateral Nasal		-15.91	(2.72)	-20.41	(3.44)	-21.12	(3.66)
Ipsilateral Nasal		-2.70	(2.04)	-6.33	(3.03)	-4.34	(2.99)
Contralateral Medial Orbit		-24.40	(1.85)	-30.27	(3.41)	-33.66	(3.09)
Ipsilateral Medial Orbit		2.38	(1.58)	5.92	(3.61)	3.62	(2.39)
Contralateral Superior Orbit		-32.93	(2.25)	-37.51	(3.06)	-41.54	(2.58)
Ipsilateral Lateral Orbit		35.17	(2.95)	9.26	(2.27)	43.41	(2.93)
Contralateral Inferior Orbit				-40.54	(3.30)	-45.56	(3.62)
Ipsilateral Inferior Orbit				10.68	(2.99)	18.47	(2.97)
<u>Approach Angle with respect to skull base</u>		Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv
Bilateral Nasal		-17.17	(6.21)	-14.33	(6.23)	-20.26	(7.32)
Medial & Lateral Orbit		4.57	(3.18)	7.85	(4.90)	5.37	(3.49)
Superior Orbit		19.71	(5.52)	20.33	(5.95)	20.37	(5.72)
Inferior Orbit				8.35	(4.89)	15.74	(5.84)

FIG. 11

Midline Target Results	Prechiasmatic		Postchiasmatic		3rd Ventricle		Basal Cistern		Clivus	
<u>Angles Between Instruments</u>	Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv
Bilateral Nasal	14.69	(1.89)	13.20	(1.72)	12.50	(1.69)	13.08	(1.72)	12.60	(1.80)
Nasal and Opposite Medial Orbit	28.11	(3.59)	22.66	(3.56)	22.34	(3.47)	26.08	(3.66)	26.27	(4.35)
Nasal and Opposite Superior Orbit	41.91	(4.52)	41.37	(3.63)						
Bilateral Medial Orbit	28.63	(3.17)	24.32	(2.50)	23.09	(3.05)	22.21	(2.22)	19.86	(2.37)
Bilateral Superior Orbit			46.03	(3.62)						
Nasal and Opposite inferior Orbit					44.68	(4.73)	45.90	(2.65)	43.01	(3.86)
<u>Distances to Target</u>	Distance (mm)	stdv	Distance (mm)	stdv	Distance (mm)	stdv	Distance (mm)	stdv	Distance (mm)	stdv
Nasal	93.22	(5.61)	103.74	(7.04)	109.59	(9.92)	104.95	(6.09)	108.71	(9.10)
Medial Orbit	69.96	(2.36)	70.28	(3.57)	74.34	(6.70)	76.80	(2.48)	86.03	(4.98)
Superior Orbit	78.41	(2.38)	82.41	(3.67)	84.63	(8.37)	91.72	(3.18)	102.86	(6.28)
Inferior Orbit					66.66	(9.02)	83.85	(4.06)	89.49	(6.47)
<u>Approach Angle with respect to midsagittal plane</u>	Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv
Nasal	8.01	(1.39)	7.14	(1.28)	7.01	(3.29)	6.83	(2.77)	6.20	(2.51)
Medial Orbit	14.69	(1.73)	12.50	(1.40)	12.26	(3.97)	11.33	(2.14)	10.46	(2.12)
Lateral Orbit	47.93	(2.21)			41.50	(5.34)	38.84	(2.45)	36.10	(3.46)
Superior Orbit	26.48	(1.53)	23.29	(1.73)	22.91	(3.97)	21.47	(1.83)	20.09	(1.85)
Inferior Orbit					25.27	(4.04)	23.50	(2.34)	21.76	(2.63)
<u>Approach Angle with respect to skull base</u>	Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv	Angle (degrees)	stdv
Nasal	-21.20	(6.02)	-21.23	(5.78)	-24.71	(6.50)	-11.52	(9.73)	-4.74	(3.02)
Medial Orbit	3.47	(4.17)	5.90	(4.62)	11.78	(7.43)	8.31	(3.41)	18.73	(4.30)
Lateral Orbit	8.20	(4.56)			15.40	(8.16)	8.42	(6.09)	20.31	(4.88)
Superior Orbit	11.66	(5.93)	8.39	(5.22)	5.03	(4.68)	16.91	(6.02)	27.25	(4.99)
Inferior Orbit					29.18	(7.44)	6.53	(4.23)	7.27	(4.43)

FIG. 12

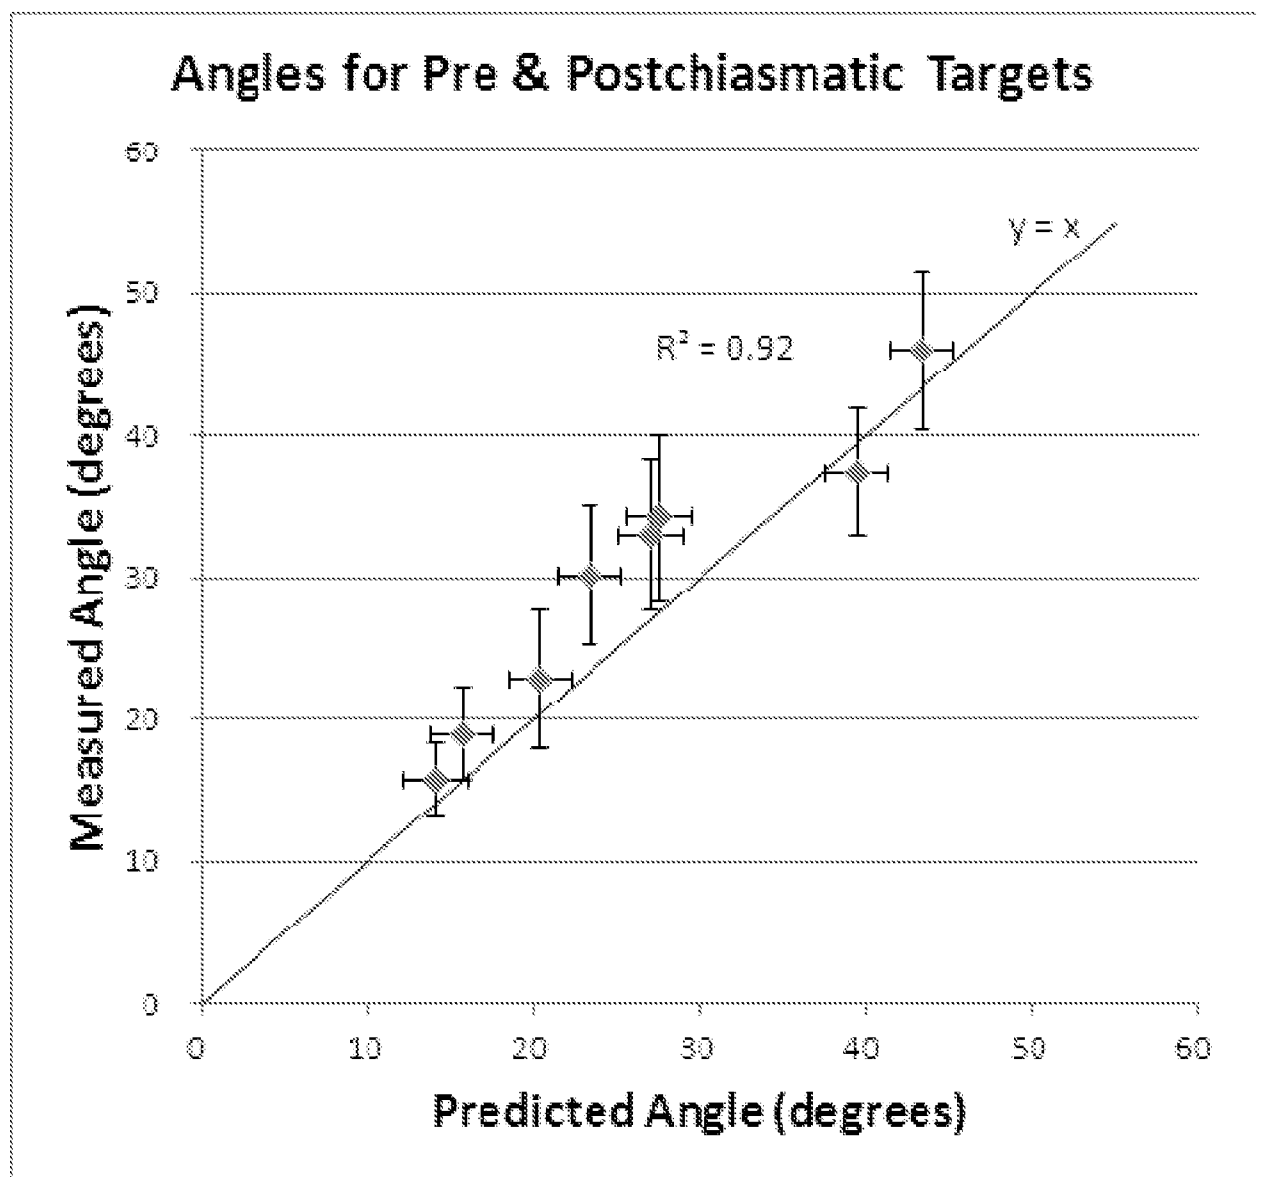**FIG. 13**

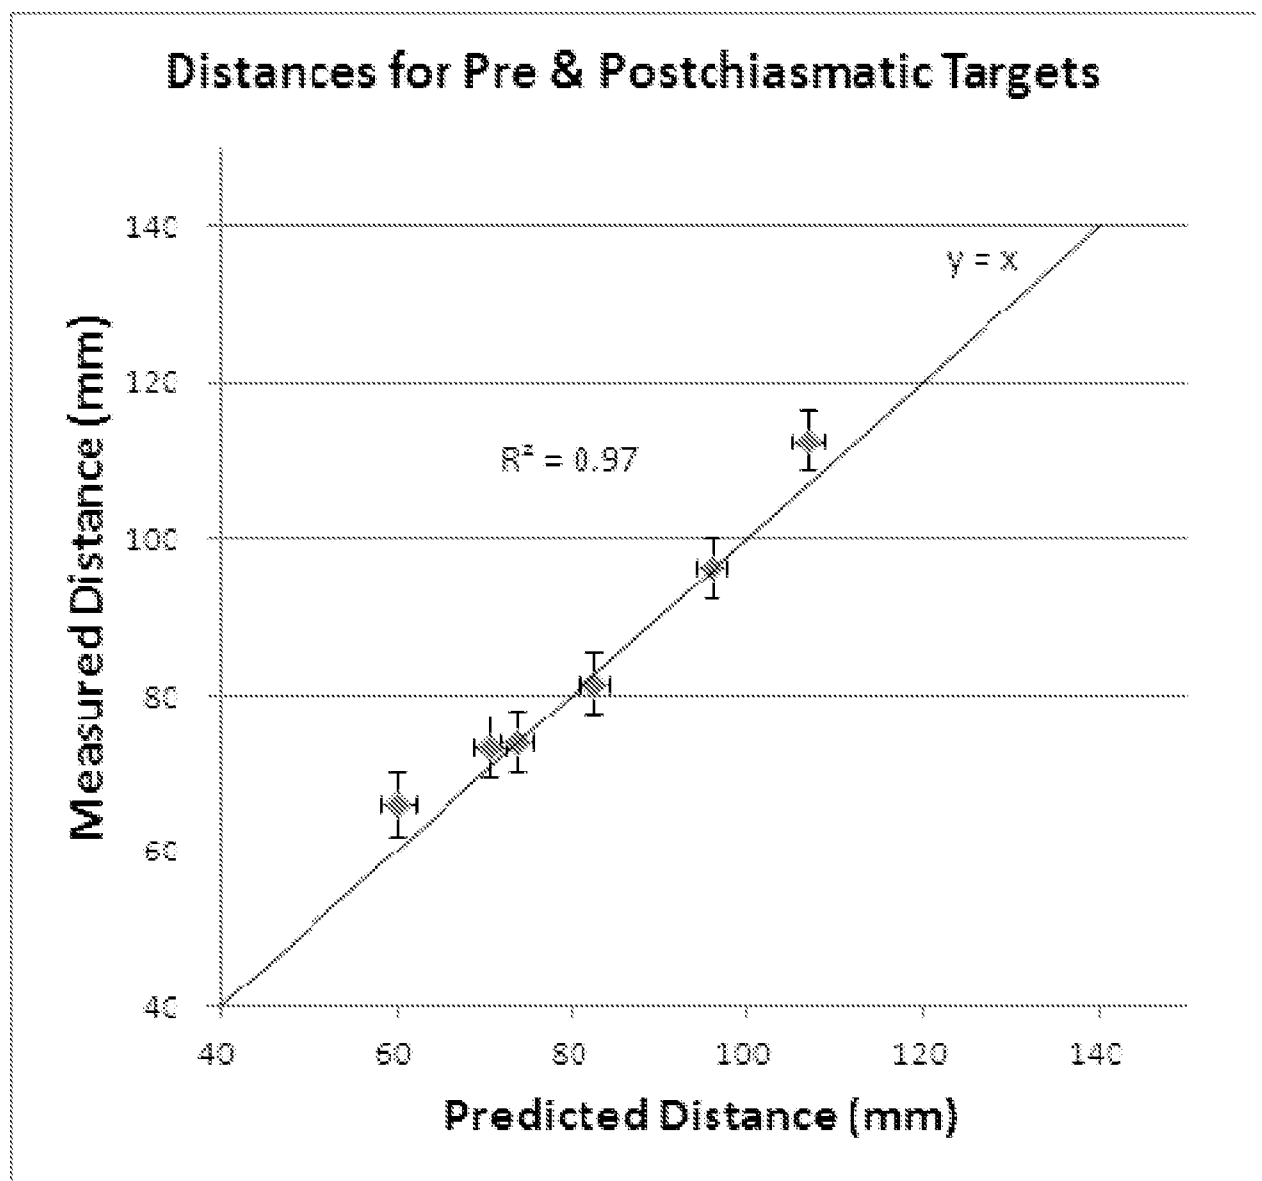**FIG. 14**

Cadaver Data		Cadaver #1			Cadaver #2			Cadaver #3			Cadaver #4		
Prethiomatic	Average (all 14 CT scans)	Predicted Value by Model	Physical Measurements	Predicted Value by Model	Physical Measurements	Predicted Value by Model	Physical Measurements	Predicted Value by Model	Physical Measurements	Predicted Value by Model	Physical Measurements	Predicted Value by Model	Physical Measurements
	Angle (degrees)	Angle (degrees)	Angle (+/- Error)	Angle (degrees)	Angle (+/- Error)	Angle (degrees)	Angle (+/- Error)	Angle (degrees)	Angle (+/- Error)	Angle (degrees)	Angle (+/- Error)	Angle (degrees)	Angle (+/- Error)
Angles	stdev												
	Bilateral Nasal	14.69 (1.9)	16.64	19.2 (3.5)	15.49 (3.2)	18.17 (3.2)	15.97 (3.3)	19.39 (3.3)	19.39 (3.3)	14.54 (3.1)	18.99 (3.1)	14.54 (3.1)	18.99 (3.1)
	Nasal and Opposite Medial Orbit	27.55 (3.6)	25.42	32.9 (5.4)	30.18 (5.8)	33.32 (5.8)	30.18 (5.8)	29.49 (5.4)	29.49 (5.4)	30.75 (5.4)	36.44 (5.4)	30.75 (5.4)	36.44 (5.4)
	Nasal and Opposite Superior Orbit	41.91 (4.8)	44.08	49.7 (5.9)	44.27 (5.3)	46.04 (5.3)	38.69 (5.3)	47.12 (5.7)	47.12 (5.7)	46.48 (5.1)	44.20 (5.1)	46.48 (5.1)	44.20 (5.1)
Distances	stdev												
	Bilateral Medial Orbit	28.83 (3.2)	28.12	35.8 (6.0)	29.45 (6.1)	32.79 (6.1)	22.26 (6.1)	35.84 (6.0)	35.84 (6.0)	30.20 (5.2)	32.26 (5.2)	30.20 (5.2)	32.26 (5.2)
	Nasal	93.22 (5.6)	89.40	90 (4)	94.26 (4)	10 (4)	96.79 (4)	95.00 (4)	95.00 (4)	103.54 (4)	100 (4)	103.54 (4)	100 (4)
	Medial Orbit	59.95 (2.4)	59.78	65 (4)	60.29 (4)	62 (4)	61.90 (4)	65.00 (4)	65.00 (4)	59.10 (4)	72 (4)	59.10 (4)	72 (4)
Postthiomatic	stdev												
	Bilateral Nasal	13.20 (1.7)	15.18	15.67 (2.7)	13.63 (2.5)	14.99 (2.5)	14.40 (2.5)	16.00 (2.6)	16.00 (2.6)	13.10 (1.6)	16.50 (1.6)	13.10 (1.6)	16.50 (1.6)
	Nasal and Opposite Medial Orbit	22.80 (5.7)	17.59	22.67 (4.7)	24.03 (5.3)	20.30 (5.3)	15.62 (5.3)	20.45 (4.6)	20.45 (4.6)	24.30 (4.7)	27.86 (4.7)	24.30 (4.7)	27.86 (4.7)
	Nasal and Opposite Superior Orbit	40.61 (3.2)	43.30	39.40 (4.7)	43.06 (4.5)	35.69 (4.5)	26.94 (4.5)	37.24 (4.3)	37.24 (4.3)	44.64 (4.3)	35.95 (4.3)	44.64 (4.3)	35.95 (4.3)
Distances	stdev												
	Bilateral Medial Orbit	24.32 (2.5)	24.75	30.93 (4.9)	24.47 (5.1)	28.96 (5.1)	18.95 (5.1)	29.71 (4.6)	29.71 (4.6)	25.33 (4.9)	30.93 (4.9)	25.33 (4.9)	30.93 (4.9)
	Nasal	103.74 (7.0)	97.93	105 (4)	107.09 (4)	115 (4)	107.32 (4)	115 (4)	115 (4)	114.90 (4)	115 (4)	114.90 (4)	115 (4)
	Medial Orbit	70.28 (3.6)	67.76	70 (4)	72.24 (4)	70 (4)	72.83 (4)	76 (4)	76 (4)	70.17 (4)	73 (4)	70.17 (4)	73 (4)
Superior Orbit	82.41 (3.7)	80.56	80 (4)	82.16 (4)	81 (4)	86.78 (4)	84 (4)	84 (4)	84 (4)	80.54 (4)	81 (4)	80.54 (4)	81 (4)

FIG. 15

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/075115

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06F19/00 A61B19/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F A61B G09B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009/259230 A1 (KHADEM RASOOL [US] ET AL) 15 October 2009 (2009-10-15)	1,6,8, 13,15, 20,22, 27,29, 34,36,41
A	paragraph [0005] - paragraph [0008] paragraph [0018] - paragraph [0029] paragraph [0040] - paragraph [0053] ----- -/--	2-5, 9-12, 16-19, 23-26, 30-33, 37-40



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

6 March 2014

Date of mailing of the international search report

13/03/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Abbing, Ralf

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2013/075115

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008/123922 A1 (GIELEN FRANS L H [NL] ET AL) 29 May 2008 (2008-05-29)	1,8,15, 22,29,36
A	paragraph [0007] - paragraph [0010] paragraph [0029] - paragraph [0030] paragraph [0059] - paragraph [0061]	2-6, 9-13, 16-20, 23-27, 30-34, 37-41
A	----- US 2008/097187 A1 (GIELEN FRANS L H [NL] ET AL) 24 April 2008 (2008-04-24)	1-6, 8-13, 15-20, 22-27, 29-34, 36-41
	abstract paragraph [0007] - paragraph [0010] paragraph [0027] - paragraph [0034] paragraph [0063] - paragraph [0075]	
A	----- DAVID T GERING ET AL: "An Integrated Visualization System for Surgical Planning and Guidance Using Image Fusion and Interventional Imaging", 1 January 2006 (2006-01-01), MEDICAL IMAGE COMPUTING AND COMPUTER ASSISTED INTERVENTION - MICCAI '99 : SECOND INTERNATIONAL CONFERENCE, CAMBRIDGE, UK, SEPTEMBER 19 - 22, 1999; [LECTURE NOTES IN COMPUTER SCIENCE ; 1679], SPRINGER, BERLIN [U.A.], PAGE(S) 809 - 819, XP019036236, ISBN: 978-3-540-66503-8 the whole document	1-6, 8-13, 15-20, 22-27, 29-34, 36-41
A	----- WO 2008/032230 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; TROVATO KAREN I [US]) 20 March 2008 (2008-03-20)	3,4,10, 11,17, 18,24, 25,31, 32,38,39
	the whole document -----	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/075115

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 7, 14, 21, 28, 35, 42
because they relate to subject matter not required to be searched by this Authority, namely:
see FURTHER INFORMATION sheet PCT/ISA/210
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.1

Claims Nos.: 7, 14, 21, 28, 35, 42

The subject-matter of claims 7, 14, 21, 28, 35 and 42 defines a method, eventually computer-implemented, of treatment of the human body and program instructions, eventually implemented on a computer readable medium, causing a surgical instrument to perform a treatment of the human body. Under Rule 39.1(iv) PCT, the International searching Authority is not required to search such subject-matter.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/075115

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009259230 A1	15-10-2009	NONE	
US 2008123922 A1	29-05-2008	US 2008123922 A1	29-05-2008
		US 2012184844 A1	19-07-2012
US 2008097187 A1	24-04-2008	NONE	
WO 2008032230 A1	20-03-2008	CN 101516277 A	26-08-2009
		EP 2066245 A1	10-06-2009
		JP 2010503449 A	04-02-2010
		RU 2009113800 A	20-10-2010
		US 2009248045 A1	01-10-2009
		WO 2008032230 A1	20-03-2008