




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01B 121/08, G01M 13/02		A1	(11) International Publication Number: WO 96/16315
			(43) International Publication Date: 30 May 1996 (30.05.96)
(21) International Application Number: PCT/US95/09754		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).	
(22) International Filing Date: 2 August 1995 (02.08.95)			
(30) Priority Data: 08/343,341 22 November 1994 (22.11.94) US			
(71) Applicant: ILLINOIS TOOL WORKS, INC. [US/US]; 3600 West Lake Avenue, Glenview, IL 60025 (US).		Published With international search report.	
(72) Inventor: FLAIR, Henry, J.; 3515 Sunset Lane, Franklin Park, IL 60131 (US).			
(74) Agent: ORUM, Keith, H.; Dvorak and Traub, 53 West Jackson Boulevard, Chicago, IL 60604 (US).			

(54) Title: APPARATUS FOR INSPECTING A GEAR

(57) Abstract

A master gear (100) for measuring, in a parallel axis gear measuring apparatus (10), tooth profile, tooth pitch and tooth thickness of a work gear (200). The master gear (100) has a plurality of adjacent teeth separated by a tooth spacing that varies as a repeatable sequence of spacings, wherein the master gear (100) contacts only a single tooth of the work gear (200) during measurement of work gear tooth profile and tooth thickness. The master gear (100) contacts only two teeth of the work gear (200) during a transition between measurement of tooth profile of individual teeth of the work gear (200), wherein tooth pitch is measured during the transition. The master gear (100) also has transverse operating pressure angle dependent on a transverse pressure angle at an outer diameter of the work gear (200), a transverse pressure angle at a form diameter of the work gear (200), a transverse pressure angle at a pitch diameter of the work gear (200), a transverse tooth thickness at a pitch diameter of the work gear (200) and a pitch diameter of the work gear (200). In one embodiment, the master gear (100) has helical teeth having a tooth spacing and a gear width dependent on a contact ratio of the work gear (200). In another embodiment, the master gear (100) has spur teeth for measuring a work gear (200) having spur teeth. The master gear (100) having spur teeth is defined by parameters relating to a pressure angle of an imaginary outer diameter of the work gear (200) and a pressure angle of an imaginary form diameter of the work gear (200).

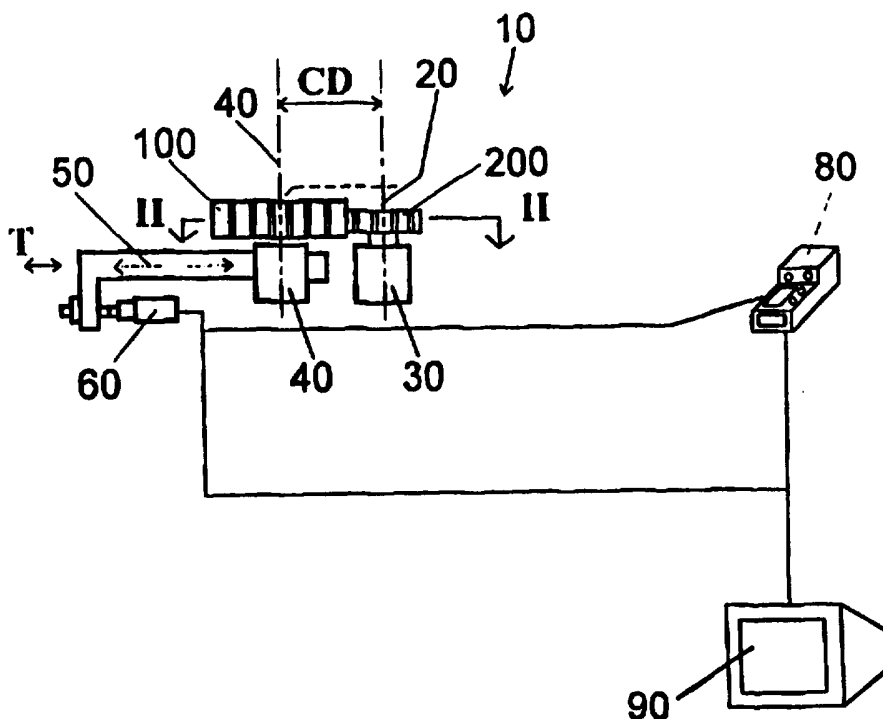

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

APPARATUS FOR INSPECTING A GEAR

S P E C I F I C A T I O N

FIELD OF THE INVENTION

The present invention generally relates to a master or checking gear for measuring or inspecting tooth profile, tooth pitch, and tooth thickness of a work gear in a parallel axis type gear measuring apparatus.

BACKGROUND OF THE INVENTION

In the past, parallel axis type gear measuring apparatuses measured parameters of a work gear by measuring a change in a center distance between the rotation axes of the work gear and a master gear, wherein the change in center distance was monitored by a mechanical gauge. The change in center distance, however, is a composite signal resulting from many parameters of the work gear and had limited value. The composite signal results from the engagement of more than one tooth of the work gear by the master gear, wherein the change in center distance was a result of measurement components from several teeth of the work gear at one time. More recently, it has been suggested to convert the change in center distance to an electrical signal, wherein the components of the electrical signal are separated by electronically filtering the signal, over different frequency ranges, into its component signals. The component electrical signals correspond to various parameters of the work gear, and therefore provide more precise measurement information about the work gear. For example, the component electrical signals provide measurement information on lead error, nicks, gear size, runout, bore size, angular velocity error, and gear face squareness. Parameters derived by electronic filtering, however, have a limited accuracy, and require costly electronic equipment. Further, the automated gear measurements discussed above do not provide any information on tooth profile, which has generally been measured using time consuming and costly analytical techniques.

In view of the discussion above, there exists a demonstrated need for an advancement in the art of a master gear for checking a work gear, and, in particular, for a master gear that quickly and economically measures gear parameters including tooth profile.

It is therefore an object of the present invention to provide a novel master gear for measuring a work gear in a parallel axis gear measuring apparatus.

It is another object of the present invention to provide a novel master gear that measures tooth profile, tooth pitch, and tooth thickness of the work gear.

It is a further object of the present invention to provide a novel master gear for quickly and economically measuring a work gear, wherein work gear parameters may be measured for each tooth or, in the alternative, may be averaged.

It is also an object of the present invention to provide a novel master gear that contacts only a single tooth of the work gear during measurement of work gear tooth profile and tooth thickness, wherein the measurement is not affected by contact between other teeth of the work gear and the master gear.

It is yet another object of the present invention to provide a novel master gear that contacts only two teeth of the work gear to provide a continuous, smooth, transition between engagement of individual teeth for measurement of tooth profile, wherein tooth pitch is measured during the transition.

It is another object of the present invention to provide a master gear that has a transverse operating pressure angle that depends on a transverse pressure angle at an outer diameter of the work gear, a transverse pressure angle at a form diameter of the work gear, a transverse pressure angle at a pitch diameter of the work gear, a transverse tooth thickness at a pitch diameter of the work gear, and a pitch diameter of the work gear.

It is a further object of the present invention to provide a novel master gear having helical teeth for measuring a work gear having helical teeth, wherein the master gear has a minimum width and tooth spacing that depends on a gear contact ratio.

It is yet a further abject of the present invention to provide a novel master gear having spur teeth for measuring a work gear having spur teeth.

Accordingly, the present invention is directed toward a novel master gear for measuring, in a parallel axis gear measuring apparatus, tooth profile, tooth pitch, and tooth thickness of a work gear. The master gear includes a plurality of adjacent teeth separated by a tooth spacing that varies as a repeatable sequence of spacings, wherein the master gear contacts only a single tooth of the work gear during measurement of work gear tooth profile and tooth thickness. The master gear contacts only two teeth of the work gear during a transition between measurement of tooth profile on teeth of the work gear, wherein tooth pitch is measured during the transition. The master gear has a transverse operating pressure angle dependent on a transverse pressure angle at an outer diameter of the work gear, a transverse pressure angle at a form diameter of the work gear, a transverse pressure angle at a pitch diameter of the work gear, a transverse tooth thickness at a pitch diameter of the work gear, and a pitch diameter of the work gear. In one embodiment, the master gear has helical teeth having a tooth spacing dependant on a contact ratio of the work gear. The width of the master gear with helical teeth is dependent on an involute contact ratio of the work gear, a number of teeth in the work gear, a normal diametral pitch, a helix angle of the work gear, and a factor that compensates for frictional wear on the master gear. In another embodiment, the master gear has spur teeth for measuring a work gear having spur teeth. The master gear having spur teeth is further defined by parameters relating to a pressure angle of an imaginary outer diameter of the work gear and a pressure angle of an imaginary form diameter of the work gear. The additional parameters depend on an involute contact ratio of the work gear, a pressure angle at an outer diameter of the work gear, a pressure angle at a form diameter of the work gear, a generating pressure angle of the work gear, a number of teeth on the work gear, a pitch diameter of the work gear, a tooth thickness at a pitch diameter of the work gear, a pressure angle of an imaginary outer diameter of the work gear, and a pressure angle of an imaginary form diameter of the work gear.

These and other objects, features and advantages of the present invention will become apparent upon consideration of the following Detailed Description of the Invention with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a parallel axis type work gear measuring apparatus including the checking gear of the present invention.

Fig. 2a is a partial sectional view of an infinitely thin plane along the line II-II through a helical tooth checking gear and a helical tooth work gear of Fig. 1.

Fig. 2b is another partial sectional view along the line II-II through a helical tooth checking gear and helical tooth work gear of Fig. 1, wherein the helical tooth work gear and helical tooth checking gear have been rotationally advanced through an angular interval relative to the orientation of Fig. 2a.

Fig. 3 is an exemplary graphical depiction of the change in center distance, CD, versus the change in angular position of the work gear 200 over an angular interval.

Fig. 4a is a partial sectional view of an infinitely thin plane along the line II-II through a spur tooth checking gear and a spur tooth work gear of Fig. 1.

Fig. 4b is another partial sectional view along the line II-II through the spur tooth checking gear and spur tooth work gear of Fig. 1, wherein the spur tooth work gear and spur tooth checking gear have been rotationally advanced through an angular interval relative to the orientation of Fig. 4a.

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 is a parallel axis type gear measuring apparatus 10 generally comprising a checking gear, or master gear, 100 for measuring parameters of a work gear 200. The work gear 200 is coupled to a servo-motor 30 by means known in the art, and rotatable about a fixed axis 20. The checking gear 100 is mounted on an arm 50 and is rotatable about an axis 40, substantially parallel to the axis 20. The arm 50 is movable along a radial T of the master gear 100, transverse to the axis 30. A transducer 60 detects mechanical motion of the arm 50, which corresponds to changes in the center distance, CD, between the axes 20 and 40 of the work gear 200 and checking gear 100. The transducer 60, for example, a linear differential transformer, converts the mechanical motion of the arm 50 to an electrical output signal that is proportional to the change in CD in relation to the change in angular position of the work gear. In one embodiment, the electrical output signal is amplified by an amplifier. The electrical output signal may also be filtered by a filter before or after amplification. The electrical output signal is used as a basis for forming a graphical image of the change of CD versus the change in angular position on a plotter 80, or on a CRT 90. The electrical output signal may also be digitized with an A/D converter and stored in a non-volatile memory and later transformed, filtered and otherwise manipulated by a computing device.

In one embodiment, the checking gear 100 is configured to check a work gear 200 with helical teeth, and having a contact ratio of 2 or less. Figs. 2a and 2b are partial sectional views of an infinitely thin plane along the line II-II of Figure 1, wherein the spacing S_2 , S_3 , S_4 , and S_5 between teeth M_1 , M_2 , M_3 , and M_4 of the checking gear varies as a repeatable sequence wherein every second tooth spacing is narrow in comparison with the first tooth spacing. Specifically, the spacing S_2 between teeth M_1 and M_2 is greater than the spacing S_3 between teeth M_2 and M_3 , wherein the spacing S_4 is equal to S_4 , S_6 etc., and the spacing S_1 is equal to S_3 , S_5 , etc.

In operation, the checking gear 100 measures several parameters of the work gear 200 including tooth profile or involute, tooth thickness, and tooth pitch. Fig. 3 is a chart showing the change in center distance, CD, versus angular rotation of the work gear

200. During the measurement of work gear tooth profile, the two teeth of the checking gear 100 engage only one tooth of the work gear 200 to ensure that the measurement of the tooth profile is not effected by contact between any other teeth of the checking gear and the work gear. In Fig. 2a, teeth M_2 and M_3 of the checking gear 100 measure the tooth profile of tooth 3 of the work gear 200. During the measurement of tooth profile, there are only two contact points P_1 and P_2 between the teeth of the checking gear and the tooth of the work gear. Tooth profile measurement begins when the contact point P_1 is at a specified point A on a first side surface, or flank, of the tooth, and the contact point P_2 is at a point B, of an opposing, second side surface of the measured tooth. As the measurement proceeds, the contact points P_1 and P_2 move up and down the respective flanks of the tooth. Tooth profile measurement is complete when the contact point P_1 is at point A' on the first flank, and the contact point P_2 is at point B' on the second flank. The points A and B' are design specifications, and are always symmetrically located on the opposing flanks of the tooth, but the location may be specified anywhere along the tooth flank, depending on the gear application. The points A' and B, however, are located at the outer diameter of the tooth.

Fig. 2b shows the relative position of the checking gear 100 and the work gear 200 at the end of profile measurement of tooth 3 and at the beginning of profile measurement of tooth 5. During the transition, the checking gear 100 contacts two teeth of the work gear 200, in this example teeth 3 and 5, at four contact points. The flank of tooth M_2 contacts the outer diameter of tooth 3 at point A', and the outer diameter of tooth M_3 contacts the second flank of tooth 3. Also, the outer diameter of tooth M_4 contacts the first flank of tooth 5, and the flank of tooth M_5 contacts the outer diameter of tooth 5 at point B. If the work gear is perfect, tooth M_3 will contact tooth 3 at B', and tooth M_4 will contact tooth 5 at A. The four contact points ensure continuity of engagement between the checking gear and the work gear, and a smooth transition from the individual engagement and measurement tooth 3, to the individual engagement and measurement of tooth 5. The four contact points, however, exist only during the transition which occurs over an angular interval during the which irregularities in tooth pitch will result in variations in CD as further discussed below. In the exemplary embodiment of Fig.2, wherein the contact ratio

of the checking gear and work gear is 2 or less, the checking gear engages only every other tooth of the work gear, which in the example are the odd numbered teeth 1,3, 5 *etc.* The intermediate, even numbered gears, may be measured by incrementing the checking gear one tooth relative to the work gear. As a practical matter, however, it may be necessary only to obtain average parameter measurements by measuring every other tooth, or in an embodiment discussed below, every third tooth, of the work gear.

Fig. 3 is an exemplary graphical depiction of the change in CD versus the change in angular position of the work gear 200 over an angular interval between α_0 and α_3 . The upper most and lower most curves represent the K-factor tolerance band, which is a design parameter specified for a particular gear application, as is known in the art. Each curve, between the K-factor tolerance band, corresponds to measured changes in tooth profile and tooth pitch for one of several teeth on a gear. In the exemplary embodiment, all of the curves are within the K-factor tolerance band, which indicates that the gear is within the design specification. The change in CD over the interval α_0 through α_1 is a measurement of change in tooth profile along a first flank of the tooth, and the change in CD over the interval α_1 through α_2 is a measurement of change in tooth profile along the second, opposing, flank of the same tooth. The change in CD over the interval α_2 through α_3 is a measurement of change in tooth pitch. The change in CD at α_1 is a measurement of change in tooth thickness.

The helical checking gear 100 of the present invention has two design parameters, the transverse operating pressure angle, OPA_T , and checking gear thickness or width, both of which are a function of parameters of the work gear. The transverse operating pressure angle, OPA_T , for a helical checking gear according to the present invention is given by the expression

$$\frac{\tan(TPA_{OD}) + \tan(TPA_{FD})}{2} - INV(TPA_G) - \frac{TTT_{PD}}{PD_G}$$

where TPA_{OD} is a transverse pressure angle at an outer diameter of the work gear, TPA_{FD} is a transverse pressure angle at a form diameter of the work gear, $INV(TPA_G)$ is an involute function of a transverse pressure angle at a pitch diameter of the work gear, TTT_{PD} is a transverse tooth thickness at a pitch diameter of the work gear, and PD_G is a

pitch diameter of the work gear.

The helical checking gear must also have a minimum width to ensure a continuous transfer between teeth of the checking gear and work gear as discussed above. The minimum width, W_{m2} , for a helical checking gear with a contact ratio of 2 or less is given by the expression

$$\frac{\pi(2-CR_{INV})}{NDP\sin(HA_G)} + K_w$$

where CR_{INV} is an involute contact ratio of the work gear given by the expression

$$\frac{N_G}{2\pi}(\tan(TPA_{OD}) - \tan(TPA_{FD}))$$

where N_G is a number of teeth in the work gear, TPA_{OD} and TPA_{FD} are defined above, NDP is a normal diametral pitch, HA_G is a helix angle of the work gear, and K_w is a factor that compensates for frictional wear on the checking gear.

The transverse operating pressure angle, OPA_T , for a helical checking gear having a contact ratio between 2 and 3 is the same as for a helical gear with a contact ratio of 2 or less as discussed above. In the case of a helical checking gear with a contact ratio between 2 and 3, however, the spacing between the teeth varies as a repeatable sequence wherein every third tooth spacing is narrow in comparison with the first and second tooth spacings. Also, the minimum width, W_{m3} , of the helical checking gear with a contact ratio between 2 and 3 is given by the expression

$$\frac{\pi(3-CR_{INV})}{NDP\sin(HA_G)} + K_w$$

where the variables are defined above.

In an alternative embodiment, the checking gear of the present invention has spur teeth to measure a work gear with spur teeth. Figs. 4a and 4b are, again, partial sectional views of an infinitely thin plane along the line II-II of Figure 1, wherein the gears have spur teeth. The spacing between every other tooth of the checking gear varies as a repeatable sequence of spacings which includes a first wide tooth spacing and a second comparatively narrow tooth spacing. The wide spacing is defined by a first and second flank of adjacent first and second teeth. The flanks of the teeth defining the wide spaces

S_2 , S_4 , etc., each include a stud 140 extending in the wide space therebetween, which may be formed by grinding process.

A checking gear having spur teeth has a transverse operating pressure angle, OPA_T , which is determined by the same expression given above as in the case for a master gear having helical teeth. A master gear having spur teeth, however, is further defined by parameters relating to a pressure angle of an imaginary outer diameter of the work gear, PA_{ROD} , expressed as

$$\tan(PA_{OD}) - \frac{2\pi}{N_G}(CR_{INV} - 1)$$

and a pressure angle of an imaginary form diameter of the work gear, PA_{RFD} , expressed as

$$\tan(PA_{OD}) - \frac{2\pi}{N_G}$$

where CR_{INV} is an involute contact ratio of the work gear is expressed as

$$\frac{(\tan(PA_{OD}) - \tan(PA_{FD}))N_G}{2\pi}$$

wherein PA_{OD} is a pressure angle at the outer diameter of the work gear, PA_{FD} is a pressure angle at the form diameter of the work gear, PA_g is a generating pressure angle of the work gear, N_G is a number of teeth on the work gear, PD_G is a pitch diameter of the work gear, TT_G is a tooth thickness (circular) at a pitch diameter of the work gear, PA_{ROD} is a pressure angle of an imaginary outer diameter of the work gear, and PA_{RFD} is a pressure angle of an imaginary form diameter of the work gear.

The foregoing is a description enabling one of ordinary skill in the art to make and use the preferred embodiments of the present invention. It will be appreciated by those skilled in the art that there exists variations, modifications and equivalents to the embodiments disclosed herein. The present invention therefore is to be limited only by the scope of the appended claims.

CLAIMS

What is claimed is:

1. A master gear for measuring, in a parallel axis gear measuring apparatus, tooth profile, tooth pitch, and tooth thickness of a work gear, the master gear comprising:

a plurality of adjacent teeth separated by a tooth spacing that varies as a repeatable sequence of spacings, the master gear contacting only a single tooth of the work gear during measurement of work gear tooth profile and tooth thickness; and

a transverse operating pressure angle, OPA_T , expressed as

$$\frac{\tan(TPA_{OD}) + \tan(TPA_{FD})}{2} - INV(TPA_G) - \frac{TTT_{PD}}{PD_G}$$

where TPA_{OD} is a transverse pressure angle at an outer diameter of the work gear, TPA_{FD} is a transverse pressure angle at a form diameter of the work gear, $INV(TPA_G)$ is an involute function of a transverse pressure angle at a pitch diameter of the work gear, TTT_{PD} is a transverse tooth thickness at a pitch diameter of the work gear, and PD_G is a pitch diameter of the work gear.

2. The master gear of Claim 1, wherein the master gear further comprises helical teeth for measuring a work gear having helical teeth, and the master gear has a minimum width, the master gear contacting only two teeth of the work gear during a transition between measurement of tooth profile on teeth of the work gear, wherein tooth pitch is measured during the transition.

3. The master gear of Claim 2, wherein the repeatable sequence of spacings between the plurality of adjacent teeth includes a first wide tooth spacing and a second comparatively narrow tooth spacing.

4. The master gear of Claim 2, wherein the repeatable sequence of spacings between the plurality of adjacent teeth includes a first wide tooth spacing, a second wide tooth spacing, substantially the same width as the first wide tooth spacing, and a third comparatively narrow tooth spacing.

5. The master gear of Claim 3, wherein the master gear has a contact ratio of 2 or less, and the minimum width, W_{m2} , is expressed as

$$\frac{\pi(2-CR_{INV})}{NDP\sin(HA_G)} + K_w$$

where CR_{INV} is an involute contact ratio of the work gear expressed as

$$\frac{N_G}{2\pi}(\tan(TPA_{OD}) - \tan(TPA_{FD}))$$

where N_G is a number of teeth in the work gear, NDP is a normal diametral pitch, HA_G is a helix angle of the work gear, and K_w is a factor that compensates for frictional wear on the master gear.

6. The master gear of Claim 4, wherein the master gear has a contact ratio between 2 and 3, and the minimum width, W_{m3} , is expressed as

$$\frac{\pi(3-CR_{INV})}{NDP\sin(HA_G)} + K_w$$

where CR_{INV} is an involute contact ratio of the work gear expressed as

$$\frac{N_G}{2\pi}(\tan(TPA_{OD}) - \tan(TPA_{FD}))$$

where N_G is a number of teeth in the work gear, NDP is the normal diametral pitch, HA_G is a helix angle of the work gear, and K_w is a factor that compensates for frictional wear on the master gear.

7. The master gear of Claim 1, wherein the master gear has spur teeth for measuring a work gear having spur teeth.

8. The master gear of Claim 7, wherein the repeatable sequence of spacings between the plurality of adjacent teeth includes a first wide tooth spacing and a second comparatively narrow tooth spacing, the wide spacing defined by a first and second flank of adjacent first and second teeth, each flank defining the wide spacing having a stud extending into the wide spacing therebetween.

9. The master gear of Claim 8, wherein the master gear having spur teeth is further defined by parameters relating to a pressure angle of an imaginary outer diameter of the work gear, PA_{ROD} , expressed as

$$\tan(PA_{\text{OD}}) - \frac{2\pi}{N_G}(CR_{\text{INV}} - 1)$$


and a pressure angle of an imaginary form diameter of the work gear, PA_{RFD} , expressed as

$$\tan(PA_{\text{OD}}) - \frac{2\pi}{N_G}$$

where CR_{INV} is an involute contact ratio of the work gear is expressed as

$$\frac{(\tan(PA_{\text{OD}}) - \tan(PA_{\text{FD}}))N_G}{2\pi}$$

wherein PA_{OD} is a pressure angle at an outer diameter of the work gear, PA_{FD} is a pressure angle at a form diameter of the work gear, PA_g is a generating pressure angle of the work gear, N_G is a number of teeth on the work gear, PD_G is a pitch diameter of the work gear, TT_G is a tooth thickness at a pitch diameter of the work gear, PA_{ROD} is a pressure angle of an imaginary outer diameter of the work gear, and PA_{RFD} is a pressure angle of an imaginary form diameter of the work gear.

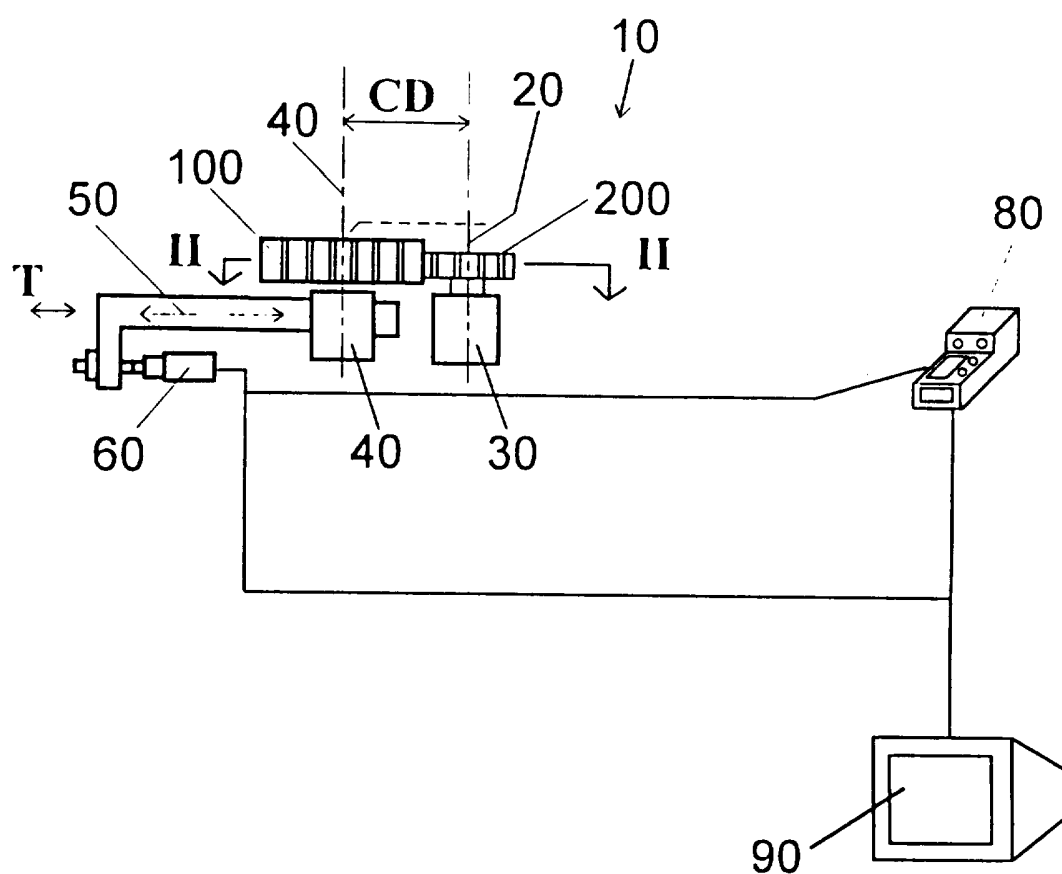**FIGURE 1**

2/4

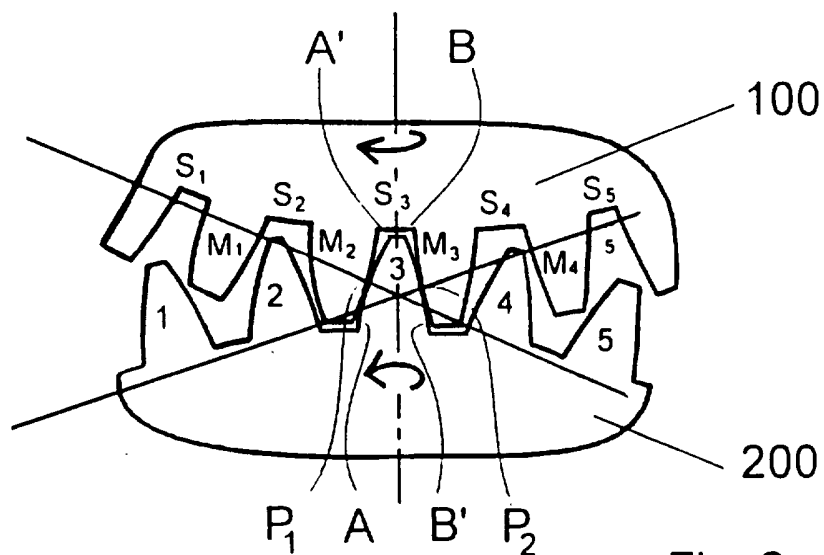


Fig. 2a

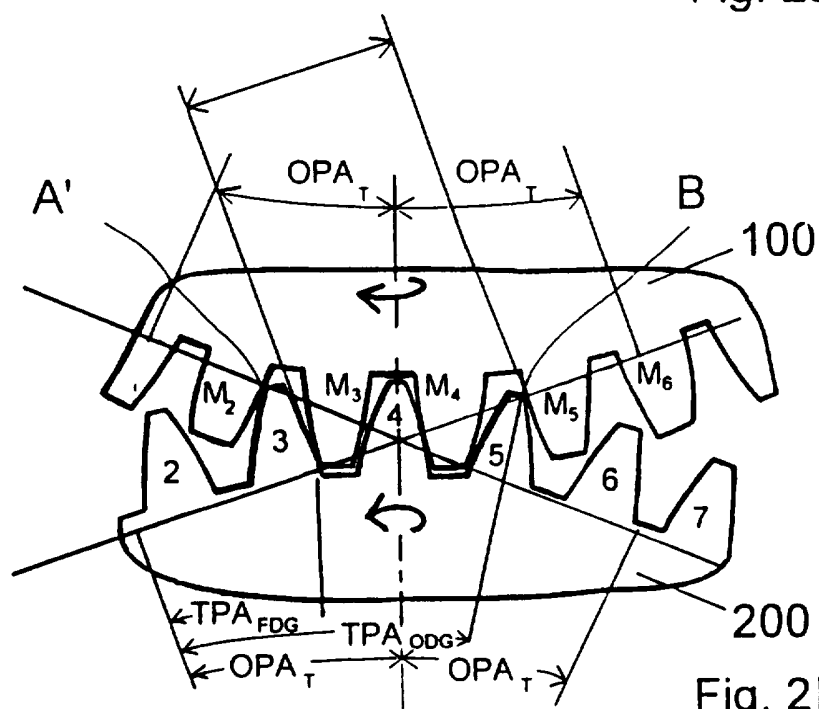


Fig. 2b

3/4

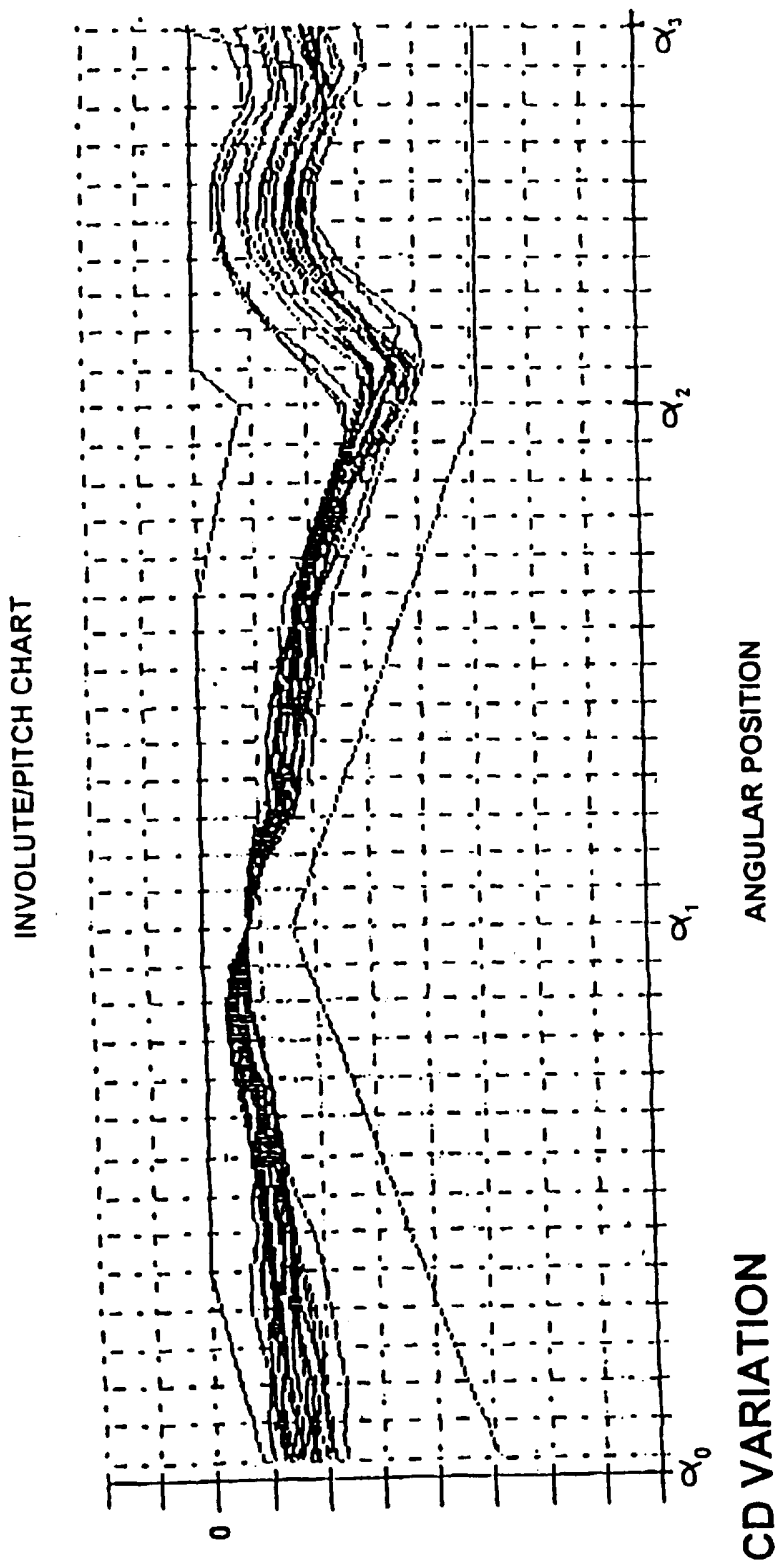


FIGURE 3

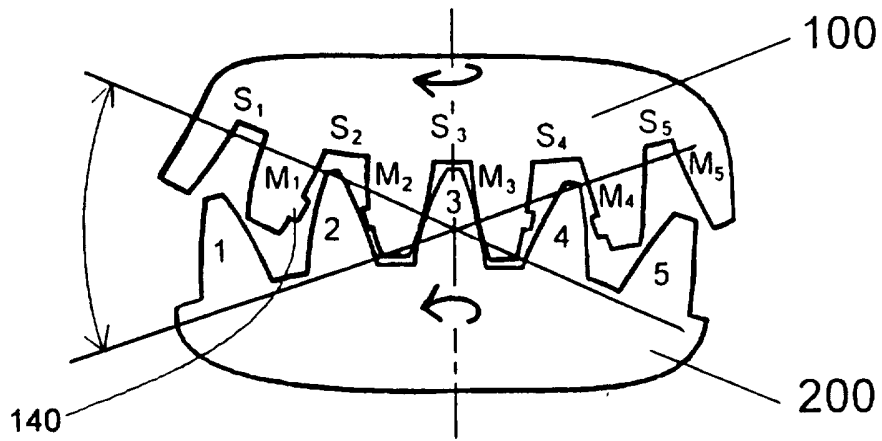


Fig. 4a

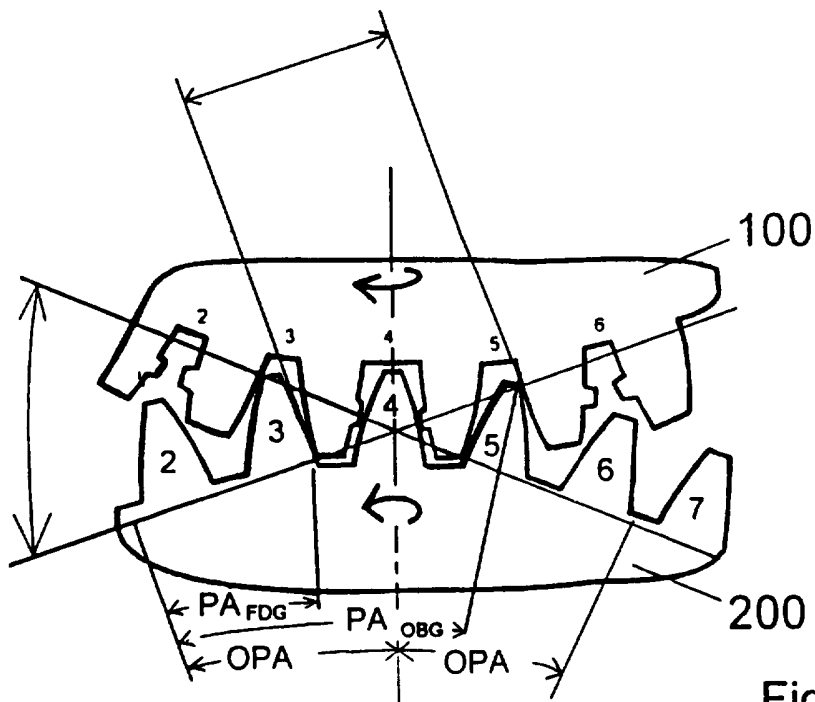


Fig. 4b

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US95/09754**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) : G01B 121:08 ; G01M 13/02

US CL : 33/501.19, 501.13, 501.8 ; 73/162

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 33/501.19, 501.13, 501.8, 501.7, 501.16 ; 73/162

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
A	US, A, 5,016,471 (OCH) 21 MAY 1991	NONE
A	US, A, 4,704,799 (KOBETSKY) 10 NOVEMBER 1987	NONE
A	US, A, 4,321,753 (FUSARI) 30 MARCH 1982	NONE
A	US, A, 3,921,304 (YAGIELA) 25 NOVEMBER 1975	NONE
A	US, A, 3,370,146 (MATTEUCCI) 20 FEBRUARY 1968	NONE
A	US, A, 3,337,964 (ANTHONY) 29 AUGUST 1967	NONE
A	US, A, 3,031,765 (MULLER) 01 MAY 1962	NONE
A	US, A, 2,726,456 (PERGANDE) 13 DECEMBER 1955	NONE
A	US, A, 2,726,455 (SAARI) 13 DECEMBER 1955	NONE

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

18 OCTOBER 1995

Date of mailing of the international search report

11 DEC 1995

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-7687

Authorized officer

THOMAS B. WILF

Telephone No. (703) 308-3870

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US95/09754

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JA, A, 49,936 (KOIKE) 06 MAY 1981	NONE