



US00D327657S

# United States Patent [19]

[11] Patent Number: Des. 327,657

Marcou et al.

[45] Date of Patent: \*\* Jul. 7, 1992

[54] INFRARED SIGNAL DETECTOR

3,619,629	11/1971	Matthews .....	340/556
4,012,731	3/1977	Solomon .....	340/341
4,037,223	7/1977	Tucci et al. ....	340/571
4,191,947	3/1980	Bouchard et al. ....	340/541

[75] Inventors: Jean-Claude Marcou, Fayetteville; Edward B. Hubben, Skaneateles, both of N.Y.

[73] Assignee: Pass & Seymour, Inc., Syracuse, N.Y.

[\*\*] Term: 14 Years

[21] Appl. No.: 532,981

[22] Filed: Jun. 4, 1990

[52] U.S. Cl. .... D10/106

[58] Field of Search ..... D10/104, 105, 106, 121; D8/404; D13/137, 138, 139; 340/541, 571, 556, 546, 572

[56] **References Cited**

**U.S. PATENT DOCUMENTS**

D. 275,462	9/1984	Beeson et al. ....	D10/106
D. 275,464	9/1984	Beeson et al. ....	D10/106
D. 307,560	5/1990	Andrews et al. ....	D10/106
3,390,388	6/1968	Kahl, Jr. et al. ....	340/556


*Primary Examiner*—James M. Gandy  
*Assistant Examiner*—Marcus Jackson  
*Attorney, Agent, or Firm*—Charles S. McGuire

[57] **CLAIM**

The ornamental design for infrared signal detector, as shown and described.

**DESCRIPTION**

FIG. 1 is a reduced front perspective view of an infrared signal detector showing our new design; FIG. 2 is a front elevational view thereof; FIG. 3 is a right side elevational view thereof, with left side being a mirror image, and with the wires broken away to indicate indeterminate length; FIG. 4 is a rear elevational view thereof; FIG. 5 is a top plan view thereof; and, FIG. 6 is a bottom plan view thereof.

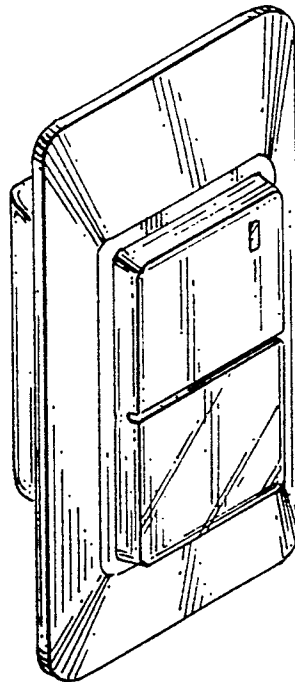

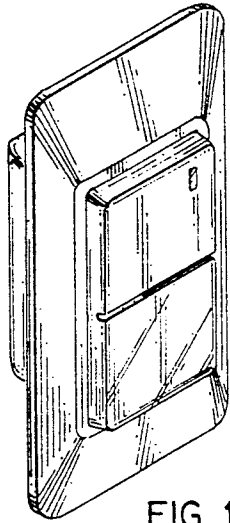


FIG. 1

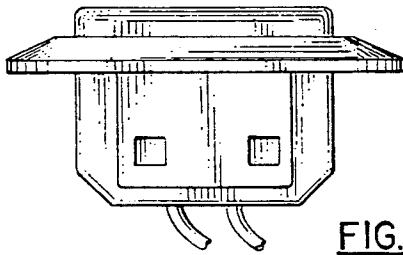


FIG. 5

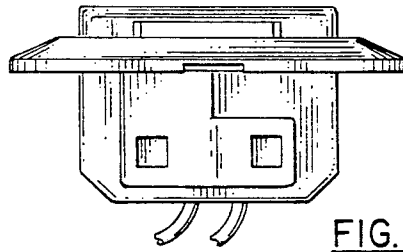


FIG. 6

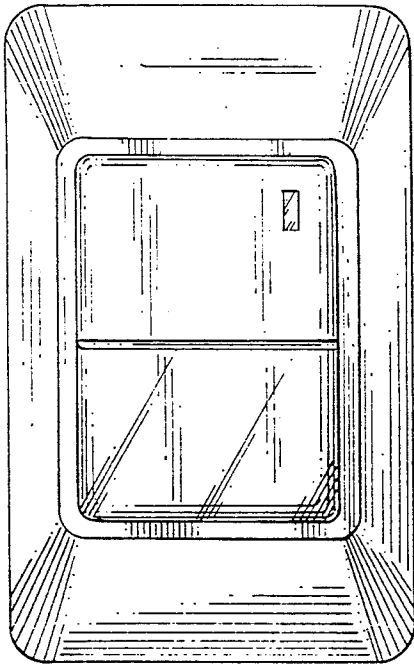


FIG. 2

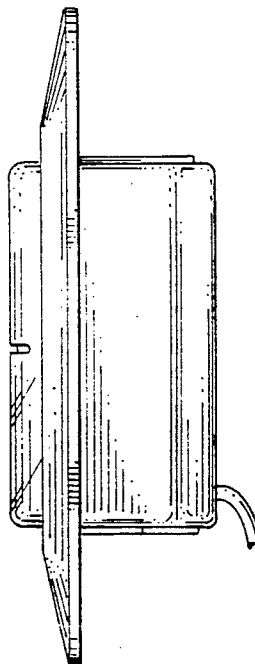


FIG. 3

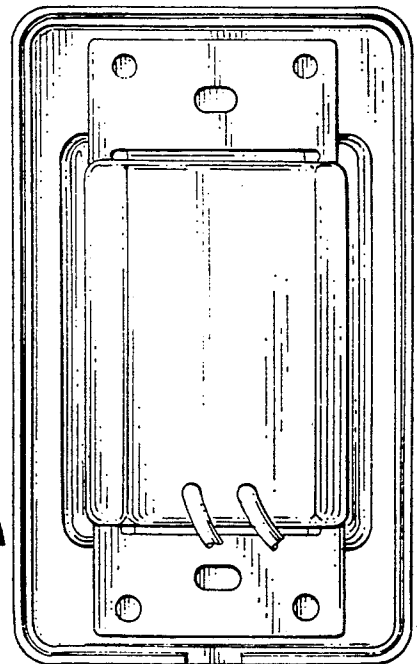


FIG. 4