



- (51) **International Patent Classification:**
E21B 43/12 (2006.01) *E21B 34/08* (2006.01)
- (21) **International Application Number:**
PCT/US2012/033534
- (22) **International Filing Date:**
13 April 2012 (13.04.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/100,006 3 May 2011 (03.05.2011) US
- (71) **Applicant** (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US];
10200 Bellaire Boulevard, Houston, TX 77072 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants** (for US only): **FRIPP, Michael, L.** [US/US]; 2601 Beltline Road, Carrollton, TX 75006 (US).
DYKSTRA, Jason, D. [US/US]; 2601 Beltline Road, Carrollton, TX 75006 (US).
- (74) **Agent:** **HIGGINS, Sheri, L.**; SHERI HIGGINS LAW, P.L.L.C., 4106 University Boulevard, Dallas, TX 75205 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) **Title:** A DEVICE FOR DIRECTING THE FLOW OF A FLUID USING A CENTRIFUGAL SWITCH

(57) **Abstract:** According to an embodiment, a device for directing the flow of a fluid comprises: a fluid chamber; a first outlet; a second outlet; a first outlet fluid passageway, wherein the first outlet fluid passageway is operatively connected to the first outlet; and a second outlet fluid passageway, wherein the second outlet fluid passageway is operatively connected to the second outlet; wherein the fluid rotationally flows about the inside of the chamber, and wherein the fluid flowing through the first outlet fluid passageway conjoins with the fluid flowing through the second outlet fluid passageway at a point downstream of the first and second outlet. According to another embodiment, a device for directing the flow of a fluid comprises: a sensor; a first outlet connected to the sensor; a second outlet connected to the sensor; a first outlet fluid passageway; and a second outlet fluid passageway; wherein as the total number of phases of the fluid increases, the sensor directs at least a first phase of the fluid into the first outlet fluid passageway and directs at least a second phase of the fluid into the second outlet fluid passageway, and wherein the fluid flowing through the first outlet fluid passageway conjoins with the fluid flowing through the second outlet fluid passageway at a point downstream of the first and second outlet.



A DEVICE FOR DIRECTING THE FLOW OF A FLUID USING A CENTRIFUGAL SWITCH

Technical Field

[0001] A device for directing the flow of a fluid is provided. In certain embodiments, the device directs the fluid based on the density or viscosity of the fluid. According to an embodiment, the device is used in a flow regulator. According to another embodiment, the flow regulator is used in a subterranean formation.

Summary

[0002] According to an embodiment, a device for directing the flow of a fluid comprises: a fluid chamber; a first outlet; a second outlet; a first outlet fluid passageway, wherein the first outlet fluid passageway is operatively connected to the first outlet; and a second outlet fluid passageway, wherein the second outlet fluid passageway is operatively connected to the second outlet; wherein the fluid rotationally flows about the inside of the chamber, and wherein the fluid flowing through the first outlet fluid passageway conjoins with the fluid flowing through the second outlet fluid passageway at a point downstream of the first and second outlet.

[0003] According to another embodiment, depending on at least one of the properties of the fluid, the fluid rotationally flows closer to the outside of the chamber, closer to the center of the chamber, or closer to the outside and closer to the center of the chamber. The at least one of the properties can be density or viscosity.

[0004] According to another embodiment, a device for directing the flow of a fluid comprises: a sensor; a first outlet connected to the sensor; a second outlet connected to the sensor; a first outlet fluid passageway, wherein the first outlet fluid passageway is operatively connected to the first outlet; and a second outlet fluid passageway, wherein the second outlet fluid passageway is operatively connected to the second outlet; wherein as the total number of phases of the fluid increases, the sensor directs at least a first phase of the fluid into the first outlet fluid passageway and directs at least a second phase of the fluid into the second outlet fluid passageway, and wherein the fluid flowing through the first outlet fluid passageway conjoins with the fluid flowing through the second outlet fluid passageway at a point downstream of the first and second outlet.

Brief Description of the Figures

[0005] The features and advantages of certain embodiments will be more readily appreciated when considered in conjunction with the accompanying figures. The figures are not to be construed as limiting any of the preferred embodiments.

[0006] **Fig. 1** is a diagram of a device for directing the flow of a fluid.

[0007] **Figs. 2A and 2B** illustrates rotational flow of a fluid within a chamber of the device in two different directions.

[0008] **Fig. 3** is a diagram of the device comprising fluid directors for inducing rotational flow of a fluid within the chamber.

[0009] **Fig. 4** is a diagram of a system comprising one device for directing the flow of a fluid and a bypass passageway.

[0010] **Fig. 5** is a diagram of a system comprising two devices for directing the flow of a fluid.

[0011] **Fig. 6** is a diagram of a system comprising two devices for directing the flow of a fluid and a bypass passageway.

[0012] **Fig. 7** is a well system containing at least one flow regulator comprising the device for directing the flow of a fluid.

Detailed Description

[0013] As used herein, the words "comprise," "have," "include," and all grammatical variations thereof are each intended to have an open, non-limiting meaning that does not exclude additional elements or steps.

[0014] It should be understood that, as used herein, "first," "second," "third," etc., are arbitrarily assigned and are merely intended to differentiate between two or more passageways, devices, etc., as the case may be, and does not indicate any sequence. Furthermore, it is to be understood that the mere use of the term "first" does not require that there be any "second," and the mere use of the term "second" does not require that there be any "third," etc.

[0015] As used herein, a "fluid" is a substance having a continuous phase that tends to flow and to conform to the outline of its container when the substance is tested at a temperature of 71 °F (22 °C) and a pressure of one atmosphere "atm" (0.1 megapascals "MPa"). A fluid can be a liquid or gas. A homogenous fluid has only one phase, whereas a heterogeneous

fluid has more than one distinct phase. One of the physical properties of a fluid is its density. Density is the mass per unit of volume of a substance, commonly expressed in units of pounds per gallon (ppg) or kilograms per liter (kg/L). Fluids can have different densities. For example, the density of deionized water is approximately 1 kg/L; whereas the density of crude oil is approximately 865 kg/L. A homogenous fluid will have only one density; however, a heterogeneous fluid will have at least two different densities. For example, one of the phases in a heterogeneous fluid will have a specific density and each of the other phases in the heterogeneous fluid will have a different density. Another physical property of a fluid is its viscosity. Viscosity is a measure of the resistance of a fluid to flow, defined as the ratio of shear stress to shear rate. Viscosity can be expressed in units of (force*time)/area. For example, viscosity can be expressed in units of dyne*s/cm² (commonly referred to as Poise (P)), or expressed in units of Pascals/second (Pa/s). However, because a material that has a viscosity of 1 P is a relatively viscous material, viscosity is more commonly expressed in units of centipoise (cP), which is 1/100 P.

[0016] Oil and gas hydrocarbons are naturally occurring in some subterranean formations. A subterranean formation containing oil or gas is sometimes referred to as a reservoir. A reservoir may be located under land or off shore. Reservoirs are typically located in the range of a few hundred feet (shallow reservoirs) to a few tens of thousands of feet (ultra-deep reservoirs). In order to produce oil or gas, a wellbore is drilled into a reservoir or adjacent to a reservoir.

[0017] A well can include, without limitation, an oil, gas, water, or injection well. A well used to produce oil or gas is generally referred to as a production well. As used

herein, a "well" includes at least one wellbore. A wellbore can include vertical, inclined, and horizontal portions, and it can be straight, curved, or branched. As used herein, the term "wellbore" includes any cased, and any uncased, open-hole portion of the wellbore. As used herein, "into a well" means and includes into any portion of the well, including into the wellbore or into a near-wellbore region via the wellbore.

[0018] A portion of a wellbore may be an open hole or cased hole. In an open-hole wellbore portion, a tubing string may be placed into the wellbore. The tubing string allows fluids to be introduced into or flowed from a remote portion of the wellbore. In a cased-hole wellbore portion, a casing is placed into the wellbore which can also contain a tubing string. A wellbore can contain an annulus. Examples of an annulus include, but are not limited to: the space between the wellbore and the outside of a tubing string in an open-hole wellbore; the space between the wellbore and the outside of a casing in a cased-hole wellbore; and the space between the inside of a casing and the outside of a tubing string in a cased-hole wellbore.

[0019] A wellbore can extend several hundreds of feet or several thousands of feet into a subterranean formation. The subterranean formation can have different zones. For example, one zone can have a higher permeability compared to another zone. Permeability refers to how easily fluids can flow through a material. For example, if the permeability is high, then fluids will flow more easily and more quickly through the subterranean formation. If the permeability is low, then fluids will flow less easily and more slowly through the subterranean formation. One example of a highly permeable zone in a subterranean formation is a fissure or fracture. The flow rate of a fluid from a subterranean formation into a wellbore or from

a wellbore into a formation within one zone may vary. Moreover, the flow rate of a fluid may be greater in one zone compared to another zone. A difference in flow rates within one zone or between zones in a subterranean formation may be undesirable.

[0020] During production operations, another common problem is the production of an undesired fluid along with the production of a desired fluid. For example, water production is when water (the undesired fluid) is produced along with oil or gas (the desired fluid). By way of another example, gas may be the undesired fluid while oil is the desired fluid. In yet another example, gas may be the desired fluid while water and oil are the undesired fluid. It is beneficial to produce as little of the undesired fluid as possible.

[0021] During secondary recovery operations, an injection well can be used for water flooding. Water flooding is where water is injected into the reservoir to displace oil or gas that was not produced during primary recovery operations. The water from the injection well physically sweeps some of the remaining oil or gas in the reservoir to a production well. Potential problems associated with water flooding techniques can include inefficient recovery due to variable permeability in a subterranean formation and a difference in flow rates of a fluid from the injection well into the subterranean formation.

[0022] A flow regulator can be used to help overcome some of these problems. A flow regulator can be used to regulate the flow of a fluid. For a single stream of fluid entering a flow regulator, the regulator can help decrease the flow rate of the fluid exiting the regulator or restrict the volume of fluid exiting the regulator. When two or more separate streams of fluid enter a flow regulator, the regulator can be designed such that the flow rate or total volume of one of the streams can be restricted compared to the other streams

when exiting the regulator. By way of example, when a desired homogenous fluid is flowing through the regulator, the regulator can deliver a relatively constant volume of the desired fluid upon exit. However, if an undesired fluid also starts flowing into the regulator, along with the desired fluid, then the regulator can restrict the total volume of the undesired fluid exiting with little change to the volume of the desired fluid exiting the regulator.

[0023] A novel device for directing the flow of a fluid uses at least one property of the fluid to direct the flow of the fluid into at least one fluid outlet. According to an embodiment, the at least one property is density or viscosity.

[0024] According to an embodiment, a device for directing the flow of a fluid comprises: a fluid chamber; a first outlet; a second outlet; a first outlet fluid passageway, wherein the first outlet fluid passageway is operatively connected to the first outlet; and a second outlet fluid passageway, wherein the second outlet fluid passageway is operatively connected to the second outlet; wherein the fluid rotationally flows about the inside of the chamber, and wherein the fluid flowing through the first outlet fluid passageway conjoins with the fluid flowing through the second outlet fluid passageway at a point downstream of the first and second outlet. As used herein, the term "downstream" means a location that is further away from another location in the direction of fluid flow out of the chamber and through a fluid passageway.

[0025] The device for directing the flow of the fluid is designed to be an independent device, i.e., it is designed to automatically direct the fluid to flow into either the first or second outlets based on at least the density or viscosity of the fluid, without any external intervention.

[0026] The components of the device for directing the flow of a fluid can be made from a variety of materials. Examples of suitable materials include, but are not limited to: metals, such as steel, aluminum, titanium, and nickel; alloys; plastics; composites, such as fiber reinforced phenolic; ceramics, such as tungsten carbide or alumina; elastomers; and dissolvable materials.

[0027] Turning to the Figures. **Fig. 1** is a diagram of the device for directing the flow of a fluid **100**. The device **100** includes a fluid chamber. As used herein, a "chamber" means a volume surrounded by a structure, where the structure has at least two openings. One of the openings can be a fluid inlet and the other opening can be a fluid outlet. The fluid flows rotationally about the inside of the chamber. According to an embodiment, the chamber is designed such that a fluid is capable of rotationally flowing about the inside of the chamber. For example, the shape of the chamber can be designed such that the fluid rotational flows or is capable of rotationally flowing about the inside of the chamber. The shape of the chamber can be circular, rounded, orbicular, elliptical, cylinoidal, cylindrical, polygonal, frustrum, or conical.

[0028] According to an embodiment, depending on at least one of the properties of the fluid, the fluid rotationally flows closer to the outside of the chamber, closer to the center of the chamber, or closer to the outside and closer to the center of the chamber. The at least one of the properties of the fluid can be density or viscosity. For example, the density or viscosity of a homogenous fluid dictates the location within the chamber the fluid will rotationally flow (e.g., closer to the outside of the chamber or closer to the inside of the chamber). By way of another example, the different densities or the different viscosities of the phases of a heterogeneous fluid

dictates the location within the chamber each phase of the fluid will rotationally flow (e.g., closer to the outside of the chamber for one of the phases and closer to the center of the chamber for another one of the phases).

[0029] During rotational flow, a fluid having a higher density or higher viscosity will be forced farther towards the outside (i.e., the circumference or the perimeter) of the chamber compared to a fluid having a lower density or lower viscosity. This is due in part, to the increased effect that centripetal and reactive centrifugal forces have on the greater mass or viscosity of the higher density/viscosity fluid. As used herein, the term "outside" means the circumference or perimeter of the chamber. According to an embodiment, the phase of the fluid having a higher density or higher viscosity rotationally flows closer to the outside of the chamber and the phase of the fluid having a lower density or lower viscosity rotationally flows closer to the center of the chamber. While the higher density fluid will flow farther towards the outside of the chamber, the lower density fluid will flow closer towards the center of the chamber.

[0030] For a homogenous fluid, the location of the fluid flow (i.e., closer towards the outside or closer towards the center of the chamber) will be dictated by the density or viscosity of the fluid, and thus, the fluid will tend to flow in one location rotationally about the inside of the chamber. For a heterogeneous fluid, the flow location of each phase of the fluid will be dictated by the distinct density or viscosity for each phase. For example, a heterogeneous fluid having three phases with the magnitude of densities or viscosities of the phases being in order of: phase 1 < phase 2 < phase 3, means that phase 3 will flow the closest towards the outside of the chamber, phase 1 will flow the closest towards the center of the

chamber, and phase 2 will flow somewhere in between phase 3 and phase 1. Of course, the exact location of the different phases will be dictated by the actual density or viscosity of each phase. In the preceding example, if the density of phase 2 is closer in value to the density of phase 1 compared to phase 3, then phase 2 will flow closer towards phase 1 about the inside of the chamber and *vice versa*. The preceding statement is also true for the different viscosities of each phase.

[0031] The device **100** can further include at least one inlet **101**. The chamber can be operatively connected to a first fluid passageway **201** via the first inlet **101**. In this manner, a fluid can enter the chamber via the first fluid passageway **201** through the first inlet **101**. The fluid can be a homogenous fluid or a heterogeneous fluid. The chamber can be connected to the first fluid passageway **201** in a variety of ways. For example, and as depicted in some of the figures, the first fluid passageway **201** is connected to the chamber such that the fluid can enter the chamber in a tangential direction relative to a radius of the chamber. The first fluid passageway **201** can also be connected to the chamber such that the fluid can enter the chamber in a radial direction or an axial direction relative to a radius of the chamber. For example, **Fig. 3** depicts the first fluid passageway **201** connected to the chamber such that the fluid enters the chamber in a radial direction relative to a radius of the chamber. Preferably, the first fluid passageway **201** is connected to the chamber in a manner such that the fluid, upon entering the chamber, is induced to flow in a rotational direction about the inside of the chamber.

[0032] According to another embodiment, both the manner in which the first fluid passageway **201** is connected to the chamber and the design of the chamber work in tandem to induce rotational flow of the fluid about the inside of the

chamber. By way of example, if the first fluid passageway **201** is connected to the chamber such that the fluid enters the chamber tangentially, then the only design consideration may be the shape of the chamber. By way of another example, if the first fluid passageway **201** is connected to the chamber such that the fluid enters the chamber radially or axially, then the chamber may need to include design elements in addition to the shape of the chamber. An example of a design element in addition to shape includes, but is not limited to, at least one fluid director **131**, shown in **Fig. 3**. According to an embodiment, the fluid director **131** induces rotational flow of the fluid about the inside of the chamber. For example, the fluid director **131** can have a shape such that the fluid, upon entering the chamber, is induced to flow rotationally about the inside of the chamber. At least one edge of the fluid director **131** can induce rotational flow in the direction of $\mathbf{d}_1$ (such as by being curved). Additionally, another edge can inhibit flow of the fluid in a radial direction or in a direction other than $\mathbf{d}_1$ (such as by being relatively straight-sided).

[0033] The first fluid passageway **201** (and any other passageways) can be tubular, rectangular, pyramidal, or curlicue in shape. Although illustrated as a single passageway, the first fluid passageway **201** (and any other passageway) could feature multiple passageways connected in parallel.

[0034] The device includes at least one first outlet **111** and at least one second outlet **112**. The device can include more than one of each outlet. As depicted in **Figs. 2A and 2B**, the device includes three second outlets **112**. Any discussion of a particular component of the device **100** (e.g., a second outlet **112**) is meant to include the singular form of the component and also the plural form of the component, without the need to continually refer to the component in both the singular

and plural form throughout. For example, if a discussion involves "the second outlet **112**," it is to be understood that the discussion pertains to one second outlet (singular) and two or more second outlets (plural). The first or second outlets **111/112** can be positioned at different distances from the center of the chamber **100**. For example, if there are two or more second outlets **112**, then each of the second outlets **112** can be located at a different distance from the center of the chamber **100**.

[0035] According to an embodiment, the first outlet **111** is positioned within the chamber at a location in the center or closer to the center of the chamber. If a fluid is rotationally flowing closer to the center of the chamber, then at least some of this fluid can exit the chamber via the first outlet **111**. Preferably, the majority of a fluid flowing closer to the center will exit the chamber via the first outlet **111**. According to another embodiment, the second outlet **112** is positioned within the chamber at a location closer to the outside of the chamber. If a fluid is rotationally flowing closer to the outside of the chamber, then at least some of this fluid can exit the chamber via the second outlet **112**. Preferably, the majority of a fluid flowing closer to the circumference will exit the chamber via the second outlet **112**.

[0036] The outlets **111/112** can be oriented within the chamber in relation to the direction of fluid rotation. As can be seen in **Fig. 2A**, the first fluid passageway **201** is positioned relative to the chamber such that a fluid can enter the chamber and rotationally flow about the inside of the chamber in the direction of **d₁**. When the fluid is rotationally flowing in the direction of **d₁**, then the outlets **111/112** should be positioned adjacent to the direction of fluid exit (shown on the right-hand side of the chamber). As can be seen in **Fig. 2B**,

the first fluid passageway **201** is positioned relative to the chamber such that a fluid can enter the chamber and rotationally flow about the inside of the chamber in the direction of **d₂**. When the fluid is rotationally flowing in the direction of **d₂**, then the outlets **111/112** should be positioned adjacent to the direction of fluid exit (shown on the left-hand side of the chamber).

[0037] One of the advantages to the device for directing the flow of a fluid **100** is that the device does not need to be oriented with gravity in order for the chamber to direct the fluid into one or more of the fluid outlets **111/112** based on a property of the fluid. Because the device **100** does not need to be oriented with gravity, the device **100** is simpler in design and easier to install in a wellbore compared to other fluid directors that do need to be oriented with gravity. For example, the device **100** does not need to contain parts, such as floats or weights, for determining an orientation with gravity. Moreover, the lack of gravity orientation allows for more versatility in installation and positioning of the device **100** within a wellbore.

[0038] It should be understood that the chamber is designed to direct the fluid into a rotational flow path about the inside of the chamber at one or more locations within the chamber based on at least one property of a homogenous fluid or a difference in the properties of each phase of a heterogeneous fluid. For a heterogeneous fluid, each phase may have a different density or viscosity compared to the other phases. For a heterogeneous fluid, the device is most preferably for use with a fluid wherein each of the phases have a different density compared to the other phases, but wherein each of the phases have a similar viscosity compared to the other phases. Some examples of heterogeneous fluids that have different densities

but similar viscosities include, but are not limited to: a water and gas mixture; an oil and water mixture; a natural gas and carbon dioxide mixture; and a gas and gas condensate mixture.

[0039] The chamber can further include at least one first outlet fluid passageway **121** and at least one second outlet fluid passageway **122**. Preferably, the first outlet fluid passageway **121** is connected to the first outlet **111**. Preferably, the second outlet fluid passageway **122** is connected to the second outlet **112**. If there is more than one outlet (e.g., two or more second outlets), then each outlet can be connected to two or more passageways (e.g., two or more second outlet fluid passageways) or all of the outlets can be connected to only one passageway. The fluid velocity or flow rate will vary in each of the passageways **121/122** depending, in part, on the at least one of the properties of the fluid in each of the passageways. Assuming the passageways are identical (e.g., having the same dimensions and angles of any bends in the passageway), the fluid flowing through the first outlet fluid passageway **121** will have a particular flow rate and the fluid flowing through the second outlet fluid passageway **122** will have a different flow rate based on the difference in properties of the fluids. For example, if the fluid flowing through the second outlet fluid passageway **122** has a density that is greater than the fluid flowing through the first outlet fluid passageway **121**, then the flow rate of the fluid through the second outlet fluid passageway **122** will be greater than the flow rate of the fluid flowing through the first outlet fluid passageway **121**. Of course, the diameter of any of the passageways or the angle of any bends in the passageways can be adjusted to help control the flow rate of a fluid through that particular passageway.

[0040] According to an embodiment, the fluid flowing through the first and second outlet fluid passageways

121/122 conjoins at a junction **301**. The junction **301** can be a vortex triode or a switch. The first and second outlet fluid passageways **121/122** can terminate at the junction. The first and second outlet fluid passageways **121/122** can also be operatively connected to the junction. As can be seen in **Figs. 1 and 3**, the first outlet fluid passageway **121** and the second outlet fluid passageway **122** terminate at the junction **301**. According to another embodiment, additional fluid passageways can also terminate at the junction **301**. For example, **Fig. 4** illustrates a fourth fluid passageway **204** terminating at the junction **301** in addition to the first outlet fluid passageway **121** and the second outlet fluid passageway **122**. According to this embodiment, the fourth fluid passageway **204** can bypass the device **100** such that any fluid flowing into the fourth fluid passageway **204** directly enters the junction **301**. There may be several reasons why a bypass passageway is beneficial. One example of such a reason is when the fluid is relatively viscous. For relatively viscous fluids, the bypass passageway **204** can allow for a decreased pressure drop in the system compared to when all of the fluid enters the chamber.

[0041] The flow rate of the fluid entering the junction **301** will depend on the flow rate of the fluid in each passageway. For example, the higher the flow rate of a fluid flowing through a particular passageway, the higher the flow rate that fluid will enter the junction **301**. Thus, for similar passageways (e.g., dimensions and angle of bends), the fluid flowing through the second outlet fluid passageway **122** will enter the junction **301** at a greater flow rate compared to the fluid flowing through the first outlet fluid passageway **121**.

[0042] According to an embodiment, a device for directing the flow of a fluid comprises: a sensor; a first outlet connected to the sensor; a second outlet connected to the

sensor; a first outlet fluid passageway, wherein the first outlet fluid passageway is operatively connected to the first outlet; and a second outlet fluid passageway, wherein the second outlet fluid passageway is operatively connected to the second outlet; wherein as the total number of phases of the fluid increases, the sensor directs at least a first phase of the fluid into the first outlet fluid passageway and directs at least a second phase of the fluid into the second outlet fluid passageway, and wherein the fluid flowing through the first outlet fluid passageway conjoins with the fluid flowing through the second outlet fluid passageway at a point downstream of the first and second outlet. The sensor can be a centrifugal chamber.

[0043] The device for directing the flow of a fluid **100** can be used in any system. An example of a system is a flow regulator **25**, illustrated in **Fig. 7**. The system can comprise: the device for directing the flow of a fluid **100**; a first fluid passageway **201**; a second fluid passageway **202**; and a third fluid passageway **203**. The system can also include an exit assembly (not shown). The exit assembly can be a vortex triode. The system can also include a fourth fluid passageway **204**.

[0044] **Figs. 1, 3, and 4** show the system comprising one device **100**. **Figs. 5 and 6** depict the system comprising two devices **100**. The system can also include more than two devices **100**. As can be seen in **Fig. 5**, the system includes two devices **100**, wherein each device is connected to the first fluid passageway **201** without a bypass passageway. As can be seen in **Fig. 6**, the system includes two devices **100**, wherein each device and a bypass passageway **204** are connected to the first fluid passageway **201**. The fluid passageways can be connected in a variety of ways. Each of the devices **100** can be connected to the first fluid passageway **201** in the same manner or a different

manner. For example, a first device **100** can be connected to the first fluid passageway **201** such that the fluid enters the chamber tangentially while a second device **100** can be connected such that the fluid enters the chamber radially or axially with respect to an axis of the chamber. According to an embodiment, the first outlet fluid passageway **121** of the second device **100** and the second outlet fluid passageway **122** of the first device terminate at the junction **301**. According to another embodiment, the second outlet fluid passageway **122** of the second device **100** and the first outlet fluid passageway **121** of the first device join together at a section of passageway that then terminates at the junction **301**. According to yet another embodiment, the second outlet fluid passageway **122** of the second device **100**, the first outlet fluid passageway **121** of the first device, and the bypass passageway **204** join together at a section of passageway that then terminates at the junction **301**.

[0045] Any of the passageways **121**, **122**, or **204** can be connected directly to the exit assembly (not shown). Any of the passageways **121**, **122**, or **204** can be operatively connected to the exit assembly via the junction **301** or other intermediary passageways. According to an embodiment, the junction **301** can be connected to the second fluid passageway **202** and the third fluid passageway **203**. According to this embodiment, the second fluid passageway **202** and the third fluid passageway **203** are connected to the exit assembly. According to another embodiment, the second fluid passageway **202** and the third fluid passageway **203** can branch at a branching point **210**. The passageways **202/203** can branch at a variety of angles θ_1 and θ_2 . Preferably, the passageways **202/203** are connected to the junction **301** such that depending on the flow rate of the fluid entering the junction **301** via the first outlet fluid passageway **121** and/or the second outlet fluid passageway **122**, the fluid is

directed into one or both of the passageways **202/203**. For example, if one fluid is flowing through the second outlet fluid passageway **122** at a higher velocity compared to another fluid that is flowing through the first outlet fluid passageway **121**, then at least some of the fluid entering the junction **301** via the second outlet fluid passageway **122** can be directed into the second fluid passageway **202**. Conversely, the fluid entering the junction **301** via the first outlet fluid passageway **121** can be directed into the third fluid passageway **203**. Most preferably, in the above example, a majority of the fluid entering the junction **301** via the second outlet fluid passageway **122** is directed into the second fluid passageway **202**, while a majority of the fluid entering the junction **301** via the first outlet fluid passageway **121** is directed into the third fluid passageway **203**. As used herein, the term "majority" means greater than 50%.

[0046] According to an embodiment, the passageways **202/203** are connected to an exit assembly. According to this embodiment, the exit assembly is preferably capable of regulating the flow rate of the fluid exiting the assembly. By way of example, the exit assembly may be designed such that a constant flow rate of fluid will exit the assembly even though the flow rate of the fluid entering the assembly via the passageways **202/203** may be different.

[0047] A desired flow rate of a fluid exiting the exit assembly can be predetermined. The predetermined flow rate can be selected based on the type of fluid entering the device. The predetermined flow rate can differ based on the type of the fluid. The predetermined flow rate can also be selected based on a property of the fluid entering the device **100**. For example, depending on the specific application, the desired flow rate of a gas-based fluid may be predetermined to be 150 barrels

per day (BPD); whereas, the desired flow rate of an oil-based fluid may be predetermined to be 300 BPD. Of course, one device **100** can be designed with a predetermined flow rate of 150 BPD and another device **100** can be designed with a predetermined flow rate of 300 BPD. Moreover, if more than one device **100** is used in a system, then each of the devices **100** can be designed with a different predetermined flow rate.

[0048] The system can be designed to cooperatively interact with the device **100** to regulate a fluid exiting the system. The following examples are not the only examples that could be used to illustrate the cooperative interaction. When a homogenous fluid having a low density enters the chamber, the fluid will tend to flow rotationally about the inside of the chamber closer to the center of the chamber. At least some of the fluid and more preferably, the majority of the fluid, will exit the chamber via the first outlet **111** and flow into the first outlet fluid passageway **121** towards the junction **301**. Because of the lower density of the fluid, the flow rate of the fluid entering the junction **301** can be relatively low, thus causing the fluid to increasingly flow into the third fluid passageway **203**. As such, the flow regulator can have little effect on restricting the fluid exiting the regulator. As the density of the homogenous fluid increases, the fluid entering the chamber will increasingly flow rotationally about the inside of the chamber at a location closer to the outside of the chamber. The fluid will then increasingly exit the chamber via the second outlet **112** and flow into the second outlet fluid passageway **122** towards the junction **301**. Because of the increased density, the flow rate of the fluid entering the junction **301** will be greater than any fluid entering via the first outlet fluid passageway **121**. As a result, the fluid will increasingly flow into the second fluid passageway **202**.

[0049] The device can be used to detect a phase change of a fluid entering the system. For example, if oil is being produced, the device can be used to detect the onset of water production along with the oil and direct each phase of the fluid (e.g., the water and the oil) into two or more fluid passageways. In this example, if the fluid entering the system becomes a heterogeneous fluid, then the fluid will enter the chamber and rotationally flow about the inside of the chamber. Each phase of the fluid will then be directed to a particular location within the chamber based on at least one property of each of the phases. For example, the higher-density phase will tend to exit the chamber via the second outlet **112** and flow into the second outlet fluid passageway **122**, while the lower-density phase will tend to exit the chamber via the first outlet **111** and flow into the first outlet fluid passageway **121**. As mentioned above, the flow rate of the fluid in the second outlet fluid passageway **122** will tend to be greater than the flow rate of the fluid in the first outlet fluid passageway **121**. As a result, more of the fluid will enter the second fluid passageway **202** and less of the fluid will enter the third fluid passageway **203**. The exit assembly can then function to restrict the total volume of the water exiting the system, but not restrict the total volume of oil exiting the system based on the amount of fluid entering the exit assembly via the passageways **202/203**.

[0050] According to an embodiment, the system is a flow regulator **25**. According to another embodiment, the flow regulator is used in a subterranean formation. A flow regulator **25** used in a subterranean formation is illustrated in **Fig. 7**.

[0051] **Fig. 7** is a well system **10** which can encompass certain embodiments. As depicted in **Fig. 7**, a wellbore **12** has a generally vertical uncased section **14** extending downwardly from a casing **16**, as well as a generally

horizontal uncased section **18** extending through a subterranean formation **20**. The subterranean formation **20** can be a portion of a reservoir or adjacent to a reservoir.

[0052] A tubing string **22** (such as a production tubing string) is installed in the wellbore **12**. Interconnected in the tubing string **22** are multiple well screens **24**, flow regulators **25**, and packers **26**.

[0053] The packers **26** seal off an annulus **28** formed radially between the tubing string **22** and the wellbore section **18**. In this manner, a fluid **30** may be produced from multiple zones of the formation **20** via isolated portions of the annulus **28** between adjacent pairs of the packers **26**.

[0054] Positioned between each adjacent pair of the packers **26**, a well screen **24** and a flow regulator **25** are interconnected in the tubing string **22**. The well screen **24** filters the fluid **30** flowing into the tubing string **22** from the annulus **28**. The flow regulator **25** regulates the flow rate of the fluid **30** into the tubing string **22**, based on certain characteristics of the fluid, e.g., the density of the fluid. In another embodiment, the well system **10** is an injection well and the flow regulator **25** regulates the flow rate of fluid **30** out of the tubing string **22** and into the formation **20**.

[0055] It should be noted that the well system **10** is illustrated in the drawings and is described herein as merely one example of a wide variety of well systems in which the principles of this disclosure can be utilized. It should be clearly understood that the principles of this disclosure are not limited to any of the details of the well system **10**, or components thereof, depicted in the drawings or described herein. Furthermore, the well system **10** can include other components not depicted in the drawing. For example, cement may

be used instead of packers **26** to isolate different zones. Cement may also be used in addition to packers **26**.

[0056] By way of another example, the wellbore **12** can include only a generally vertical wellbore section **14** or can include only a generally horizontal wellbore section **18**. The fluid **30** can be produced from the formation **20**, the fluid could also be injected into the formation, and the fluid could be both injected into and produced from the formation.

[0057] The well system does not need to include a packer **26**. Also, it is not necessary for only one well screen **24** and only one flow regulator **25** to be positioned between each adjacent pair of the packers **26**. It is also not necessary for a single flow regulator **25** to be used in conjunction with a single well screen **24**. Any number, arrangement and/or combination of these components may be used. Moreover, it is not necessary for any flow regulator **25** to be used in conjunction with a well screen **24**. For example, in injection wells, the injected fluid could be flowed through a flow regulator **25**, without also flowing through a well screen **24**. There can be multiple flow regulators **25** connected in fluid parallel or series.

[0058] It is not necessary for the well screens **24**, flow regulator **25**, packers **26** or any other components of the tubing string **22** to be positioned in uncased sections **14**, **18** of the wellbore **12**. Any section of the wellbore **12** may be cased or uncased, and any portion of the tubing string **22** may be positioned in an uncased or cased section of the wellbore, in keeping with the principles of this disclosure.

[0059] It will be appreciated by those skilled in the art that it would be beneficial to be able to regulate the flow rate of the fluid **30** entering into the tubing string **22** from each zone of the formation **20**, for example, to prevent water coning **32** or gas coning **34** in the formation. Other uses

for flow regulation in a well include, but are not limited to, balancing production from (or injection into) multiple zones, minimizing production or injection of undesired fluids, maximizing production or injection of desired fluids, etc.

[0060] The flow regulator **25** can be positioned in the tubing string **22** in a manner such that the fluid **30** enters the first fluid passageway **201** and travels into the chamber via the fluid inlet **101**. For example, in a production well, the regulator **25** may be positioned such that the first fluid passageway **201** is functionally oriented towards the formation **20**. Therefore, as the fluid **30** flows from the formation **20** into the tubing string **22**, the fluid **30** will enter the first fluid passageway **201**. By way of another example, in an injection well, the regulator **25** may be positioned such that the first fluid passageway **201** is functionally oriented towards the tubing string **22**. Therefore, as the fluid **30** flows from the tubing string **22** into the formation **20**, the fluid **30** will enter the first fluid passageway **201**.

[0061] An advantage for when the device for directing the flow of a fluid **100** is used in a flow regulator **25** in a subterranean formation **20**, is that it can help regulate the flow rate of a fluid within a particular zone and also regulate the flow rates of a fluid between two or more zones. Another advantage is that the device **100** can help solve the problem of production of a heterogeneous fluid. For example, if oil is the desired fluid to be produced, the device **100** can be designed such that if water enters the flow regulator **25** along with the oil, then the device **100** can direct the oil to increasingly flow into the second fluid passageway **202** based on the higher density of the oil compared to water. The versatility of the device **100** allows for specific problems in a formation to be addressed.

[0062] Therefore, the present invention is well adapted to attain the ends and advantages mentioned as well as those that are inherent therein. The particular embodiments disclosed above are illustrative only, as the present invention may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Furthermore, no limitations are intended to the details of construction or design herein shown, other than as described in the claims below. It is, therefore, evident that the particular illustrative embodiments disclosed above may be altered or modified and all such variations are considered within the scope and spirit of the present invention. While compositions and methods are described in terms of "comprising," "containing," or "including" various components or steps, the compositions and methods also can "consist essentially of" or "consist of" the various components and steps. Whenever a numerical range with a lower limit and an upper limit is disclosed, any number and any included range falling within the range is specifically disclosed. In particular, every range of values (of the form, "from about a to about b," or, equivalently, "from approximately a to b," or, equivalently, "from approximately a to b") disclosed herein is to be understood to set forth every number and range encompassed within the broader range of values. Also, the terms in the claims have their plain, ordinary meaning unless otherwise explicitly and clearly defined by the patentee. Moreover, the indefinite articles "a" or "an", as used in the claims, are defined herein to mean one or more than one of the element that it introduces. If there is any conflict in the usages of a word or term in this specification and one or more patent(s) or other documents that may be incorporated herein by reference, the

definitions that are consistent with this specification should be adopted.

WHAT IS CLAIMED IS:

1. A device for directing the flow of a fluid comprises:
 - a fluid chamber;
 - a first outlet;
 - a second outlet;
 - a first outlet fluid passageway, wherein the first outlet fluid passageway is operatively connected to the first outlet; and
 - a second outlet fluid passageway, wherein the second outlet fluid passageway is operatively connected to the second outlet;wherein the fluid rotationally flows about the inside of the chamber, and
wherein the fluid flowing through the first outlet fluid passageway conjoins with the fluid flowing through the second outlet fluid passageway at a point downstream of the first and second outlet.
2. The device according to Claim 1, wherein the shape of the chamber is selected such that the fluid rotationally flows about the inside of the chamber.
3. The device according to Claim 1, wherein depending on at least one of the properties of the fluid, the fluid rotationally flows closer to the outside of the chamber, closer to the center of the chamber, or closer to the outside and closer to the center of the chamber.
4. The device according to Claim 3, wherein the at least one of the properties of the fluid is density or viscosity.

5. The device according to Claim 4, wherein as the density or the viscosity of the fluid increases, the fluid increasingly flows closer to the outside of the chamber and wherein as the density or the viscosity of the fluid decreases, the fluid increasingly flows closer to the center of the chamber.

6. The device according to Claim 4, wherein the fluid is a heterogeneous fluid.

7. The device according to Claim 6, wherein the phase of the fluid having a higher density or higher viscosity rotationally flows closer to the outside of the chamber and the phase of the fluid having a lower density or lower viscosity rotationally flows closer to the center of the chamber.

8. The device according to Claim 1, wherein the chamber further comprises an inlet.

9. The device according to Claim 8, further comprising a first fluid passageway, wherein the first fluid passageway is operatively connected to the chamber via the inlet.

10. The device according to Claim 9, wherein the first fluid passageway is connected to the chamber such that the fluid can enter the chamber in a tangential direction relative to a radius of the chamber.

11. The device according to Claim 9, wherein the first fluid passageway is connected to the chamber such that the fluid can enter the chamber in a radial direction or an axial direction relative to a radius of the chamber.

12. The device according to Claim 11, further comprising at least one fluid director.

13. The device according to Claim 12, wherein the at least one fluid director induces rotational flow of the fluid about the inside of the chamber.

14. The device according to Claim 1, wherein at least some of the fluid rotationally flowing closer to the outside of the chamber exits the chamber via the second outlet and wherein at least some of the fluid rotationally flowing closer to the center of the chamber exits the chamber via the first outlet.

15. The device according to Claim 1, wherein the majority of the fluid rotationally flowing closer to the outside of the chamber exits the chamber via the second outlet and wherein the majority of the fluid rotationally flowing closer to the center of the chamber exits the chamber via the first outlet.

16. The device according to Claim 1, wherein the fluid flowing through the first and second outlet fluid passageways conjoins at a junction.

17. The device according to Claim 16, wherein the junction is a vortex triode or a switch.

18. The device according to Claim 17, wherein the first and second outlet fluid passageways terminate at the junction.

19. A device for directing the flow of a fluid comprises:
- a sensor;
 - a first outlet connected to the sensor;
 - a second outlet connected to the sensor;
 - a first outlet fluid passageway, wherein the first outlet fluid passageway is operatively connected to the first outlet; and
 - a second outlet fluid passageway, wherein the second outlet fluid passageway is operatively connected to the second outlet;
- wherein as the total number of phases of the fluid increases, the sensor directs at least a first phase of the fluid into the first outlet fluid passageway and directs at least a second phase of the fluid into the second outlet fluid passageway, and
- wherein the fluid flowing through the first outlet fluid passageway conjoins with the fluid flowing through the second outlet fluid passageway at a point downstream of the first and second outlet.
20. The device according to Claim 19, wherein the sensor is a centrifugal chamber.

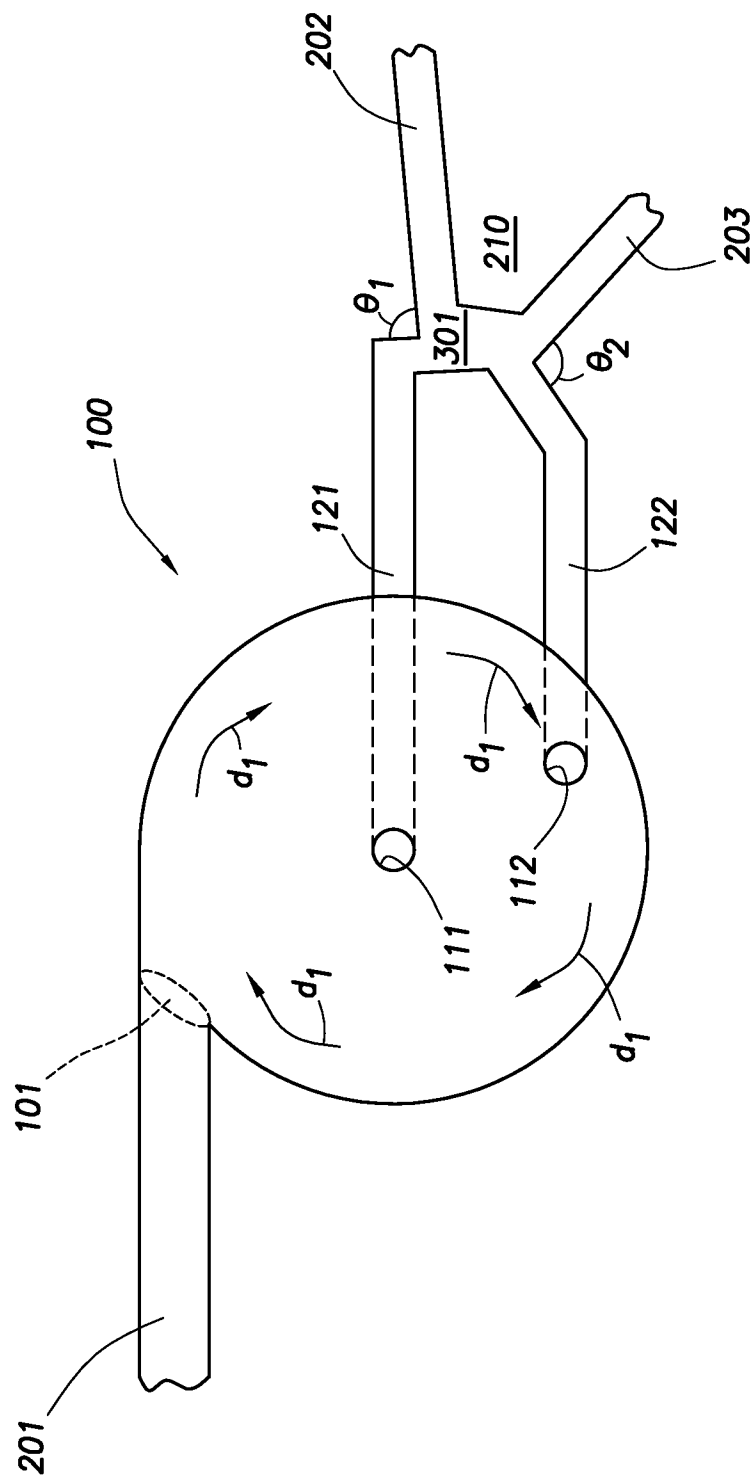


FIG. 1

2/7

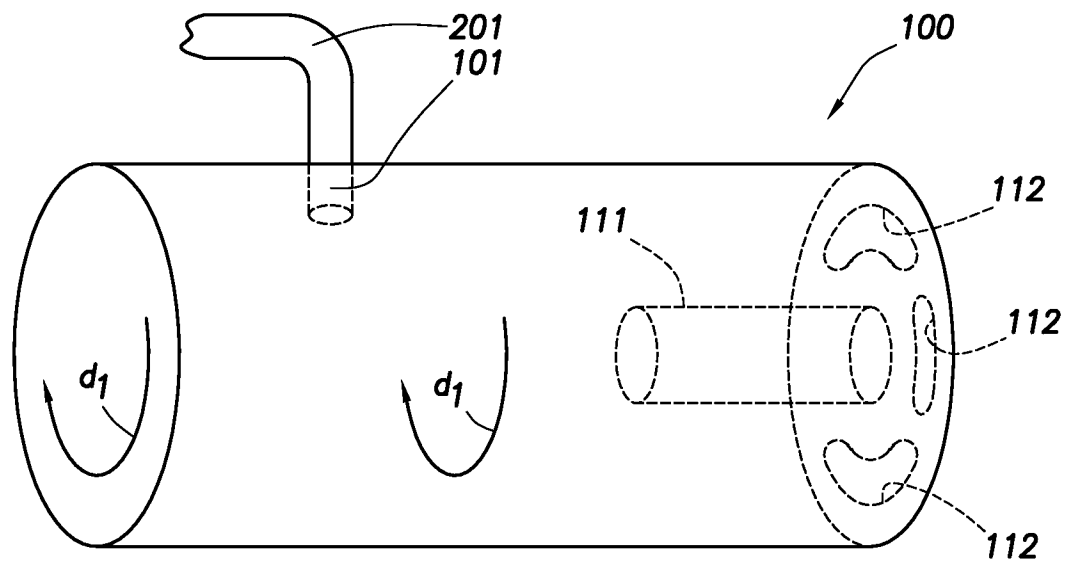


FIG. 2A

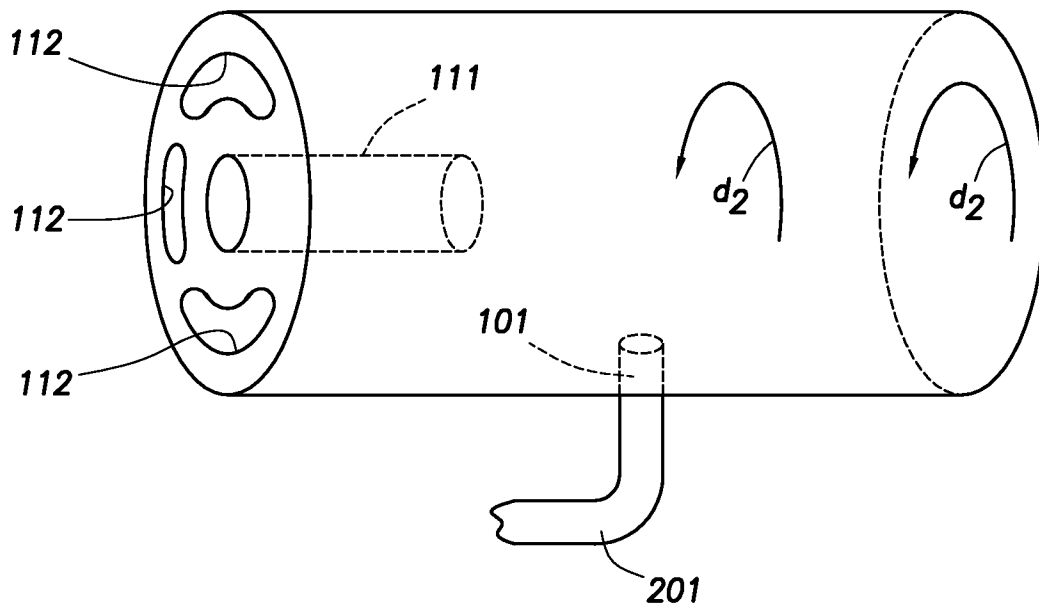


FIG. 2B

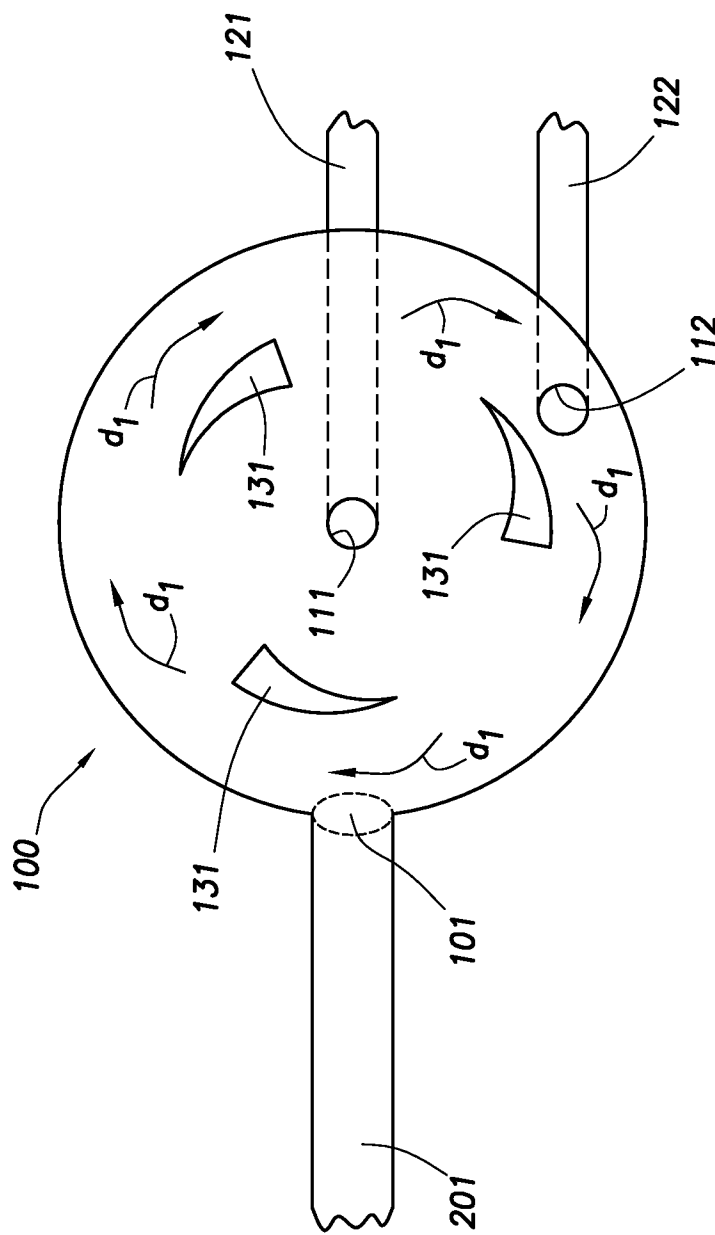


FIG.3

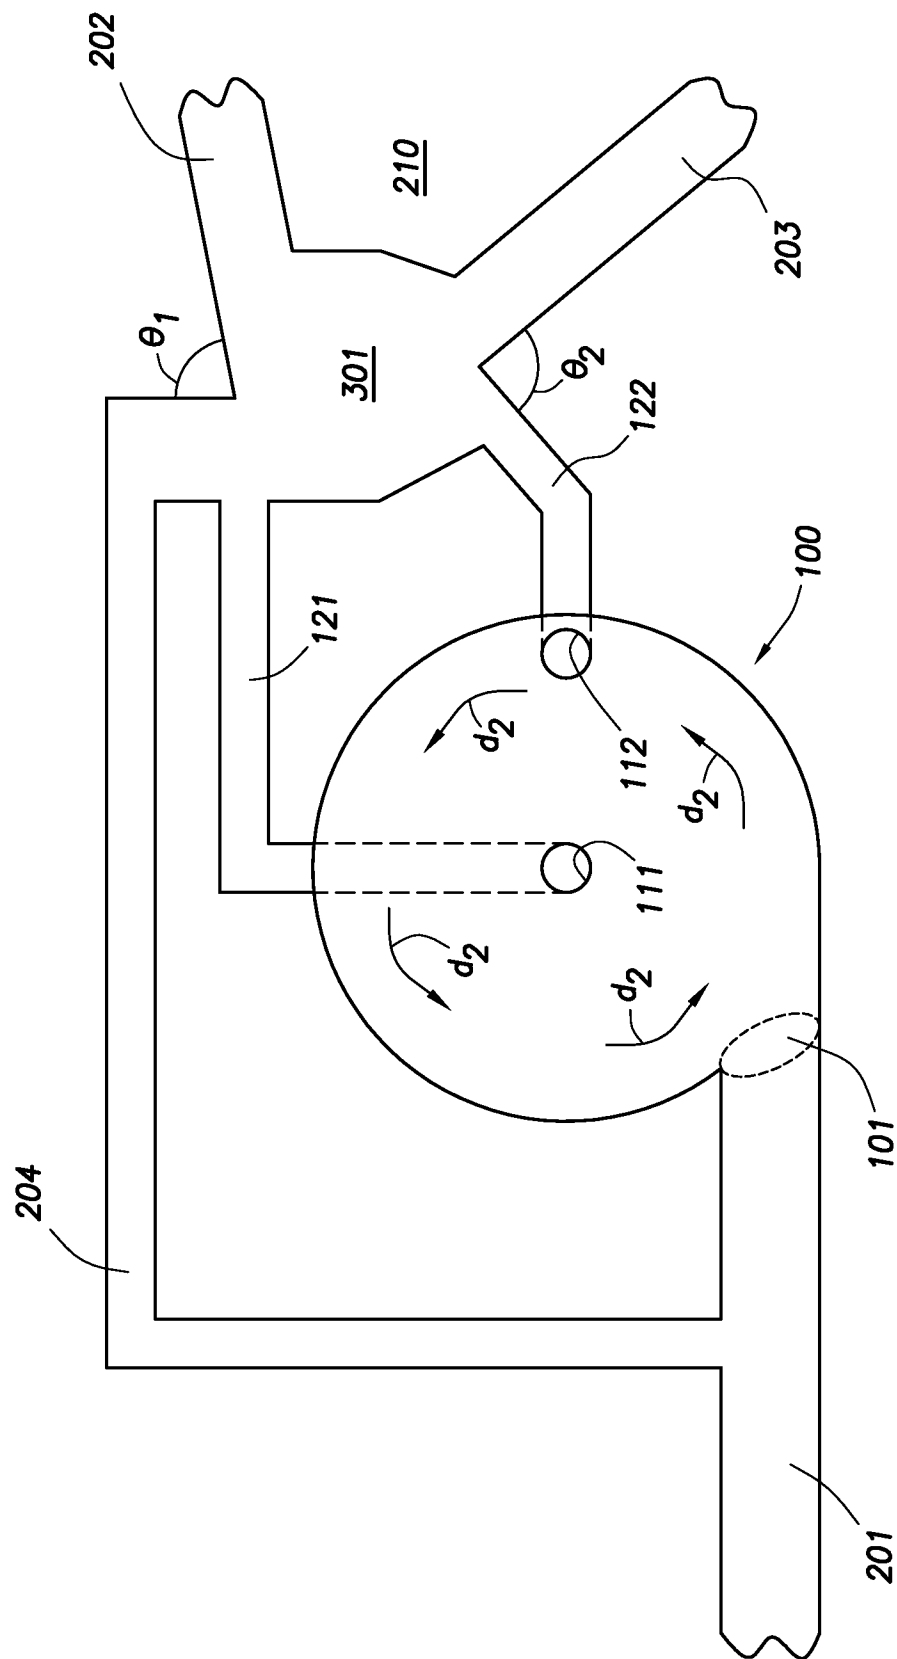


FIG. 4

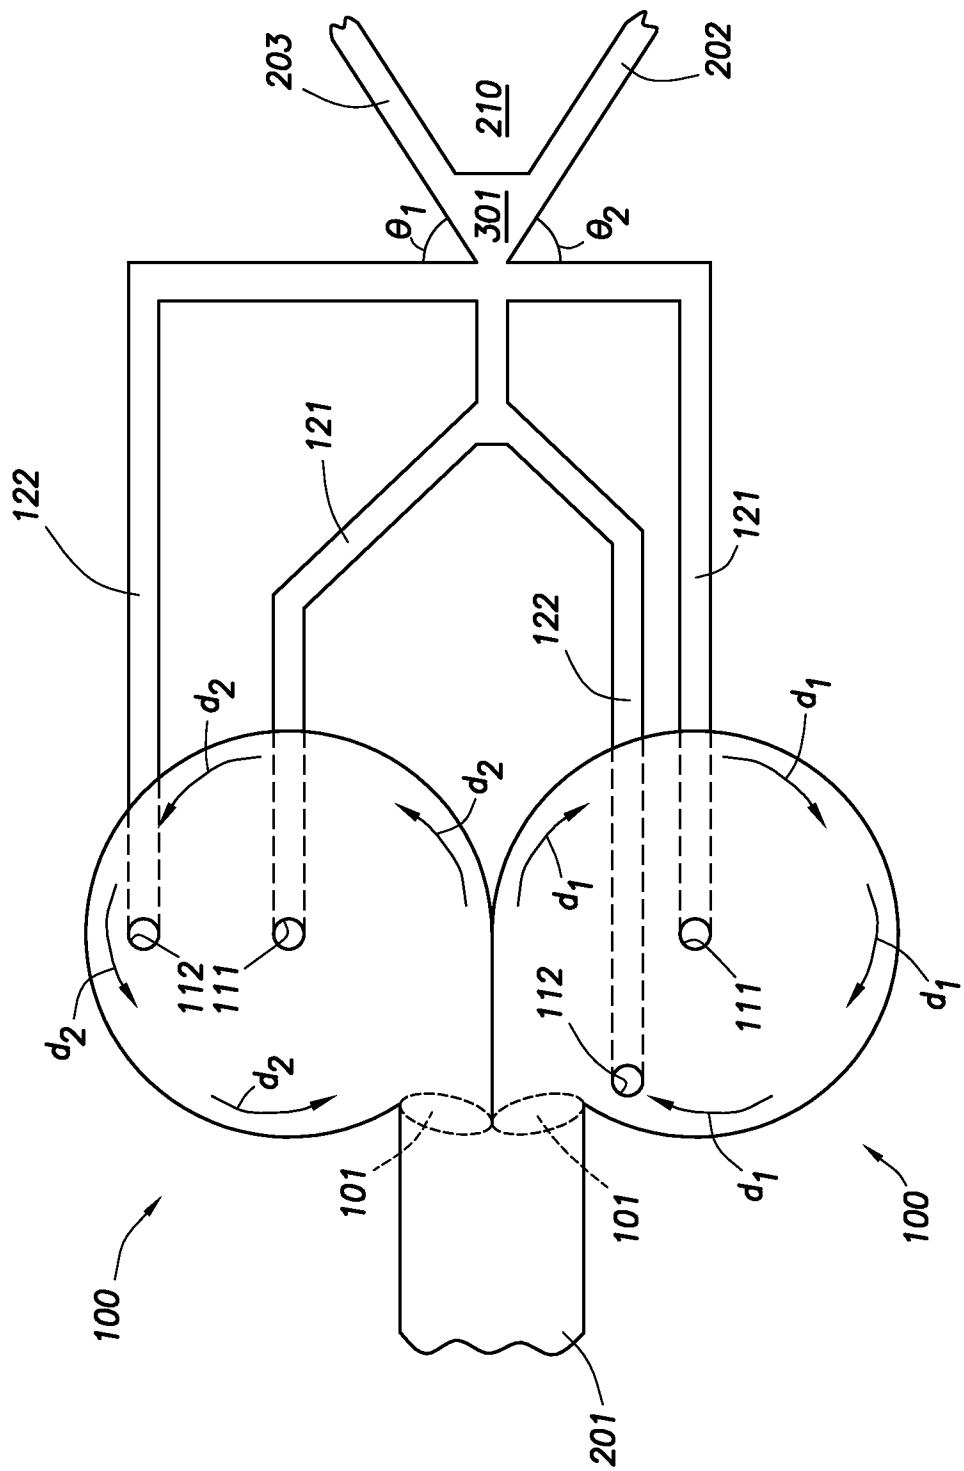


FIG. 5

6/7

