

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 December 2000 (14.12.2000)


PCT

(10) International Publication Number
WO 00/76210 A1

- (51) International Patent Classification⁷: H04N 5/66, 5/64, 9/12 A.; 926 North Cordova Street, Burbank, CA 91505 (US). PAUL, Lawrence, S.; 16929 Escalon Drive, Encino, CA 91436 (US).
- (21) International Application Number: PCT/US00/40177
- (22) International Filing Date: 9 June 2000 (09.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/138,245 9 June 1999 (09.06.1999) US
Not furnished 8 June 2000 (08.06.2000) US
- (71) Applicant: PANORAM TECHNOLOGIES, INC. [US/US]; 10951 Pendleton Street, Sun Valley, CA 91352 (US).
- (72) Inventors: MAYER, Theodore, III; 9701 La Canada Way, Shadow Hills, CA 91040 (US). CHANEY, Todd,
- (74) Agent: JEON, Jun-Young, E.; Christie, Parker & Hale LLP, P.O. Box 7068, Pasadena, CA 91109-7068 (US).
- (81) Designated States (*national*): CA, JP, KR.
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- Published:**
— With international search report.
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MULTI-PANEL VIDEO DISPLAY

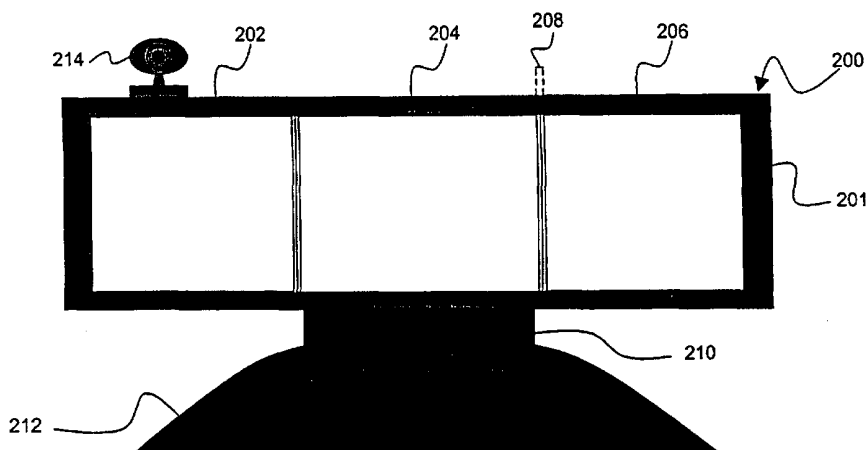

(57) Abstract: A multi-panel video display system includes multiple display panels (202, 204, 206). The display panels are enclosed in a single chassis (201). The gaps or mullions (208) between the display panels are minimized as to provide a composite display without distraction. The display panels are at an angle with one another as to make the display panels equidistant from the eye point of the user. The multiple display panels may be tilted forward such that display surfaces of the display panels may be at an angle with respect to the plane normal to ground.



WO 00/76210 A1

1

MULTI-PANEL VIDEO DISPLAY

BACKGROUND OF THE INVENTION

5

Computer users often desire to view video or graphic images that exceed the viewable area of a single monitor. For example, designers of large systems often use computer aided design (CAD) tools to generate designs. Many times, these designs are too detailed or too large to fully display on a single monitor with the desired high enough resolution. In addition, users often display multiple computer windows simultaneously. The multiple windows typically overlay and block one another since the viewable area of a monitor is generally not large enough to accommodate more than a few computer windows at the same time.

10

A typical home computer user may become frustrated by the crowding of the desktop screen by multiple computer windows. A professional computer user, e.g., a graphic artist or a CAD designer, in addition, may suffer from inefficiency or low productivity associated with being able to view only a portion of a large image or having to stack and re-stack multiple computer windows.

15

A larger viewable area, i.e., larger screen real estate, and higher resolution, i.e., more pixels, is typically very useful for laying out and viewing a larger portion of video or graphic images at the same time. Therefore, it is often desirable to display video or graphic images on a viewable area that is bigger than what is typically available on a single monitor. Arrayed display systems have been used to create a viewable area that is taller or wider than what is normally available on a single monitor. A typical arrayed display system includes three or more video display devices that are adjacent to one another.

20

The arrayed display systems typically include projector-based display systems. These systems typically include three or more video projectors that are arrayed in an overlapping adjacent format with each projector being fed by one channel of a visual computer or other video source. The result generally includes a composite image that combines the additive size, the additive brightness and the additive resolution of the multiple channel source and the multiple projectors. The projector-based display systems may use, for example, the process described in U.S. patent No. 5,136,390 entitled "Adjustable Multiple Image Display Smoothing Method and Apparatus" to create a single seamless image.

25

30

The use of projector-based display systems may provide a larger viewable area and higher resolution than a single monitor or a display device. However, a projector-based display system is typically not suited for widespread use by individuals since it is costly and generally requires a great deal of technical support and regular maintenance. In addition, the current system is typically bulky and thus occupies a large space.

35

Multiple conventional computer monitors may be placed adjacently side by side to provide a type of arrayed display system. However, due to the packaging of most standard CRTs and other monitors, such a configuration typically results in wider than acceptable gap, also referred

1 to as a mullion, between the displays. This prevents the displays from having an integrated look as illustrated in FIGs. 1A, 1B and 2.

5 FIG. 1A illustrates three conventional monitors 100, 102 and 104 placed side-by-side in an array. FIG. 1B is a top view of the three arrayed monitors 100, 102 and 104 of FIG. 1A. The monitors 100, 102 and 104 have viewable areas 106, 108 and 110, respectively. The viewable areas are smaller than the front surface of the monitors because of the respective housings. A relatively wide gap or mullion, e.g., gap 112 between the viewable areas 108 and 110 of the adjacent monitors 102 and 104, exists between adjacent viewable areas.

10 FIG. 2 illustrates a distracting effect of the mullions between the viewable areas when the three monitors 100, 102 and 104 are used to display a single composite image. The composite image displays the enlarged text "TEST" across all three of the monitors. As shown in the figure, the first T is displayed on monitors 100 and 102 while the second T is displayed on monitors 102 and 104. The relatively large mullions may distract viewers from viewing the text as a single integrated image.

15 Therefore, there is a need for an arrayed display system that is capable of providing reduced separation between portions of a composite image in adjacent displays as to reduce viewer distraction. The arrayed display system preferably takes less space and requires less technical support and less frequent maintenance. The arrayed display system preferably is also affordable to a wider range of users and designed to address ergonomic considerations for providing viewer comfort.

20

SUMMARY OF THE INVENTION

25 Accordingly, in one embodiment of the present invention, a multi-panel video display system includes a plurality of display panels and a housing to contain them. The plurality of display panels are fixedly mounted in the housing, and they are adjacent to one another such that a width of a mullion between adjacent display panels is minimized. The display panels are also at an angle with respect to one another such that the display panels are substantially equidistant from an eye point of a user.

30 Another embodiment of the present invention is a method of displaying a high resolution image using a plurality of display panels. The plurality of display panels are mounted in a single housing closely to one another as to minimize a mullion between viewable areas of adjacent ones of the plurality of display panels. The display panels are at an angle with one another so that the display panels are substantially equidistant from an eye point of a user.

35 Yet another embodiment of the present invention is a method of fabricating a three-panel video display system for displaying a high resolution image. A range of angles between a center panel and each of left and right side panels is calculated. The range of angles are selected so that the center panel, the left side panel, and the right side panel are substantially equidistant from an eye point of a user when the distance between the center panel and the eye point of the user is

1 between approximately 18 inches and approximately 24 inches. The center panel and the left and right side panels are mounted in a housing with an angle between the center panel and each of the left and right side panels within the range of angles.

5 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is an illustration of three conventional monitors placed next to one another in an exemplary prior art configuration;

FIG. 1B is a top view of the three conventional monitors of FIG. 1A;

10 FIG. 2 is an illustration of a display of a composite image over three adjacent conventional monitors arranged in a prior art configuration;

FIG. 3A is an illustration of a multi-panel video display according to an embodiment of the present invention, having three display panels mounted in a single chassis at an angle with respect to one another;

FIG. 3B is a top view of a multi-panel video display of FIG. 3A;

15 FIG. 4 is an illustration of a display of a composite image over a multi-panel video display according to an embodiment of the present invention;

FIG. 5 is a front view of a multi-panel video display according to an embodiment of the present invention;

20 FIG. 6A is a top view of a multi-panel video display according to the present invention, in which the three display panels are mounted in a single chassis to be substantially equidistant from the user;

FIG. 6B is a top view of a multi-panel video display similar to the multi-panel video display of FIG. 6A, except that the angles between the panels are narrower;

25 FIG. 7 is a front view of a multi-panel video display according to an alternate embodiment of the present invention, which is mounted on a hinged support;

FIG. 8 is a block diagram that illustrates operation of the three displays to display images from a multi-channel visual computer, a laptop and a video cassette recorder (VCR);

FIG. 9A is a front view of a multi-panel video display according to the present invention, in which a composite image is displayed across three display panels;

30 FIG. 9B is a front view of a multi-panel video display according to the present invention, in which separate images are displayed on each of three display panels;

FIG. 10 is a diagram that illustrates a spatial relationship between a user and surfaces of multi-panel video displays with 18.1" display panels and 15.0" display panels at two distances (18" and 24"); and

35 FIG. 11 is a diagram that illustrates an example of ergonomic principles used during the design of one embodiment of multi-panel video display of the present invention.

Common reference numerals may be used to represent like components.

1 DETAILED DESCRIPTION

FIG. 3A is an illustration of one embodiment of a multi-panel video display 200 that includes three display panels 202, 204 and 206 that are packaged into a single chassis (housing or molding) 201, allowing the display panels to be placed much closer to one another with the separation between two adjacent images being less than approximately 3% of the composite image. In other embodiments, the separation between two adjacent images may be approximately 1% or less of the composite image. Studies have indicated that approximately 7% between two adjacent images may be the allowable separation beyond which the users are typically distracted from considering the images as a single composite image.

5 Use of a single chassis in one embodiment to mount the three display panels results in a robust system. Since the displays panels are mounted in a single chassis, for example, re-alignment of the displays is typically not necessary, thus reducing the need for technical support when compared to the case of using projector-based arrayed displays. In other embodiments, the number of display panels may be more or less than three.

15 A mullion 208 is located between two adjacent display panels 204 and 206. In one embodiment, the width of the mullion 208 is less than approximately 3% of the width of the composite image. For example, in the described embodiment, the display panels 204 and 206 are actually touching each other at the adjacent edge. However, due to current state of the technology used to fabricate the display panels, there may be no active pixels at their left and right edges. For example, the display panels 204 and 206 may be liquid crystal display (LCD) panels that do not have active pixels at left and right edges. Thus, in the described embodiment, even though glass of one LCD panel may be touching glass of the adjacent LCD panel, but not completely without a seam between the images. In other embodiments, the mullion 208 may actually disappear, e.g., with the availability of active pixels at the left and right edges, resulting in a truly seamless composite image.

20 The multi-panel video display 200 may be tilted forward, i.e., towards the user, such that the plane of a display surface of the display panel 204 is at an angle with respect to a plane normal to the ground. For example, in one embodiment of the present invention, this angle is approximately 5.5 degrees. In another embodiment, this angle is approximately three degrees. In other embodiments, the angle may be greater than approximately three degrees and less than approximately 5.5 degrees. In still other embodiments, the angle may be less than approximately three degrees or greater than approximately 5.5 degrees.

25 The multi-panel video display 200 may also be tilted backward, i.e., away from the user. For example, in one embodiment of the present invention, the multi-panel video display 200 may be tilted backward at an angle of approximately 30 degrees. In other embodiments, the multi-panel video display 200 may be tilted at an angle less than or greater than 30 degrees.

30 The multi-panel video display may also be coupled to a control unit (not shown) for providing inputs and power to the display panels, and for controlling the displays. The control

1 unit may be mounted on the chassis 201 or on the base 212. The control unit may also be
mounted on the support 210. In addition, the control unit may be a separate unit which is not
mounted on the chassis, the support or the base.

5 In one embodiment, the multi-panel video display includes an integrated control unit,
which is used to control display characteristics of all three of the display panels. In other
embodiments, a separate control unit may be used to control display for each display panel.

The multi-panel video display 200 may include a control software for display
configuration and maintenance. The control software may be commanded to perform control
functions from the control unit or any other external device such as an external computer. The
10 control software may be controlled by using an input device such as a keyboard and/or mouse.

In one embodiment, the multi-panel video display may include a port (not shown), such
as a universal serial bus (USB) port, an RS-232 port, or any other conventional or non-
conventional serial or control port, for communication with an external device such as a
computer. The port may be used to perform control functions. The port input and the control
15 software preferably allows for external control of characteristics including but not limited to:
screen input selection, automatic input calibration and three screen interactive color adjustments.
A full setup configuration may be stored and be easily accessible, by, e.g., clicking a mouse
button.

The display panels may include an liquid crystal display (LCD) panels or they may include
20 any other commonly used display panels such as plasma display panels. The display panels may
also include digital display panels such as digital video interface (DVI) panels. The chassis 201
may be made of plastic, metal or any other suitable material. In this embodiment, the chassis 201
is fixedly coupled to a support 210, which in turn is fixedly coupled to a base 212. In other
embodiments, the chassis 201 may be hingedly coupled to a support, and the support may include
25 a hinge for folding and unfolding.

The multi-panel video display in one embodiment of the present invention is capable of
receiving inputs including but not limited to: a main and auxiliary RGB signals for each of the
three display panels, composite video signals and/or S-video (Y/C). These inputs allow for use
of other devices in addition to a main multi-channel visual computer. Other devices that may
30 provide inputs to the multi-panel video display may include laptops, VCR, DVD, video
conferencing equipment, cable television set top box, as well as closed circuit television and
satellite feeds. For example, the user may be able to select the input feeds using a computer
through the USB port. The multi-panel video display 200 may also include audio inputs and be
coupled to speakers for audiovisual communications.

35 In one embodiment, a camera 214 may be placed on top of the multi-panel video display
200. The camera 214 may be placed at any location across the top of the multi-panel video
display 200. A flat channel may be available at the top of the chassis 201 so that the camera 214
may be positioned at any location along the top of the chassis. The camera 214 may be a video

1 camera, which, for example, is used for video conferencing. The base 212 may include a power supply (not shown) for utility devices such as video conference cameras. The power supply may be a 12V power supply.

5 FIG. 3B is a top view of the multi-panel video display 200, which includes three display panels 202, 204 and 206 encased in a single chassis 201. The angle 216 between the display panel 202 and the display panel 204 is fixed, and is decided based on such factors as the size of the display panels and the typical distance of the user from the multi-panel video display. The angle between the display panel 204 and the display panel 206 is also fixed and is similar to the angle 216. In other embodiments, chassis 201 may be divided into three individual housings
10 and/or the display panels 202, 204 and 206 are hingedly coupled to one another such that the angle between adjacent display panels are variable.

FIG. 4 is an illustration of one embodiment of the present invention that shows the multi-panel video display 200 displaying a composite image "TEST". The gap between the adjacent display panels are reduced such that the mullion 208 is less than approximately 3% of the composite image. In other embodiments, the mullion 208 may be approximately 1% or less of the composite image. A portion of the first "T" appears on the display panel 202 while another portion of the first "T" appears on the display panel 204. Due to the separation of less than approximately 3% (of the composite image) between the viewable areas of the two display panels, the spacing between the two portions of the first "T" is relatively non-distracting. This also applies to two portions of the second "T", which appears on viewable areas of the display
15 panels 204 and 206, respectively.

FIG. 5 is an illustration that shows display size of the composite image on a multi-panel video display 200. Each of the three display panels 202, 204 and 206 has a horizontal active pixel count 500 of 1280 and a vertical active pixel count 502 of 1024. Thus, each of the three display panels in this embodiment is capable of displaying 1280 x 1024 (1.3 million) pixels. Therefore, a total horizontal active pixel count 504 across the three display panels is 3840, and the multi-panel video display 200 is capable of displaying 3840 x 1024 (3.9 million) pixels.
20

In one embodiment of the present invention, the height 506 from a supporting surface to lower edges of the display panels is fixed. Thus, the height 506 of the display panels may be adjusted by adjusting the height of the supporting surface. In other embodiments, the height 506 may be variable so that the height of display panels may be adjusted, e.g., depending on the eye level of the user. The eye level of the user is an eye height of the user at the time he or she is viewing images on the multi-panel video display.
25

FIG. 6A is an illustration of a spatial relationship between a multi-panel video display 200 and a user 601. A line 620 is indicative of an eye position of the user 601. A line 630 is indicative of a position of a display surface of a center display panel. An angle 216 between adjacent display panels is selected in accordance with the design distance between an eye point of the user 601 and the multi-panel video display 200. The eye point is defined to be at the
30

1 location of the user's eyes. A chassis 201 of the multi-panel video display 200 is designed so that
the eye point of the user 601 is substantially equidistant from each of three display panels 202,
204 and 206. In other words, the distances 603a, 603b and 603c between the eye point of the user
601 and the display panels 202, 204 and 206, respectively, are approximately equal to one
5 another.

The distances 603a, 603b, 603c and the angles between the display panels are preferably
selected based on ergonomic considerations. For example, in one embodiment of the present
invention, the angle 216 preferably is approximately 140 degrees when each of the distances
603a, 603b, 603c is between approximately 18 and approximately 24 inches and each of the
10 display panels 202, 204, 206 is an 18.1" display panel. In other embodiments, the distances or
the angles may be different.

FIG. 6B is an illustration of the spatial relationship between a multi-panel video display
600 and a user 601. An angle 616 between adjacent display panels is selected in accordance with
the design distance between an eye point of the user 601 and the multi-panel video display 600.
15 A chassis 601 of the multi-panel video display 600 is designed so that the eye point of the user
601 is substantially equidistant from each of three display panels 602, 604 and 606. In other
words, the distances 614a, 614b and 614c between the eye point of the user 601 and the display
panels 602, 604 and 606, respectively, are approximately equal to one another.

The display panels 602, 604 and 606 in FIG. 6B are smaller than the display panels 202,
20 204 and 206 of FIG. 6A. For example, the display panels 202, 204, 206 may be 18.1" in size
while the display panels 602, 604, 606 may be 15.0" in size. When FIG. 6A is compared with
FIG. 6B, it can be seen that there is a relationship between the size of the display panels and the
angle between adjacent display panels. The relationship is that the size of the display panels of
the multi-panel video display is typically inversely proportional to the angle between adjacent
25 display panels. For example, the angle 216 between two adjacent display panels may be
approximately 140 degrees while the angle 616 between two adjacent display panels may be
approximately 155 degrees when the distances 603a, 603b, 603c are approximately equal to the
distances 614a, 614b, 614c.

FIG. 7 is a multi-panel video display 200 in another embodiment of the present invention.
30 The multi-panel video display 200 includes display panels 202, 204 and 206 enclosed in a single
chassis 201. The chassis 201 preferably is hingedly coupled to a support 700 via a hinge (not
shown) at the backside of the chassis 201. The hinge allows the chassis 201 to tilt up or down
with respect to the axis of the support 700.

The support 700 preferably includes a hinge 702. The hinge 702 preferably allows the
35 support 700 to fold and unfold. By folding and unfolding the hinge 702, the multi-panel video
display 200 may be vertically adjusted. In others, the multi-panel video display 200 may be
moved up or down with respect to a base 704, which is coupled at the bottom of the support 700.

1 In one embodiment, the support 700 may be rotatably coupled to the base 704 so that the support
700 is capable of rotating about an axis normal to the ground.

FIG. 8 is an illustration that shows interfaces, in one embodiment of the present invention,
between a multi-panel video display 200 and devices that provide video and graphics to the
5 multi-panel video display 200. The multi-panel video display 200 preferably includes three
display panels 202, 204 and 206. A multi-channel visual computer 800 preferably includes three
graphic interface cards 802, 804 and 806. The graphic interface cards 802, 804 and 806
preferably provides images 816, 818 and 820 to corresponding display panels 202, 204 and 206,
respectively. The multi-channel visual computer may be based on one or more of Unix, Mac-OS,
10 Windows/NT and Linux operating systems or any other conventional or non-conventional
operating system.

The multi-channel visual computer 800 may provide graphics and/or video signals that
represent the images 816, 818 and 820 to corresponding input for each of the three display panels
202, 204 and 206 including but not limited to: main and auxiliary RGB inputs, composite video
15 inputs and S-video (Y/C) inputs. In other embodiments, two or three separate computers may
be used in place of the multi-channel visual computer 800 to provide graphics and/or video
signals to the multi-panel video display 200. The images 816, 818 and 820 may be three
unrelated images or each of the images may be a portion of a composite image. The graphic
images 816, 818 and 820 may also be substantially identical to one another.

20 An additional image may be provided by a laptop 810 or any other computer or an
electronic device capable of providing an image. The laptop 810 preferably provides an image
826 to the multi-panel video display 200. For example, the image 826 may include a picture of
an automobile.

Since the multi-panel video display 200 in this embodiment is typically used to display
25 three images, one on each display panel, when the laptop 810 provides the fourth image 826 in
addition to the graphic images 816, 818 and 820 from the multi-channel visual computer 800, a
switch 814 preferably is used to switch between one of the images from the multi-channel visual
computer 800 and the image 826. For example, the images 820 and 826 preferably are coupled
to the switch 814. The switch 814 preferably multiplexes them to provide an image 828 to the
30 display panel 206 of the multi-panel video display 200. The image 828 may be the image 820
or the image 826 based on the selection by the switch. The switch 814 may be manually
controlled, e.g., through manipulation of a mechanical switch by the user. The switch 814 may
also be controlled automatically, e.g., by a software running in the control unit (not shown).

A video cassette recorder (VCR) 808 in one embodiment may provide a graphic image 822
35 to a switch 812. The image 816 from the multi-channel visual computer preferably is also
coupled to the switch 812. The switch 812 preferably operates similarly to the switch 814 in that
it selects between the image inputs to provide an image 824 to the display panel 202 of the multi-

1 panel video display 200. Similarly, the image 818 may also be coupled to a switch in other
embodiments.

5 FIG. 9A is a front view of the multi-panel video display 200 in one embodiment of the
present invention. The multi-panel video display 200 displays a composite image across the three
display panels 202, 204 and 206. In one embodiment, all three images that make up the
composite image may be provided by the multi-channel visual computer 800 in FIG. 8. For
example, the three images may be provided by the three graphic interface cards, 802, 804 and
806, respectively. In other embodiments, each of the three images may be provided by a different
computer.

10 FIG. 9B is a front view of the multi-panel display 200 in one embodiment of the present
invention. The display panel 204 displays a portion of the composite image similar to the display
panel 204 shown in FIG. 9A. The portion of the composite image may be provided by the graphic
interface card 804 shown in FIG. 8. The display panel 202, however, displays an image that is
independent of the composite image. For example, the image in the display panel 202 may be
15 that of a person playing tennis. The image in the display panel 202, e.g., may be provided by the
VCR 808 through the switch 812 shown in FIG. 8.

The display panel 206 also displays an image that is independent of the composite image.
For example, the image in the display panel 206 may be that of an automobile. The image in the
display panel 206, e.g., may be provided by the laptop 810 through the switch 814 shown in FIG.
20 8. In other embodiments, the display panel 204 may also display an image, which is not a part
of a composite image.

FIG. 10 is a diagram that illustrates a spatial relationship between a user (viewer) 900 and
display surfaces of multi-panel video displays. In FIG. 10, a multi-panel video display with three
18.1" display panels and a multi-panel video display with three 15.0" display panels are
25 represented both at approximately 18" and approximately 24" away from an eye point of the user
900. The spatial relationships between the user 900 and multi-panel video displays have been
designed to provide user comfort in accordance with ergonomic principles. The ergonomic
considerations are based on disclosures in *Ergonomic Design for People at Work Volume I*,
Eastman Kodak Company, Wiley & Sons, Inc., 1983 (ISBN 0471-28924-8) and *The Measure of*
30 *Man and Woman: Human Factors in Design*, Henry Dreyfuss Associates, Whitney Library of
Design (New York), 1993 (ISBN 0-8230-3031-8), which are hereby fully incorporated by
reference.

In the described embodiment, a line 902 passes through the eye point of the user 900.
Semi-circles 904 and 906, respectively, are approximately 24 inches and approximately 18 inches
35 away from the eye point of the user 900. According to ergonomic principles, a display surface
located at between approximately 18" and approximately 24" from the eye point of the user
(viewer) 900 typically provides viewing comfort of the user 900.

1 Lines 908a and 908b, respectively, represent left and right edges of a 18.1" center panel
with a display surface represented by line 912. The line 912 is tangent to the semi-circle 904 at
about the center of the display surface of the 18.1" center panel. Lines 914a and 914b,
respectively, represent display surfaces of 18.1" side panels that are coupled to the center panel
5 at the lines 908a and 908b. The lines 914a and 914b are tangent to the semi-circle 904 at about
the center of the display surfaces, respectively, of the 18.1" side panels.

 In the described embodiment, the display surfaces of the 18.1" center panel and the two
18.1" side panels preferably are substantially equidistant from the eye point of the user 900.
However, in practice, the distances of the side panel display surfaces from the eye point may be
10 slightly more or slightly less than the distance between the center panel display surface and the
eye point. For example, arrows 915a and 915b indicate a tolerance of ± 1 inch for the left 18.1"
side panel. In other words, the display surface of the left 18.1" side panel may be represented by
a line 916a, which is one inch closer than the line 914a to the eye point of the user 900, or by a
line 916b, which is one inch further than the line 914a from the eye point of the user 900.

15 In the described embodiment, the line 912 also represents a display surface of a 15.0"
center panel whose left and right edges are represented by lines 910a and 910b, respectively. The
line 912 is tangent to the semi-circle 904 (with a radius of 24") at about the center of the display
surface of the 15.0" center panel. Lines 918a and 918b, respectively, represent display surfaces
of 15.0" side panels that are coupled to the 15.0" center panel at the lines 910a and 910b. The
20 lines 918a and 918b are tangent to the semi-circle 904 at about the center of the display surfaces,
respectively, of the 15.0" side panels.

 It can be seen from FIG. 10 that an angle between a center panel and a side panel is greater
for the 15.0" display panels than for the 18.1" display panels. For example, the angle between
the line 912 (representing the display surface of the 15.0" center panel) and the line 918a
25 (representing the display surface of the left 15.0" side panel) is greater than the angle between
the line 912 (representing the display surface of the 18.1" center panel) and the line 914a
(representing the display surface of the left 18.1" side panel). For example, in one embodiment,
the angle between the line 912 and the line 918a is 155 degrees while the angle between the line
912 and the line 914a is 140 degrees.

30 FIG. 10 also illustrates multi-panel displays with three 18.1" display panels and three 15.0"
display panels, respectively, at approximately 18" from the eye point of the user 900. In the
described embodiment, a line 920 represents both a display surface of a 18.1" center panel and
a display surface of the 15.0" center panel. The 18.1" center panel has left and right edges
indicated by the lines 908a and 908b, respectively. The 15.0" center panel has left and right
35 edges indicated by the lines 910a and 910b, respectively. The line 920 is tangent to the semi-
circle 906 at about the center of the display surfaces of the 18.1" center panel and the 15.0" center
panel.

1 Lines 922a and 922b, respectively, represent display surfaces of left and right 18.1" side panels. The left and right 18.1" side panels are coupled to the 18.1" center panel at the lines 908a and 908b, respectively. The lines 922a and 922b are tangent to the semi-circle 906, respectively, at about the center points of the left 18.1" side panel and the right 18.1" side panel.

5 Lines 924a and 924b, respectively, represent display surfaces of left and right 15.0" side panels. The left and right 15.0" side panels are coupled to the 15.0" center panel at the lines 910a and 910b, respectively. The lines 924a and 924b are tangent to the semi-circle 906, respectively, at about the center points of the left 15.0" side panel and the right 15.0" side panel.

10 FIG. 11 a diagram that illustrates an example of ergonomic principles used during the design of one embodiment of multi-panel video display of the present invention. A user 950 has an eye line (sight line) represented by a line 956. A line 952 indicates an alignment between the head and spine of the user when the head is not tilted either forward or backward with respect to the spine. A line 954 indicates horizontal location of the user's eye point. Arcs 953a and 953b, respectively, indicate an alignment between the head and the spine of the user when the head is tilted -3 degrees and +3 degrees with respect to the spine. For user comfort, the user (viewer) preferably is not required to tilt the head by more than 3 degrees either forward or backward when viewing a display.

15 A line 958 forms a 30 degree angle 970 with respect to the line 956. A vertical viewing range of an eye in a downward direction, without tilting the head, typically is 30 degrees. A height of the multi-panel video display is designed so that the line 956 (which represents the eye line (eye level) of the user) is at 3/4th of the distance between a bottom edge 962 and a top edge 960 of a center display panel. The 3/4th of the distance is represented by a double-headed arrow 972. A line 966 and a line 964, respectively, intersects the line 962 (the bottom edge of the display panel) and the line 960 (the top edge of the display panel) at the plane of the display surface of the center display panel.

20 Table 1 gives a list of preferred ranges of an angle between the center panel and the side panels for providing user comfort in accordance with ergonomic principles in one embodiment of the present invention. In other embodiments, the distance from the eye point of the user to the center panel may be less than 18" or more than 24", in which case new ranges of angle between the center panel and the side panels may be derived. For example, for panel with larger sizes, e.g., for a 52" panel, the distance to center panel may be adjusted to exceed 24", and the range of angle may reflect the increased distance to the center panel.

35

1

5

10

15

Panel Size	Dimensions (W x H)	Eye Line from Bottom	Distance to Center Panel	Angle of Side Panels (DEG)
12.1"	9.68" x 7.26"	5.45"	18"	136-162
			24"	145-169
14.0"	11.2" x 8.4"	6.3"	18"	135-155
			24"	144-164
15.0"	12" x 9"	6.75"	18"	133-153
15.1"	12.08" x 9.06"	6.8"		24"
18.0"	14.4" x 10.8"	8.1"	18"	128-144
18.1"	14.48" x 10.86"	8.14"		24"
20.0"	16" x 12"	9"	18"	125-139
20.1"	16.08" x 12.06"	9.05"		24"

TABLE 1

20

25

30

35

It is seen from Table 1 that the distance from the eye line (eye level) to the bottom of each panel is 3/4th of the height (H) of the panel to provide the user comfort. The distance between the eye point of the user and the center panel preferably is between approximately 18" and approximately 24". The angle between the center panel and each of the side panels preferably is selected from a range of angles. For example, for a multi-panel video display with 12.1" display panels at the distance of 18" from the user's eye point, the range of angles is 138 degrees to 162 degrees. The range of angles is allowed under ergonomic principles since, e.g., the side panels may be further or closer to the user's eye point than the center panel by up to approximately one inch. It is also seen from Table 1 that the angle between the center panel and the side panel is typically inversely proportional to the size of the panel.

Accordingly, the present invention provides a multi-panel video display for displaying a high-resolution composite image. Although this invention has been described in certain specific embodiments, many additional modifications and variations would be apparent to those skilled in the art. It is therefore to be understood that this invention may be practiced otherwise than as specifically described. Thus, the present embodiments of the invention should be considered in all respects as illustrative and not restrictive, the scope of the invention to be determined by the appended claims and their equivalents rather than the foregoing description.

1 CLAIMS:

1. A multi-panel video display system comprising:
a plurality of display panels to display a composite image, each display panel
5 including a display area; and
a housing to contain the plurality of display panels,
wherein the plurality of display panels are fixedly mounted in the housing, are
mounted adjacent to one another as to limit a width of a mullion between adjacent display areas
to less than approximately 7% of a width of the composite image, and are at an angle with respect
10 to one another as to be substantially equidistant from an eye point of a user.

2. The multi-panel video display system of claim 1 wherein the width of the mullion
between adjacent display areas is between approximately 1% to approximately 3% of the width
of the composite image.
15

3. The multi-panel video display system of claim 1 wherein the width of the mullion
between adjacent display panels is less than approximately 1% of the width of the composite
image.

4. The multi-panel video display system of claim 1 wherein the plurality of display
panels includes three display panels consisting of a left display panel, a center display panel and
a right display panel.
20

5. The multi-panel video display system of claim 4 wherein the housing is tilted
forward so that an angle between a display surface of the center display panel and a plane normal
to ground is between approximately 2 degrees and approximately 5.5 degrees.
25

6. The multi-panel video display system of claim 4 wherein the center panel is
mounted in such a way that an eye level of the user is at 3/4th of the way from a bottom of the
center panel to a top of the center panel.
30

7. The multi-panel video display system of claim 1 wherein each of the plurality of
display panels is selected from a group consisting of an LCD panel, a plasma display panel and
a digital display panel.
35

8. The multi-panel video display system of claim 1 further comprising:

1 a support having an upper end and a lower end, and the upper end is coupled to the
housing as to support the housing; and
 a base which is coupled to the lower end of the support.

5 9. The multi-panel video display system of claim 8 wherein the upper end of the
support is fixedly coupled to the housing, and the lower end of the support is fixedly coupled to
the base.

10 10. The multi-panel video display system of claim 8 wherein the upper end of the
support is hingedly coupled to the housing, and the housing can be tilted up and down with
respect to an axis of the support.

15 11. The multi-panel video display system of claim 8 wherein the support includes a
hinge member, and wherein the support can be folded and unfolded about the hinge member.

 12. The multi-panel video display system of claim 8 wherein the support is rotatably
coupled to the base so that the support can be rotated about an axis normal to ground.

20 13. The multi-panel video display system of claim 1 further comprising a USB port to
communicate with an external device.

 14. The multi-panel video display system of claim 1 further comprising a video input
selected from a group consisting of a composite video input, an RGB video input and an S-video
(Y/C) input.

25 15. A method of displaying a high resolution image using a plurality of display panels
comprising:

 mounting the plurality of display panels in a single housing closely to one another
as to limit a width of a mullion between viewable areas of adjacent ones of the plurality of
30 display panels to approximately 7% of a width of the high resolution image,

 wherein the display panels are at an angle with one another so that the display
panels are substantially equidistant from an eye point of a user.

35 16. The method of displaying a high resolution image using a plurality of display panels
of claim 15 further comprising:

 providing a portion of a composite image to each of the plurality of display panels
as to display a single high resolution composite image across the plurality of display panels.

1 17. The method of displaying a high resolution image using a plurality of display panels
of claim 15 further comprising:

 providing an independent image to at least one of the plurality of display panels as
to display more than one independent images on the plurality of display panels.

5

 18. The method of displaying a high resolution image using a plurality of display panels
of claim 15 wherein a single multi-channel visual computer provides an image to each of the
plurality of display panels.

10

 19. The method of displaying a high resolution image using a plurality of display panels
of claim 15 wherein at least two separate image sources provide images to the plurality of display
panels.

15

 20. The method of displaying a high resolution image using a plurality of display panels
of claim 15 wherein mounting a plurality of display panels includes mounting a center panel so
that an eye level of the user is at 3/4 of the way between a bottom of the center panel and a top
of the center panel.

20

 21. A method of fabricating a three-panel video display system for displaying a high
resolution image comprising:

 calculating a range of angles between a center panel and each of left and right side panels,
the range of angles being selected such that the center panel, the left side panel, and the right side
panel are substantially equidistant from an eye point of a user when the distance between the
center panel and the eye point of the user is between approximately 18 inches and approximately
25 24 inches; and

 mounting the center panel and the left and right side panels in a housing with an angle
between the center panel and each of the left and right side panels within the range of angles.

30

 22. The method of fabricating a three-panel video display system of claim 21 wherein
mounting the center panel and the left and right side panels includes limiting a width of a mullion
between a viewable area of the center panel and a viewable area of each of the left and right side
panels to approximately 7% of a width of the high resolution image.

35

 23. The method of fabricating a three-panel video display system of claim 21 further
comprising mounting the housing on a support as to tilt the center panel forward at an angle
between approximately 2 degrees and approximately 5.5 degrees with respect to a plane normal
to ground.

1 24. The method of fabricating a three-panel video display system of claim 23 wherein
a height of the support is selected so that an eye level of the user is at 3/4th of the way from a
bottom of the center panel to a top of the center panel.

5 25. The method of fabricating a three-panel video display system of claim 23 wherein
the support includes a hinge member to fold and unfold the support.

10


15

20


25

30


35

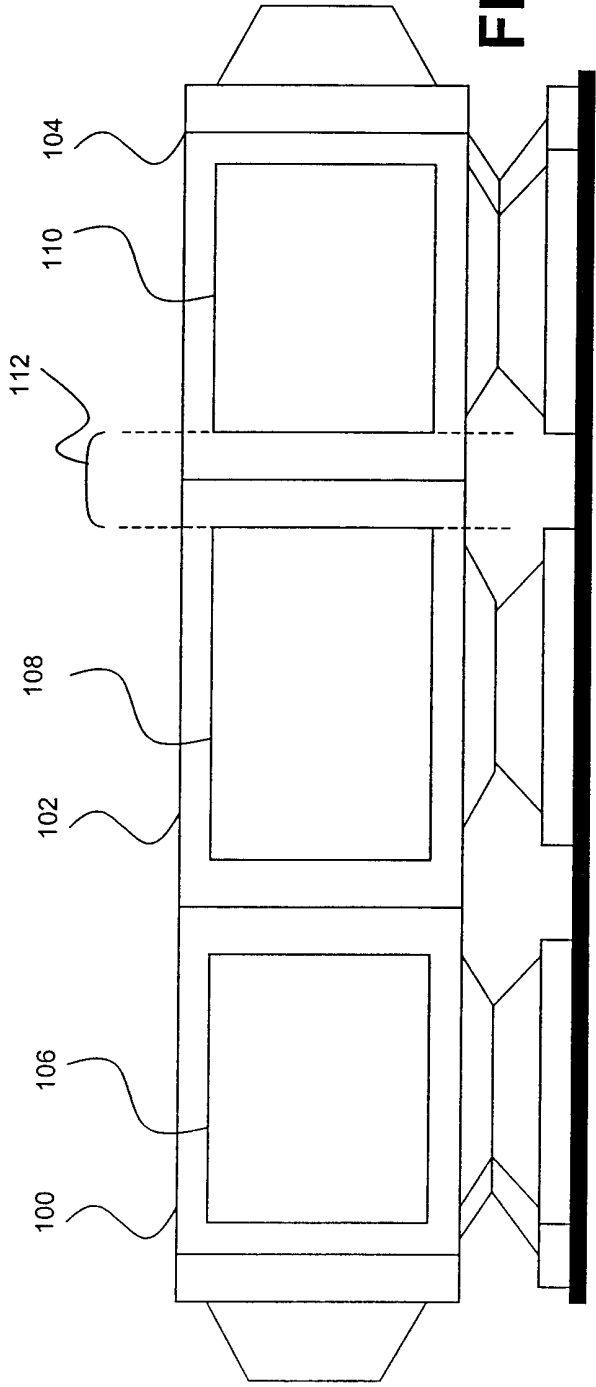

PRIOR ART


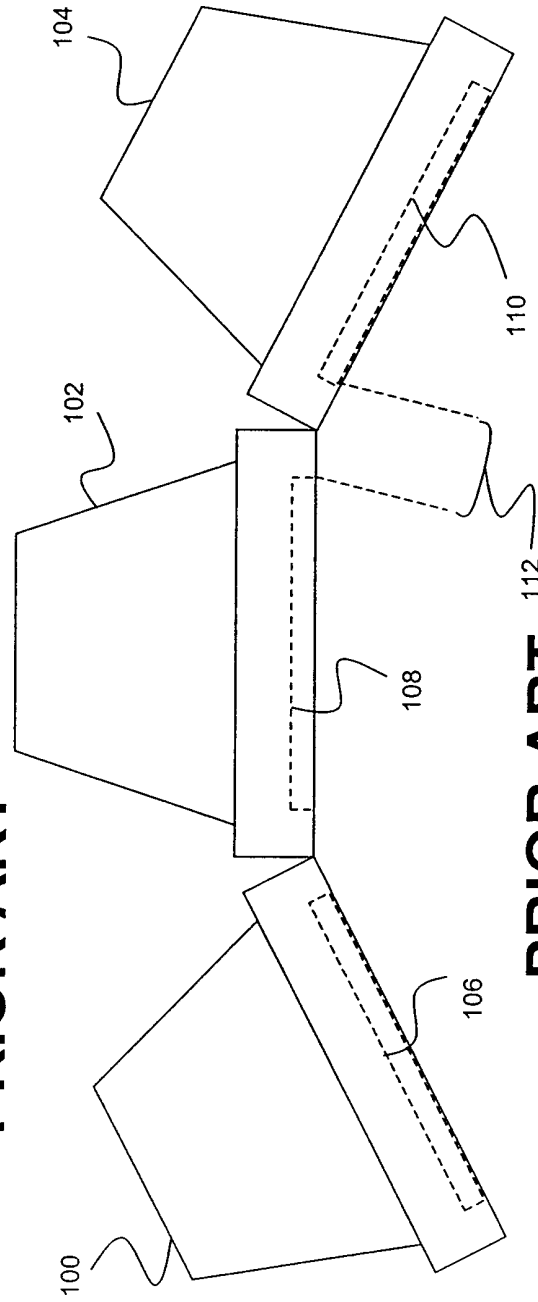


PRIOR ART

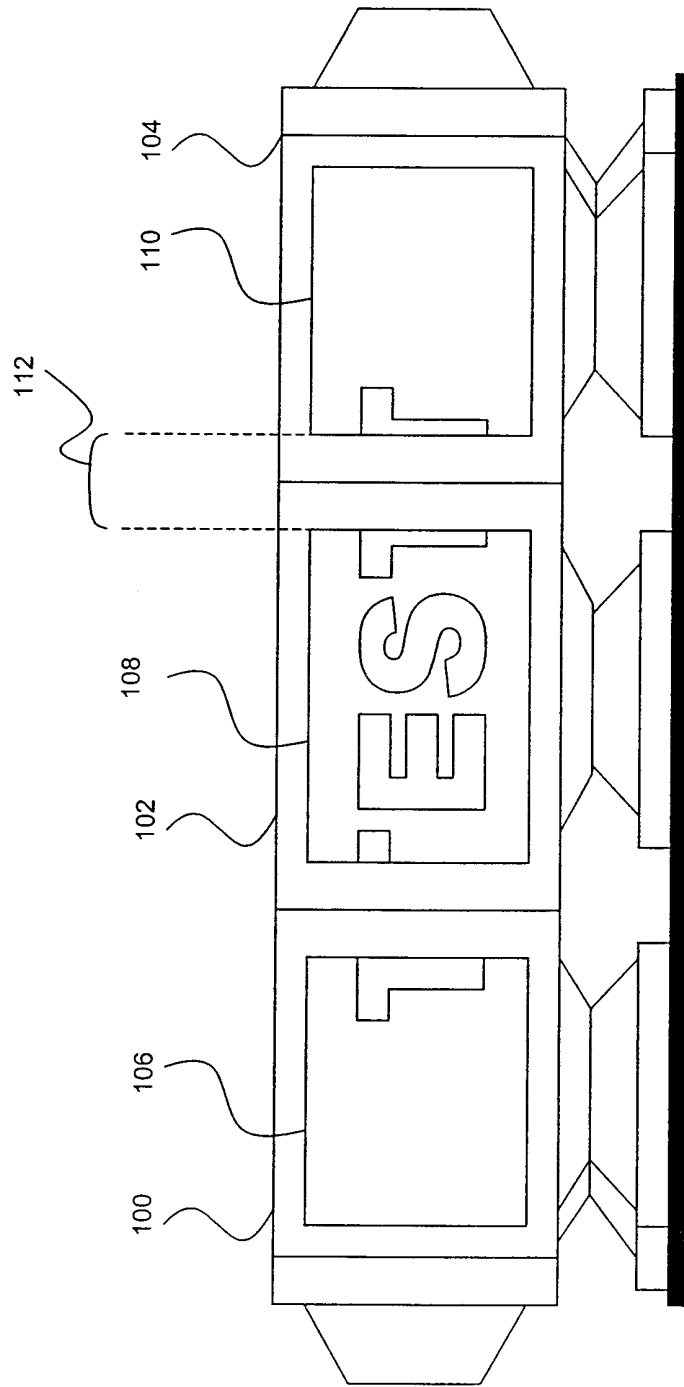

PRIOR ART

FIG. 2

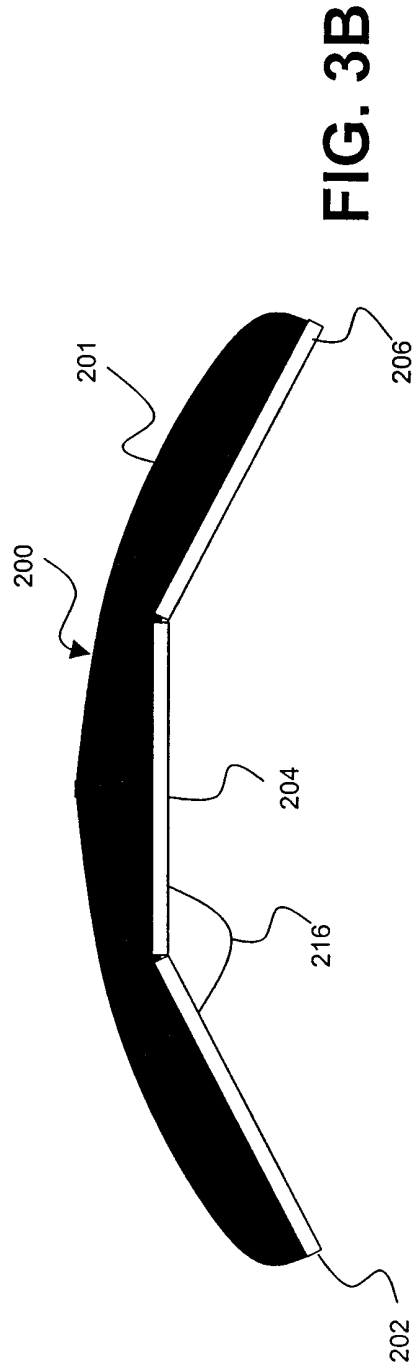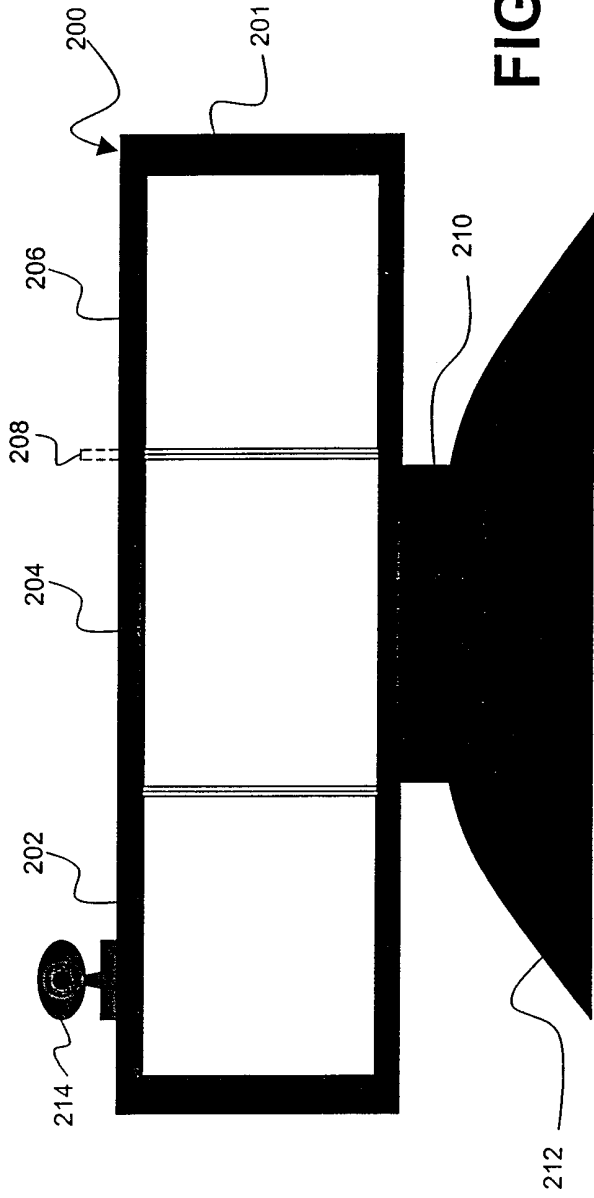

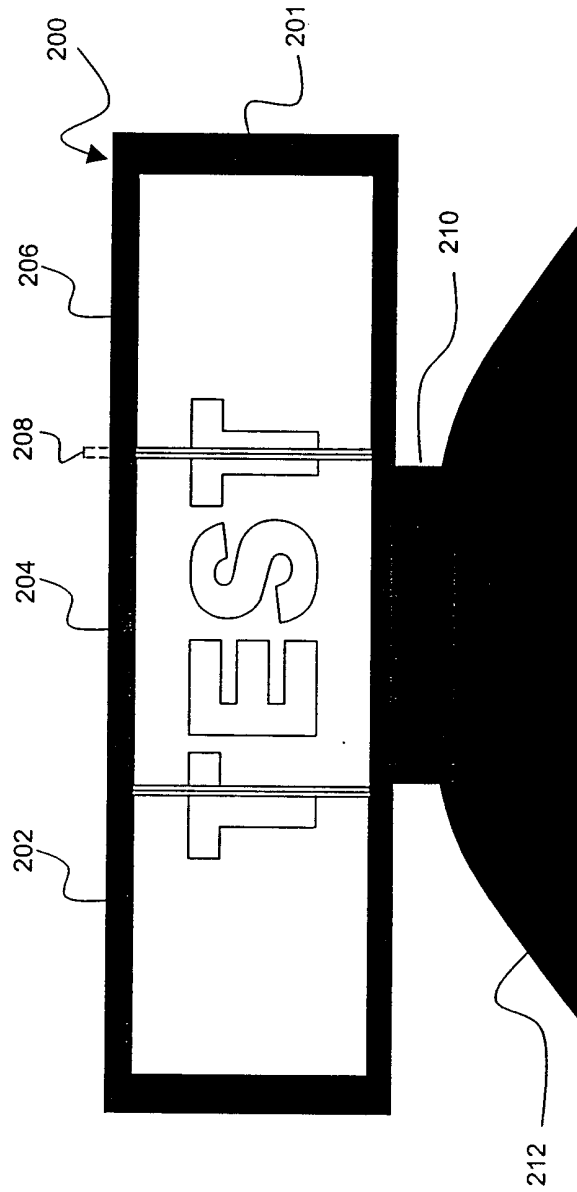


FIG. 4

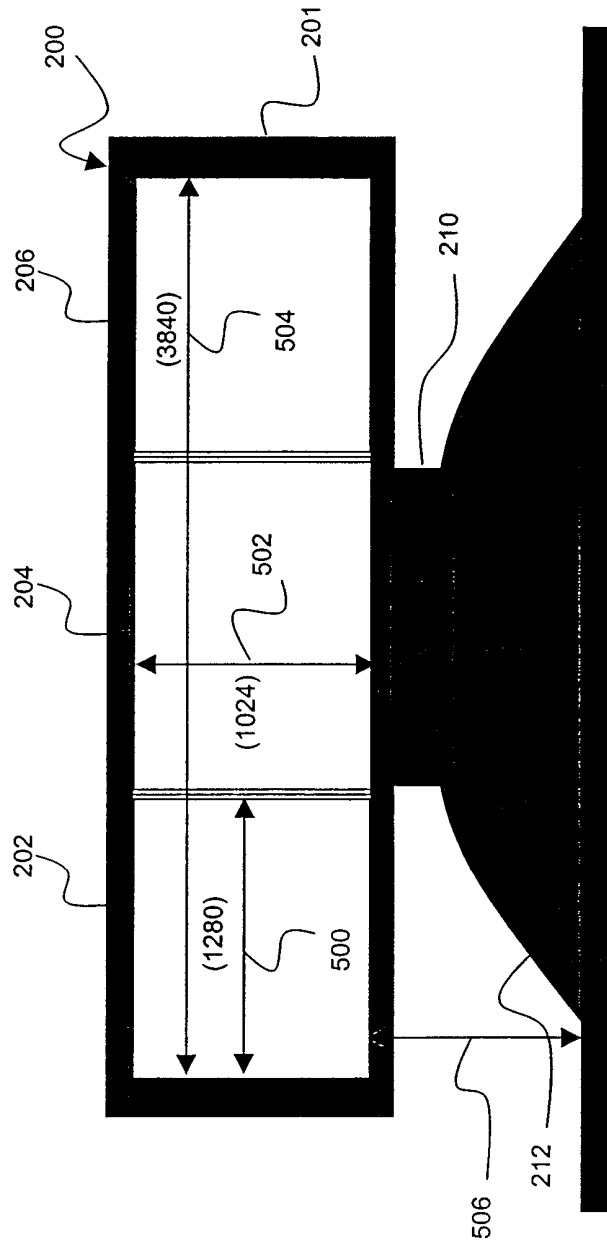


FIG. 5

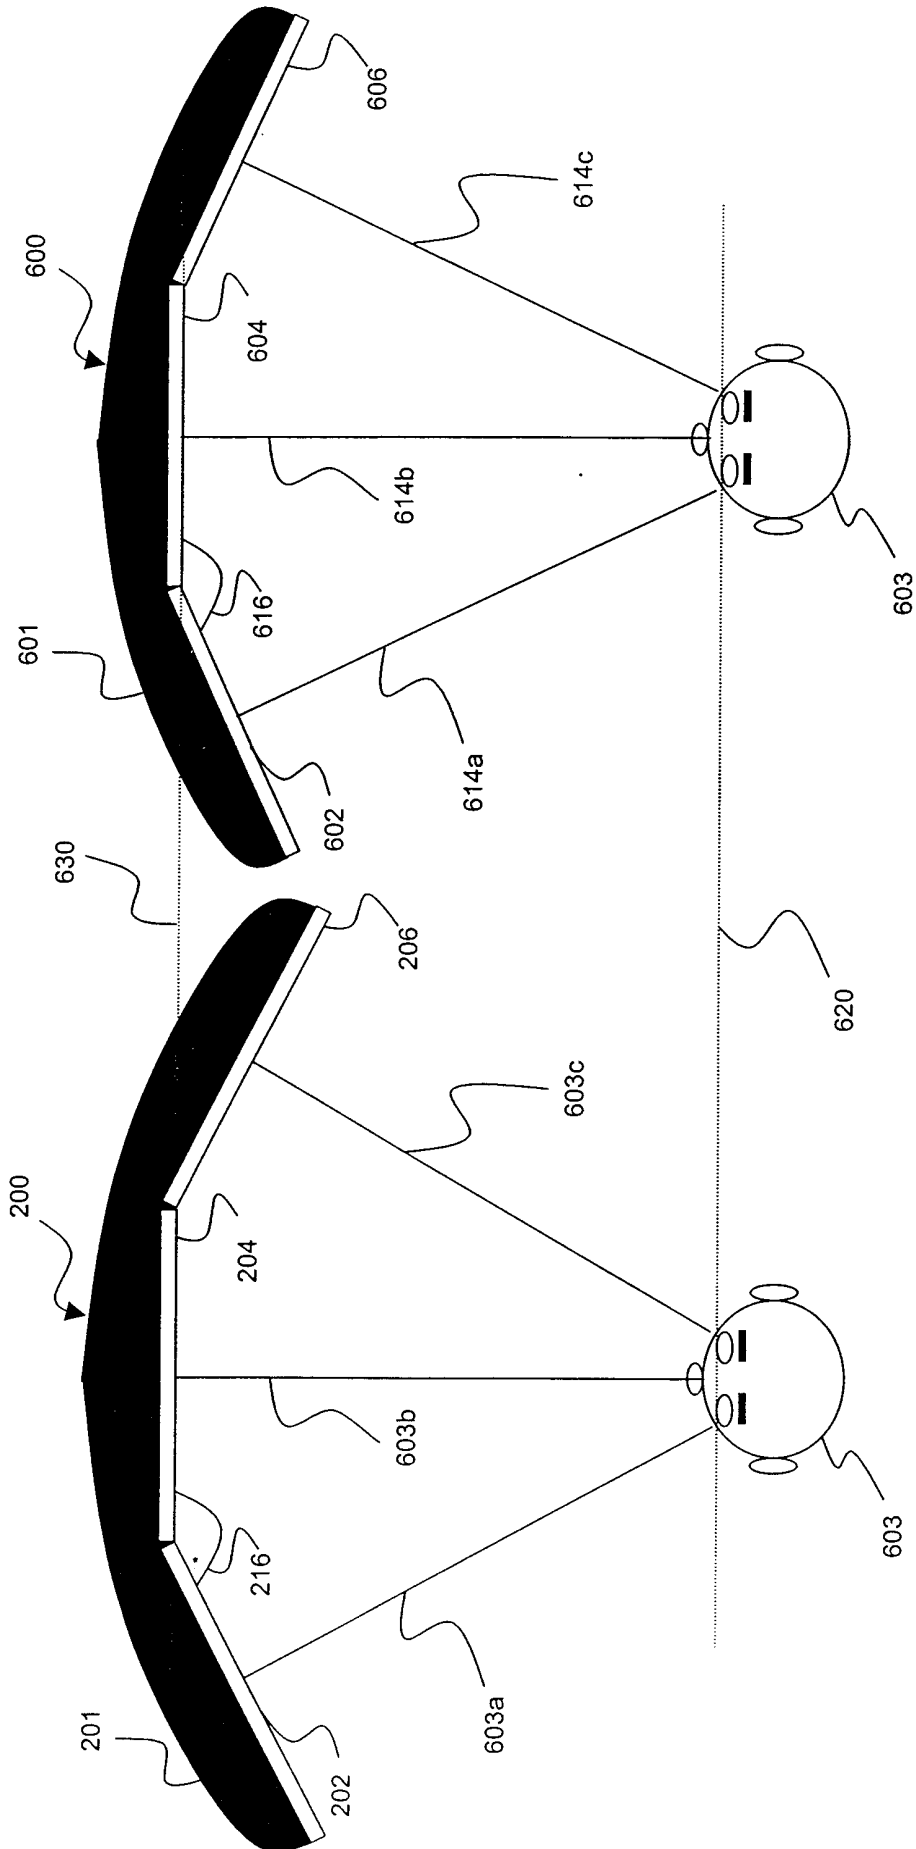


FIG. 6A

FIG. 6B

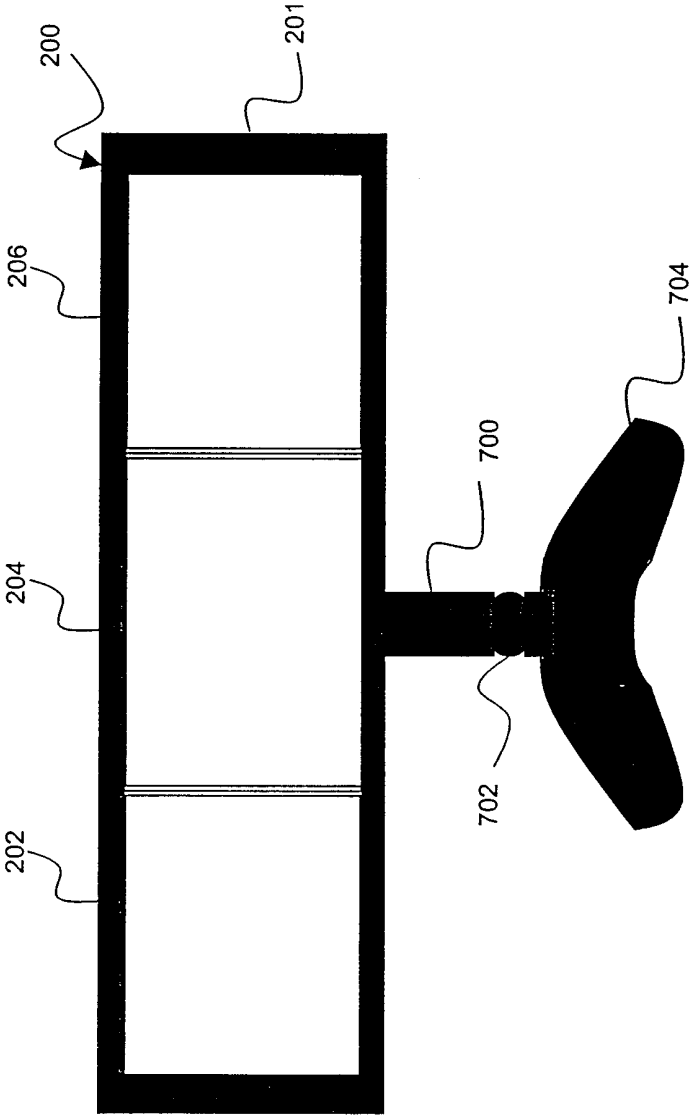


FIG. 7

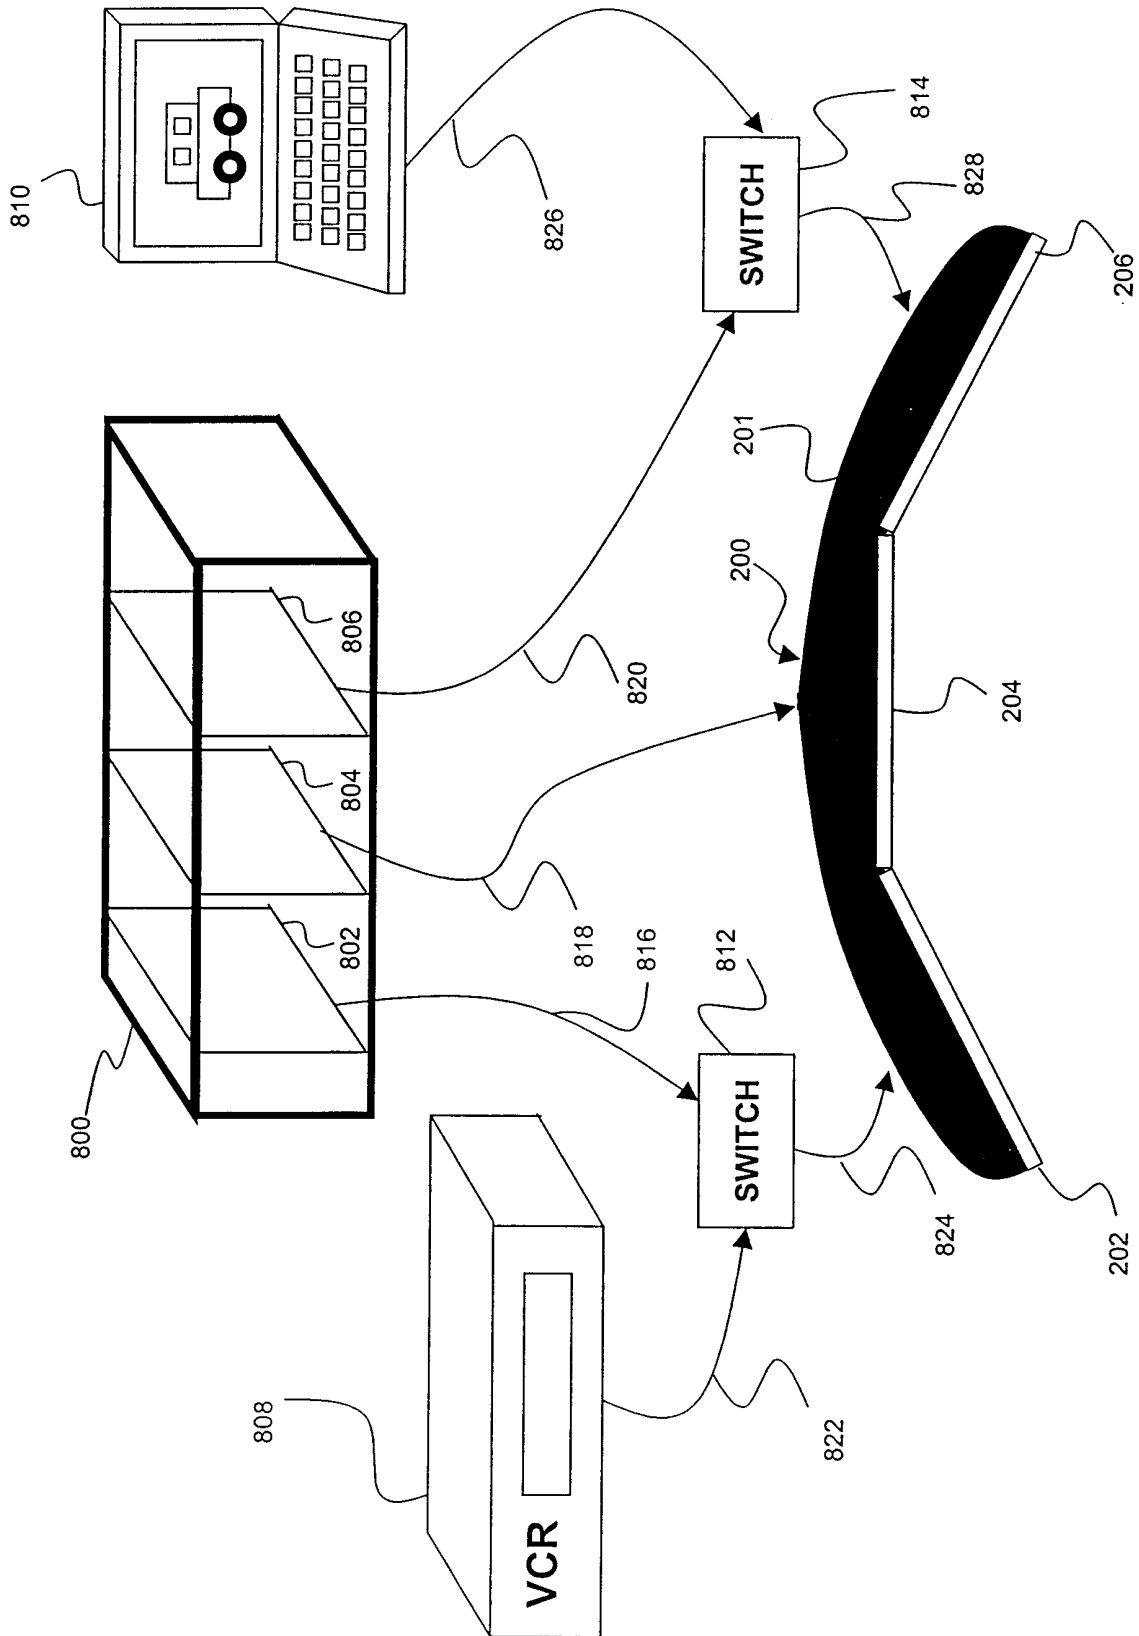


FIG. 8

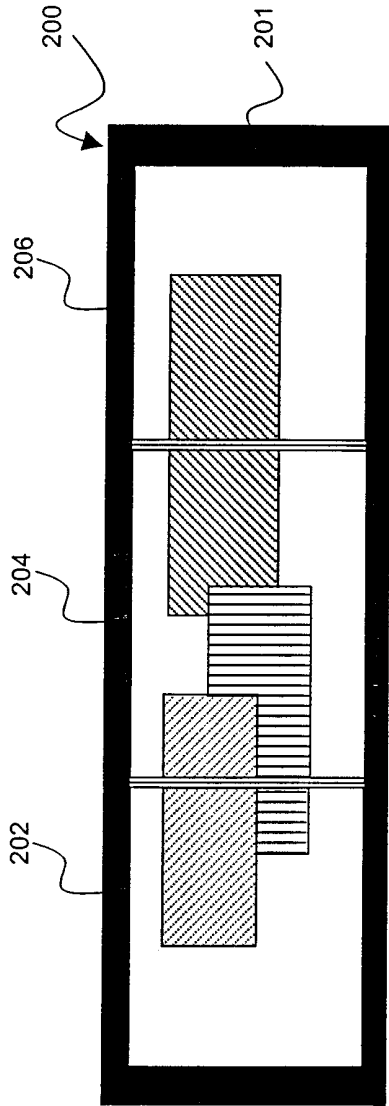


FIG. 9A

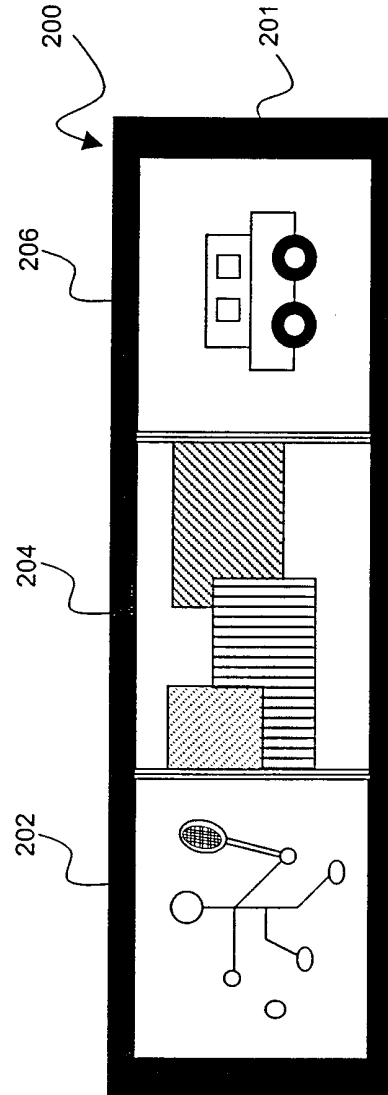


FIG. 9B

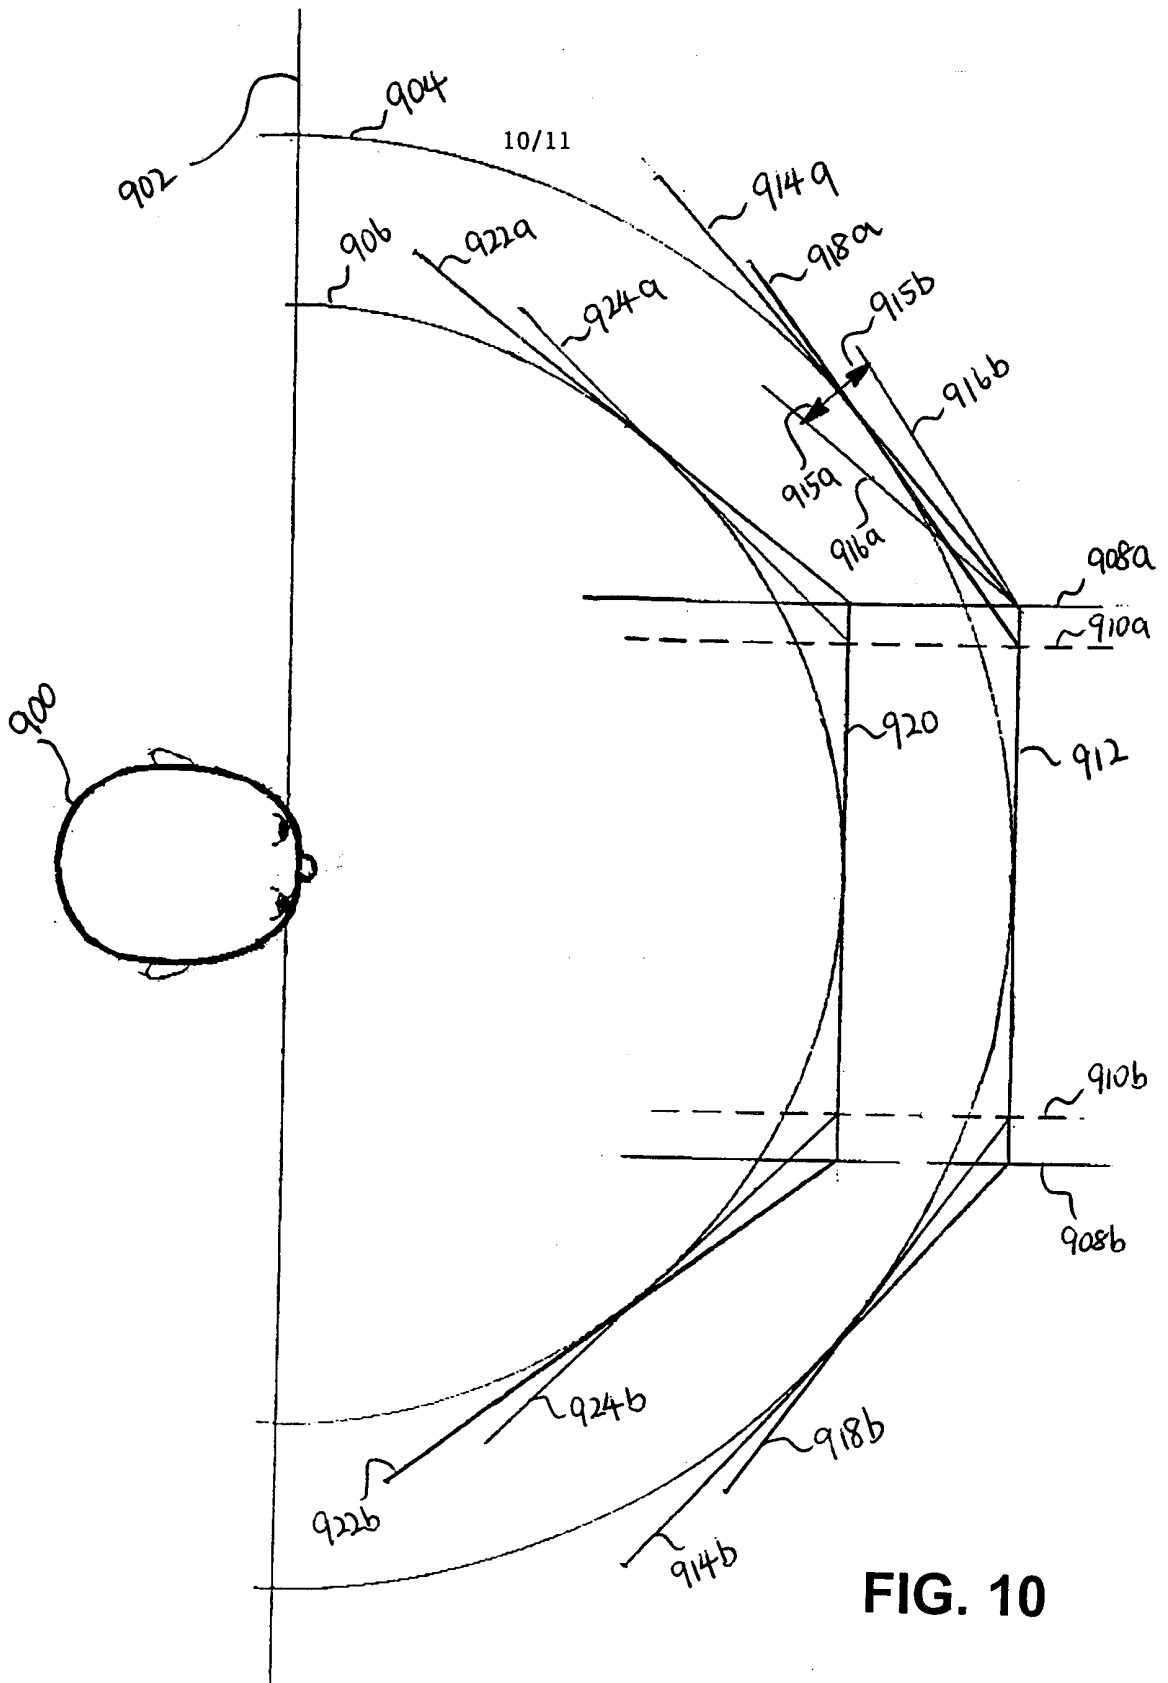


FIG. 10

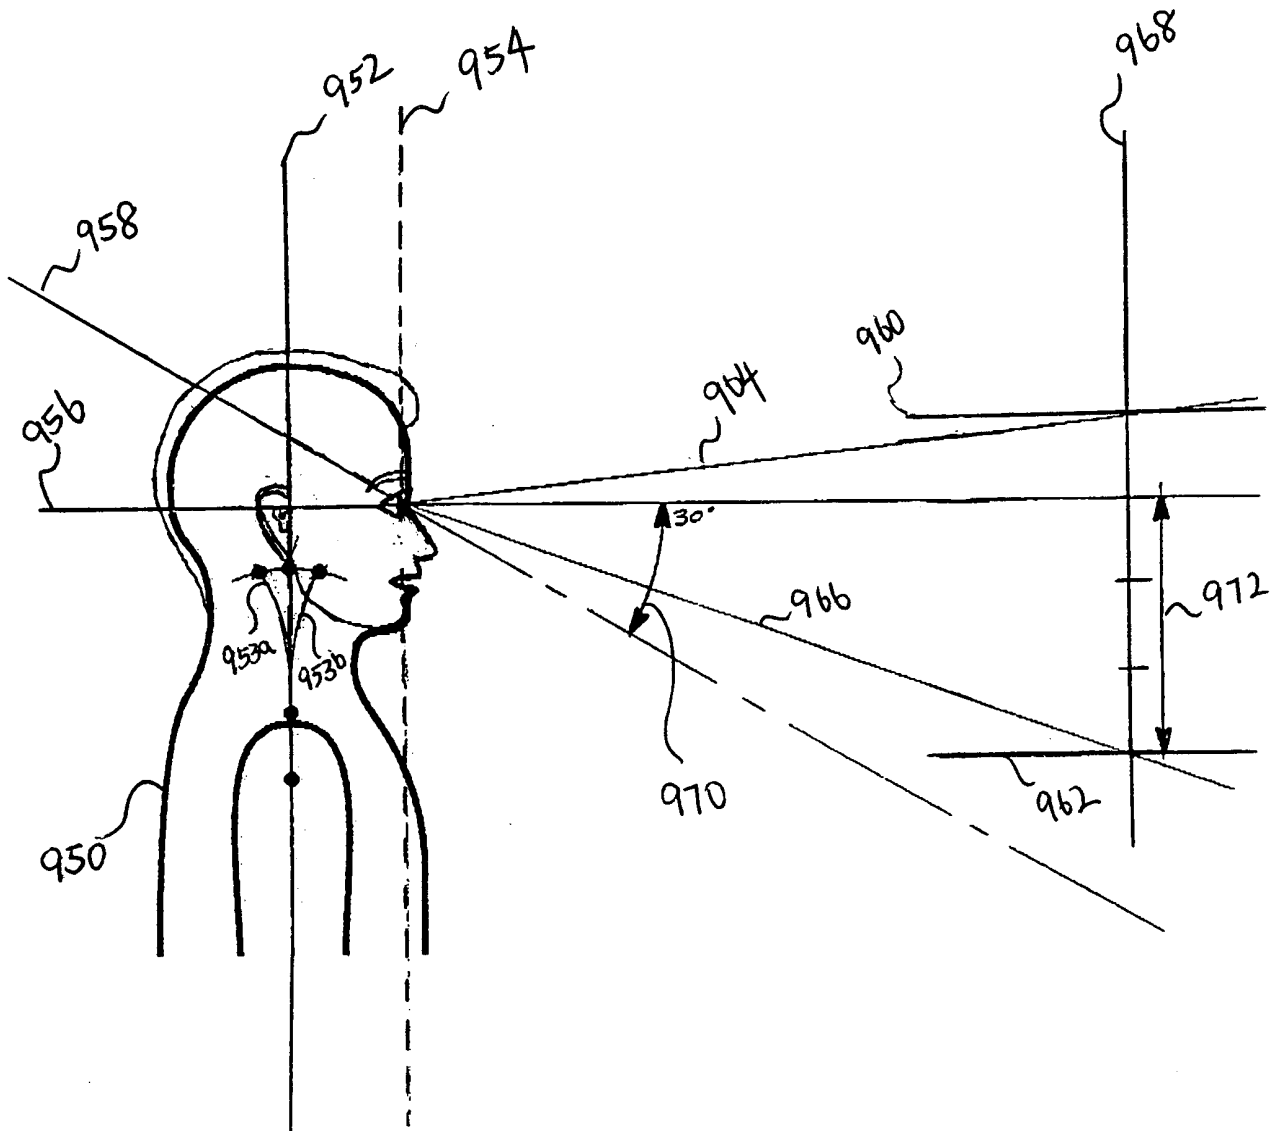


FIG. 11

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/40177

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :HO4N 5/66,64; HO4N 9/12

US CL :348/383,745,836,839,840,36,51-53; 345/1;359/443,449

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 348/383,745,836,839,840,36,51-53; 345/1;359/443,449

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EAST and WEST

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,828,410 A (DRAPEAU) 27 October 1998, whole document	1-20
A	U.S. 5,612,741 A (LOBAN et al.) 18 March 1997, whole document	1-14
A	U.S. 4,800,376 A (SUGA et al.) 24 January 1989, whole document	1-20
A,P	U.S. 5,926,153 A (OHISHI et al.) 20 July 1999, whole document	1-20

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*g* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

14 SEPTEMBER 2000

Date of mailing of the international search report

10 OCT 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

PAULOS M. NATHAEL

Telephone No. (703) 305-0019

Rugenia Zagan