

(21) Application No 9513525.7

(22) Date of Filing 03.07.1995

(30) Priority Data

(31) 94016683

(32) 06.07.1994

(33) KR

(71) Applicant(s)

LG Electronics Inc

(Incorporated in the Republic of Korea)

20 Yoido-Dong, Youngdungpo-gu, Seoul,  
Republic of Korea

(72) Inventor(s)

Jong Woog Lee

(74) Agent and/or Address for Service

F J Cleveland & Co

40-43 Chancery Lane, LONDON, WC2A 1JQ,  
United Kingdom

(51) INT CL<sup>6</sup>

H05B 6/80

(52) UK CL (Edition O )

H5H HMCR H302

U1S S2400

(56) Documents Cited

US 4882462 A

(58) Field of Search

UK CL (Edition N ) H5H HMCR

INT CL<sup>6</sup> H05B 6/80

(54) Single thermostat monitoring both magnetron and exhaust air temperatures in microwave oven

(57) This invention discloses a safety device for electronic range or microwave oven having one thermostat (320) commonly preventing possible overheating of the cavity (100) and magnetron (110) of the range. The thermostat (320) is placed in a position suitable for sensing both a peripheral temperature of a magnetron and the temperature of air exhausted from a heating cavity (100) through an air exhaust port (310). The thermostat cuts off the outside electric power for the range when at least one of the peripheral temperature of the magnetron and the temperature of the exhaust air coming out of the heating cavity is higher than a predetermined allowable temperature. The air exhaust port is provided about the magnetron. A thermostat mounting bracket (330) is connected to the magnetron mounting bracket.

FIG. 3


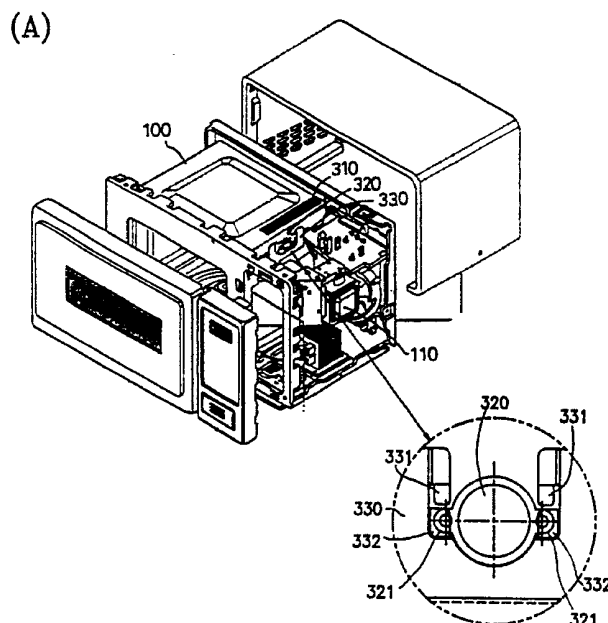


FIG. 1

(A)

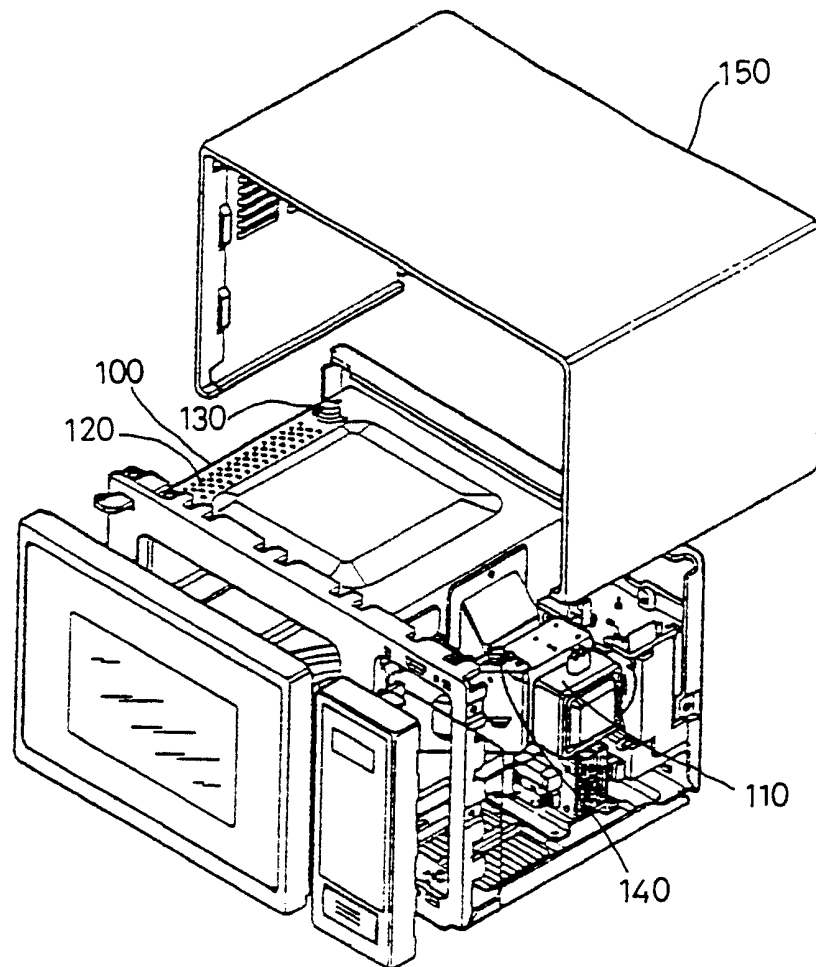

(B)


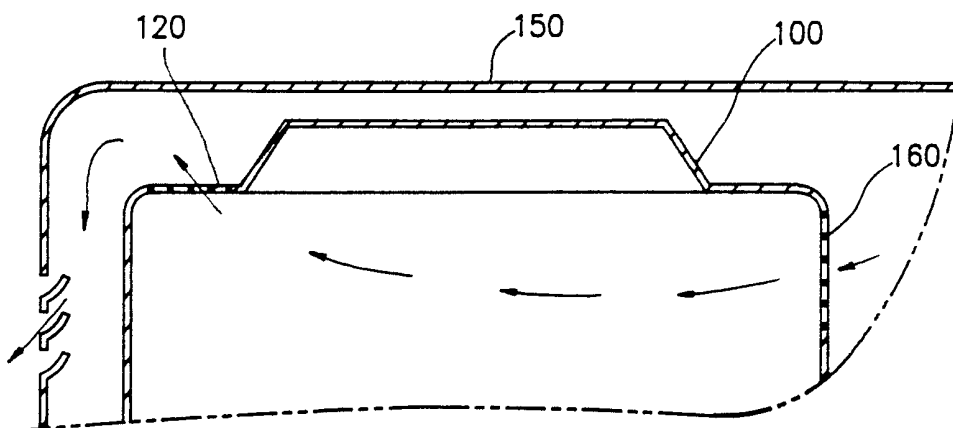




FIG. 3

(A)

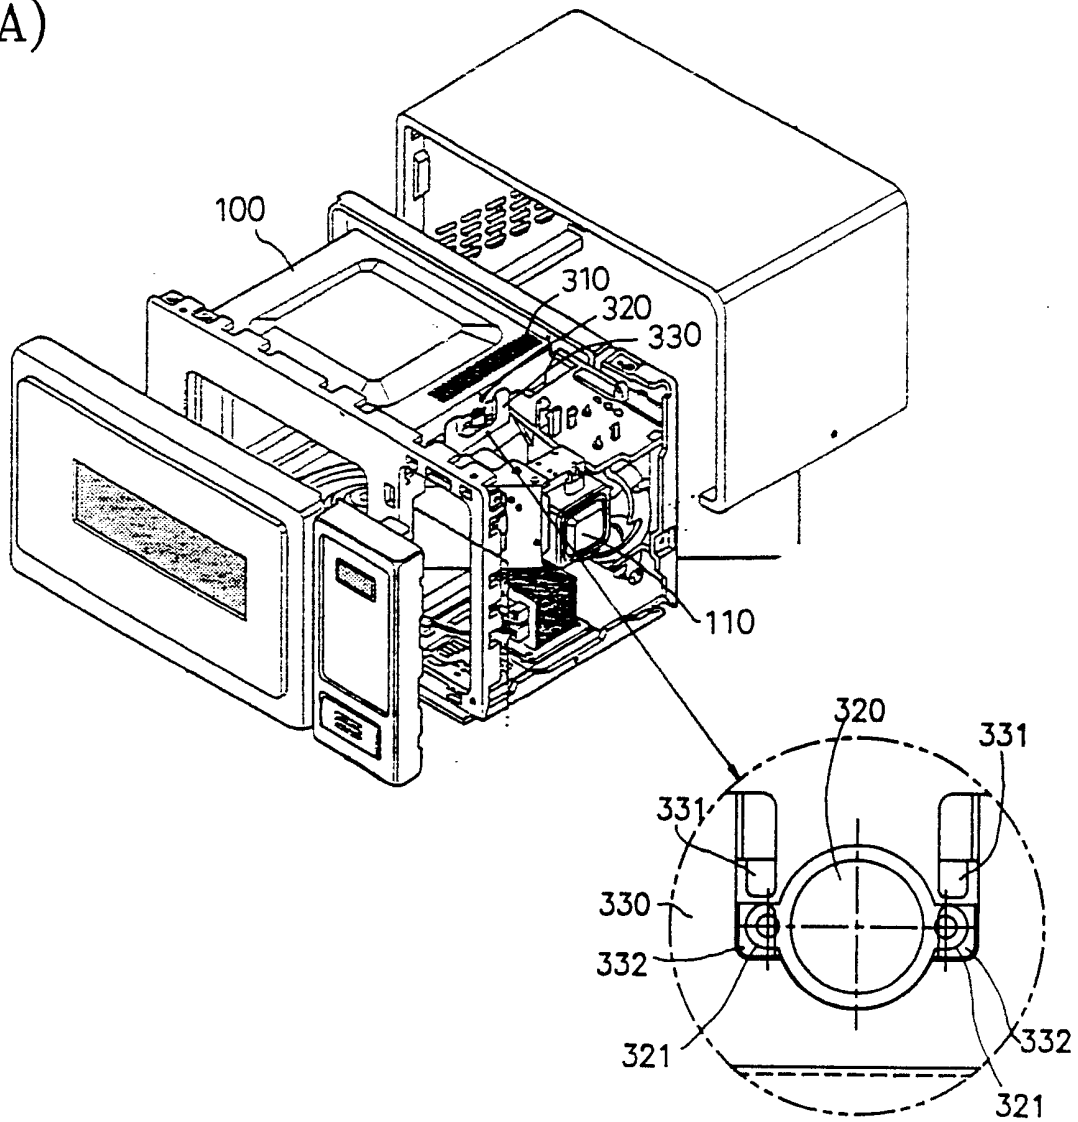

(B)


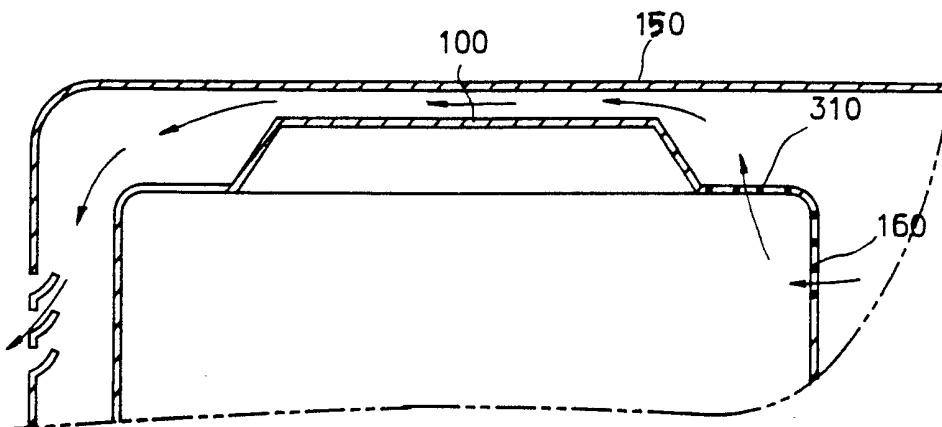


FIG. 4

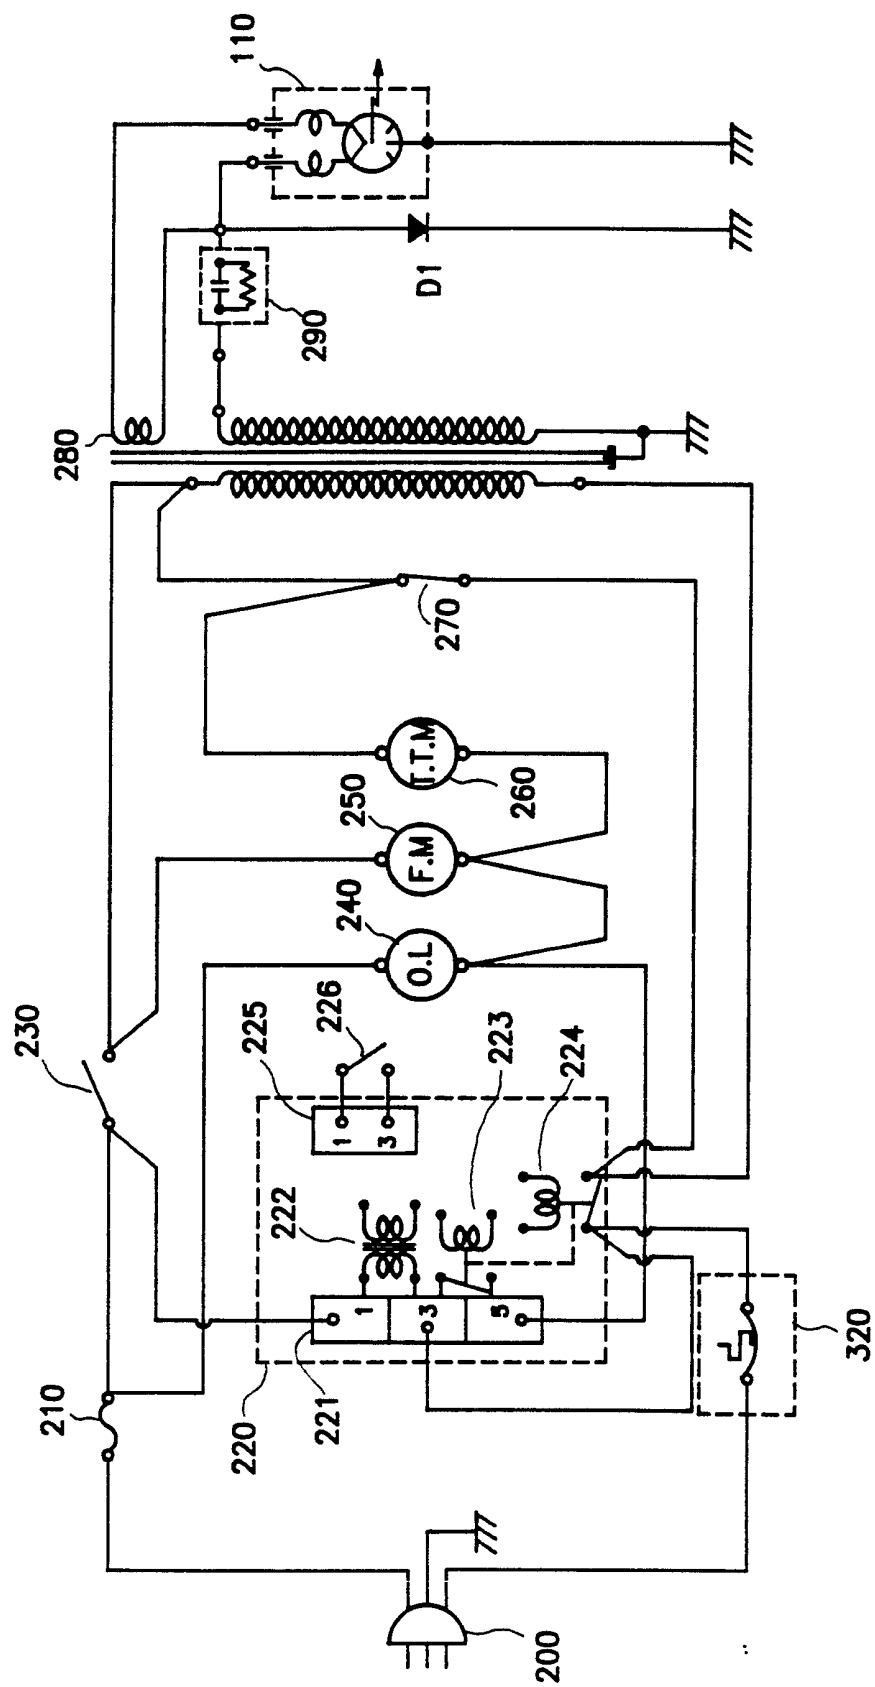

## SAFETY DEVICE FOR ELECTRONIC RANGE

### BACKGROUND OF THE INVENTION

#### 5 Field of the Invention

The present invention relates in general to a safety device for an electronic range or microwave heating apparatus and, more particularly, to a structural improvement in such a safety device for simplifying the structure of the device and reliably preventing possible damage of the electronic range caused by overheat of either the magnetron or the heating cavity of the electronic range.

10

#### Description of the Prior Art

Typical electronic ranges may have danger of a fire in their cavities due to careless operation of the users or forcible operation under the abnormal conditions of the ranges. When an electronic range is carelessly operated with no food charged in the heating cavity of the range, the microwave emitted from the magnetron returns to the magnetron due to no food to be heated in the cavity. When the magnetron is overheated as described above, the magnetron will be overheated to be seriously damaged.

15

20

In an effort to combat the above problems of the typical electronic ranges, the electronic ranges are preferably provided with their safety devices. With reference to Figs.

25

1A and 1B, there is shown an electronic range with a typical safety device. As shown in these drawings, the electronic range includes a heating cavity 100 which will be charged with food to be heated and cooked by the microwave. A magnetron 110 is mounted to a side of the cavity 100 and generates the microwave used for heating the food in the cavity 100. The range also includes an air exhaust port 120 which is formed in the top wall of the cavity 100 such that the port 120 is opposite to the magnetron 110. The port 120 is used for exhausting the air of the cavity 100 to the outside. An oven thermostat 130 is provided on the top wall of the cavity 100 about the exhaust port 120 and used for sensing the inner temperature of the cavity 100 by checking the air exhausted from the cavity 100 through the port 120. The thermostat 130 has a bimetal structure which will cut off the electric power for the range when the thermostat 130 senses that the inner temperature of the cavity 100 is abnormally increased. The range further includes a magnetron thermostat 140 which is provided about the magnetron 110 and used for cutting off the outside electric power for the magnetron 110 when the temperature of the magnetron 110 is higher than a predetermined allowable temperature. In the above drawings, the reference numeral 150 denotes a casing which surrounds and protects the parts of the range and the numeral 160 denotes an air suction port which is formed in the cavity wall and used

for sucking the outside air into the cavity 100 therethrough.

Turning to Fig. 2, there is shown a circuit of the typical safety device provided in the range of Fig. 1A. The above safety device includes a power plug 200 and a fuse 210.

5 The oven thermostat 130, which will cut off the electric power for the range when the temperature of the exhaust air discharged from the cavity 100 through the port 120 is higher than the allowable temperature, is included in the safety

device. The safety device also includes the magnetron  
10 thermostat 140 which will cut off the outside electric power for the magnetron 110 when the temperature of the magnetron 110 is higher than the allowable temperature. The circuit of

the safety device is controlled by a control unit 220. The device further includes a first switch 230, an oven lamp 240,

15 a fan motor 250, a turntable motor 260, a second switch 270, a transformer 280, a high voltage capacitor 290 and the magnetron 110. The first switch 230 selectively opens the circuit to stop the magnetron 110 when the door of the range is opened. The oven lamp 240 lights the inside of the cavity

20 110. The fan motor 250 generates the rotational force for sucking and exhausting the air relative to the cavity 100, while the turntable motor 260 generates the rotational force for rotating a food turntable (not shown) in the cavity 100.

The second switch 170 is a safety switch which will cut the  
25 fuse 210 and open the circuit when the first switch 230 is out



of order. The transformer 180 converts the input voltage into a high voltage. The high voltage capacitor 190 doubles the high voltage of the transformer 280 prior to applying the voltage to the magnetron 110. The magnetron 110 is applied  
5 with the high voltage from both the transformer 280 and the high voltage capacitor 290 and generates the microwave for heating the food laid on the turntable in the cavity 100.

The control unit 220 in turn includes a first connector 221 for connecting the outside electric power to first and  
10 second internal relays 222 and 223. The first relay 222 selectively relays the outside electric power to a function control panel (not shown) of the range as desired. The second relay 223 relays the input power to all of the oven lamp 240, the fan motor 250 and the turntable motor 260. The control  
15 unit 220 also includes a third relay 224 which controls the operation of the magnetron 110 and in turn controls the output of the magnetron 110. The control unit 220 further includes a second connector 225 which connects the output electric power to a control switch 226. The control switch 226 is for  
20 controlling the operation of the relays 223 and 224.

In operation of the above electronic range, the range is applied with the outside electric power through the plug 200 and performs a cooking mode which is selected by the user by operating the function control panel (not shown). When the  
25 selected cooking mode is performed, the air sucked into the

cavity 100 through the air suction port 160 as shown in Fig. 1B and heated in the cavity 100 by the microwave of the magnetron 110. The heated air is, thereafter, exhausted to the outside of the cavity 100 through the air exhaust port 120. In the case, when the temperature of the exhaust air discharged from the cavity 100 through the port 120 is higher than the allowable temperature, the oven thermostat 130 senses the overheated exhaust air temperature and cuts off the outside electric power for the range and thereby preventing possible overheating of the cavity 100.

When the range is carelessly operated with no food charged in the cavity 100, the microwave emitted from the magnetron 110 will return to the magnetron 110 and overheat the magnetron 110. In order to prevent such an overheating of the magnetron 110, the magnetron thermostat 140 is provided about the magnetron 110 and checks the peripheral temperature of the magnetron 110. In the same manner as described for the oven thermostat 130, the magnetron thermostat 140 cuts off the outside electric power for the magnetron 110 when the magnetron temperature is higher than the allowable temperature and thereby prevent possible overheating of the magnetron 110.

However, the above safety device for electronic range has a problem in that the safety device has a complicated construction and increases the cost because the device separately includes two thermostats 130 and 140, which are

used for preventing possible overhear of the cavity 100 and possible overhear of the magnetron 110 respectively, even though the functions of the two thermostats 130 and 140 are practically same with each other.

5

#### SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a safety device for electronic range in which the  
10 above problems can be overcome and which has one thermostat commonly prevent possible overhear of the cavity and magnetron.

In order to accomplish the above object, the present invention provides a safety device for electronic range  
15 comprising a thermostat placed in a position suitable for sensing both the peripheral temperature of a magnetron and the inner temperature of a heating cavity and adapted for cutting off the outside electric power for the range when at least one of the peripheral temperature of the magnetron and the inner  
20 temperature of the cavity is higher than a predetermined allowable temperature.

25

## BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and other advantages of the present invention will be more clearly understood from the following detailed description taken in  
5 conjunction with the accompanying drawings, in which:

Fig. 1A is a partially exploded perspective view of an electronic range with a typical safety device separately including a magnetron thermostat and an oven thermostat;

10 Fig. 1B is a sectional view of the top section of the range of Fig. 1A, showing the circulation of the air through an air suction port and an air exhaust port in a cooking mode of the range;

Fig. 2 is a circuit diagram of the safety device provided  
15 in the range of Fig. 1A;

Fig. 3A is a partially exploded perspective view of an electronic range with a safety device in accordance with a preferred embodiment of the present invention;

20 Fig. 3B is a sectional view of the top section of the range of Fig. 3A, showing the circulation of the air through an air suction port and an air exhaust port in a cooking mode of the range; and

Fig. 4 is a circuit diagram of the safety device provided in the range of Fig. 3A.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

With reference to Figs. 3A and 3B, there is shown an electronic range with a safety device in accordance with a preferred embodiment of the present invention. As shown in these drawings, the safety device of this invention includes the cavity 100 and the magnetron 110 in the same manner as described for the prior art range of Fig. 1A. However, the air exhaust port 310 of this device for discharging the air from the cavity 100 is formed on the top of the cavity 100 about the magnetron 110 differently from the prior art device. The device of this invention also includes a thermostat 320 which is mounted to a side wall of the cavity 100 about the magnetron 110 by means of a thermostat bracket 330. The thermostat 320, which is placed in a position suitable for sensing both the peripheral temperature of the magnetron 110 and the inner temperature of the cavity 100, cuts off the outside electric power for the range when at least one of the peripheral temperature of the magnetron 110 and the inner temperature of the cavity 100 is higher than a predetermined allowable temperature. In the above safety device, the bracket 330 for mounting the thermostat 320 to the side wall of the cavity 100 is connected to a magnetron bracket (not shown) for mounting the magnetron 110. The temperature of the magnetron 110 is thus easily transmitted to the thermostat 320

through the connected brackets. The enlarged and encircled part of Fig. 3A shows an embodiment of a structure for mounting the thermostat 320 to the side wall of the cavity 100 using the bracket 330. That is, the opposite bosses 321 of the thermostat 320 are seated in and held by the opposite supports 332 of the bracket 330 respectively. After holding the opposite bosses 321 of the thermostat 320 on the supports 332 of the bracket 330, opposite elastic fixing members 331 of the bracket 330 elastically fix the position of the coupling parts 321 downward so that the thermostat 320 is prevented from vertical vibration in the bracket 330. Fig. 4 is a circuit diagram of the safety device provided in the electronic range of Fig. 3A. As shown in the circuit diagram of Fig. 4, the general elements of the circuit of the safety device of this invention remain the same as described for the circuit of the prior art device of Fig. 2, but one thermostat 230 is substituted for the two thermostats, that is, the oven thermostat 130 and magnetron thermostat 140, of the prior art device.

In operation of the above electronic range, the range is applied with the outside electric power through the plug 200 and performs a cooking mode which is selected by the user by operating the function control panel (not shown). When the selected cooking mode is performed, the air sucked into the cavity 100 through the air suction port 160 as shown in Fig.

3B and heated in the cavity 100 by the microwave of the magnetron 110. The heated air is, thereafter, exhausted to the outside of the cavity 100 through the air exhaust port 310. In the safety device of the invention, the air exhaust port 310 for discharging the air from the cavity 100 is formed on the top of the cavity 100 about the magnetron 110 such that the thermostat 320 readily senses both the peripheral temperature of the magnetron 110 and the inner temperature of the cavity 100 differently from the prior art device. In this regard, when the temperature of the exhaust air discharged from the cavity 100 through the port 310 is higher than the allowable temperature, the thermostat 320 cuts off the outside electric power for the range and thereby preventing possible overheat of the cavity 100.

When the range is carelessly operated with no food charged in the cavity 100, the microwave emitted from the magnetron 110 will return to the magnetron 110 and overheat the magnetron 110. When the magnetron 110 is overheated as described above to increase the peripheral temperature of the magnetron 110, the peripheral temperature of the magnetron 110 is transmitted to the thermostat 320 through the brackets 330. When the temperature of the magnetron 110 sensed by the thermostat 320 is higher than the predetermined allowable temperature, the thermostat 320 cuts off the outside electric power for the magnetron 110 and thereby preventing possible

overheat of the magnetron 110.

As described above, the present invention provides an improved safety device for electronic range which has one thermostat commonly functioning as the prior art oven thermostat for preventing possible overheat of the heating cavity and as the prior art magnetron thermostat for preventing possible overheat of the magnetron. Therefore, the safety device of this invention has a simple construction and cuts down the cost.

Although the preferred embodiments of the present invention have been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.



CLAIMS:

1. A safety device for electronic range or oven comprising:

5 a thermostat placed in a position suitable for sensing  
both a peripheral temperature of a magnetron and a temperature  
of an air exhausted from a heating cavity through an air  
exhaust port and adapted for cutting off the outside electric  
power for the range when at least one of the peripheral  
10 temperature of the magnetron and the temperature of the  
exhaust air coming out of the heating cavity is higher than a  
predetermined allowable temperature.

2. The safety device according to claim 1, wherein said  
air exhaust port is provided about the magnetron.

15 3. The safety device according to claim 1, wherein said  
thermostat and magnetron are mounted to the cavity using  
brackets respectively, said brackets being connected to each  
other.

20 4. A safety device substantially as hereinbefore described with  
reference to and as shown in Figs. 3 and 4 of the accompanying drawings.

**Relevant Technical Fields**

(i) UK Cl (Ed.N) H5H HMCR

(ii) Int Cl (Ed.6) H05B 6/80

**Databases** (see below)

(i) UK Patent Office collections of GB, EP, WO and US patent specifications.

(ii)

Search Examiner  
 D MIDGLEY

Date of completion of Search  
 16 AUGUST 1995

Documents considered relevant  
 following a search in respect of  
 Claims :-  
 1-4

**Categories of documents**

- |   |   |
|---|---|
| <b>X:</b> Document indicating lack of novelty or of inventive step.   | <b>P:</b> Document published on or after the declared priority date but before the filing date of the present application.        |
| <b>Y:</b> Document indicating lack of inventive step if combined with one or more other documents of the same category. | <b>E:</b> Patent document published on or after, but with priority date earlier than, the filing date of the present application. |
| <b>A:</b> Document indicating technological background and/or state of the art.   | <b>&amp;:</b> Member of the same patent family; corresponding document.   |

Category	Identity of document and relevant passages	Relevant to claim(s)
A	US 4882462 (BOSCH) whole document	1

**Databases:** The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).