



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
09.07.2008 Bulletin 2008/28

(51) Int Cl.:
A24C 5/356 (2006.01) A24C 5/358 (2006.01)

(21) Application number: **07460035.4**

(22) Date of filing: **06.12.2007**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR
 Designated Extension States:
AL BA HR MK RS

(72) Inventors:
 • **Sikora, Leszek**
26-600 Radom (PL)
 • **Cieslikowski Bartosz**
26-400 Przysucha (PL)

(30) Priority: **21.12.2006 PL 38137606**

(74) Representative: **Przykorski, Andrzej**
Kancelaria Patentowa
ul. Malawskiego 5/108
PL-02-641 Warszawa (PL)

(71) Applicant: **International Tobacco Machinery Poland Sp. z o.o.**
26-600 Radom (PL)

(54) **Method of protecting rod-Like elements gathered in tray while handling the tray**

(57) The rod-like elements (3) shall be prevented from translocations inside a tray (2) so as to protect them against damage on the tray (2) handling during a rotary operation on unloading device (1), the tray (2) filled up with rod-like elements (3) being fed to the unloading device (7) with its open side upwards. The tray (2) is locked up in the unloading device (1) and rotated through about 180° and the rod-like elements (3) move out of the tray (2) by gravity or mechanically to the next operating work-stations. A segment support (6) holds the rod-like elements (3). The support (6) consists of independent segments (7) positioned so that their lengths are parallel to the rod-like elements (3). The support 6 is connected to the unloading device (1), wherein each segment (7) can freely move on over a plane perpendicular to the back wall of the tray (2). During feeding the tray (2), the segments (7) enter the tray (2) interior from above till they contact the rod-like elements (3) and copy the natural layout of the rod-like elements (3) in the tray (2). Then all the rod-like elements (3) become locked up. After the tray (2) together with the segments (7) and the immobilized rod-like elements (3) is rotated, the segments (7) are displaced together with rod-like elements (3) to one common level and then removed. The number of segments (7) is compatible with the assumed precision of copying the natural layout of the elements (3) in the tray (2). The support 6 can also consist of one segment (7). All the segments (7) of the support 6 can be equal. They hold the rod-like elements (3) along their entire length.

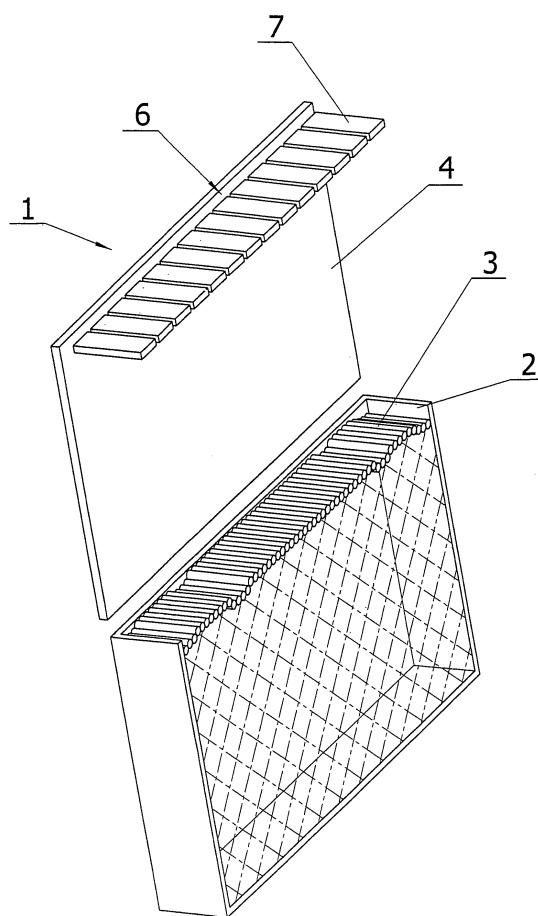


Fig.1

Description

[0001] The object of the present invention is a method of protecting rod-like elements gathered in a tray used in the tobacco industry from translocations while handling the tray during unloading the tray in order to transfer the rod-like elements to the next workstations.

[0002] The trays are often used in production lines that produce tobacco products such as cigarettes, cigarette filters or cigars as intermediate stores in order to temporarily store the rod-like elements. Especially, they apply in cases when the machine supplying the rod-like elements has a different operating capacity than that of the element-receiving machine. The trays are also used, where the ready products are transferred among various production lines. The supply of the rod-like elements to the workstations takes place after their unloading by a tray-unloader. Many different types of trays are employed in the tobacco industry. The general operating principle of the tray-unloader consists in that each delivered tray rotates so as to mechanically empty its content or unload it by gravity, wherein rotary motion or a combination of rotary-linear motion are used and full trays are supplied from below or they translocate along the direction of axis of rotation of the rotary mechanism. During the tray rotation, the rod-like elements are held down by means of a supporting plate that contacts the upper open side of the tray. After the tray rotation and placement in the tray unloading position, the supporting plate withdraws from its lower holding position. Then the rod-like elements fall down by gravity out of the tray onto the rod-like elements already present in the hopper or they can be removed mechanically from the tray. In the applied tray-unloaders, the tray-rotary mechanism is constructionally integrated with the supporting plate, wherein the supporting plate contacts the rod-like elements during the tray rotary motion and only in the course of the tray rotary motion. It results from the fact that the trays are not filled up to their upper edge. It is because the products are manufactured with certain allowances, thus the filling level becomes variable. Besides, the tray-loaders designed to fill trays with the rod-like elements cannot ensure the filling repeatability of the tray. In addition, also the upper tray corners cannot be fully filled up because of the element translocations that take place in the tray transport to the tray-unloader. Because of the clearance between non-uniform layer of the rod-like elements in the tray and also considering that the supporting plate does not enter the tray interior but only abuts to its upper edge, the rod-like elements translocate during rotation of the filled up tray so as to be supported by the supporting plate, and at the same time rub against the back wall of the tray. The above-mentioned translocations result in a dynamic load exerted on the rod-like elements as well as in the damage of the element ends that contact the back wall of the tray. After the tray rotation, the rod-like elements rest on the supporting plate until it is withdrawn. The withdrawal of the supporting plate follows in its linear motion, swinging

motion or resultant of linear and swinging motion. Many patent specifications present systems of that type. For example, from the US patent specification no. 3,527,369 tray-unloading device is known wherein the supporting plate for the rod-like elements has a swinging mount. The supply of filled-up tray and placement thereof below under the supporting plate is made in the linear motion and in parallel direction to the rotation axis of the rotary mechanism, and then the tray is interlocked in the mentioned mechanism and rotated together with the supporting plate. Having rotated, the tray is lowered so as to take up its unloading position as near as possible to the earlier unloaded rod-like elements, wherein the supporting plate is removed to its withdrawn position. From another US patent specification no. 3,298,549, also a tray-unloading device is known, wherein the supporting plate for the rod-like elements travels in its linear motion between the hold-up position and the withdrawn position. The filled-up tray approaches from below the supporting plate on the rotary mechanism. Having been then interlocked, the tray and the supporting plate will rotate. The ultimate phase of the tray travel toward the unloading position is a resultant combination of rotary and linear motions. The tray arrives at its unloading position above the earlier unloaded rod-like elements, and the supporting plate having been removed, the unloading of rod-like elements out of the tray will follow. In other US patent specification no. 3,655,080, a tray-unloading device is also disclosed, wherein the rod-like elements are held by means of two-part supporting plate. The filled-up tray approaches the two-part supporting plate from below and then becomes interlocked in the rotary mechanism and rotated. Having rotated, the tray is lowered down to its unloading position, wherein the two symmetric halves of the two-part supporting plate are separated and the rod-like elements unloading follows. In all the known solutions, during the tray rotation, the rod-like elements can translocate relative to the tray and approach the supporting plate. It is because of clearance between the upper surface of elements and the surface of the supporting plate. Especially, the clearance is increased at the corners of the tray. Thus a part of the rod-like elements becomes damaged, in particular the element ends that rub against the back wall of the tray. In addition, the dynamic motion of the rod-like elements can cause them to take up non-parallel positions relative to the other adjacent elements. Also, considering the structural conditions of the unloading device, the supporting plate does not hold up the rod-like elements along their entire length, which might also cause their deformations.

[0003] The object of this invention is a method of protecting the rod-like elements gathered in a tray while handling the tray during the operation of rotating the tray in a tray unloading device, the tray filled with rod-like elements being fed to the unloading device with its top open side upwards, after locking in the device and rotation through an angle of about 180°, the rod-like elements move out of the tray by gravity or mechanically for the

next workstations. According to this invention, in the tray that moves toward the unloading device, the rod-like elements are held down from above with the aid of a segment support consisting of independent segments positioned so that their lengths are parallel to the rod-like elements, the segment support is connected to the unloading device. Each segment can displace freely over a plane perpendicular to the back wall of the tray and during feeding the tray, the segments enter the tray interior until they contact the rod-like elements thus copying the natural layout of the rod-like elements in the tray, then all the segments become locked in the tray, and after rotation of the tray with the segments and the immobilized rod-like elements, the segments and the rod-like elements resting on them are properly displaced to one common level, and then the segments are removed which enables the tray unloading. The number of segments of the support is compatible with the assumed precision of copying the natural layout of the rod-like elements in the tray, wherein the support can consist of one segment only. All the segments can be equal, the rod-like elements being held by the segments along their entire length. The presented method enables rotating the tray filled up with the rod-like elements with no translocation of elements relative to the tray. Thus the rod-like elements are not exposed to the dynamic loads, damage of their ends or unparallel layout relative to other adjacent elements. While handling the tray, the filling degree of the tray has no negative influence whatsoever and the operation remains also reliable if the tray is slightly overfilled above its upper edge. In case of small unevenness of the tray filling level, a support consisting of one segment can be applied, the segment being preferably elastic. The segment length can be freely adapted depending on the length of rod-like elements so as to support the elements along their entire length and prevent them from squeezing.

[0004] For better understanding, the object of the invention is presented in a simplified way for an exemplary embodiment in the following drawings. Fig. 1 presents a perspective view of a plate assembly of a rotary mechanism of a tray unloading device, segments of a segment support and a tray filled up with rod-like elements, the tray awaiting to be placed in the unloading device, fig. 2 - a front open side view of the assembly and the tray shown in fig. 1, fig. 3 - a cross-section of the assembly and the tray shown in fig. 2, fig. 4 - a view of the assembly from fig. 2 after the tray placement on the plate of the rotary mechanism, fig. 5 - a cross-section view of the assembly from fig. 4, fig. 6 - the assembly from fig. 5 after its rotation, fig. 7 - the assembly from fig. 6 after leveling the segments of the support, fig. 8 - a front open side view of the assembly from fig. 7, fig. 9 - the position of the assembly from fig. 7 after the tray placement in the unloading position and fig. 10 - a cross-section of the plate of the rotary mechanism and segments after rotation in the awaiting position for the next consecutive tray.

[0005] Embodiment. In fig. 1, fig. 2 and fig. 3 of the

drawing, a situation is presented, wherein an unloading device 1 is ready to receive a tray 2 filled up with rod-like elements 3. The device 1 has a plate 4 connected to the rotary mechanism that rotates by means of an axis 5. A segment support 6 is fastened to the plate 4, wherein each segment 7 is separately suspended by means of a four-bar linkage 8 on the plate 4 and the length of segments 7 is compatible with that of the rod-like elements 3 and is parallel to them. In the shown instant, the segments 7 are freely suspended and can stay in any position along the direction of motion of the tray 2. During the displacement of the tray 2 upwards so as to position it on the plate 4 of the rotary mechanism (fig. 4 and fig. 5), the segment support 6 enters the interior of the tray 2 so that the individual segments 7 contact the rod-like elements 3 and copy the natural layout of the rod-like elements 3 in the tray 2. Then after locking the tray 2 on the plate 4, the segments 7 are also locked in the position determined earlier and then the plate 4 and the tray 2 rotate round the axis 5 (fig. 6), afterwards the segments 7 are withdrawn to one common level (fig. 7, fig. 8) so that the segment support 6, on which the external layer of the rod-like elements 3 rests, forms one common plane. At the next stage (fig. 9), the tray 2 with the rod-like elements 3 is positioned on the support plate 9 at the unloading section 10 of the unloading device 1 and the plate 4 of the rotary mechanism and the segments 7 of the segment support 6, withdrawn to the common level, rotate round the axis 5 (fig. 10), then the segments 7 are unlocked and return to the position of their free suspension (fig. 2) and the unloading device 1 is ready to receive the consecutive tray 2.

Claims

1. A method of protecting rod-like elements gathered in a tray (2) while handling the tray (2) especially of protecting against translocations during the operation of rotating the tray (2) in unloading device (1), the tray (2) being fed to the unloading device (1) with its top open side upwards, after the tray (2) is locked and rotated through about 180° the rod-like elements (3) move out of the tray (2) by gravity or mechanically for next workstations, **characterized in that** in the tray (2) fed for the tray unloading device (1) rod-like elements (3) are held down from above with the aid of a segment support (6) consisting of independent segments (7) positioned so that their lengths are parallel to the rod-like elements (3) and the support (6) is connected to the unloading device (1), whereas each of the segments (7) can displace freely over a plane perpendicular to the back wall of the tray (2), and during feeding the tray (2) the segments (7) enter the interior of the tray (2) till they contact the rod-like elements (3) and copy the natural layout of the elements (3), then all the segments (7) become locked, and after rotation of the tray (2) with the segments

(7) and the immobilized rod-like elements (3), the segments (7) and the rod-like elements (3) resting on them are properly displaced to one common level, and then the segments (7) are removed which enables the tray (2) unloading.

5

2. A method as in claim 1, **characterized in that** the number of segments (7) of the support (6) is compatible with the assumed precision of copying the natural layout of the rod-like elements (3) in the tray (2). 10
3. A method as in claim 1 or 2, **characterized in that** the segment support (6) consists of one segment (7). 15
4. A method as in claim 1 or 2, **characterized in that** all the segments (7) of the support (6) are equal.
5. A method as in claim 1, **characterized in that** the segments (7) hold the rod-like elements (3) along their entire length. 20

25

30

35

40

45

50

55

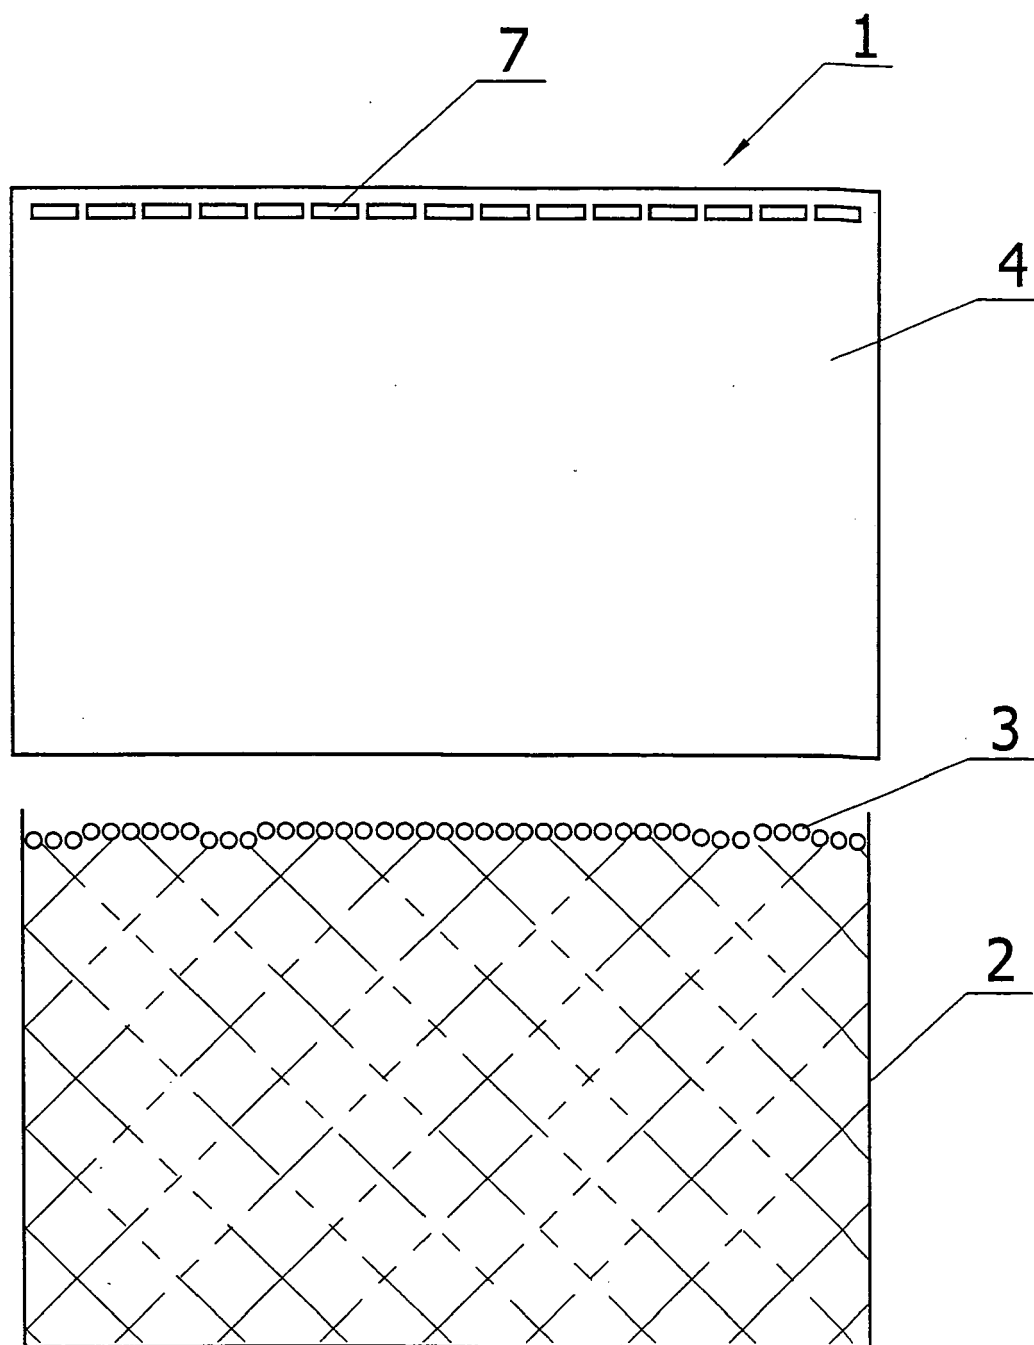


Fig.2

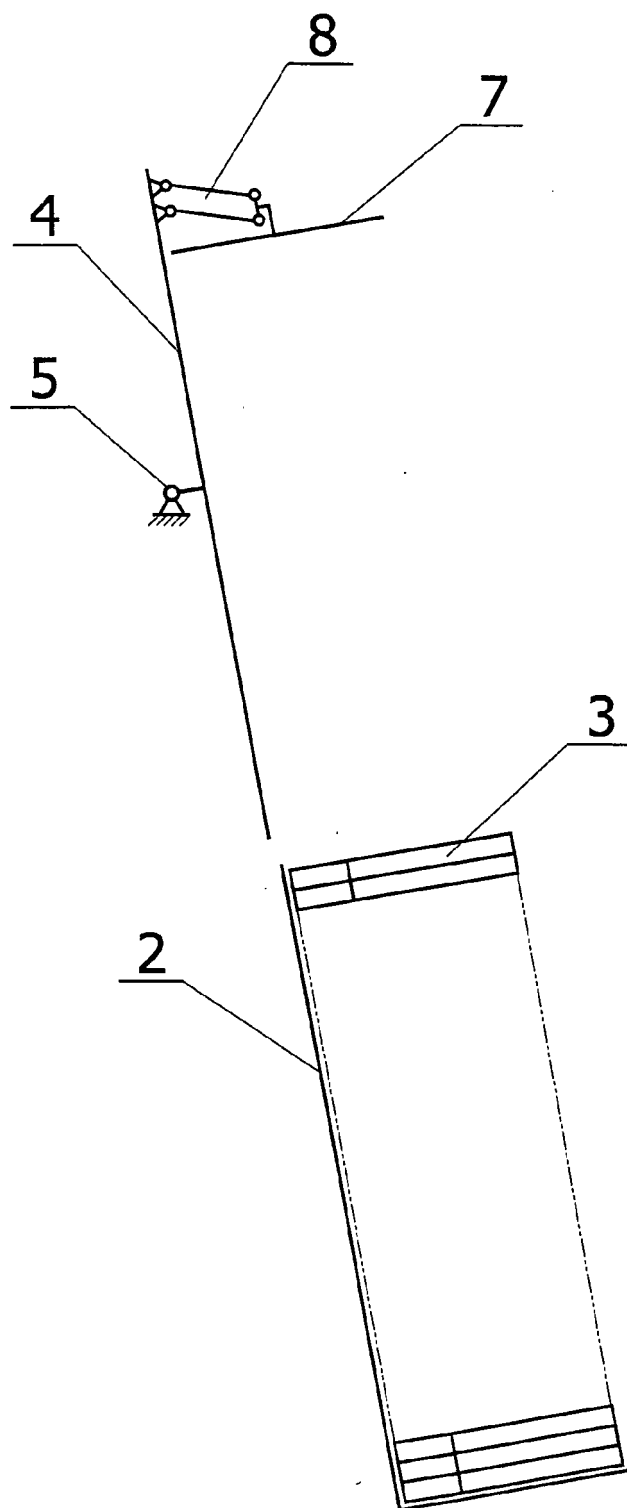


Fig.3

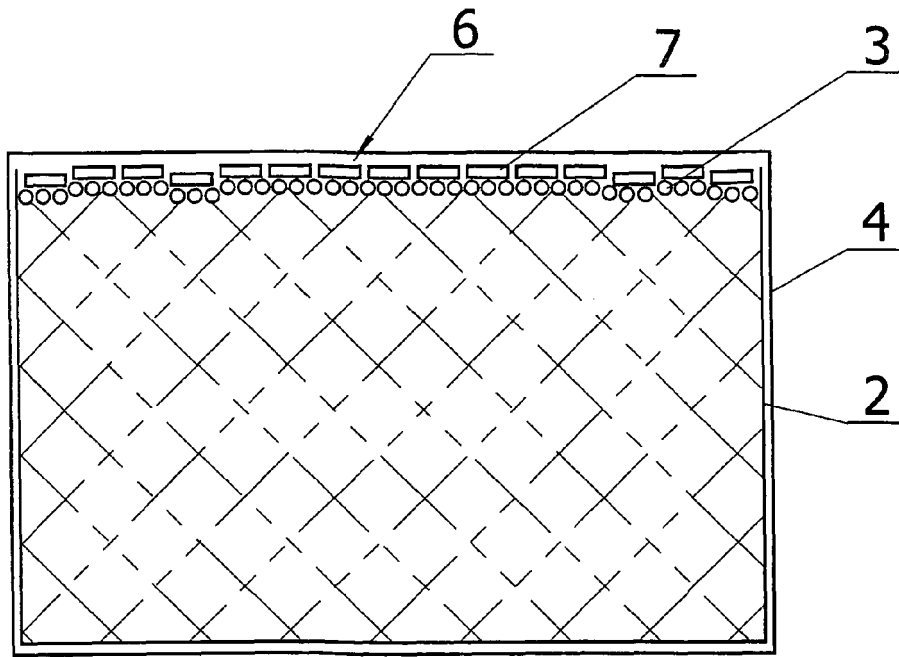


Fig. 4

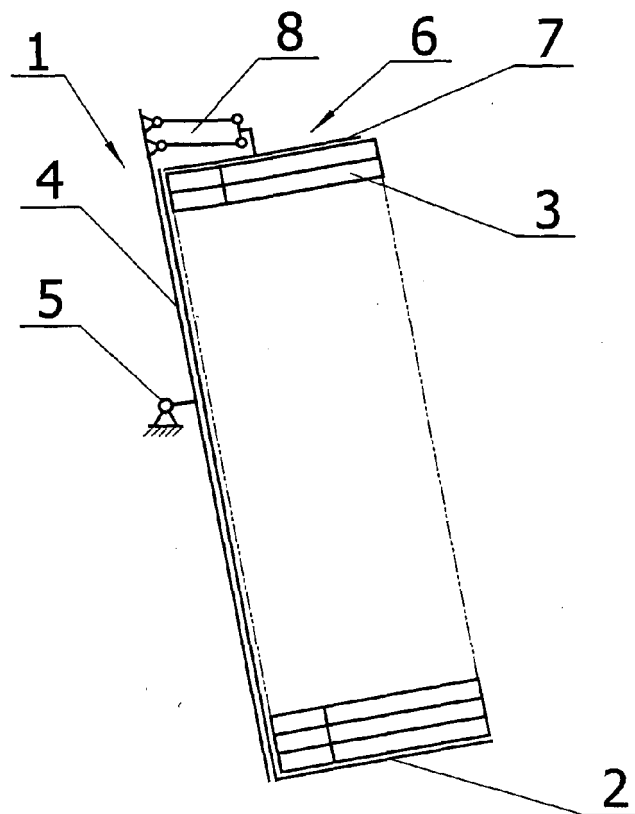


Fig. 5

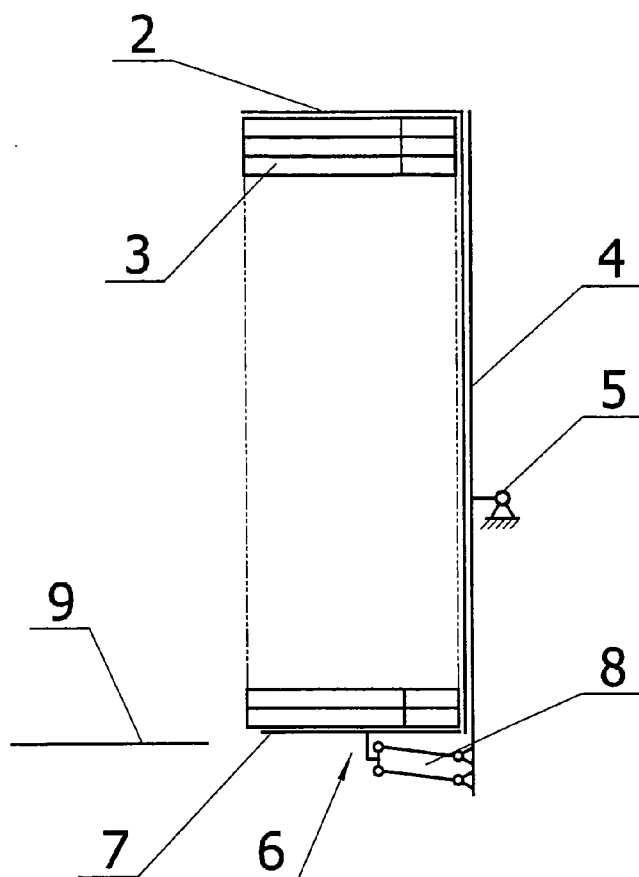


Fig.6

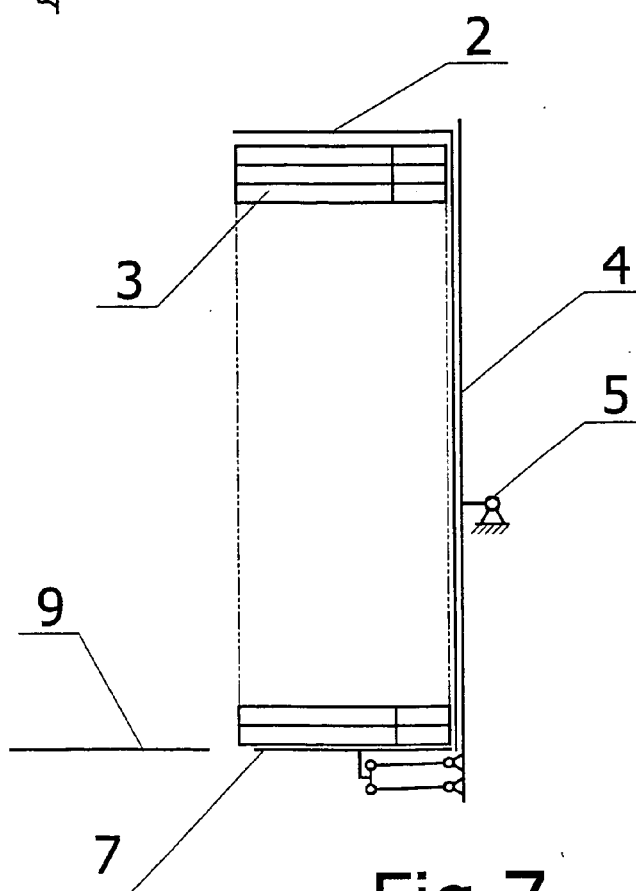
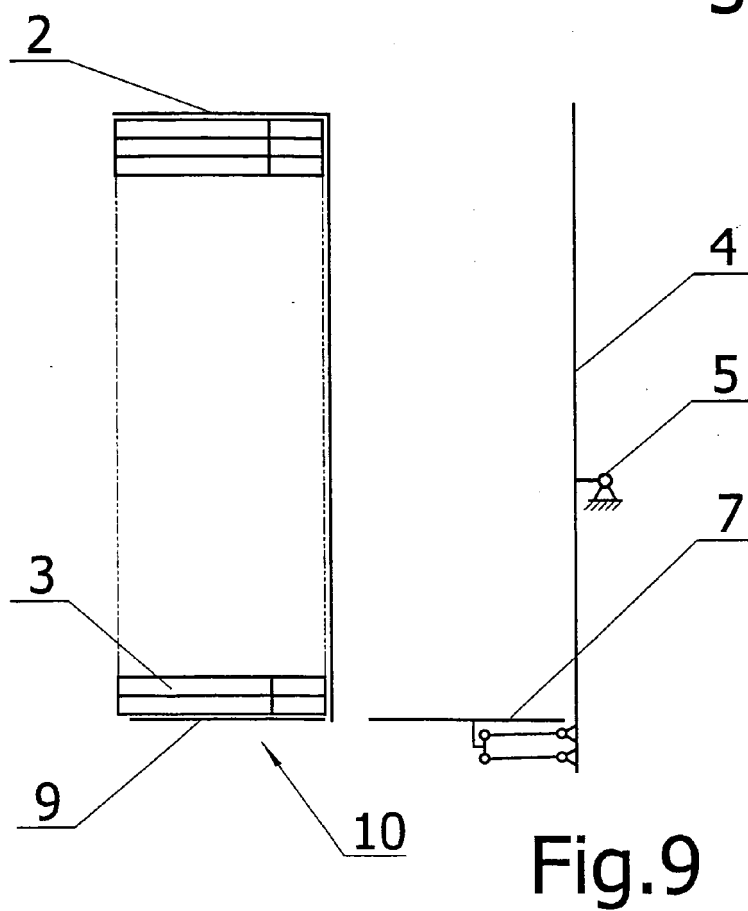
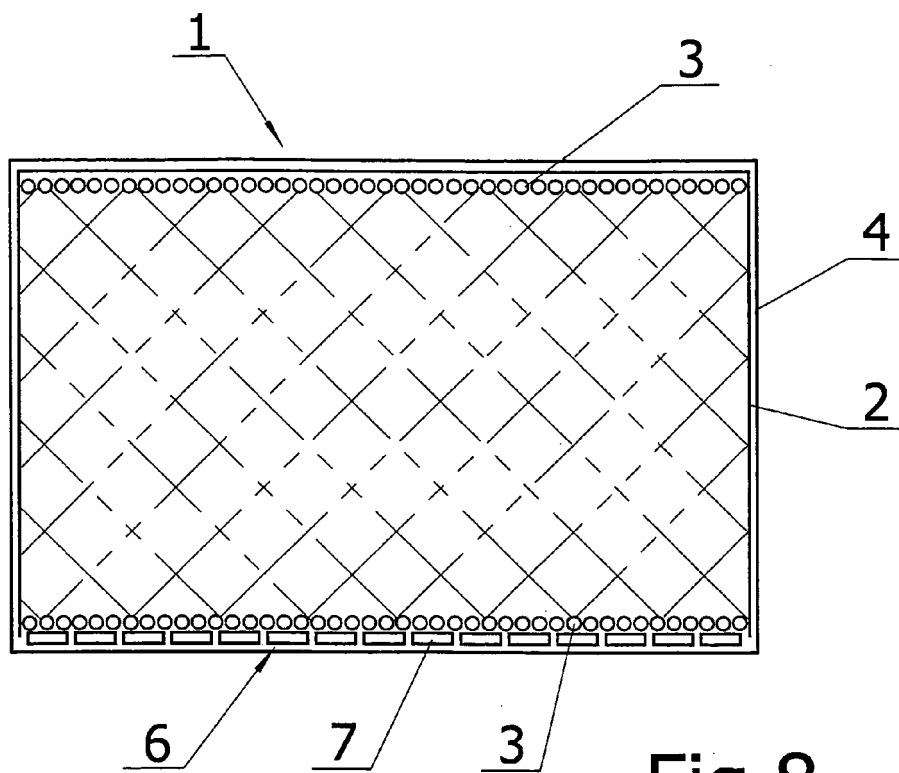


Fig.7



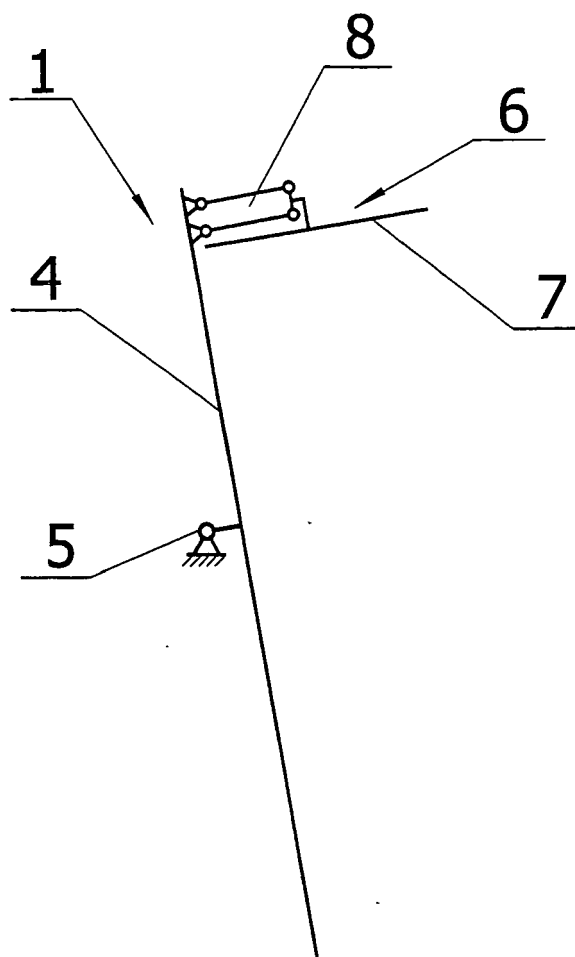


Fig.10



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 07 46 0035

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2 753 062 A (ARTHUR LOUDON) 3 July 1956 (1956-07-03) * column 2, line 8 - line 46; figures *	1,2,4,5	INV. A24C5/356 A24C5/358
A	DE 944 178 C (KYRIAZI FRERES ZIGARETTENFABRI) 7 June 1956 (1956-06-07) * the whole document *	1	
X		3	
A	DE 15 86 276 A1 (SEITA) 21 May 1970 (1970-05-21) * page 5 - page 6; figures *		
A	EP 1 086 628 A (HAUNI WERKE KOERBER & CO KG [DE]) 28 March 2001 (2001-03-28) * paragraph [0013]; figures *		
A	US 3 595 413 A (HILLMAN JAMES GEORGE EDWARD) 27 July 1971 (1971-07-27) * column 6, line 1 - line 13; figures *		
A	US 2 681 160 A (WALTER MOLINS DESMOND ET AL) 15 June 1954 (1954-06-15) * column 6, line 36 - line 66; figures *		TECHNICAL FIELDS SEARCHED (IPC) A24C B65B
A	EP 0 598 135 A (TOKYO AUTOMATIC MACH WORKS [JP]; JAPAN TOBACCO INC [JP]) 25 May 1994 (1994-05-25) * column 5, line 36 - column 6, line 51; figures *	1	
A	GB 1 215 769 A (AMF INC [US]) 16 December 1970 (1970-12-16) * page 3, line 7 - page 4, line 63; figures *		
A	DE 534 692 C (MULLER J C & CO) 30 September 1931 (1931-09-30) * the whole document *		
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 3 April 2008	Examiner Marzano Monterosso
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

3
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 46 0035

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-04-2008

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2753062	A	03-07-1956	NONE	
DE 944178	C	07-06-1956	NONE	
DE 1586276	A1	21-05-1970	FR 1498451 A	20-10-1967
EP 1086628	A	28-03-2001	AT 330497 T CN 1289716 A DE 19945808 A1 ES 2264658 T3 JP 2001139148 A PL 342680 A1 US 6517306 B1	15-07-2006 04-04-2001 29-03-2001 16-01-2007 22-05-2001 26-03-2001 11-02-2003
US 3595413	A	27-07-1971	DE 1657258 A1 DE 6610240 U FR 1566344 A GB 1191342 A JP 50021560 B US 3718224 A	11-02-1971 12-07-1973 09-05-1969 13-05-1970 23-07-1975 27-02-1973
US 2681160	A	15-06-1954	CH 307500 A FR 1059023 A GB 720536 A	31-05-1955 22-03-1954 22-12-1954
EP 0598135	A	25-05-1994	DE 69307469 D1 DE 69307469 T2 WO 9322199 A1 US 5435688 A	27-02-1997 22-05-1997 11-11-1993 25-07-1995
GB 1215769	A	16-12-1970	NONE	
DE 534692	C	30-09-1931	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3527369 A [0002]
- US 3298549 A [0002]
- US 3655080 A [0002]