



US007095981B1

(12) **United States Patent**
Voroba et al.

(10) **Patent No.:** **US 7,095,981 B1**
(45) **Date of Patent:** **Aug. 22, 2006**

(54) **LOW POWER INFRARED PORTABLE COMMUNICATION SYSTEM WITH WIRELESS RECEIVER AND METHODS REGARDING SAME**

5,714,741 A 2/1998 Pieterse et al.
5,774,791 A * 6/1998 Strohallen et al. 455/41.1

(Continued)

(75) Inventors: **Barry Voroba**, Minnetonka, MN (US);
Marlyn J. Anderson, St. Louis Park, MN (US)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Great American Technologies**,
Oceanside, NY (US)

EP	613320	*	8/1994
EP	0 665 655 A		8/1995
FR	2 730 592 A		8/1996
GB	2 103 043 A		2/1983
WO	WO 99/34576	*	8/1999
WO	WO 9934576	*	8/1999

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

OTHER PUBLICATIONS

(21) Appl. No.: **09/542,708**

SpyLab—The Over the Counter Spy Shop, "Discrete Radio Headset with Wireless Earpiece," p. 2 of 3 pages, www.spylab.com/twowayradios.htm (available on-line as of Mar. 8, 2000).

(22) Filed: **Apr. 4, 2000**

Technology Hong Kong, "MG9901, Hands-Free System for Automobile," 2 pages, 5.mhk.com/MG9001.htm (available on-line as of Mar. 8, 2000).

(51) **Int. Cl.**
H04B 7/00 (2006.01)
H04M 1/00 (2006.01)

Soloring.com, Inc., Garden Grove, CA, "What is wireless handsfree soloring?" [online; accessed on Oct. 30, 2000]. From Internet URL: <www.soloring.com>, 15 pages.

(52) **U.S. Cl.** **455/41.2**; 455/426.1; 455/569.1; 375/295

Soloring.com, Inc., Garden Grove, CA, "Meet the latest concept of wireless handfree" advertisement brochure, undated, 2 pages.

(58) **Field of Classification Search** 455/550.1, 455/552.1, 554.2, 556.1, 557, 569.1, 569.2, 455/575.1, 575.2, 575.6, 575.9, 90.2, 90.3, 455/41.1, 41.2, 41.3, 90.1; 375/259, 219, 375/258; 340/825.69; 704/275, 248; 379/56.3, 379/56.1, 56.2

See application file for complete search history.

Primary Examiner—Tilahun Gesesse

(74) *Attorney, Agent, or Firm*—Mueting, Raasch & Gebhardt, P.A.

(56) **References Cited**


U.S. PATENT DOCUMENTS

4,980,926 A	12/1990	Noetzel	
5,027,433 A *	6/1991	Menadier et al.	398/129
5,241,410 A *	8/1993	Streck et al.	398/115
5,446,783 A *	8/1995	May	455/557
5,495,357 A *	2/1996	Osterhout	398/107
5,568,516 A *	10/1996	Strohallen et al.	375/259
5,615,229 A	3/1997	Sharma et al.	
5,636,264 A *	6/1997	Sulavuori et al.	398/41

(57) **ABSTRACT**

A portable communication system provides a universal transmitter that mechanically couples to a communication device having a sound output, e.g., a cellular phone handset, and which transforms the sound output into infrared signals, e.g., pulses, for transmission to a wireless receiver, e.g., a behind the ear or in the ear receiver.

21 Claims, 18 Drawing Sheets

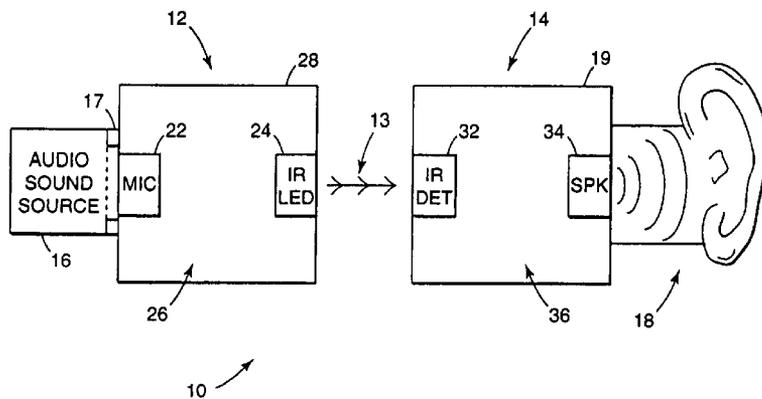

US 7,095,981 B1

Page 2

U.S. PATENT DOCUMENTS

5,812,598 A	9/1998	Sharma et al.		6,151,149 A	11/2000	Rybicki et al.	
5,867,794 A *	2/1999	Hayes et al.	455/557	6,236,969 B1	5/2001	Ruppert et al.	
5,881,149 A	3/1999	Weatherill		6,281,811 B1 *	8/2001	Ranzino	340/988
5,907,418 A *	5/1999	Walczak et al.	398/106	6,393,301 B1 *	5/2002	Oda	455/557
5,966,643 A	10/1999	Radley		6,421,426 B1 *	7/2002	Lucey	379/56.3

* cited by examiner

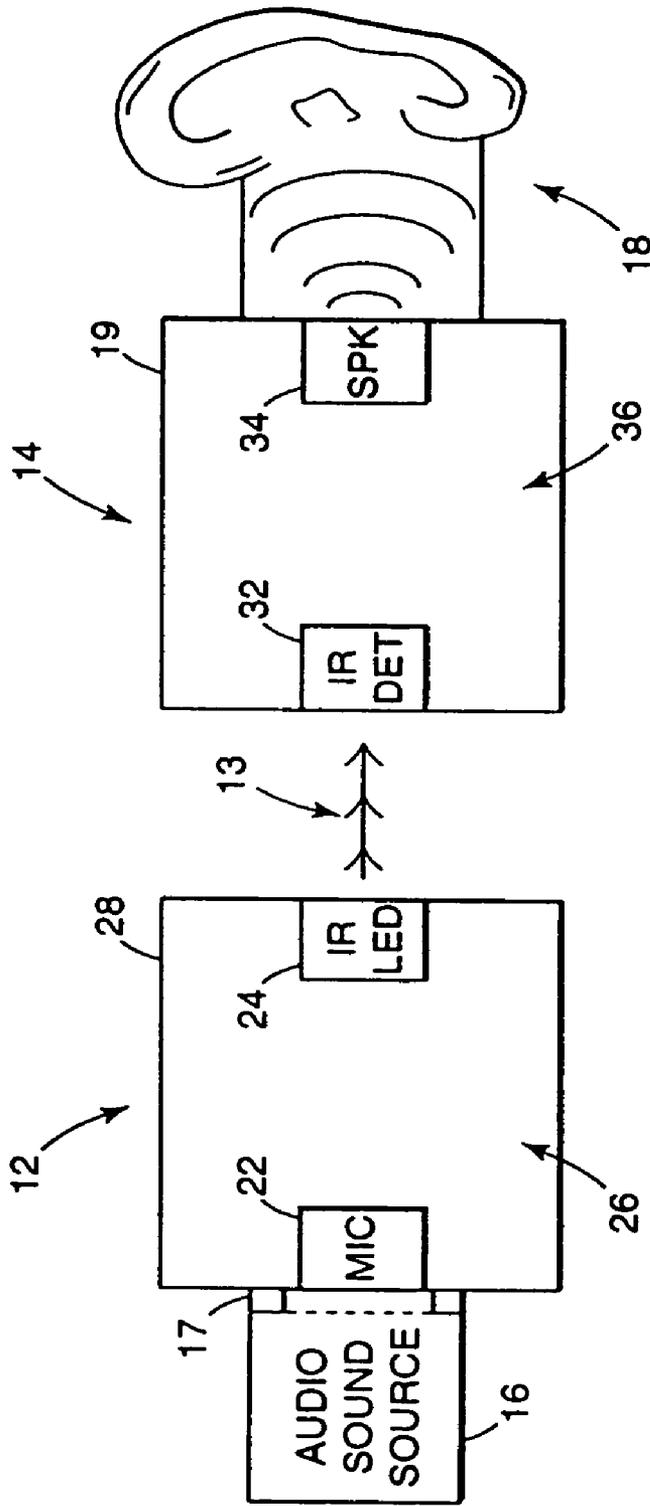


Fig. 1

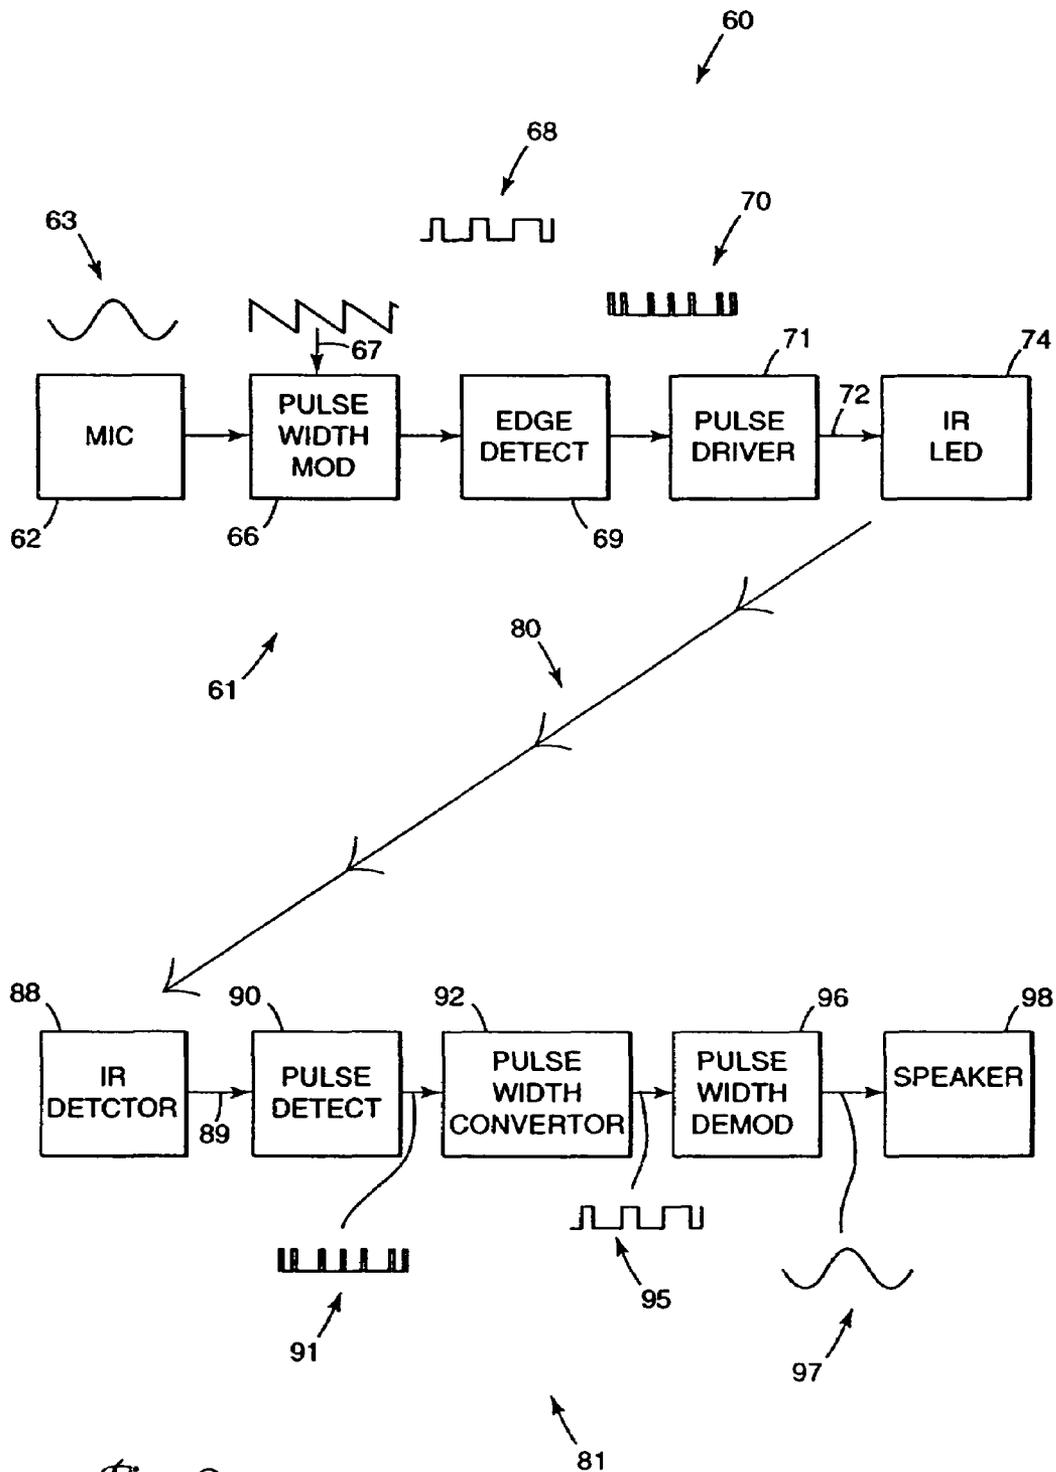


Fig. 2

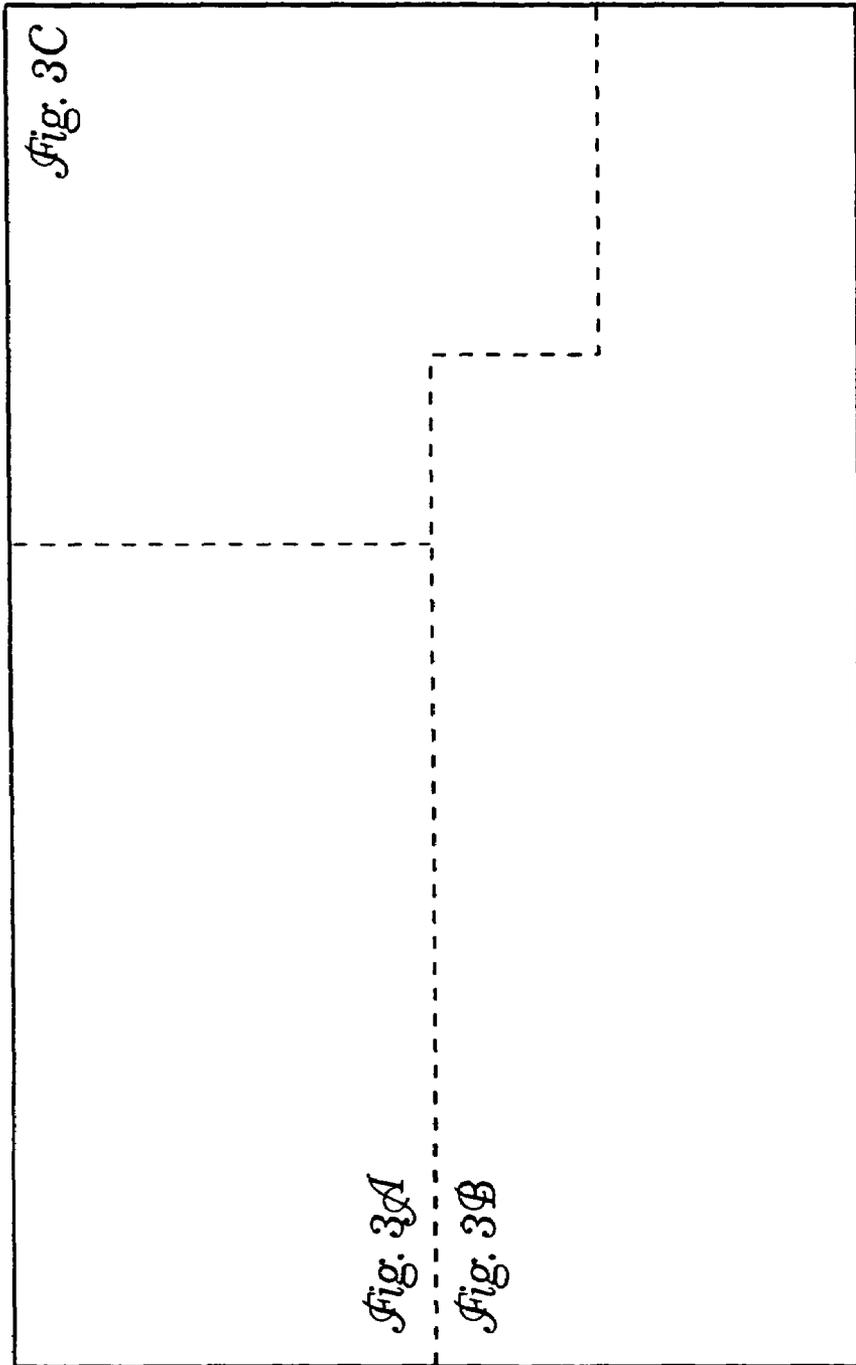


Fig. 3

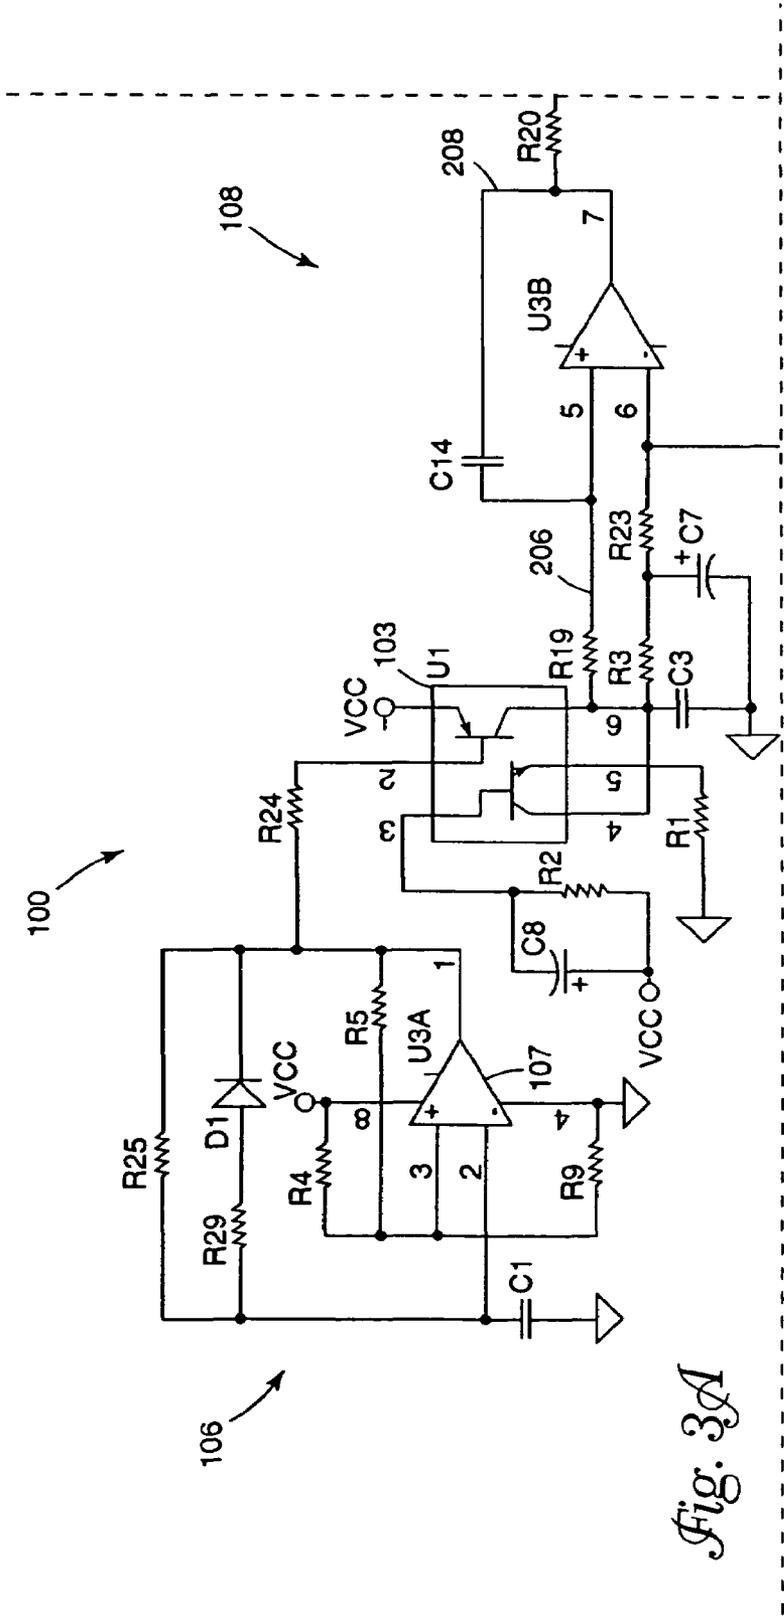


Fig. 3A

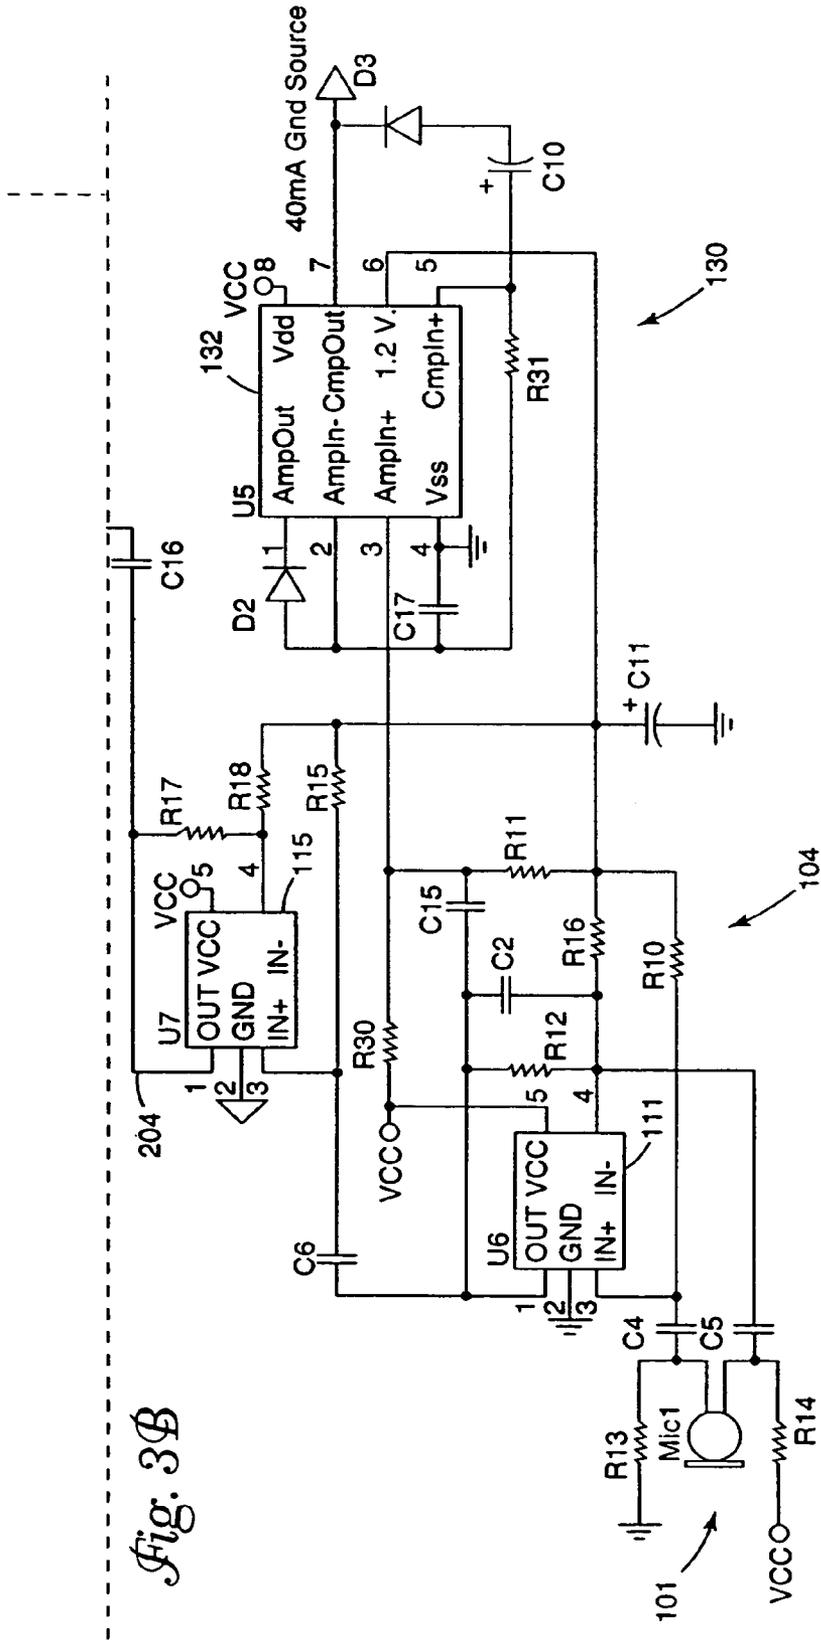


Fig. 3B

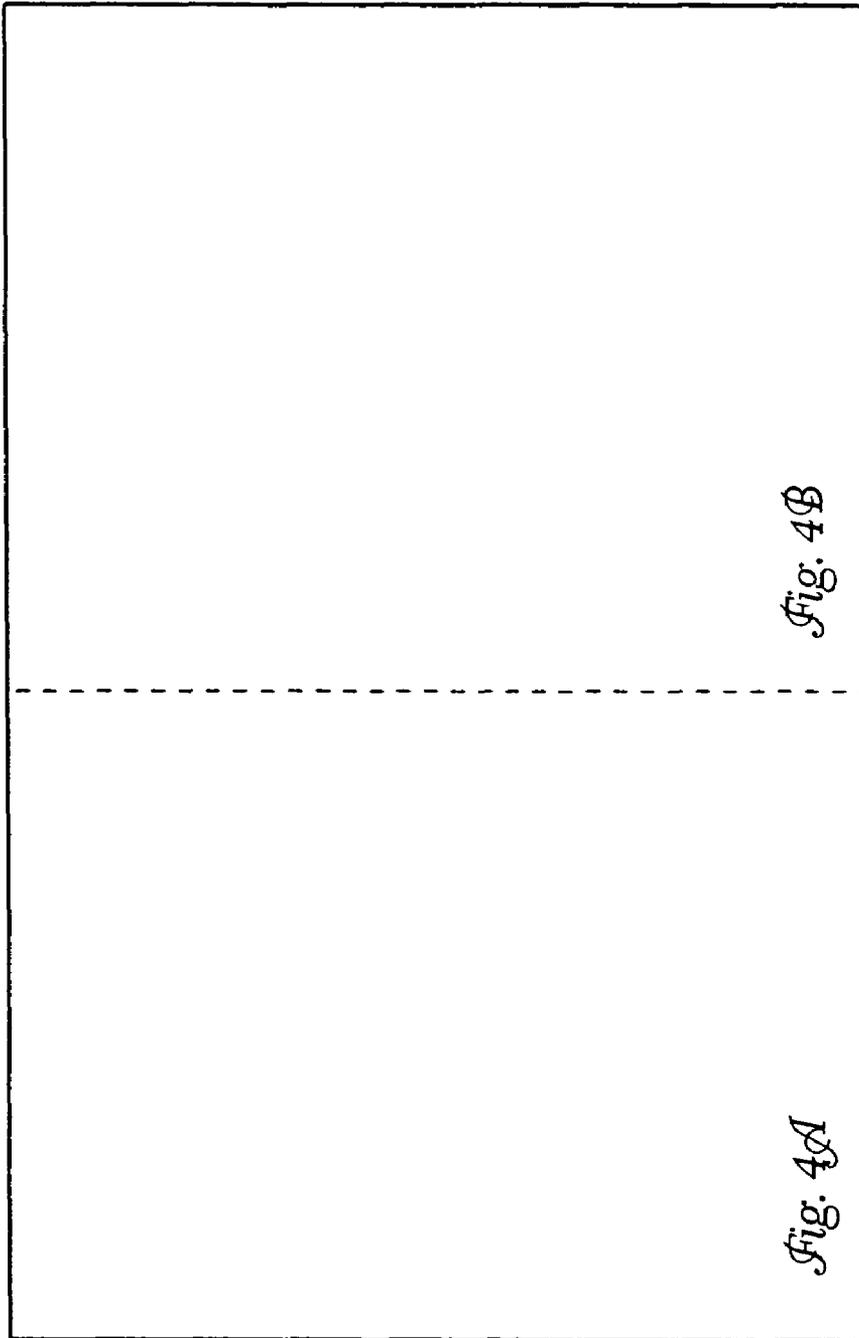


Fig. 4B

Fig. 4A

Fig. 4

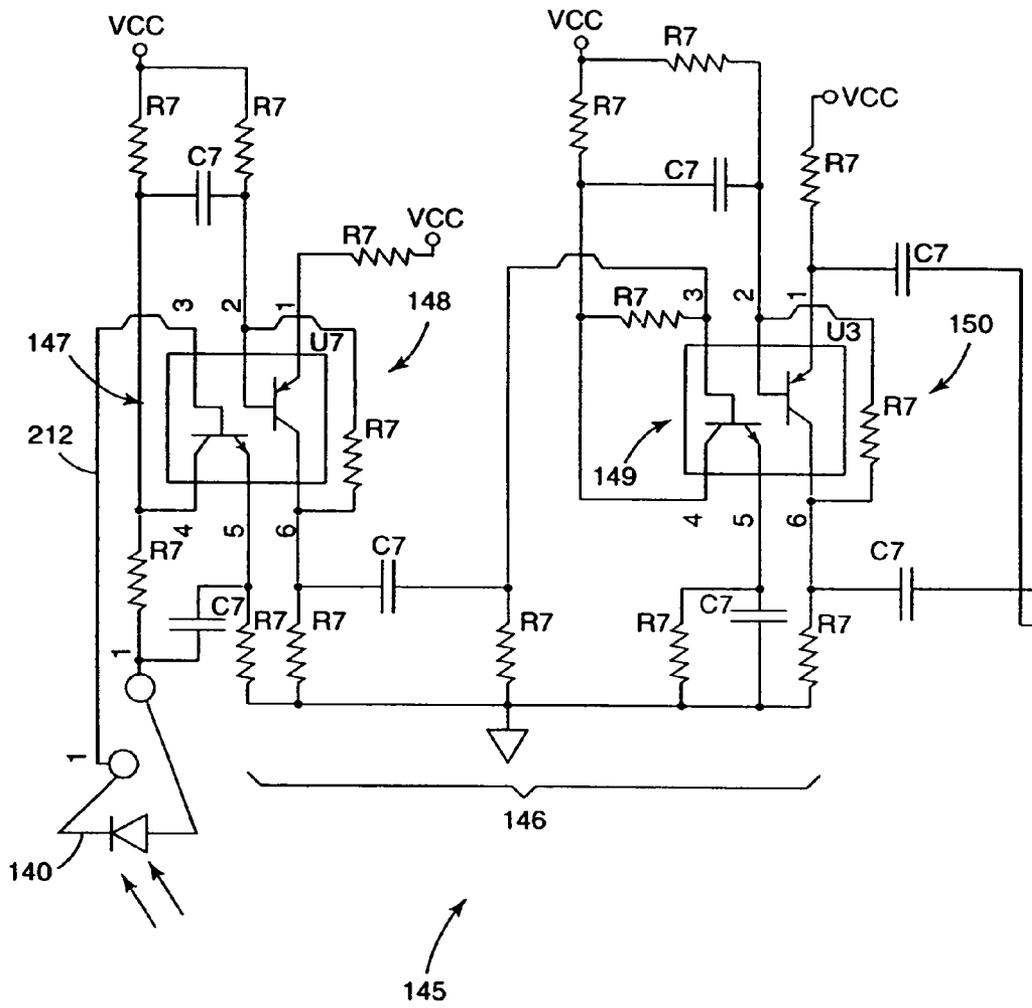


Fig. 4A

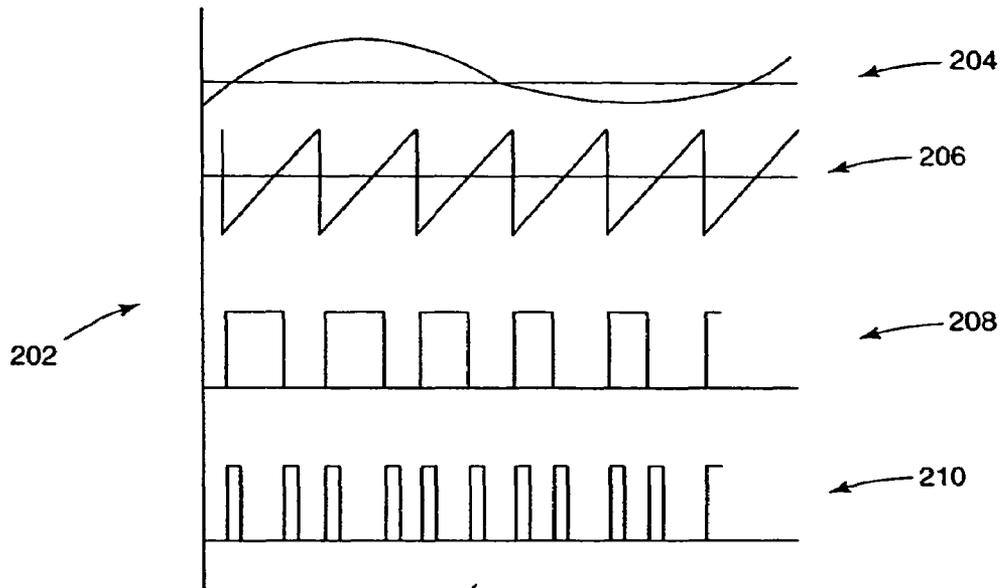


Fig. 5

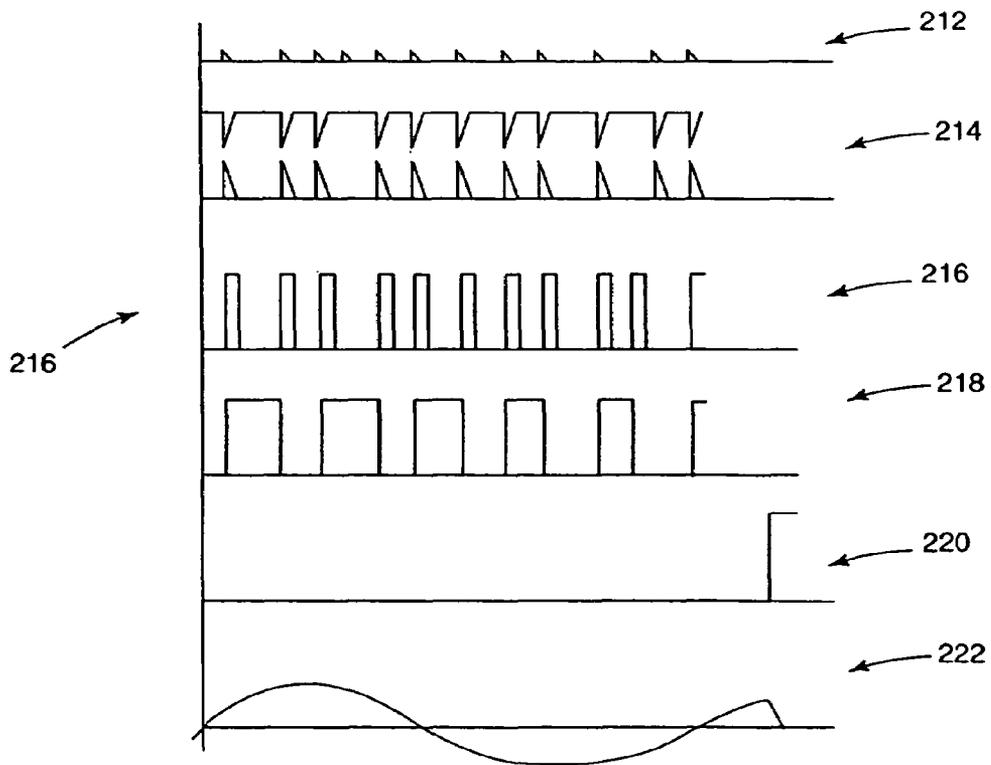


Fig. 6

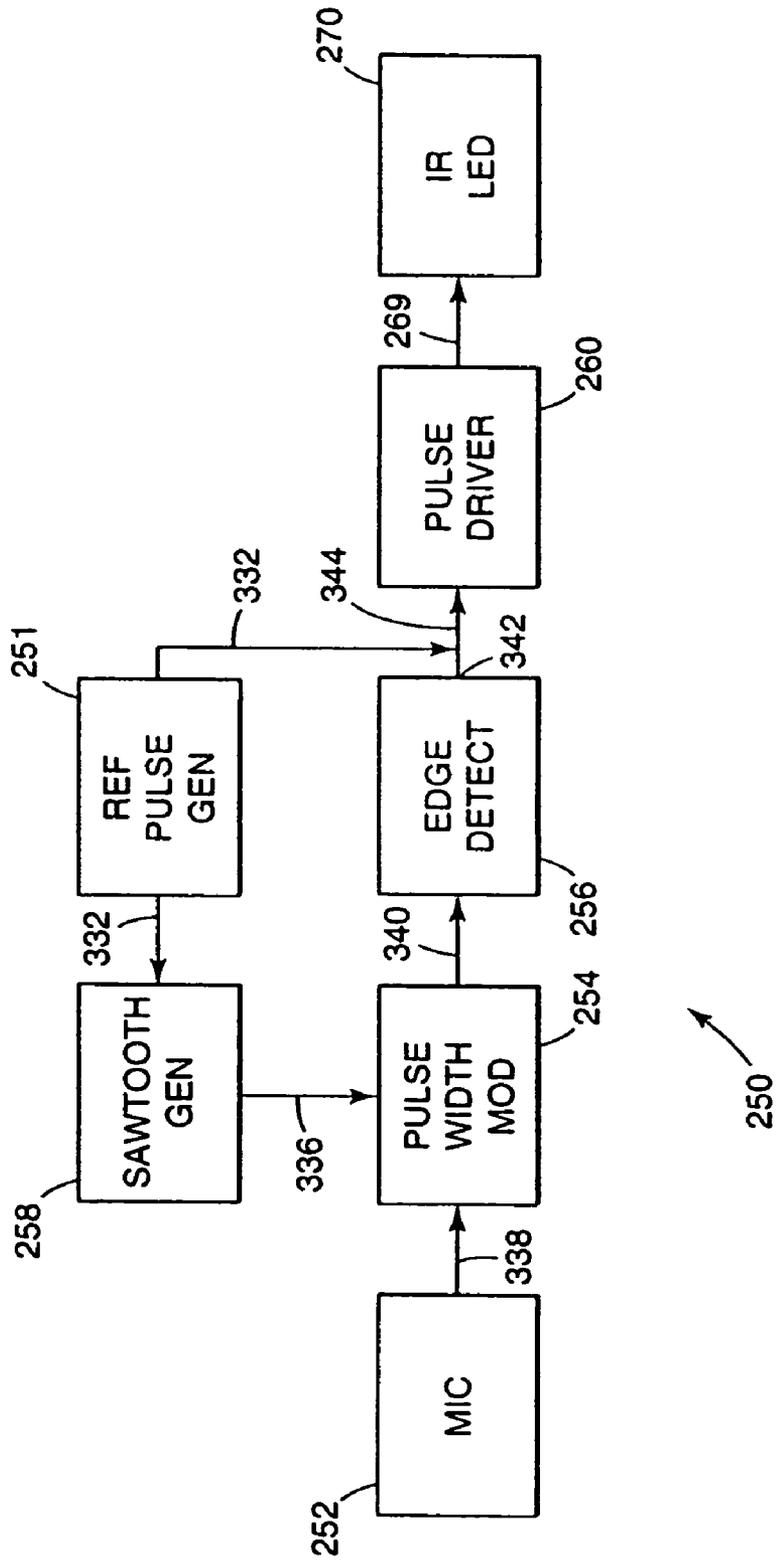


Fig. 7A

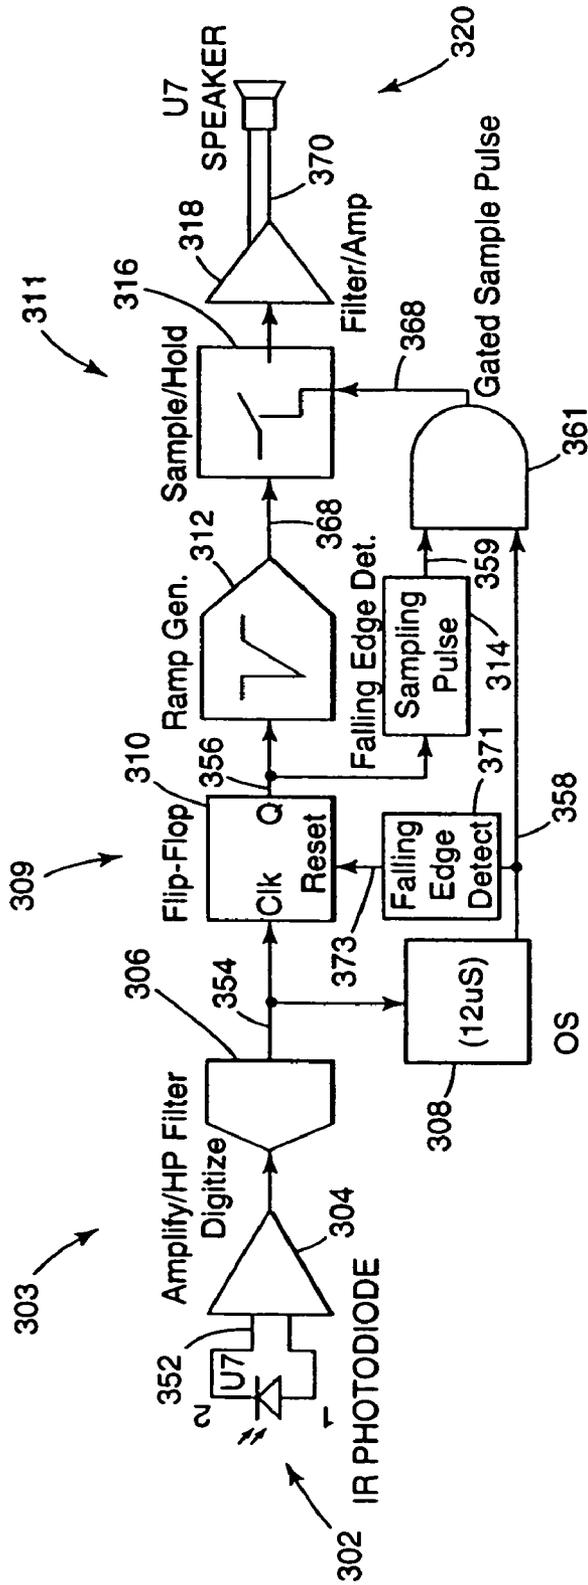


Fig. 8

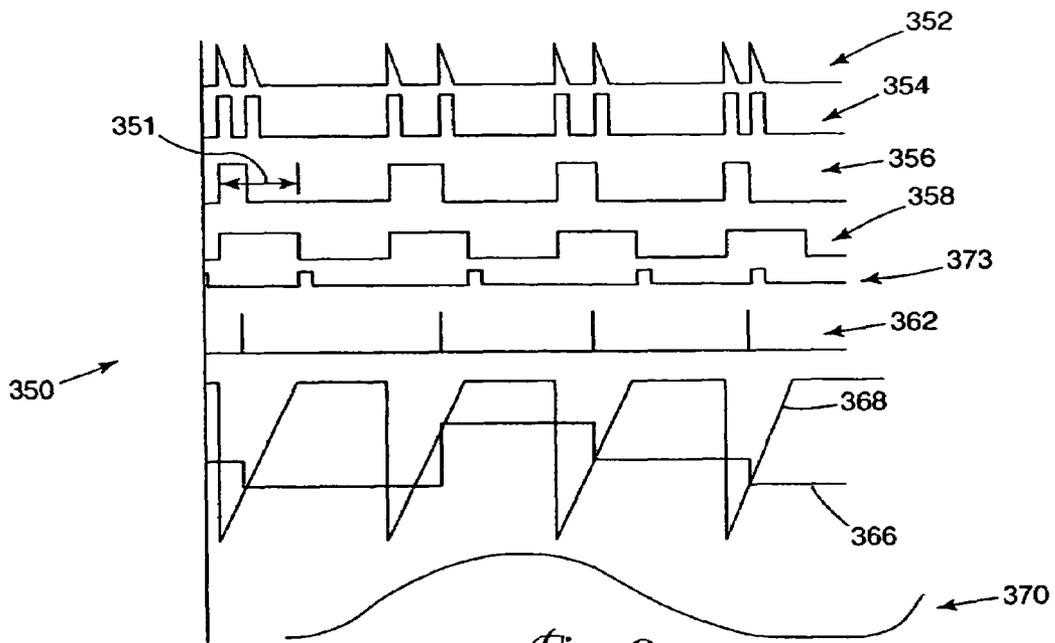
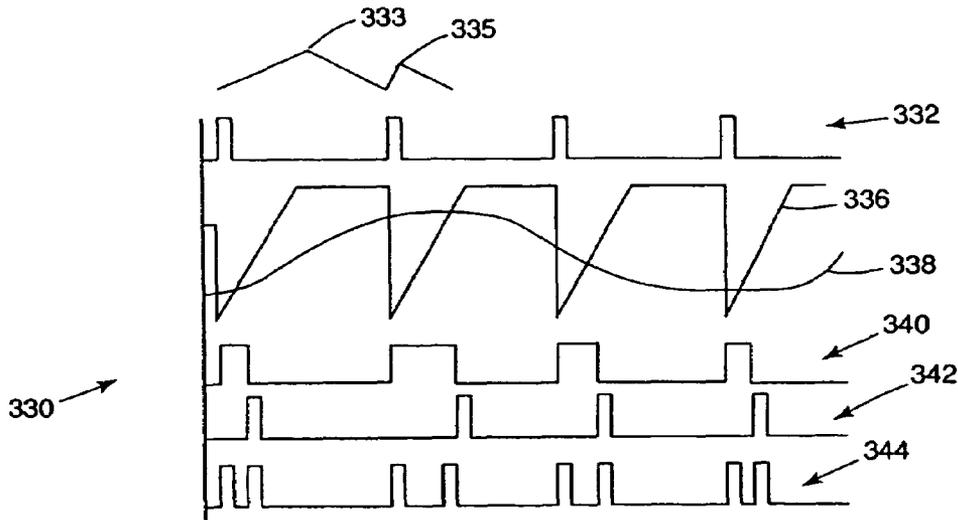


Fig. 9

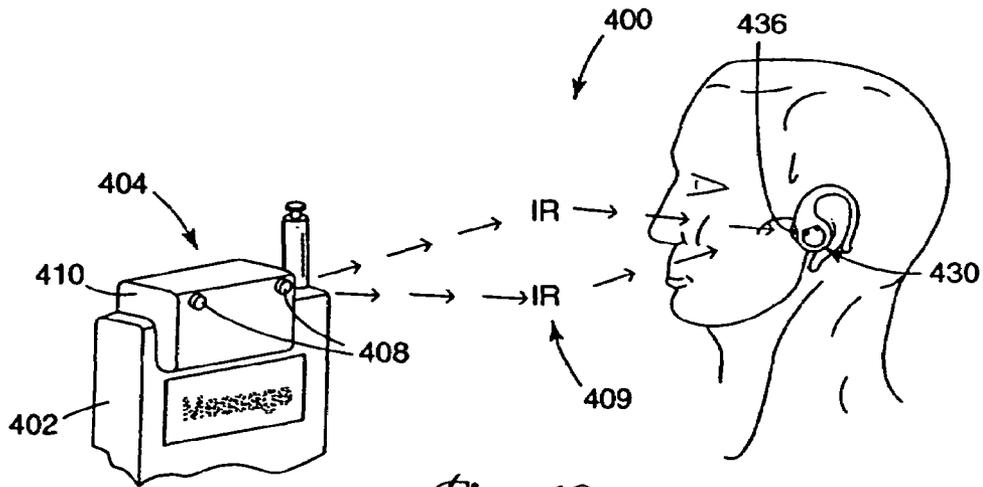


Fig. 10

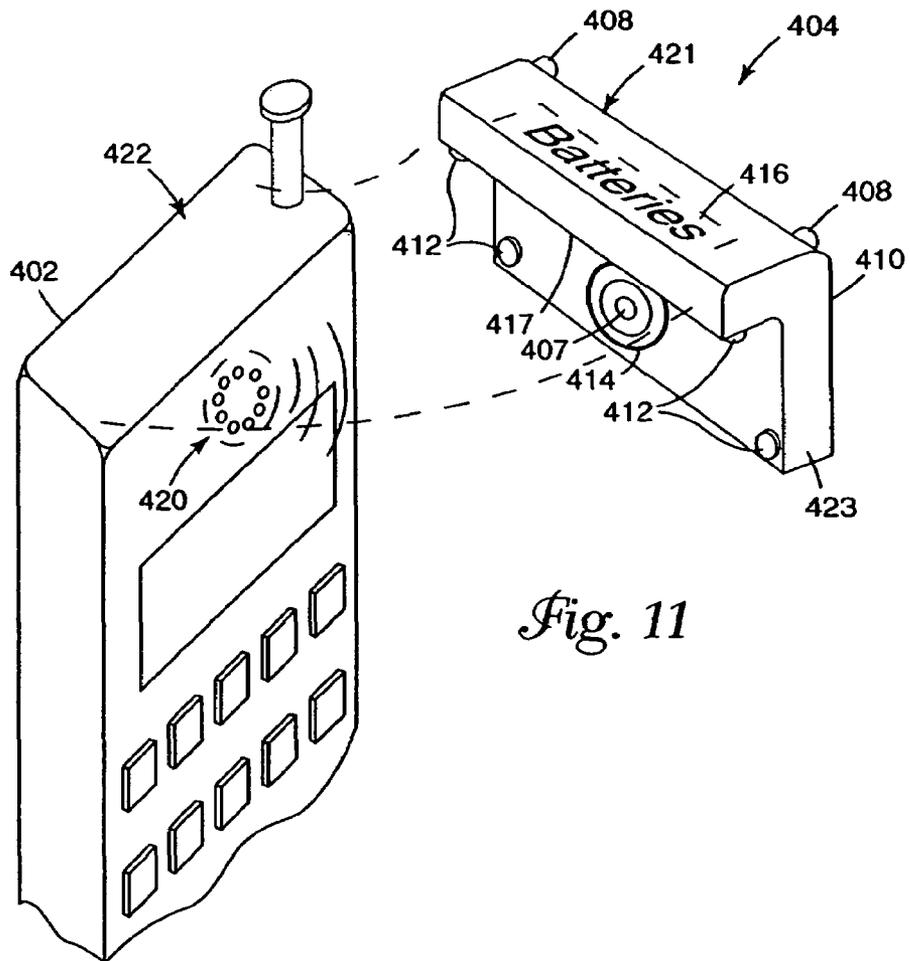
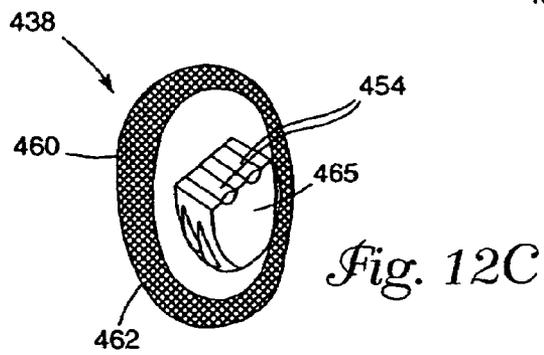
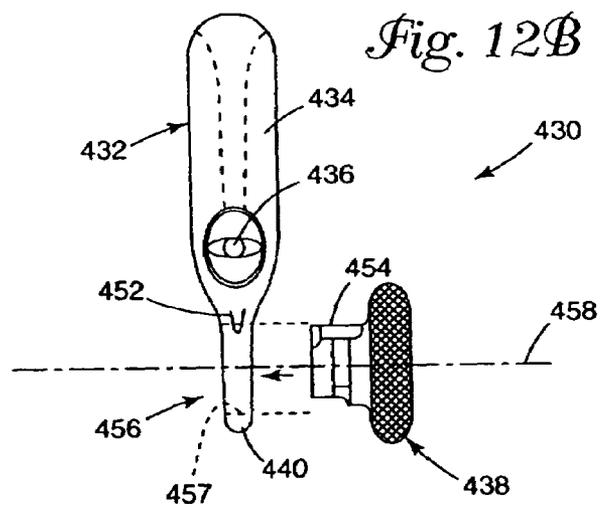
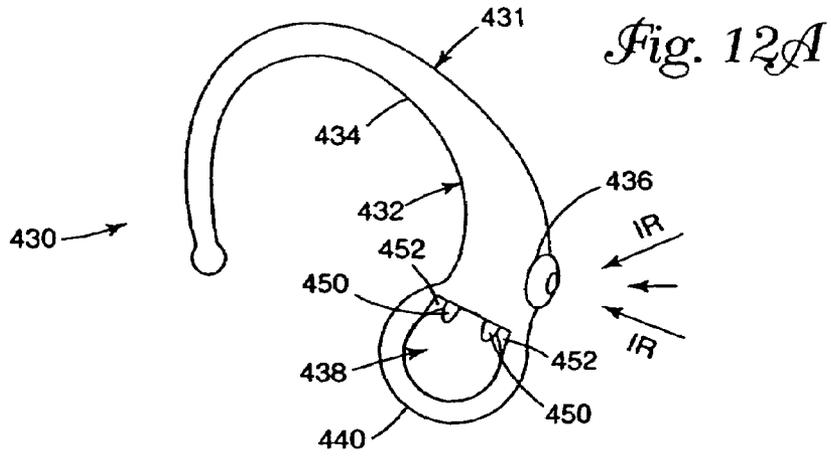


Fig. 11



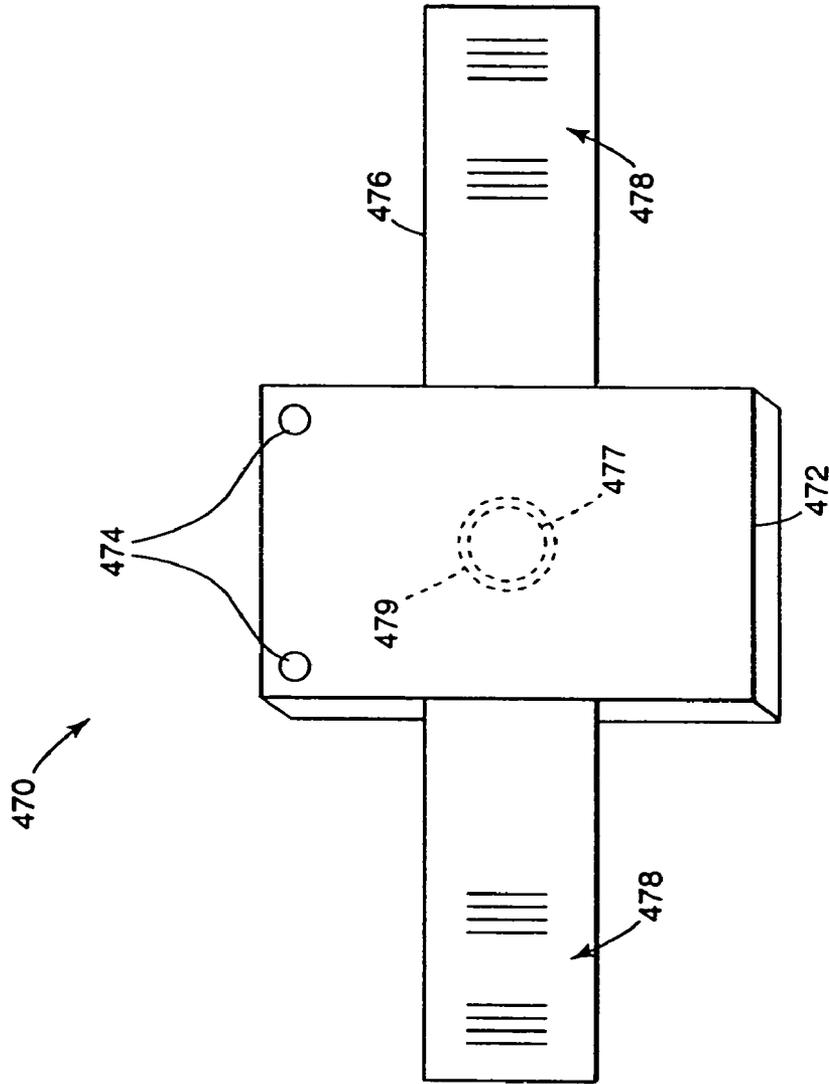


Fig. 13

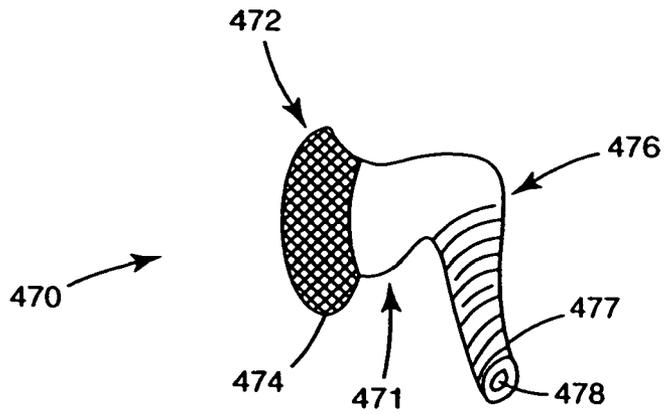


Fig 14

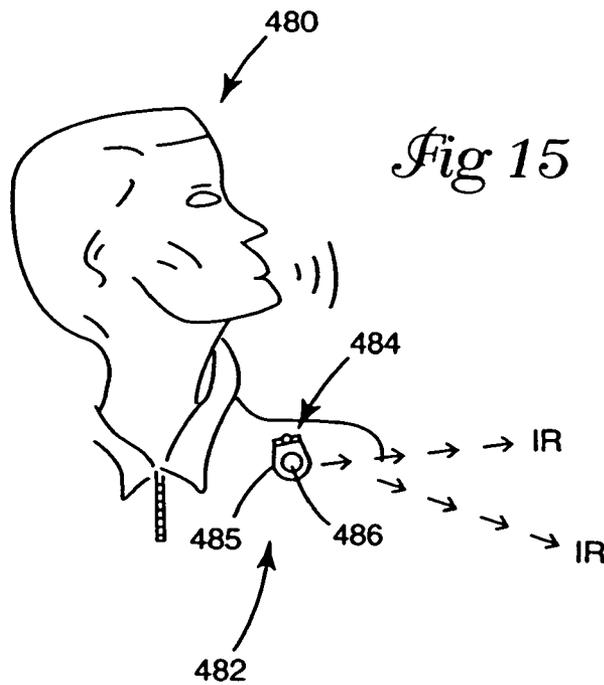


Fig 15

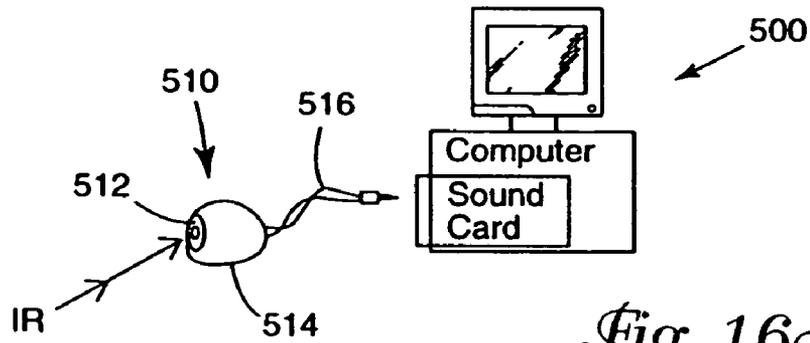


Fig. 16A

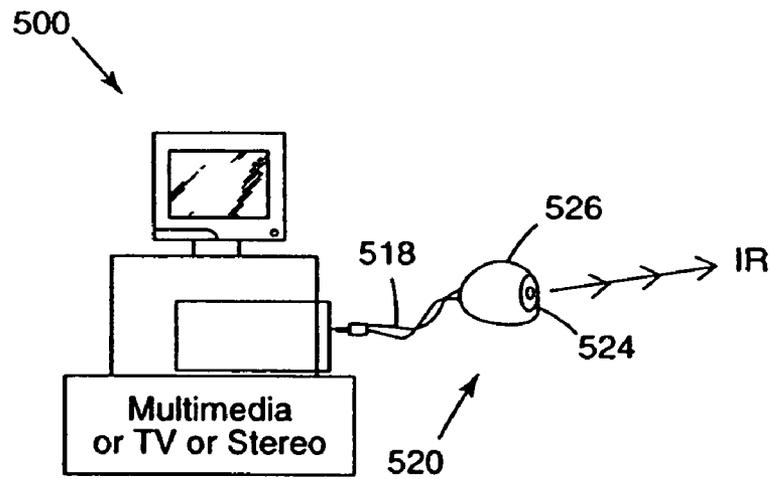


Fig. 16B

1

**LOW POWER INFRARED PORTABLE
COMMUNICATION SYSTEM WITH
WIRELESS RECEIVER AND METHODS
REGARDING SAME**

FIELD OF THE INVENTION

The present invention pertains to portable communication systems. More particularly, the present invention relates to an infrared (IR) portable system that employs an infrared wireless receiver and/or an IR wireless transmitter.

BACKGROUND OF THE INVENTION

Short range, wireless transmission of audio is an established and convenient manner for users to listen to sound sources such as television, stereo and computer multimedia devices without disturbing others. Typically, such privacy listening systems employ one or two earphones mounted into a headset that contains the receiver circuitry and power supply.

Generally, wireless communication systems use one of acoustic, radio frequency, infrared, and inductive techniques for short range transmission of audio. Radio frequency and infrared signal transmission are most commonly used for such short range transmission; however, magnetic induction is also used as described in U.S. Pat. No. 5,774,791 to Strohallen et al., entitled "Low Power Wireless Communication System Employing Magnetic Control Zones," issued 30 Jun. 1998.

As described in U.S. Pat. No. 5,774,791, a receiver configured as a behind the ear (BTE) hearing aid, an in the ear (ITE) hearing aid, or as a cordless headset is described. A transmitter unit, which may include a microphone for picking up external sounds, modulates audio sound to drive a magnetic transmission element, e.g., a neck loop, for transmission to the receiver. The receiver, which includes a magnetic receiving element, demodulates the received signal to provide a sound output to the user. In one embodiment of U.S. Pat. No. 5,774,791, a headset which includes the receiver containing the magnetic receiving element, also may include an infrared (IR) transmitter for transmitting signals back to a base station for two-way communication.

Various types of phones are available, such as cordless phones, cordless cellular phones, corded phones, etc. In particular, cellular phone usage has increased dramatically over the years. Most hand-held radiotelephones, such as mobile phones, or cordless telephones are designed to assume at least the size of a conventional handset during operation, e.g., a fixed handset configuration or a flip phone configuration, with the antenna being in close proximity to the user's head. Recently, health concerns over cell phone radiation and the safety concerns over use of the cell phones while driving (e.g., desire for hands free operation) invite significant new development in this technology.

Several earpiece receivers have been described for phones even though the generally sizeable circuitry and battery power requirements for IR receivers pose a significant challenge to subminiaturization and have generally precluded the use of a comfortable and convenient subminiature earpiece. For example, U.S. Pat. No. 5,881,149 to Weatherill, entitled "Portable Communications Device With Wireless Transmitter and Detachable Earpiece Including a Wireless Receiver," issued 9 Mar. 1999, describes a portable communication device, i.e., a phone, having a detachable receiver part which can be placed against the ear for use. The portable communications device has an integral transmitter

2

for communicating with the detachable receiver part. Further, U.S. Pat. No. 5,966,643 to Radley, entitled "Hand-Held Radiotelephone Having Two-Part Construction," issued 12 Oct. 1999, describes a radiotelephone having an earpiece that is spatially separated from the other components of the radiotelephone and includes an IR receiver. The housing of the handheld radiotelephone includes an IR transmitter, i.e., the transmitter is integral with the radiotelephone.

It will be recognized that in each example, the transmitter is integral with the phone. As such, the external wireless earpiece receiver will only function with a particular type of phone.

Further, IR systems have been criticized for being restricted to line of sight communications. While line of sight communications provide for a relatively secure communication link, IR communications have been described as requiring considerable power. For example, the amount of power required by an IR receiver is generally proportional to the ambient light conditions in the user area and the range or distance from the transmitter. Thus, as the ambient light level increases, the power that is needed generally increases. In a like manner, as the range or distance from the transmitter to the receiver increases the power required also increases.

SUMMARY OF THE INVENTION

A portable communication system and components thereof are provided according to the present invention to overcome one or more of the problems described above. The system according to the present invention provides a universal transmitter that mechanically couples to a communication device having a sound output, e.g., a cellular phone handset, and which transforms the sound output into infrared signals for transmission to a wireless receiver. Thus, at least for cellular phones, the type of phone or wire handset is generally irrelevant and the transmitter can be used with numerous types of phones and handsets. A direct input to the transmitter from the sound output of the communication device provides privacy listening. Further, pulse code modulation provides the system according to the present invention with very low power consumption while achieving high quality IR communication. In addition, several designs of a receiver for BTE positioning or ITE positioning are described.

A portable communication system according to the present invention for use with a communication apparatus having a sound output device includes an infrared transmitter apparatus. The infrared transmitter apparatus comprises a microphone to generate an audio signal from received sound input, at least one infrared light emitting device, modulation circuitry operable to convert the audio signal to one or more constant width electrical pulses (e.g., less than about 2 microseconds in duration, preferably less than about 1 microsecond in duration) to drive the infrared light emitting device to transmit one or more corresponding constant width infrared pulses, and a transmitter housing enclosing the microphone and modulation circuitry and upon which the infrared light emitting device is mounted. The transmitter housing is configured to be removably coupled to the communication apparatus such that the microphone is positioned adjacent the sound output device of the communication apparatus. The system further includes an infrared receiver apparatus. The infrared receiver apparatus includes an infrared light detection device to detect the one or more corresponding infrared pulses and generate one or more electric signals representative of the detected infrared

pulses, a speaker, demodulation circuitry operable to convert the one or more electric signals representative of the detected infrared pulses to an audio signal to power the speaker to produce a sound output, and a receiver housing enclosing the speaker and the demodulation circuitry and upon which the infrared light detection device is mounted. The receiver housing is formed to be self-supported entirely by the ear of a user.

In various embodiments of the system, the transmitter housing may be sized for positioning of the microphone adjacent a speaker of a phone apparatus, the transmitter housing may include structure for removably attaching the housing to the phone apparatus (e.g., an opening sized to fit over an end of a phone apparatus or an adjustable band element to attach the housing to a phone apparatus), the receiver housing may include an in the ear receiver housing securable within the concha of the ear, and the receiver housing may include a behind the ear receiver housing securable by the pinna of the ear.

In another embodiment of the system, the modulation circuitry includes pulse width modulation circuitry to convert the audio signal using a carrier signal to one or more width modulated pulses. The width of the one or more pulses is varied as a function of the audio signal. The circuitry further includes an edge detect circuit to detect the edges of the one or more width modulated pulses and to generate constant width pulses based on the detected edges. In addition, the circuitry includes a pulse driver circuit to drive the infrared light emitting device.

In another embodiment, the demodulation circuitry includes pulse detection circuitry (e.g., an amplifier configuration and a comparator) to convert the one or more electrical signals representative of the detected infrared pulses to one or more constant width pulses based thereon. Pulse width convertor circuitry (e.g., a flip flop) converts the one or more constant width pulses to one or more width modulated pulses and pulse width demodulation circuitry converts the one or more width modulated pulses to an audio signal for application to the speaker.

The receiver of the system may also include missing pulse detection circuitry that includes detection circuitry to detect the absence of one or more constant width pulses and disable circuitry to disable one or more components of the receiver upon detection of the absence of one or more constant width pulses. In addition, the transmitter of the system may include a sound activated power circuit to power one or more components of the transmitter upon detection of sound input.

A portable infrared transmitter apparatus for use with a communication apparatus having a sound output device is also provided. The transmitter apparatus includes a microphone to generate an audio signal from received sound input, at least one infrared light emitting device, modulation circuitry operable to convert the audio signal to one or more constant width electrical pulses to drive the infrared light emitting diode for transmission of one or more corresponding constant width infrared pulses, and a transmitter housing enclosing the microphone and modulation circuitry and upon which the at least one infrared light emitting device is mounted. The transmitter housing is configured to be removably coupled to the communication apparatus such that the microphone is positioned adjacent the sound output device of the communication apparatus.

In various embodiments of the transmitter apparatus, the transmitter housing may be sized for positioning of the microphone adjacent a speaker of a phone apparatus and the transmitter housing may include structure for removably

attaching the housing to the phone apparatus (e.g., an opening sized to fit over an end of a phone apparatus or an adjustable band element to attach the housing to a phone apparatus).

A portable infrared receiver apparatus according to the present invention is also described. The receiver apparatus includes an infrared light detection device to detect one or more infrared pulses and to generate one or more electric signals representative of the detected infrared pulses, a speaker, and demodulation circuitry operable to convert the one or more electric signals representative of the detected infrared pulses to an audio signal to power the speaker to produce a sound output. The demodulation circuitry includes pulse detection circuitry to convert the one or more electrical signals representative of the detected infrared pulses to one or more constant width pulses based thereon, pulse width convertor circuitry to convert the one or more constant width pulses to one or more width modulated pulses, and pulse width modulation circuitry to convert the one or more width modulated pulses to an audio signal for application to the speaker. The receiver apparatus further comprises a receiver housing enclosing the speaker and the demodulation circuitry and upon which the infrared light detection device is mounted. The receiver housing is formed to be self-supported entirely by the ear of a user.

Several receiver housings according to the present invention are also described. In one embodiment, the receiver housing includes an in the ear receiver housing securable within the concha of the ear. The receiver housing includes a speaker portion enclosing at least a speaker and a power source. The speaker portion has a compactable/expandable material about at least a portion thereof to support the receiver housing in the concha of the ear. The material is placed in a compacted state upon insertion in the concha of the ear and further the material expands to an expanded state to hold the receiver housing in the concha of the ear upon release from the compacted state. The receiver housing further includes an elongated portion extending from the speaker portion enclosing at least a portion of the demodulation circuitry. The infrared light detection device is positioned on the elongated portion.

In another embodiment of a receiver housing, the receiver housing includes a behind the ear receiver housing securable by the pinna of the ear. The receiver housing includes a first portion that includes a behind the ear element to secure the receiver housing by the pinna of the ear and a speaker holding element extending from the behind the ear element. The speaker holding element has an opening defined there-through and includes speaker contacts (e.g., mounted in the opening). The receiver housing includes a second portion encompassing the speaker. The second portion is sized to be retained within the opening and includes speaker contacts for mating with the speaker contacts of the speaker holding element.

A method of using a portable communication system with a phone apparatus having a sound output device is also described according to the present invention. The method includes providing a removable transmitter apparatus. The removable transmitter apparatus includes a microphone to generate an audio signal from received sound input, a transmitter device, modulation circuitry operable to convert the audio signal to an electrical signal to drive the transmitter device for transmission of signals representative of the audio signal, and a transmitter housing enclosing at least the microphone and modulation circuitry. The removable transmitter apparatus is secured to the phone apparatus such that

the microphone is positioned adjacent the sound output device of the communication apparatus.

In one embodiment of the method, the removable transmitter apparatus includes an opening sized to fit over a portion of a phone apparatus. As such, the removable transmitter apparatus is secured to the phone apparatus by positioning the opening over the portion, e.g., an end portion of the phone. In another embodiment, the removable transmitter apparatus is secured to the phone apparatus by positioning a band of the removable transmitter apparatus about a perimeter of the phone apparatus. In yet another embodiment, the removable transmitter apparatus may be secured to the phone apparatus by using a two face adhering system, e.g., adhesive, hook and loop fasteners, etc. In another embodiment of the method, the removable transmitter apparatus is detached from the phone apparatus and secured to a different phone apparatus.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a general block diagram illustration of a portable communication system according to the present invention.

FIG. 2 is a block diagram of one illustrative embodiment of a portable communication system shown generally in FIG. 1.

FIG. 3 is a schematic diagram of one illustrative embodiment of an IR transmitter apparatus of a portable communication system shown generally in FIG. 2.

FIG. 4 is a schematic diagram of one illustrative embodiment of an IR receiver apparatus of a portable communication system shown generally in FIG. 2.

FIG. 5 is a waveform diagram used to illustrate the functions provided by the IR transmitter apparatus of FIG. 3.

FIG. 6 is a waveform diagram used to illustrate the functions provided by the IR receiver apparatus of FIG. 4.

FIG. 7A is a block diagram of an alternate IR transmitter apparatus of a portable communication system shown generally in FIG. 1.

FIG. 7B is a block diagram of an alternate IR receiver apparatus of a portable communication system shown generally in FIG. 1.

FIG. 8 is a waveform diagram used to illustrate the functions provided by the IR transmitter apparatus of FIG. 7A.

FIG. 9 is a waveform diagram used to illustrate the functions provided by the IR receiver apparatus of FIG. 7B.

FIG. 10 is a perspective view of an IR transmitter apparatus and an IR receiver apparatus of a system as shown in FIG. 1 used with a phone apparatus.

FIG. 11 is a more detailed perspective view of the IR transmitter apparatus of FIG. 10 and the phone with which it can be used.

FIG. 12A is a side view of the IR receiver apparatus of FIG. 10.

FIG. 12B is an exploded end view of the IR receiver apparatus of FIG. 12A.

FIG. 12C is a perspective rear view of a speaker portion of the IR receiver apparatus of FIG. 12B.

FIG. 13 is an illustrative view of an alternate embodiment of an IR transmitter apparatus having a band element for attachment to a phone apparatus.

FIG. 14 is a side view of an alternate embodiment of an IR receiver apparatus, e.g., earbud.

FIG. 15 is an illustrative perspective view of a lapel IR transmitter apparatus useable with the communication system of FIG. 1.

FIGS. 16A–16B are illustrations of corded IR transmitters and receivers usable with the communication system of FIG. 1.

DETAILED DESCRIPTION OF THE EMBODIMENTS

A portable communication system **10** according to the present invention shall be described generally with reference to FIG. 1. Thereafter, various embodiments of the portable communication system **10** and components thereof or used therewith shall be described with reference to FIGS. 2–16.

As shown in FIG. 1, portable communication system **10** includes an IR transmitter apparatus **12** which communicates by transmission of IR signals **13**, preferably short IR pulses, with a portable IR receiver apparatus **14**. Preferably, the IR transmitter is a universal wireless IR transmitter apparatus that mechanically couples to a communication device having a sound output source **16**, e.g., a cellular phone handset, and which transforms the sound output into infrared signals **13** for transmission to the wireless receiver apparatus **14**. It will be recognized that the present invention, or one or more portions of the invention as described herein, may be beneficially applied to various types of communication devices, e.g., televisions, computers, or any other apparatus having a sound output, electrical (e.g., the system of FIG. 16B, a television, etc.) or acoustical (e.g., a cellular phone, a corded phone handset, etc.), to which a transmitter apparatus can be coupled.

The IR transmitter apparatus **12** includes a transmitter housing **28** in which are located a microphone **22** and modulation circuitry **26**. One or more IR emitting devices **24**, e.g., IR light emitting diodes (LEDs), are positioned on the transmitter housing **28** for emission of IR signals **13** to the receiver apparatus **14**. The microphone **22** is positioned for receiving sound output from an audio sound source **16**. The audio source **16** may be any sound producing device of any communication apparatus, such as a television, a computer speaker, a radio, etc. Preferably, the sound source **16** is a speaker of a phone apparatus such as a handset, corded or wireless. More preferably, the audio sound source **16** is a speaker of a cellular phone.

The transmitter housing **28** is configured to be removably coupled by a coupling device **17** to the communication apparatus, e.g., cellular phone, such that the microphone **22** is positioned adjacent the sound output device **16**, e.g., speaker of the phone. Preferably, the microphone **22** is isolated so as to receive only sound from the audio sound source **16** to reduce external noise. Various types of coupling devices **17** are described herein with reference to the figures. For example, as shown in FIG. 11, the transmitter housing may be slipped over one end of a cellular phone, e.g., cap piece mounting. Further, for example, as shown in FIG. 13, the transmitter housing may include a band to wrap around a cellular phone. However, such coupling may be provided by any number of techniques. For example, two face mounting such as with the use of adhesive or hook and loop fasteners may be used, or any other mounting structure that allows the transmitter to be removed and used on another phone may be suitable. Compatibility of the transmitter apparatus for use with multiple communication apparatus, e.g., phones, is preferred.

The microphone **22** generates an audio signal from the received sound to be applied to the modulation circuitry **26**. The modulation circuitry **26** provides a modulated signal to drive the IR light emitting device **24** for transmission of IR signals. Preferably, the modulation circuitry **26** is operable

to convert the audio signal into a stream of electrical pulses to drive the IR light emitting device 24. Preferably, the audio signal is converted into a stream of constant width electrical pulses to drive the IR light emitting device 24 to transmit one or more corresponding constant width infrared pulses 13. Preferably, the pulse duration is less than about 2 microsecond. More preferably, the pulse duration is less than about 1 microsecond. The use of short pulses in the transmission of IR pulses, allows the power of such pulses to be increased without exceeding the average power rating of the IR light emitting device, e.g., IR LED.

The infrared receiver apparatus 14 includes an infrared light detection device 32 (e.g., an IR sensitive photodiode), demodulation circuitry 36 and a speaker 34. The infrared light detection device 32 detects the IR signal transmitted by IR transmitter apparatus 12. Preferably, the infrared light detection device 32 detects infrared pulses transmitted thereby. The IR light detection device 32 generates one or more electrical signals representative of the detected infrared pulses. The one or more electrical signals are applied to demodulation circuitry 36. Demodulation circuitry 36 is operable to convert the one or more electric signals representative of the detected infrared signals, e.g., pulses, to an audio signal to power the speaker to produce a sound output to be provided to the ear 18 of a user. One skilled in the art will recognize that any modulation and demodulation circuitry may be used for providing communication according to the present invention as long as they are compatible circuits, i.e., the demodulator circuitry is capable of demodulating the modulated signal. For example, several modulation and demodulation techniques are described herein with reference to FIGS. 2-9. Further, other modulation techniques are described in U.S. Pat. No. 5,774,791.

The IR receiver apparatus 14 further includes a portable receiver housing 19. The receiver housing 19 encloses the speaker 34 and the demodulation circuitry 36. The infrared light detection device 32 is mounted on the receiver housing 19. Further, preferably, the receiver housing 19 is formed to be self-supported entirely by the ear of a user. Preferably, the receiver housing 19 is either securable within the concha of the ear or the receiver housing 19 includes a behind the ear element securing the receiver housing 19 by the pinna of the ear. Various configurations of a receiver housing 19 according to the present invention are described herein with reference to FIGS. 12 and 14. However, other forms are contemplated in accordance with the present invention and the universal transmitter 12 as described herein may be used with any wireless receiver configuration, including in the ear or behind the ear configurations as well as wireless headsets.

The portable nature of the IR communication system 10 is attained at least in part through the selection of appropriate modulation and demodulation circuitry. For example, large power requirements for such circuitry generally force an increase in the size of the IR transmitter apparatus and IR receiver apparatus. As such, lower power techniques are used to reduce the size of the components of the present invention, e.g., require less and/or smaller batteries. Further, the complexity of the modulation and demodulation circuitry tends to increase part count leading to a larger size IR transmitter apparatus and IR receiver apparatus as well as to an increase in the cost for the system components. The following description of modulation and demodulation circuitry provided with reference to FIGS. 2-9 provides simple and low power techniques to reduce the size of the transmitter apparatus and receiver apparatus of a portable communication system 10.

FIG. 2 shows a block diagram of one illustrative embodiment of a portable communication system 60. The portable communication system 60 of FIG. 2 includes modulation circuitry 61 to convert an audio signal 63 from a microphone 62 to a stream of electrical pulses 72 for driving an IR LED 74 to transmit IR pulses 80. An IR photodiode 88 detects the IR pulses 80 and generates one or more electrical signals 89 representative of the detected IR pulses. The portable communication system 60 further includes demodulation circuitry 81 to convert the electrical signals to an audio signal 97 to power the speaker 98.

The modulation circuitry 61 includes pulse width modulation circuit 67, edge detect circuit 69, and pulse driver 71. With use of such circuitry a constant width pulse stream 70 is applied to the pulse driver 71 to drive the IR LED 74 with a stream of corresponding pulses 72. Preferably, a repetitive substantially linear waveform 67 of fixed repetition rate, i.e., a cyclic waveform having a predetermined total cycle time or period (e.g., a 50 kHz signal having a 20 μ sec duty cycle), is provided to pulse width modulation circuit 66 to be modulated by the audio signal 63. The pulse width modulation circuit 66 generates a modulated pulse stream 68 wherein the width of the pulses vary according to the amplitude of the audio signal 63. Thereafter, the pulse width modulated pulse stream 68 is applied to an edge detect circuit 69. The edge detect circuit 69 detects the positive and negative transitions of each pulse of the pulse width modulated pulse stream 68 and generates a stream of constant width short pulses 70, i.e., constant duration pulses, in response to the detected edges or transitions of the pulse width modulated pulse stream 68.

Preferably, the constant width pulses of the stream of pulses 70 have a duty cycle that is less than 10 percent of the total cycle time of the carrier frequency or input linear repetitive signal 67. More preferably, the duty cycle of the constant width pulses of the stream of pulses 70 is less than 5 percent of the total cycle of the carrier frequency or input linear repetitive signal 67. In other words, for a 50 kHz signal having a 20 μ sec cycle time, the constant width pulses are preferably less than about 2 μ sec, and more preferably less than about 1 μ sec. The short pulse duration allows the IR LED to be driven by a higher amplitude pulse without exceeding the average power limits of the IR LED. Such an increase in the power used to drive the IR LED results in an increased distance of detection for the transmitted pulses and/or a better quality received signal. For example, a 10 percent duty cycle means that the IR LED can be pulsed 10 times harder than normal without exceeding the average power limit of such devices. As such, the IR LED can be seen a greater distance away because the LED may shine 10 times brighter. Further, to detect such pulses, generally the input stage devices of a receiver apparatus can be operable for shorter periods of time which decreases power usage by the receiver.

For example, the audio signal 63 may be sampled at a constant frequency of about 50 kHz by a sawtooth waveform 67, e.g., the input carrier signal. The duty cycle of the 50 kHz carrier is made to vary in proportion to the amplitude of the audio signal 63 to result in the pulse width modulated stream 68. Every edge or transition of this pulse width modulated 50 kHz carrier signal 68 generates a very short duration pulse, with each pulse being of a constant width. These pulses are sent to pulse driver 71 to drive the IR LED 74. Since there are two pulses for every cycle of 50 kHz sampling, the total on-time duty cycle will be double that of each pulses on time. Hence, to achieve a 10 percent transmission duty cycle, each pulse will need to have a duty cycle

of 5 percent of the total cycle time. Likewise, to achieve a 20 percent transmission duty cycle, each pulse will need to have a duty cycle of 10 percent of the total cycle time.

The demodulation circuitry **81** includes pulse detect circuit **90**, pulse width converter circuit **92**, and pulse width demodulation circuit **96**. With use of such circuitry a stream of electrical signals **89** from an IR photodiode **88** representative of received IR pulses **80** are converted to an audio signal **97** for application to speaker **98**. The IR photodiode **88** detects the IR pulses **80** transmitted by IR LED **74** and generates an electrical signal **89** as a function of the detected pulses. The electrical signal **89** is provided to the pulse detect circuit **90** that receives, amplifies and converts the electrical signal from the IR photodiode **88** to a stream of pulses **91** representative of the detected IR pulses **80**. This stream of pulses **91** will be similar to the pulse stream **70** generated in the modulation circuitry **61**, at least with respect to the time between pulses. The stream of pulses **91** is then applied to the pulse width converter circuit **92** which converts the pulse stream **91** to a pulse width modulated stream of pulses **95**. The stream of pulse width modulated pulses **95** include pulses having varied widths, substantially similar to those of pulse stream **68** generated in the modulation circuitry **61**. This stream of pulse width modulated pulses **95** is then applied to pulse width demodulation circuit **96** which generates the audio signal **97** therefrom. For example, the demodulation circuit **96** filters the pulse width modulated stream of pulses **95** to obtain the audio signal **97** to be applied to speaker **98**.

For example, using the 50 kHz input signal parameters described above, the IR pulses **80** are detected by the IR photodiode **88** and electrical signals representative thereof are buffered, amplified, and converted to digital pulses by the pulse detect circuit **90**. These pulses are used to toggle a pulse width converter **92**, e.g., a flip flop circuit or a divide by two circuit, to convert the edge driven pulses back to the original duty cycle of the pulse width modulated 50 kHz carrier signal **95** which was used to generate them. The pulse width modulated 50 kHz carrier signal **95** is then filtered by pulse width modulation circuit **96** to leave the audio signal **97** to power the speaker **98**.

FIG. 3 shows a schematic diagram of one illustrative embodiment for implementing the IR transmitter apparatus shown generally in FIG. 2. However, it will be recognized that various other alternative implementations may be used that fall within the scope of the present invention. The sound switched transmitter circuit **100** shown in FIG. 3 includes a microphone **101**, a sawtooth generator circuit **106**, a microphone amplifier circuit **104**, a sound activated power up circuit **130**, a comparator circuit **108**, an edge detect or edge to pulse conversion circuit **112**, a pulse driver circuit **116**, and LEDs **118**. The operation of such circuits shall be described with reference to the waveform diagram **202** of FIG. 5.

The microphone **101** picks up sound input and applies an audio signal to microphone amplifier circuit **104** including amplifiers **111** and **115**. The audio signal as amplified by amplifier **111** is applied to sound activated power up circuit **130** to determine the presence of an audio signal having sufficient amplitude such that other transmitter circuitry should be supplied with power, including amplifier **115**. The sound activated power up circuit **130** includes an amplifier/comparator circuit **132**, and also power switch circuitry, used to perform peak detection and to compare the peaks detected to a reference signal. Upon receipt of an audio signal having an amplitude above a certain predetermined

limit, power is switched on to other portions of the transmitter circuit via ground connections, including power to amplifier **115**.

The audio signal amplified by amplifier **111** is provided to amplifier **115** and amplified thereby when power is provided thereto. As such, the audio signal **204** having a desired amplitude, as shown in FIG. 5, is applied to the negative input of comparator circuit **108**. The sawtooth generator circuit **106** generates a ramped 50 kHz sawtooth waveform **206** as shown in FIG. 5. One skilled in the art will recognize that other cyclic waveforms may be suitable for use according to the present invention. The comparator **107** is used to reset the sawtooth pulse every 20 μ seconds and the dual transistor package **103** is used to provide the desired ramp for the waveform **206**. The sawtooth waveform **206** is applied to the positive input of comparator circuit **108**. The comparator circuit **108** compares the audio signal **204** and the sawtooth waveform **206**, and generates an output that is a pulse width modulated waveform **208** as shown in FIG. 5. In other words, the width of the pulses vary according to the amplitude of the audio signal **204**.

The pulse width modulated waveform **208** is applied to edge detect circuit **112**. The edge detect circuit **112** includes dual comparators **113** and **114**. The leading edge of a pulse of the pulse modulated waveform **208** turns on comparator **113** and generates a constant width pulse therefrom. The trailing edge of a pulse of the pulse modulated waveform **208** turns on comparator **114** and generates a constant width pulse therefrom. The polarity of such stream of constant width pulses **210**, as shown in FIG. 5, generated based on the leading and trailing edges of the pulse width modulated waveform **208** are not important. The width of the pulses generated is controlled by pulse width limiting circuit **110** of edge detect circuit **112**. For example, a reduction in capacitor values in the limit circuit **112** result in a shorter width pulse being generated.

As described previously, preferably, the constant width pulses of the stream of pulses **210** have a duty cycle that is less than 10 percent of the total cycle of the sawtooth waveform **206**, more preferably, 5 percent of the total cycle. In other words, for the 50 kHz signal having a 20 μ sec duty cycle, the constant width pulses are preferably less than about 2 μ sec, and more preferably less than about 1 μ sec.

The stream of constant width pulses **210** are applied to pulse driver circuit **116**. The IR LEDs **118** are then driven by pulses from the pulse driver circuit **116** such that corresponding pulses of IR light are emitted therefrom.

FIG. 4 shows a schematic diagram of one illustrative embodiment for implementing the IR receiver apparatus shown generally in FIG. 2. However, it will be recognized that various other alternative implementations may be used that fall within the scope of the present invention. For example, retriggerable and resettable one shot circuits along with logic gating may be used to implement functionality such as that provided by the flip flop. The IR receiver circuit **145** shown in FIG. 4 includes an IR sensitive photodiode **140**, an amplification circuit **146**, a comparator circuit **152**, a pulse width converter circuit **154**, a pulse width demodulation circuit **160**, a volume control circuit **168**, missing pulse detection circuit **167**, and a speaker **170**. The operation of such circuits shall be described with reference to the waveform diagram **216** of FIG. 6.

IR pulses are detected by IR sensitive photodiode **140** which generates an electrical signal **212** as shown in FIG. 6. The electrical output from the photodiode **140** includes

electrical pulses corresponding to the IR pulses detected thereby. The electrical signal 212 is applied to amplification circuit 146.

Amplification circuit 146 receives and amplifies the signal for application to comparator circuit 152. The amplification circuit 146 includes three gain stages 147–149 and a buffer stage 150. Symmetrically opposed pulses are provided to comparator circuit 152 from the buffer stage 150. In other words, the stages 147–150 provide positive and negative amplified pulses 214, i.e., symmetrically opposite polarity pulses, as shown in FIG. 5 to the comparator circuit 152. As such, generally, at least in one embodiment, upon application of a detected pulse, the positive input of the comparator circuit 152 is taken higher and the negative input thereof is taken lower to provide a pulse output from the comparator circuit 152. The gain of the stages may be fixed as desired. Further, the gain of one or more stages may be adjusted on an ongoing basis to provide additional gain when distances increase between the transmitter and receiver. One will recognize that other amplification and comparison circuits may be used for detection purposes, e.g., comparison of the amplitude of a single pulse to a reference.

As such, the comparator circuit 152 determines if IR pulses have been received and generates a stream of pulses 216 as shown in FIG. 6 representative of the detected IR pulses. This stream of pulses 216 is then applied to the pulse width converter circuit 154 which basically divides the pulses by two. In other words, the flip flop 156 is toggled by the received pulses to convert the pulse stream 216 to a pulse width modulated stream of pulses 218 as shown in FIG. 6. This stream of pulse width modulated pulses 218 is then applied to pulse width demodulation circuit 160 which generates the audio signal 222 therefrom. For example, the demodulation circuit 160 includes amplifier/filter circuit 164 to filter the received pulse width modulated stream of pulses 218 to obtain the audio signal 222. The filtering is performed by filter components 165. The filtered audio signal is then provided to amplifier 162 for amplification, and thereafter, application to speaker 170 for sound production.

The volume of the speaker 170 is controlled by volume control circuit 168. The volume control circuit 168 includes a variable resistor that can be controlled by a user in any known manner, e.g., turning of a wheel, activating a push button, or any other method of user interface with a variable resistor.

The missing pulse detection circuit 167 of the receiver circuitry 145 detects when comparator 152 does not receive a pulse. The circuit 167 provides a chip disable signal to amplifier 162 when a pulse is not detected. This keeps the power amplifier 162 from being turned on and any sound from the speaker is muted when a missing pulse is detected. The output from the comparator circuit 152, i.e., pulses being detected, causes transistor 161 to remain turned off. Absence of pulses allow the switch to turn on activating the mute function. In other words, the output from the comparator circuit, i.e., when pulses are detected, is rectified and filter by circuit 163 to provide a voltage to cause the transistor 161, i.e., mute switch, to remain off. Absence of pulses allow the voltage (i.e., which is holding the switch 161 off) to drop causing the switch 161 to turn on. This pulls the chip disable of the amplifier 162 high, which turns off power to the speaker 170.

FIG. 7A shows a block diagram of another illustrative embodiment of transmitter circuitry 250 of a portable communication system 10 like that described generally with reference to FIG. 1. The operation of the transmitter circuitry 250 shall be described with reference to the waveform

diagram 330 of FIG. 8. FIG. 7B shows a block diagram of another illustrative embodiment of receiver circuitry 300 of a portable communication system 10 like that describes generally with reference to FIG. 1 and operable with the transmitter circuitry 250 of FIG. 7A.

The transmitter circuitry 250 shown in FIG. 7A includes a microphone 252, a pulse width modulation circuit 254, a sawtooth generator circuit 258, a reference pulse generator circuit 251, an edge detect or edge to pulse conversion circuit 256, a pulse driver circuit 260, and an IR LED 270. The microphone 252 picks up sound input and applies an audio signal 338 as shown in FIG. 8, preferably amplified, to the pulse width modulation circuit 254, e.g., a comparator circuit. The sawtooth generator circuit 258 generates a sampling ramp signal 336 every cycle 333 as shown in FIG. 8, e.g., every 25 useconds, based on a reference pulse signal 332 provided by pulse generator 251 at the start of every cycle. For example, the reference pulse may be a 1 usecond constant width pulse provided every 25 useconds.

The sampling ramp signal 336 is a sawtooth waveform much like the 50 kHz waveform described with reference to FIG. 3. However, the ramp time 335 as shown in FIG. 9 of the sampling ramp signal 336 is of shorter duration than the ramp of the previous waveform which extended during the entire cycle.

The sampling ramp waveform 336 is applied to the pulse width modulation circuit 254, e.g., a comparator circuit, along with the audio signal 338. The comparator circuit compares the audio signal 338 and the sampling ramp waveform 336, and generates an output that is a pulse width modulated waveform 340 as shown in FIG. 9. In other words, the width of the pulses vary according to the amplitude of the audio signal 338. However, the reason for using a shorter ramp duration is to make the pulse width of the pulses of pulse width modulated waveform 340 vary within a shorter time frame within the cycle time 333. For example, with a ramp duration of 10 useconds and a 25 useconds cycle time, the pulse width will vary between 2 useconds and 10 useconds. In other words, the 25 useconds sample period has been compressed into a maximum of 10 useconds (e.g., less than 50 percent duty cycle).

The pulse width modulated waveform 340 is applied to edge detect circuit 256 which detects the falling edge of the pulses of the pulse width modulated waveform 340 or, alternatively, both the rising and falling edges of the pulses of the pulse width modulated waveform 340. If only the falling edge is detected, the edge detect circuit 256 generates a constant width pulse stream representative of the falling edges 342 to be provided to the pulse driver 260 with the rising edge of the pulses being indicated by the stream of reference pulses 332 from reference pulse generator 251. However, preferably, both the rising and trailing edges are detected providing a stream of pulses representative thereof as shown by waveform 344 of FIG. 8. The width of the pulses generated is controlled as previously described herein. The stream of constant width pulses 344 is applied to pulse driver circuit 260. The IR LED 270 is then driven by pulses 269 from the pulse driver circuit 260 such that pulses of IR light are emitted therefrom.

The IR receiver circuit 300 shown in FIG. 7B includes an IR sensitive photodiode 302, a pulse detect circuit 303 including an amplification circuit 304 and digitization circuit 306, a pulse width converter circuit 309 including a flip flop 310, a one-shot circuit 308, a pulse width demodulation circuit 311, a duty cycle detection and polarity correction circuit 317, a filter/amplifier circuit 318, and speaker 320. IR pulses are detected by IR sensitive photodiode 302 which

generates an electrical signal **352** including output pulses as shown in FIG. 9. The electrical output pulses from the photodiode **302** correspond to the IR pulses detected thereby. The electrical signal **352** is applied to amplification circuit **304** for amplification and provision to digitization circuit **306**, e.g., a comparator circuit. The amplified pulses may be compared to a predetermined reference by the comparator circuit to determine if an IR pulse has been received. The comparator generates a stream of pulses **354**, e.g., logic level pulses, representative of the detected IR pulses to be used in clocking the flip flop **310** of the pulse width converter circuit **309** which basically divides the pulses by two. In other words, the flip flop **310** is toggled by the received logic level pulses **354**, e.g., rising edge pulses and falling edge pulses, to convert the pulse stream **354** to a pulse width modulated stream of pulses **356** as shown in FIG. 9. Also, the stream of pulses **354** are applied to the one shot circuit **308** for duty cycle detection and polarity correction purposes as described further below. The output of the flip flop **310** is rising edge detected and used to generate a reset pulse that marks the beginning of a linear ramp signal **368**, as shown in FIG. 9, generated by ramp generator circuit **312** of pulse demodulation circuit **311**. The output of the flip flop **310** is falling edge detected by falling edge detector **314** to generate a stream of sampling pulses **359**. The rising edge pulse that causes the flip flop to change state at the rising edge of the pulse width modulated stream of pulses **356**, also causes the one shot circuit **308** to start a time out period **351** running in which the trailing edge pulse that causes the state of the flip flop to change must be received before the one shot circuit **308** triggers a falling edge detector **373** to send a reset pulse to the flip flop **309**, e.g., 12 μ second when the ramp time is 10 μ seconds. During the time out period **351**, a high logic state is provided to the AND gate **361** by the one shot circuit **308** as shown by waveform **358** in FIG. 9. Upon occurrence of a falling edge pulse and detection of the falling edge of a pulse width modulated pulse of the stream of pulses **356** during the time out period **351**, a short duration high sampling pulse **359** is provided by the falling edge detection circuit **314** of the duty cycle detection and polarity correction circuit **317** to the AND gate **361**.

As high logic states are provided to the AND gate **361** from both the edge detection circuit **314** and the one shot circuit **308** when a falling edge is detected within time period **351**, a gated sample pulse **362** is provided by the AND gate **361** to open a gate on a sample/hold circuit **316** that is sampling the linear ramp **368** generated by the ramp generator circuit **312**. The gate closes and the ramp voltage last sampled is held until the next sample is taken. As such, the stepped waveform **366** as shown in FIG. 9 is provided from the sample/hold circuit **316**. This stepped waveform **366** is then applied to the filter/amplifier circuit **318** to filter the received stepped voltage waveform **366** to obtain the audio signal **370** as shown in FIG. 9. The filtered audio signal **370** is then amplified and applied to speaker **320** for sound production.

The duty cycle detection and polarity correction circuit **317** is used to maintain polarity of the pulse width modulated stream of pulses **356**. The falling edge pulse that is used to change the state of the flip flop **310** from the state caused by leading edge pulse is expected to arrive at the flip flop **310** within the time period allowed for the modulated pulse, e.g., within 12 μ seconds of the leading edge pulse that changes the state of the flip flop **310**. The reset time-out period **351** as shown in FIG. 9 is set in which to detect the trailing edge pulse used to change the state of the flip flop **310**. However, if the falling edge pulse is not detected, then

the one-shot circuit **308** times out and triggers falling edge detector **371** to provide a reset pulse **373** as shown in FIG. 9 to the flip flop **310** to make the state of the flip flop **310** correct for the next received leading edge pulse. In other words, the one shot circuit **308** changes the logic state provided to the AND gate **361**, e.g., it goes low, as shown in waveform **358** of FIG. 9, which triggers the falling edge detector **371**. Although the falling edge due to the reset pulse is detected by the falling edge detection circuit **314** and a short high pulse is provided to the AND gate **361**, with the one shot circuit input to the AND gate **361** being low, a gated sample pulse **362** is not provided to the sample and hold circuit **316**. As such, the previously sampled state is maintained. In such a manner, the polarity of the pulse width modulated pulse stream **356** can be maintained. Being able to retain polarity is important because it reduces the noise caused by frequent polarity reversals due to marginal reception conditions.

This alternate embodiment described with reference to FIGS. 7-9, can be described in other general terms. For example, the transmitter is a fixed frequency (e.g., period of 25 μ seconds) voltage to pulse width converter with a less than 50% duty cycle. The receiver is a pulse width to voltage convertor that takes advantage of the maximum pulse width, e.g., 10 μ seconds, for the modulated pulse together with fixed frequency to allow polarity determination. In other words, the operation can be referred to as mixed mode encoding. Analog information is provided by the pulse width modulated pulse stream, with each pulse occurring in less than half (e.g., 12 μ seconds) of the cycle time (e.g., 25 μ seconds). Further, one bit of digital polarity is encoded in the duty cycle (e.g., less than 50% or more than 50%) that is transmitted using the constant width pulse technique in which pulses representative of the rising and falling edges of a pulse width modulated stream of pulses are generated. The receiver detects the duty cycle and corrects the polarity of the received pulses.

FIG. 10 is a perspective view of an IR transmitter apparatus **404** and an IR receiver apparatus **430** of a portable IR communication system **400** which may implement one or more of the concepts described herein, e.g., modulation and demodulation circuitry. The IR transmitter apparatus **404** includes at least one infrared light emitting device **408** mounted on a transmitter housing **410** for transmission of IR signals **409** to IR receiver apparatus **430**. The transmitter housing is configured to be removably coupled to the phone apparatus **402**, e.g., a cellular phone, such that a microphone **407** (shown in FIG. 11) is positioned adjacent the sound output device **420** (also shown in FIG. 11) of the phone apparatus **402**.

FIG. 11 is a more detailed perspective view of the IR transmitter apparatus **404** of FIG. 10 and the phone apparatus **402** to which it may be coupled. The transmitter housing **410** encloses a microphone **407** and any transmitter circuitry necessary to drive the IR light emitting devices **408**, e.g., IR LEDs. Two infrared light emitting devices **408** are mounted on the transmitter housing **410**, however any suitable number of LEDs may be used. The transmitter housing **410** is configured with an opening **417** sized to fit over an end **422** of phone apparatus **402**. The transmitter housing **404** functions like a cap mounted, e.g., snap fitted, on the end **422** and provides microphone **407** adjacent sound output **420**. The transmitter housing **410** includes cap portion **421** having opening **417** defined therein for fitting over the end of multiple types of phones. As such, the transmitter apparatus **404** is a universal apparatus that can be switched from one phone to another. The cap portion **421** also

15

includes a battery pod or compartment **416** defined therein to hold a power source. Extending from the preferably rectangular cap portion **421** is a microphone housing portion **423** that houses the microphone **407**. The microphone housing portion **423** is preferably orthogonal to the cap portion **421**. Preferably, the transmitter housing **410** holds the microphone **407** adjacent the sound output **420** in a stable position, e.g., without significant movement being allowed that may cause quality problems. Some movement may be tolerated.

Various dampening structures **412**, e.g., pads, are provided for housing isolation between the phone apparatus **402** and transmitter housing **410**. Further, acoustic dampening material **414** is provided relative to the microphone **407** to provide housing isolation and prevent external noise from reaching the microphone **407**. For example, in FIG. **11**, a ring of acoustic dampening material **414** is provided about the microphone **407**.

Another illustrative embodiment of a transmitter housing **472** of a transmitter apparatus **470** is shown in FIG. **13**. The transmitter housing **472** has IR LEDs **474** mounted thereon. In this embodiment, the transmitter housing **472** includes a band element **476**, e.g. two portions that fasten together, that can wrap around a perimeter of a phone apparatus such that microphone **477** of the transmitter apparatus **470** is adjacent a sound output (not shown) of a phone apparatus. The microphone **477** is surrounded by acoustic dampening material **479** in much the same manner as described with reference to FIG. **11**. The band element **476** has associated therewith fastening elements **478** on one or both of the portions of band element **476**. For example, the fastening elements **478** may include hook and loop fasteners, releasable adhesives, etc. Further, the band element **476** may be formed of a single elastic material to hold the transmitter apparatus **470** about the phone apparatus.

Several illustrative diagrams of receiver apparatus usable in accordance with the present invention will be described with reference to FIGS. **12A–12C** and FIG. **14**. Although such receiver apparatus can be used in conjunction with the transmitter apparatus described herein, various other types of IR receivers may be used with such transmitter apparatus, including IR headsets as opposed to ear supported devices.

FIG. **12A** is a side view of the IR receiver apparatus **430** shown in FIG. **10**. FIG. **12B** is an exploded end view of the IR receiver apparatus **430** of FIG. **10** and FIG. **12C** is a perspective rear view of a speaker portion of the IR receiver apparatus **430** of FIG. **12B**. The IR receiver apparatus **430** includes a receiver housing **431** that is configured as a behind the ear receiver securable by the pinna of the ear. The receiver housing **431** includes a first body portion **432** that includes a behind the ear element **434** to secure the receiver housing **431** by the pinna of the ear and a speaker holding element **440** extending from the behind the ear element **434**. Preferably, the behind the ear element **434** is of a curved nature to comfortably wrap around the pinna of the ear with at least one IR sensitive photodiode **436** positioned at a surface of the behind the ear element **434**. Preferably, the IR sensitive photodiode **436** is located such that it is facing the same direction as the user's face when receiver apparatus **430** is secured by the pinna of the ear.

The speaker holding element **440** has an opening **456** defined therethrough along axis **458**. Preferably, the opening **456** is of an oblong or circular shape cross sectional shape, but any shape or size may be used. The opening **456** has an inner surface **457** that includes speaker contacts **452** mounted therein.

The receiver housing **431** further includes a second body portion **438** encompassing at least the speaker of the receiver

16

apparatus **430**. The second body portion **438** is sized to be retained within the opening **456**. Further, the second body portion **438** includes speaker contacts **454** for mating with the speaker contacts **452** mounted in the opening **456** of the speaker holding element **440** of the first body portion **432**.

The second body portion **438** preferably includes a speaker element portion **460** and a connection portion **465**. Further, preferably, the speaker portion **460** that lies outside of the opening **456** when the second portion **438** is assembled with the first portion **431** has a compressible material cover **462**, e.g., foam, to provide comfort to the user and adequate coupling of sound to the ear. The connection portion **465** is sized to fit in the opening **456** such that the contacts **454** at a surface of the connection portion **465** mate with the contacts **452** in the contact region **450** of the receiver housing **431**. Preferably, the transmitter components other than the speaker are mounted in the first body portion **432** of the receiver housing **431**. However, depending on the size of such components they could be mounted in either or both such body portions.

With the IR receiver housing **431** having a separate second body portion **438** that is removable from the opening **456**, the second body portion **438** can be inserted in the opening **456** from either direction along axis **458** with mating of the contacts **454** and **452** occurring independent of the direction of insertion. As such, the receiver housing **431** can be secured to either ear of the user with the speaker element portion **460** of the second body portion **438** being next to the user's ear and the IR LED facing forward.

FIG. **14** is a side view of an alternate embodiment of an IR receiver apparatus **470**, e.g., earbud receiver. The receiver apparatus **470** includes a receiver housing **471** that is securable within the concha of the ear. The receiver housing **471** includes a speaker portion **472** that encloses at least the speaker and preferably, also a power source of the receiver (e.g., battery, not shown). The speaker portion **472** has a compactable/expandable material **474** (e.g., foam, sponge, etc.) about at least a portion thereof to support the receiver housing **471** in the concha of the ear. The material **474** is placed in a compacted state upon insertion in the concha of the ear. Thereafter, when released from the compacted state, the material expands to an expanded state to hold the receiver housing **471** in the concha of the ear.

The receiver housing **471** further includes an elongated portion **476** that extends from the speaker portion **472**. Preferably, the elongated portion **476** generally extends in a direction orthogonal from the speaker portion **472**, or at least in a non-aligned direction. The weight of the apparatus **470** is concentrated in the speaker portion **472** for stability within the concha of the ear. Further, at least a portion of the transmitter components are enclosed by the elongated portion **476** with at least one IR sensitive device **478**, e.g. IR photodiode, mounted thereon. Preferably, an IR photodiode **478** is mounted towards the distal end **477** of the elongated portion **476**. In such a position, the elongated portion **476** can be adjusted to "point" the photodiode in a particular direction that may assist in reception of IR signals. Further, the elongated portion **476** may be formed as a flexible portion to allow for positioning of the photodiode for reception and also for stability positioning of the apparatus in the ear.

FIG. **15** is a perspective view of a lapel IR transmitter apparatus **482** useable with the communication system of FIG. **1** and FIGS. **16A–16B** are illustrations of corded IR transmitters **520** and receivers **510** usable with the communication system of FIG. **1**. Such embodiments are provided

to show the additional components that may be used in a portable system as described with reference to FIG. 1.

For example, a user **480** may wear the lapel transmitter **482** that includes a microphone **484** for picking up sound input. The transmitter apparatus **482** may transmit using the IR light emitting device **486** driven by circuitry within housing **485**. Such IR signals may be received by an IR wireless receiver apparatus such as described herein. Further, the modulation/demodulation techniques described herein may be used for communication using the lapel transmitter **482** or any other transmitter apparatus.

Further, as shown in FIG. 16A, a corded IR receiver **510** having a corded connection element **516**, e.g., a jack, may be used for receiving IR signals generated according to the present invention. For example, the receiver may be connected to a computer **500** having a sound card for output of sound based on the received IR signals detected by IR sensitive diode **512** and demodulated by circuitry within housing **514**.

Yet further, as shown in FIG. 16B, a corded IR transmitter **520** having a corded connection element **518**, e.g., a jack, may be used for transmitting IR signals generated according to the present invention. For example, the transmitter apparatus **520** may be connected to a computer **500** having a sound output jack for providing audio signal to IR transmitter **520** for modulation by circuitry within housing **526** for transmission by IR LED **524**.

One skilled in the art will recognize that various accessories items may be provided in conjunction with the present invention to provide suitable communication between the transmitter apparatus and receiver apparatus. For example, a dashboard cradle or holder may be used to place the phone apparatus having the transmitter coupled thereto in a position suitable for IR communication to be accomplished. Further phone positioning devices may include a visor clip, a window slit cradle similar to a cup holder, etc.

Preferably, according to the present invention, the ear secured housing only includes a receiver and does not include any transmitter components. With respect to use of the present invention with a phone apparatus, the microphone of the phone apparatus is believed to be able to pick up voice from a user when the phone apparatus is within a certain distance from the user. Thus, the need for additional components to relay voice to the microphone of the phone apparatus are unnecessary. However, the present invention contemplates the use of the system and methods described herein with other voice reception equipment.

A method of using a portable communication system **10** described with reference to FIG. 1 with a phone apparatus (such as shown in FIG. 11) having a sound output device is one significant application of the system of the present invention. The method includes providing the removable transmitter apparatus **12** that includes the transmitter housing **28** enclosing at least the microphone and modulation circuitry. The removable transmitter apparatus **12** is secured to the phone apparatus such that the microphone is positioned adjacent the sound output device of the phone apparatus as previously described herein or in any other manner, e.g., cap mounting or with use of a wrap around band. Being removable, the transmitter apparatus may be detached from the phone apparatus and secured to a different phone apparatus. In such a method, the transmission technique need not be IR, but could be RF or any other suitable wireless transmission techniques.

All patents and references cited herein are incorporated in their entirety as if each were incorporated separately. It is to be understood that the above description is intended to be illustrative, and not restrictive to the present invention. Many other embodiments will be apparent to those skilled in the art upon reviewing the above description. The scope of

the invention should, therefore, be determined with reference to the appended claims along with the full scope of equivalents to which such claims are entitled.

What is claimed is:

1. A portable communication system comprising:
 - an infrared transmitter apparatus, wherein the infrared transmitter apparatus comprises:
 - at least one infrared light emitting device,
 - modulation circuitry operable to convert a signal to one or more constant width electrical pulses to drive the infrared light emitting diode to transmit one or more corresponding constant width infrared pulses, and
 - a transmitter housing enclosing the modulation circuitry and upon which the at least one infrared light emitting device is mounted; and
 - an infrared receiver apparatus, wherein the infrared receiver apparatus comprises:
 - an infrared light detection device to detect the one or more corresponding infrared pulses and generate one or more electric signals representative of the detected infrared pulses,
 - a speaker,
 - demodulation circuitry operable to convert the one or more electric signals representative of the detected infrared pulses to an audio signal to power the speaker to produce a sound output, and
 - a receiver housing enclosing the speaker and the demodulation circuitry and upon which the infrared light detection device is mounted, wherein the receiver housing is formed to be self-supported entirely by the ear of a user.
2. The system of claim 1, wherein the transmitter housing includes means for removably attaching the housing to the phone apparatus.
3. The system of claim 1, wherein the receiver housing comprises an in the ear receiver housing securable within the concha of the ear.
4. The system of claim 1, wherein the receiver housing comprises a behind the ear receiver housing securable by the pinna of the ear.
5. The system of claim 1, wherein the receiver housing comprises:
 - a first portion including a behind the ear element and a speaker holding element having an opening defined therethrough, wherein the speaker holding element includes speaker contacts; and
 - a second portion encompassing the speaker, wherein second portion is sized to be retained within the opening and includes speaker contacts for mating with the speaker contacts of the speaker holding element.
6. The system of claim 1, wherein modulation circuitry comprises:
 - pulse width modulation circuitry to convert the audio signal using a carrier signal to one or more width modulated pulses, wherein the width of the one or more pulses is varied as a function of the audio signal;
 - an edge detect circuit to detect the edges of the one or more width modulated pulses and generating constant width pulses based on the detected edges; and
 - a pulse driver circuit to drive the infrared light emitting device.
7. The system of claim 1, wherein demodulation circuitry comprises:
 - pulse detection circuitry to convert the one or more electrical signals representative of the detected infrared pulses to one or more constant width pulses based thereon;

19

pulse width convertor circuitry to convert the one or more constant width pulses to one or more width modulated pulses; and
pulse width modulation circuitry to convert the one or more width modulated pulses to an audio signal for application to the speaker. 5

8. The system of claim 7, wherein the pulse detection circuitry comprises:
an amplifier configuration to provide symmetrically opposed polarity electrical pulses corresponding to each of the one or more electrical signals representative of the detected infrared pulses; and
a comparator to generate a constant width pulse each time symmetrically opposed polarity electrical pulses are applied thereto. 15

9. The system of claim 7, wherein the pulse width convertor circuitry comprises a divide by two circuit.

10. The system of claim 7, wherein the receiver further comprises missing pulse detection circuitry comprising:
detection circuitry to detect the absence of constant width pulses; and
disable circuitry to disable one or more components of the receiver upon detection of such absence of constant width pulses.

11. The system of claim 1, wherein the transmitter apparatus further comprises a sound activated power circuit to power one or more components of the transmitter upon detection of sound input. 25

12. The system of claim 1, wherein the one or more constant width electrical pulses to drive the infrared light emitting device are less than about 2 microsecond in duration. 30

13. The system of claim 12, wherein the one or more constant width electrical pulses to drive the infrared light emitting device are less than about 1 microsecond in duration. 35

14. A portable infrared receiver apparatus comprising:
an infrared light detection device to detect one or more infrared pulses and generate one or more electric signals representative of the detected infrared pulses;
a speaker; 40
demodulation circuitry operable to convert the one or more electric signals representative of the detected infrared pulses to an audio signal to power the speaker to produce a sound output, wherein the demodulation circuitry comprises:
pulse detection circuitry to convert the one or more electrical signals representative of the detected infrared pulses to one or more constant width pulses based thereon, 50
pulse width convertor circuitry to convert the one or more constant width pulses to one or more width modulated pulses, and
pulse width modulation circuitry to convert the one or more width modulated pulses to an audio signal for application to the speaker, and 55
a receiver housing enclosing the speaker and the demodulation circuitry and upon which the infrared light detection device is mounted, wherein the receiver housing is formed to be self-supported entirely by the ear of a user. 60

15. The apparatus of claim 14, wherein the receiver housing comprises an in the ear receiver housing securable within the concha of the ear, and further wherein the receiver housing includes:
a speaker portion enclosing the speaker and a power source, the speaker portion having a compactable/ 65

20

expandable material about at least a portion thereof to support the receiver housing in the concha of the ear, wherein the material is placed in a compacted state upon insertion in the concha of the ear and further wherein the material expands to an expanded state to hold the receiver housing in the concha of the ear upon release from the compacted state, and
an elongated portion extending from the speaker portion enclosing at least a portion of the demodulation circuitry, wherein the infrared light detection device is positioned on the elongated portion.

16. The apparatus of claim 14, wherein the receiver housing comprises a behind the ear receiver housing securable by the pinna of the ear, and further wherein the receiver housing includes:
a first portion comprising:
a behind the ear element to secure the receiver housing by the pinna of the ear, and
a speaker holding element extending from the behind the ear element, wherein the speaker holding element has an opening defined therethrough, and further wherein the speaker holding element includes speaker contacts; and
a second portion encompassing the speaker, wherein second portion is sized to be retained within the opening and includes speaker contacts for mating with the speaker contacts of the speaker holding element.

17. The apparatus of claim 16, wherein the speaker contacts of the speaker holding element are positioned on a surface defining the opening.

18. The apparatus of claim 14, wherein the demodulation circuitry comprises:
pulse detection circuitry to convert the one or more electrical signals representative of the detected infrared pulses to one or more constant width pulses based thereon;
pulse width convertor circuitry to convert the one or more constant width pulses to one or more width modulated pulses; and
pulse width modulation circuitry to convert the one or more width modulated pulses to an audio signal for application to the speaker.

19. The apparatus of claim 18, wherein the pulse detection circuitry comprises:
an amplifier configuration to provide symmetrically opposed polarity electrical pulses corresponding to each of the one or more electrical signals representative of the detected infrared pulses; and
a comparator to generate a constant width pulse each time the symmetrically opposed polarity electrical pulses are applied thereto.

20. The apparatus of claim 18, wherein the pulse width convertor circuitry comprises a divide by two circuit.

21. The apparatus of claim 18, wherein the receiver further comprises missing pulse detection circuitry comprising:
detection circuitry to detect the absence of constant width pulses; and
disable circuitry to disable one or more components of the receiver upon detection of such absence of constant width pulses.