(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
25 November 2004 (25.11.2004)

PCT

(10) International Publication Number
WO 2004/102609 A1

(51) International Patent Classification[7]: H01J 35/12, 35/08

(21) International Application Number: PCT/IB2004/050653

(22) International Filing Date: 12 May 2004 (12.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03101401.2 19 May 2003 (19.05.2003) EP

(71) Applicant *(for all designated States except DE, US)*: **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(71) Applicant *(for DE only)*: **PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH** [DE/DE]; Steindamm 94, 20099 Hamburg (DE).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **HARDING, Geoffrey** [GB/DE]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **DAVID, Bernd, R.** [DE/DE]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


(74) Agent: **WOLFS, Marc, J., M.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: FLUORESCENT X-RAY SOURCE

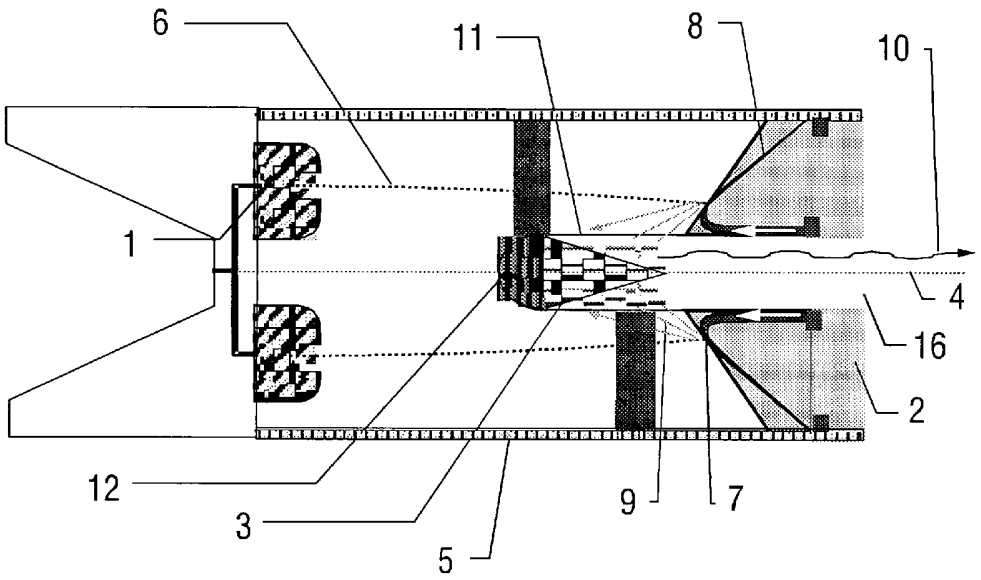

(57) Abstract: The present invention relates to an X-ray source for the generation of fluorescent X-rays comprising an electron source (1) for the emission of electrons (6) and a target which emits X-rays (10) in response to the incidence of the electrons (6), said target comprising a ring-shaped primary target (2) for the emission of primary X-rays (9) in response to the incidence of the electrons (6) and a secondary target (3) for the emission of fluorescent X-rays (10) in response to the incidence of the primary X-rays (9). To obtain an enhanced radiance, it is proposed that the primary target (2) comprises a liquid metal channel (8) arranged in radial direction relative to a central axis (4), and that a liquid metal circulates in the liquid metal channel (8) during operation of the X-ray source in radial direction from an inner side (13) to an outer side (14) of said ring-shaped primary target (2).

WO 2004/102609 A1

European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Fluorescent X-ray source

The present invention relates to an X-ray source for the generation of fluorescent X-rays comprising an electron source for the emission of electrons and a target which emits X-rays in response to the incidence of the electrons, said target comprising a ring-shaped primary target for the emission of primary X-rays in response to the incidence of the electrons and a secondary target for the emission of fluorescent X-rays in response to the incidence of the primary X-rays.

The invention further relates to an X-ray anode for the emission of fluorescent X-rays in response to the incidence of electrons, said anode comprising a ring-shaped primary target for the emission of primary X-rays in response to the incidence of the electrons and a secondary target for the emission of fluorescent X-rays in response to the incidence of the primary X-rays.

Monochromatic X-ray sources enhance the performance of conventional X-ray techniques and enable innovative ones. Such monochromatic X-ray sources are, for instance, described in US 4,903,287 and US 5,157,704. The anode, also called primary target, which encloses a member, also called secondary target, is struck by electrons on its side which faces the member and in which the primary X-ray radiation generated in the anode generates fluorescent radiation in the member. The member is preferably arranged within an enclosing shield which keeps scattered electrons remote from the member. This principle is often referred to as Fluorex principle.

The fundamental X-ray interaction cross-sections, such as Compton scattering, photoelectric absorption and coherent X-ray scatter, are all energy-dependent. It has traditionally been assumed in diagnostic radiology that the continuous spectrum emitted by polychromatic radiation sources (electron-impact) can be approximated by a monochromatic line of "average" energy. The beam hardening artefact of computed tomography (CT) is evidence that his approximation must be abandoned when accurate results for the attenuation coefficient are desired.

The "average energy" approximation breaks down even more seriously in novel X-ray techniques such as coherent scatter CT or TEAMFI, which ideally require monochromatic radiation. Such radiation sources are either weak (e.g. radionuclides) or inconvenient (e.g. synchrotrons).

Another type of monochromatic X-ray source which is based on the so-called LIMAX principle is described in US 6,185,277. In this X-ray source a liquid metal target is provided. The electrons emitted by the electron source enter the liquid metal through a thin window and produce X-rays therein. The liquid metal, having a high atomic number, circulates under the influence of a pump, so that the heat produced by the interaction with the electrons in the window and the liquid metal can be dissipated. The heat generated at this area is dissipated by a turbulent flow, thus ensuring effective cooling.

It is an object of the present invention to provide a quasi-monochromatic X-ray source for the generation of fluorescent X-rays of the kind mentioned in the opening paragraphs, by which an enhanced radiance (defined as photons per unit source area per second per steradian) can be obtained compared to known quasi-monochromatic X-ray sources. Further, an anode for use in such an X-ray source shall be provided.

In order to achieve this object, an X-ray source for the generation of fluorescent X-rays according to the invention and an X-ray anode for the emission of fluorescent X-rays according to the invention are both characterized in that said primary target comprises a liquid metal channel arranged in radial direction relative to a central axis, a liquid metal circulating in said liquid metal channel during operation of the X-ray source in radial direction from an inner side to an outer side of said ring-shaped primary target.

The present invention is based on a combination of the Fluorex principle with the liquid metal anode X-ray technique, which permits a large increase in source radiance. To obtain this increased radiance, a radial flow geometry is used in the liquid metal channel. The circular-symmetric geometry of the primary and secondary targets maximizes, for a certain size (i.e. focus dimension) of the secondary target, the mean solid angle, Ω_{mean}, which the secondary target subtends at the primary target. The radial flow arrangement correspondingly maximizes the power with which the ring-shaped circular-symmetric primary target can be loaded. By the invention, the performance of conventional radiological techniques can be enhanced and novel radiological techniques are enabled to be practically realized.

Preferred embodiments of the invention are defined in the dependent claims. It is, for instance, advantageous that the secondary target is arranged on the central axis of the ring-shaped primary target and is adapted to emit the fluorescent X-rays substantially in directions parallel to said central axis. This arrangement is most effective with respect to efficiency of use of primary X-rays. The fluorescent X-rays will thus be emitted through the central hole of the ring-shaped primary target.

According to another embodiment, the liquid metal channel comprises a constriction in an electron impact zone in which the electrons hit the primary target. This ensures that at an electron window, where the electrons are incident, the pressure on the window is minimized, i.e. the viscous pressure drop across the electron window is balanced by an increase in the Bernoulli pressure.

According to another aspect, the surface of the primary target facing the electron source is covered by a metal membrane, for instance a foil. This membrane serves for separating the vacuum region of the X-ray source from the liquid metal channel behind the membrane.

The liquid metal circulating in the liquid metal channel preferably comprises a material having a high atomic number to ensure that sufficient X-rays are generated therein upon incidence of the electrons. Preferably, the liquid metal has an atomic number larger than 40 and smaller than 80. For instance, the liquid metal may comprise an alloy of Bi, Pb, In or Sn.

To ensure a strict radial flow of the liquid metal in the liquid metal channel, radial fins are further provided to divide the liquid metal channel into a number of radial sub-channels. Thus, the liquid metal can only flow in radial direction but not in circular direction, i.e. in a direction around the central axis.

Embodiments of the present invention will now be explained in more detail with reference to the drawings, in which:

Fig. 1 shows an emission spectrum of a known Fluorex device having a Ta target;

Fig. 2 shows a central cross-section through an X-ray source according to the invention;

Fig. 3 shows an enlarged portion of a primary target of the X-ray source shown in Fig. 1; and

Fig. 4 shows an end surface of the primary target shown in Fig. 3 when viewed along the direction of a central axis of the X-ray source.

Fig. 1 shows an emission spectrum of a known Fluorex device having a Ta target as marketed by Philips. The fluorescent radiation originates via the photoelectric effect in a secondary target (of Ta in this device) which is irradiated by a continuous X-ray spectrum whose maximum photon energy is significantly higher (a factor of 3) than the K absorption edge of the secondary target. The photon output of this device is proportional to the power of the primary X-ray beam which falls on the secondary target. A higher radiance is therefore feasible when the primary power is increased. In the Fluorex arrangement, the primary beam is emitted by a water-cooled stationary anode which limits the applied power of the electron beam to approximately 10 kW. The purpose of the present invention is to radically increase the permissible power by arranging for the electron beam to interact with a turbulently–flowing liquid metal.

A central cross-section through the arrangement of an X-ray source according to the invention is shown in Fig. 2. The arrangement essentially comprises a cathode 1 and a target (anode) having a primary target (also called end cap) 2 and a secondary target 3. The arrangement is circularly symmetric around the central (rotational) axis 4 and is located inside a housing 5. An electron beam 6 emitted from the ring cathode 1 impacts on a membrane (foil) 7 of the primary target 2. The foil 7 is of a material (e.g. W) which is sufficiently thin, in order that the electrons lose a negligible proportion of their original energy therein. The primary target 2 further comprises a liquid metal channel 8 which allows a liquid metal to circulate in radial direction relative to the central axis 4 from an inner side 13 to an outer side 14 of the ring-shaped primary target 2. Fig. 3 is an enlarged view of one half of the primary target 2 shown in Fig. 2.

The foil 7 serves the purpose of separating the vacuum region of the X-ray tube from a liquid metal behind the foil 7. The liquid metal can be an alloy of e.g. Bi, Pb, In, Sn, etc., but should at least have a high atomic number, preferably between 40 and 80. The electrons 6 diffuse into the liquid metal, thereby loosing energy which is converted into heat. As the liquid metal is moving with a speed of many meters per second, the total power which can be dissipated in the liquid metal is much larger than that of a stationary anode X-ray tube.

The direction of motion of the liquid metal can be gauged from the arrows showing the flow direction in Fig. 3. It enters the primary target 2 at a comparatively small

radius and leaves it again at a comparatively large radius. Further elements such as a heat exchanger, liquid metal pump, etc. can be added to the arrangement in Fig. 2 to yield a closed circuit for the liquid metal channel 8 around which the liquid metal is repetitively circulated.

Primary X-rays 9 are generated in the electron membrane 7 and in the liquid metal 8, providing this has a relatively high Z. As shown in Fig. 2, these X-rays 9 hit the secondary target 3 through an X-ray window 11 (e. g. of Be) and excite fluorescent radiation 10. The secondary target 3 shows a cone-shaped form of a circular cross-section with a tip facing away from the cathode 2 in the direction of the central axis 4. Further, a primary beam stop 12 is provided on the side facing the cathode 1 to prevent X-rays 9 from hitting the cathode 1. The fluorescent radiation 10 leaves the X-ray tube along the direction of the central axis 4 through an exit window 16 in the primary target 2 and the housing 5. The primary target 2 is illustrated in Fig. 4 when viewed in the direction of the central axis 4.

The primary target 2 serves several purposes. First, it absorbs all the other radiation generated in the X-ray tube by the electron beam, X-ray scatter events etc. To this end the end cap has an equivalent thickness of several mm Pb. Secondly, the primary target 2 has a circular channel (inlet) 13 at a comparatively small radius, through which liquid metal is fed into the anode, and a similar channel (outlet) 14 at a comparatively large radius, through which liquid metal is transported to a pump etc. Thirdly, the primary target 2 has a form which matches with the liquid metal circuit 8 (i.e. confusor, constriction and diffusor) and supports the electron window 7.

Finally, as is apparent from Fig. 4, the part of the primary target 2 to the left of the liquid metal channel 8 in Fig. 3 is provided with fins 17 which direct the liquid metal to move in a strictly radial sense from the inner (feed) to the outer (outlet) radius.

According to the invention the liquid metal channel 8 shows a cross-sectional area (channel height x circumference) across which the liquid flow is held constant. As the radius increases (from the inlet 13 to the outlet 14) the channel height is reduced. Radial flow of the liquid metal is ensured by the fins 17. Further, the pressure on the electron window 7 can be minimised by ensuring that the viscous pressure drop across the window 7 is balanced by an increase in the Bernoulli pressure. In the radial embodiment of the liquid channel 8 the pressure drop across the window is not linear with the radius. To achieve a minimum pressure at the electron window 7, the liquid channel comprises a constriction 15 at an electron impact zone where most or all of the electrons 6 are incident.

The present invention provides a high-brightness quasi-monochromatic X-ray source for the generation of fluorescent X-rays. It employs a liquid metal target in a

circularly-symmetric flow geometry to yield a primary beam of high intensity (factor ten improvement over known Fluorex design). When this beam irradiates the exchangeable secondary target, a high intensity beam of fluorescent photons results. The enhanced radiance of this arrangement enables practical realization of otherwise unrealistic radiological techniques such as molecular imaging, tissue characterization with coherent X-ray scatter, and baggage inspection.

CLAIMS:

1. An X-ray source for the generation of fluorescent X-rays comprising:
an electron source (1) for the emission of electrons (6);
a target which emits X-rays (10) in response to the incidence of the electrons (6), said target comprising a ring-shaped primary target (2) for the emission of primary X-rays (9) in response to the incidence of the electrons (6) and a secondary target (3) for the emission of fluorescent X-rays (10) in response to the incidence of the primary X-rays (9), characterized in that said primary target (2) comprises a liquid metal channel (8) arranged in radial direction relative to a central axis (4), a liquid metal circulating in said liquid metal channel (8) during operation of the X-ray source in radial direction from an inner side (13) to an outer side (14) of said ring-shaped primary target (2).

2. An X-ray source as claimed in claim 1, characterized in that said secondary target (3) is arranged on the central axis (4) of the ring-shaped primary target (2) and is adapted to emit the fluorescent X-rays (10) substantially in directions parallel to said central axis (4).

3. An X-ray source as claimed in claim 1, characterized in that the liquid metal channel (8) comprises a constriction (15) in an electron impact zone in which the electrons (6) hit the primary target (2).

4. An X-ray source as claimed in claim 1, characterized in that the surface of the primary target (2) facing the electron source (1) is covered by a metal membrane (7).

5. An X-ray source as claimed in claim 1, characterized in that the liquid metal comprises a material having an atomic number larger than 40, in particular between 40 and 80.

6. An X-ray source as claimed in claim 1, characterized in that said liquid metal channel (8) is separated by radially aligned fins (17) into a number of radial sub-channels.

7. An X-ray anode for the emission of fluorescent X-rays (10) in response to the incidence of electrons (6), said anode comprising a ring-shaped primary target (2) for the emission of primary X-rays (9) in response to the incidence of the electrons (6) and a secondary target (3) for the emission of fluorescent X-rays (10) in response to the incidence of the primary X-rays (9), characterized in that said primary target (2) comprises a liquid metal channel (8) arranged in radial direction relative to a central axis (4), a liquid metal circulating in said liquid metal channel (8) during operation of the X-ray source in radial direction from an inner side (13) to an outer side (14) of said ring-shaped primary target (2).

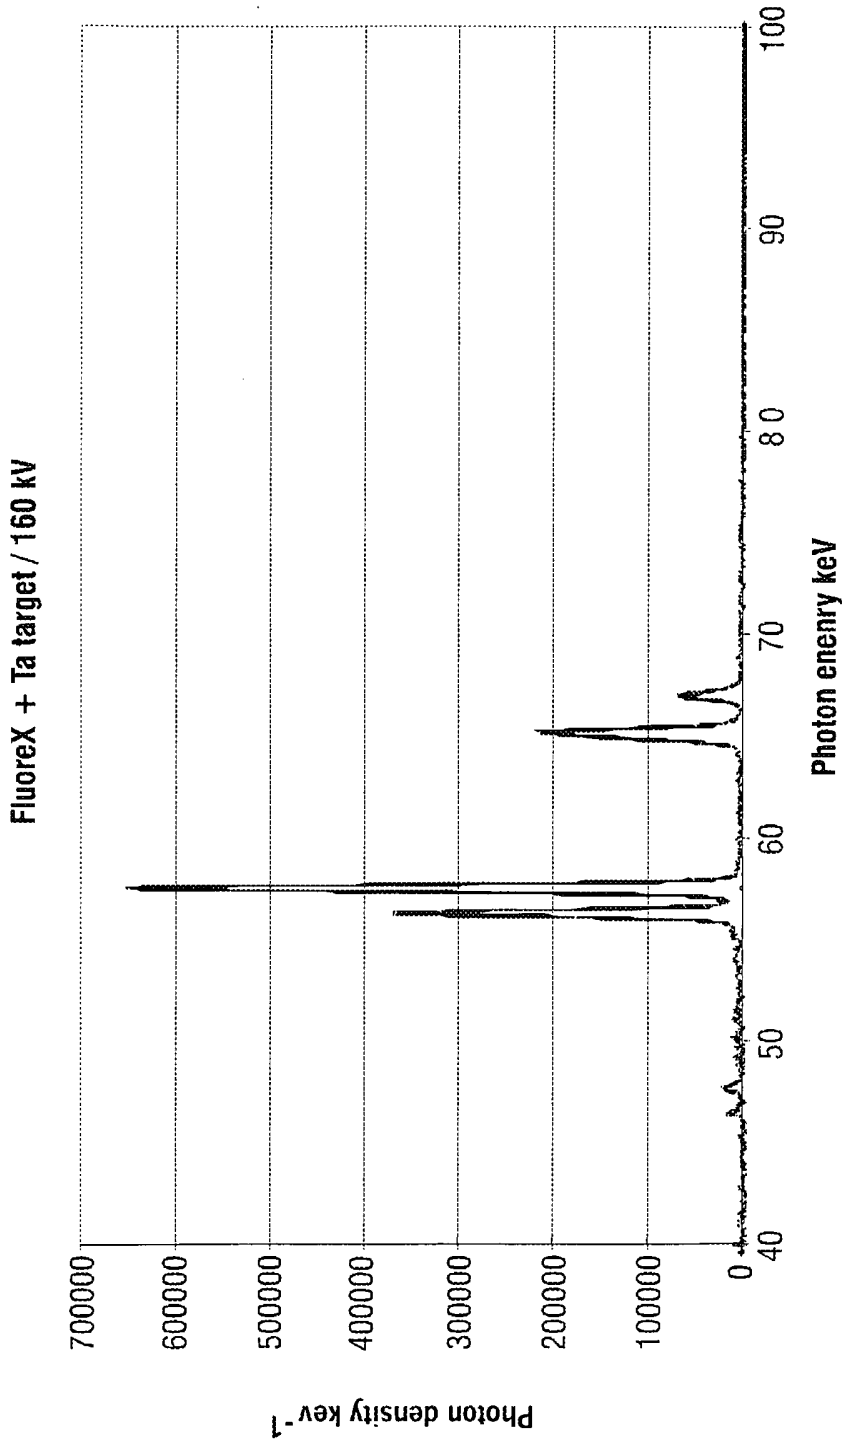

FluoreX + Ta target / 160 kV
Photon density kev-1
700000
600000
500000
400000
300000
200000
100000
0
40
50
60
70
80
90
100
Photon enenry keV

FIG.1

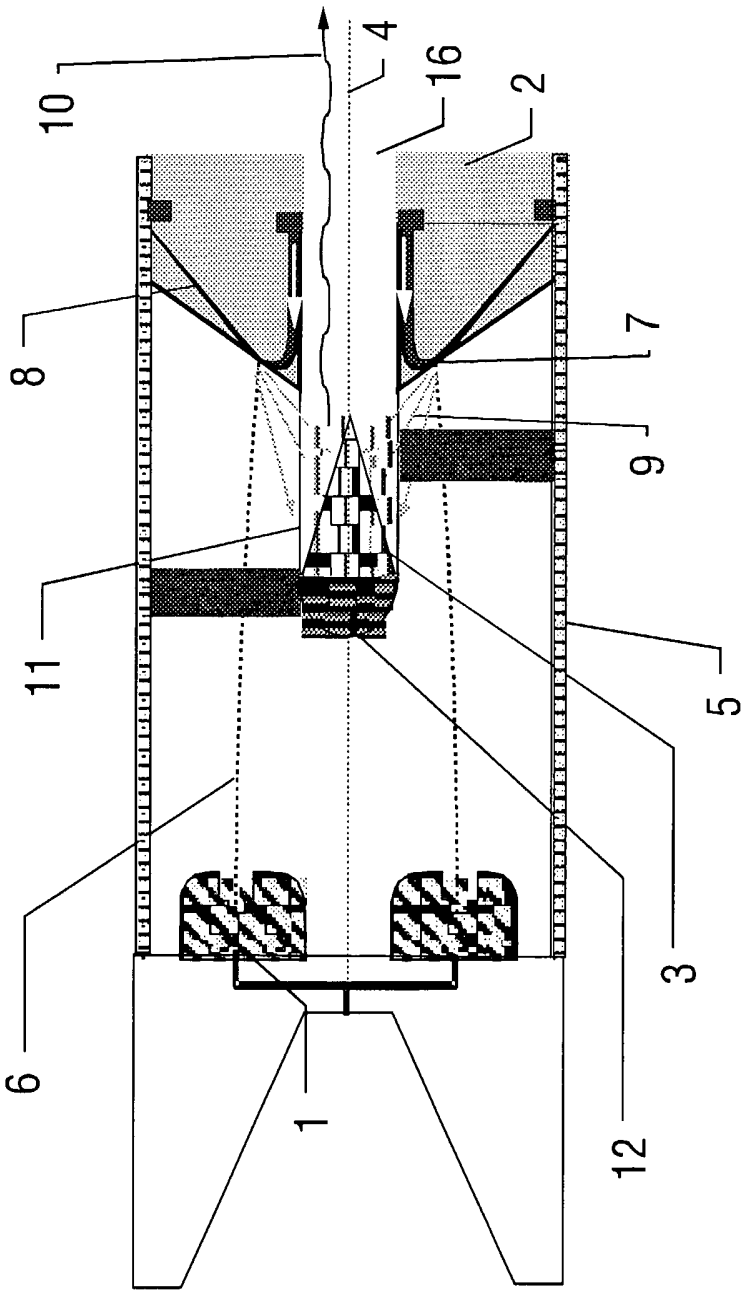


FIG.2

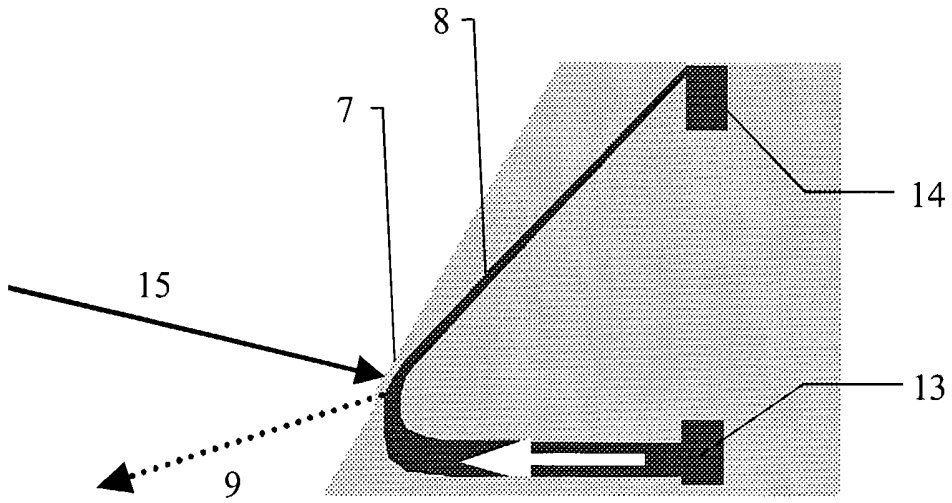


FIG.3

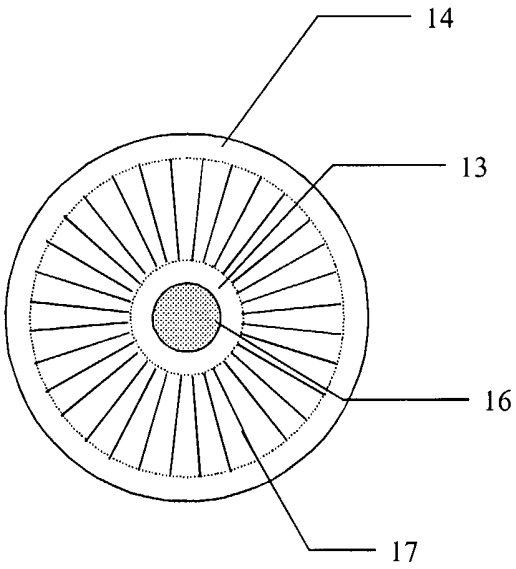


FIG.4

INTERNATIONAL SEARCH REPORT

International Application No
T/IB2004/050653

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01J35/12 H01J35/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 196 39 241 A (SIEMENS AG) 2 April 1998 (1998-04-02) column 1, lines 4,5 column 3, lines 2-10	1,2,7
Y	FR 2 108 149 A (ALSACIENNE ATOM) 19 May 1972 (1972-05-19) page 1, lines 20-30	1,2,7
A	EP 1 102 302 A (PHILIPS CORP INTELLECTUAL PTY ; KONINKL PHILIPS ELECTRONICS NV (NL)) 23 May 2001 (2001-05-23) column 1, line 44	1,2,7

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
22 September 2004	05/10/2004

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Oestreich, S

Form PCT/ISA/210 (second sheet) (January 2004)

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2004/050653

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19639241 A	02-04-1998	DE 19639241 A1	02-04-1998
FR 2108149 A	19-05-1972	FR 2108149 A5	19-05-1972
EP 1102302 A	23-05-2001	DE 19955392 A1	23-05-2001
		EP 1102302 A1	23-05-2001
		JP 2001155670 A	08-06-2001
		US 6560313 B1	06-05-2003