

[54] INTER-LINER FOR A SAFETY HELMET AND METHOD OF ASSEMBLY

3,535,710 10/1970 Aileo 2/423 X
3,911,496 10/1975 Arai et al. 2/423

[76] Inventor: William G. Morton, Box 841, Hopewell, Va. 23860

Primary Examiner—Werner H. Schroeder
Attorney, Agent, or Firm—Jacox & Meckstroth

[21] Appl. No.: 825,405

[57] ABSTRACT

[22] Filed: Aug. 17, 1977

A substantially rigid dome-shaped shell encloses a deformable cap-like headpiece of uniform thickness. The headpiece conforms to the contour of the wearer's head and cooperates with the shell to define a dome-shaped cavity which is sealed around its bottom portion. The cavity is filled with an expandable plastics foam material which hardens and conforms to the contour of the headpiece. In one embodiment, spacer members are positioned within the cavity and extend from the headpiece to the shell for positioning the shell relative to the headpiece, and in another embodiment, the shell is spaced within a slightly larger outer shell by resilient energy-absorbing foam pads. In a further embodiment, separate earpiece units are contour fitted to the wearer's head with a resilient expandable plastics foam material, and a modified helmet shell is used as a holder for fitting the headpiece and earpiece units.

Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 721,871, Sep. 9, 1976, Pat. No. 4,044,399, which is a continuation-in-part of Ser. No. 570,712, Apr. 23, 1975, Pat. No. 3,992,721, which is a continuation-in-part of Ser. No. 360,950, May 16, 1973, Pat. No. 3,882,546, which is a continuation-in-part of Ser. No. 323,195, Jan. 12, 1973, abandoned.

[51] Int. Cl.² A42B 1/08

[52] U.S. Cl. 2/423

[58] Field of Search 2/410, 411; 414, 415, 2/425, 209, 423

[56] References Cited

U.S. PATENT DOCUMENTS

3,456,263 7/1969 Aileo 2/423
3,470,564 10/1969 Aileo 2/423

11 Claims, 14 Drawing Figures

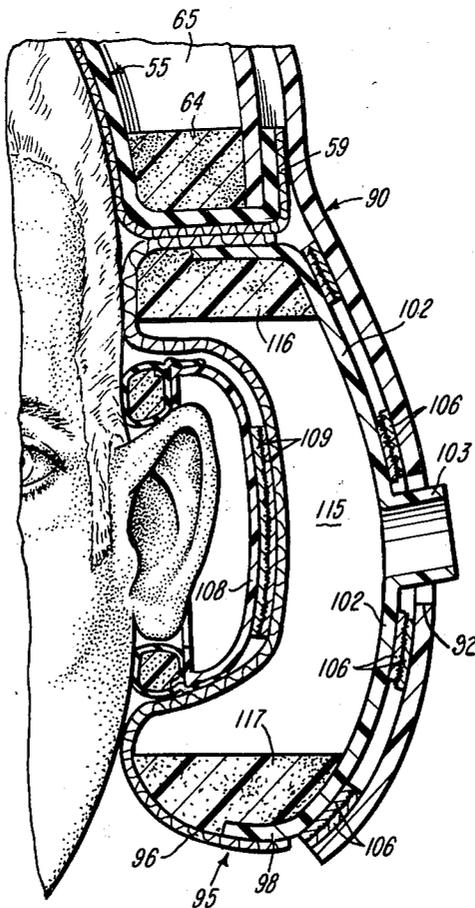


Fig-1

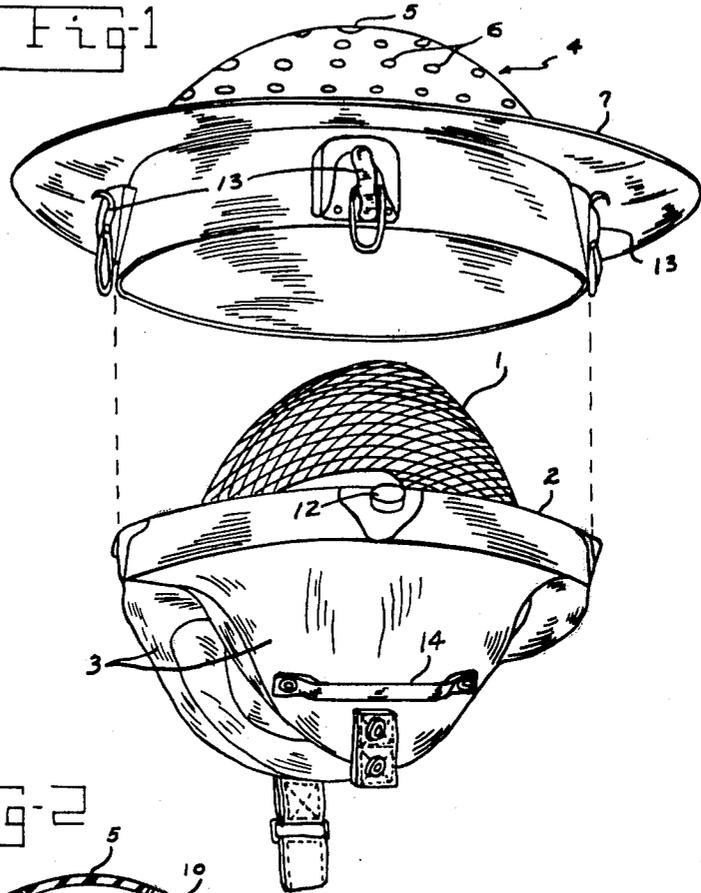
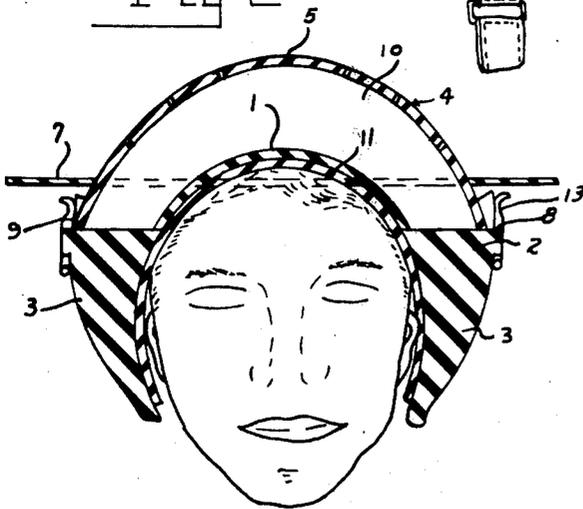
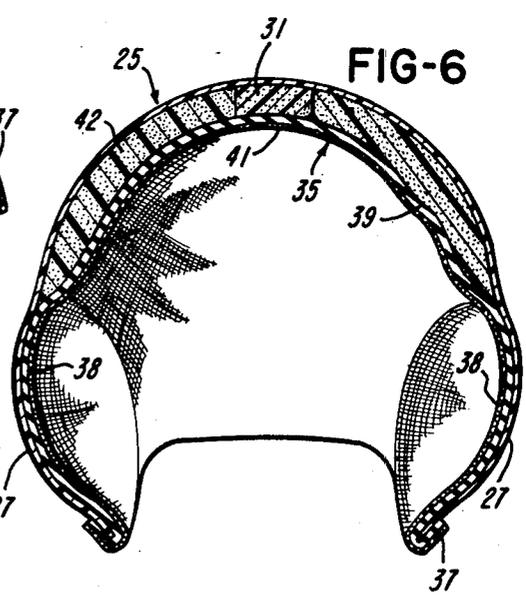
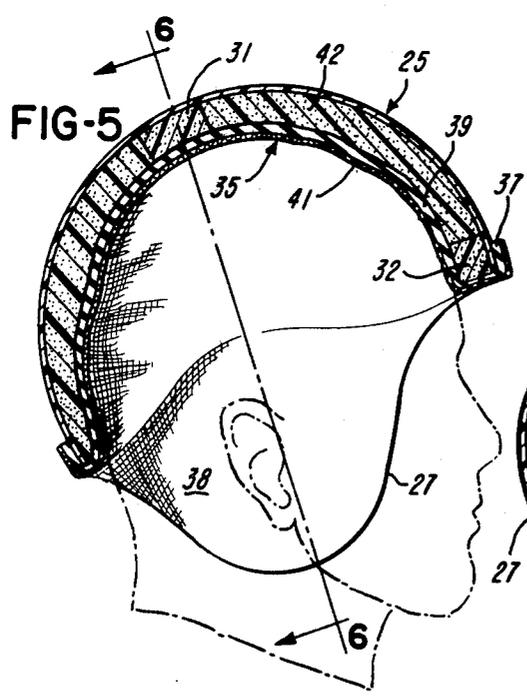
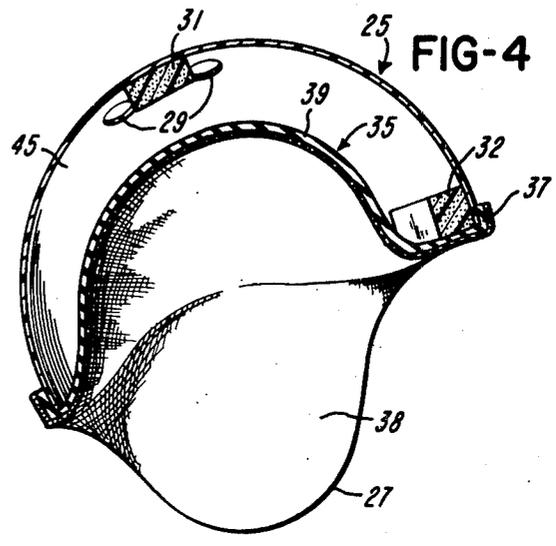
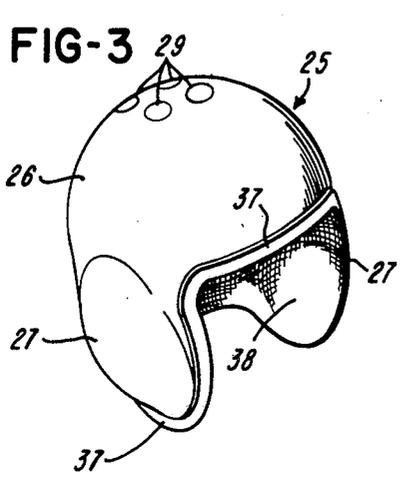


Fig-2





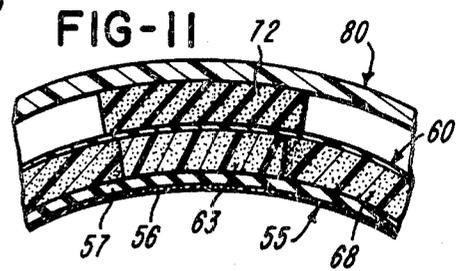
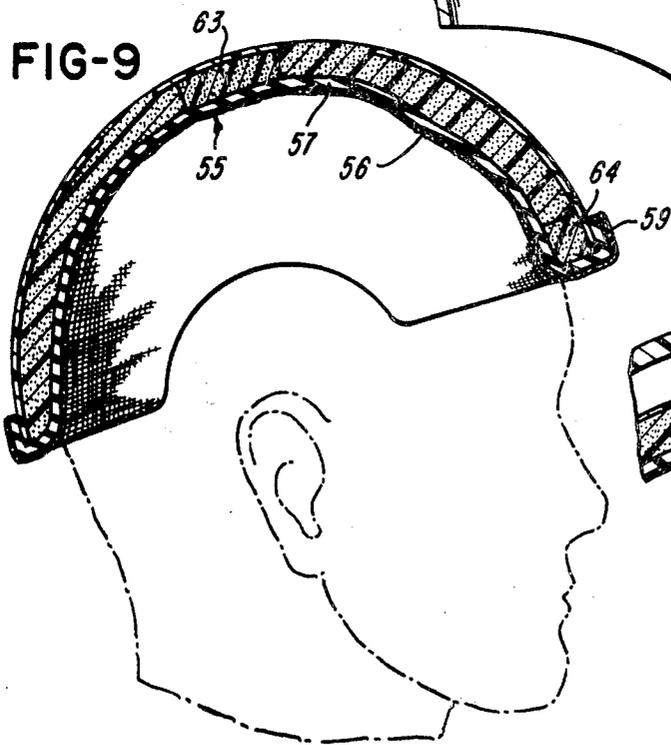
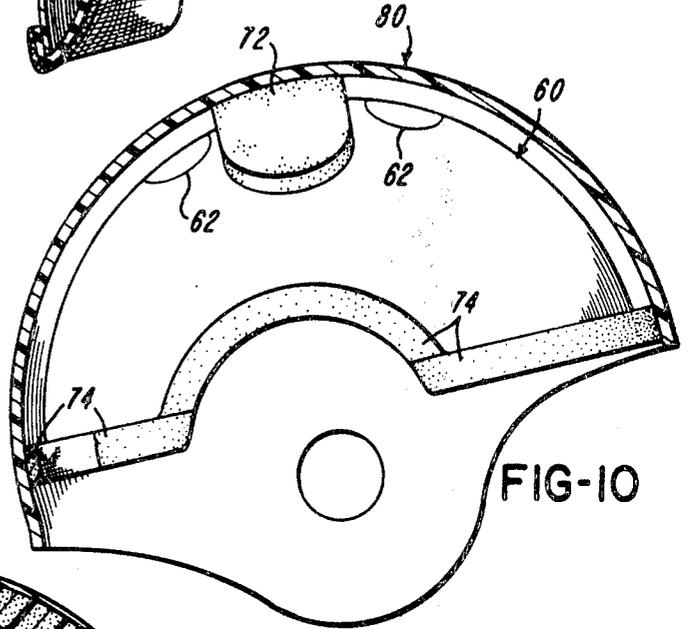
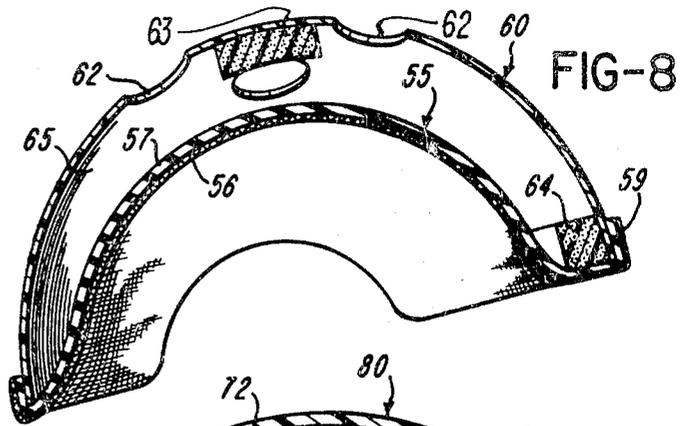
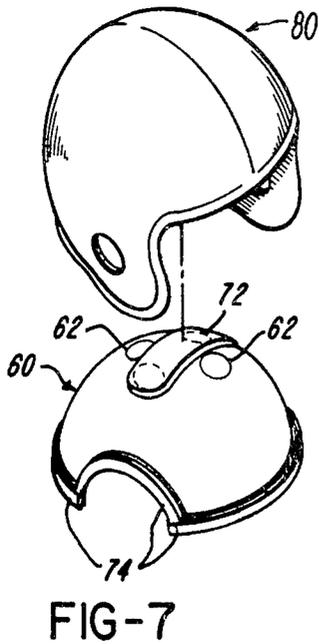


FIG-12

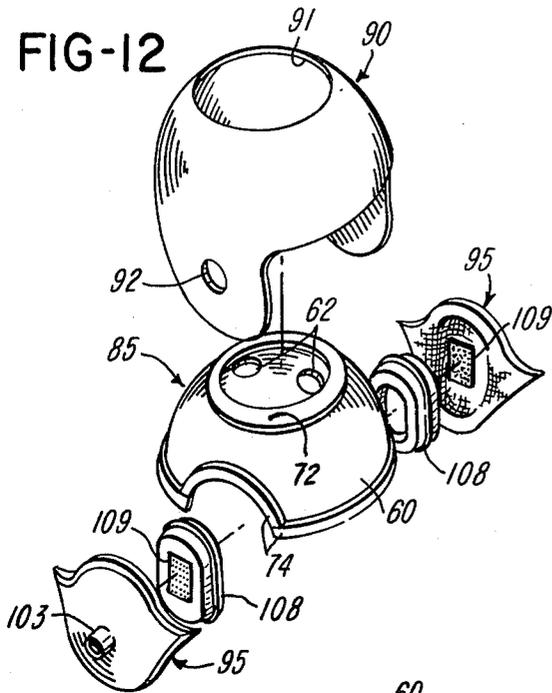


FIG-13


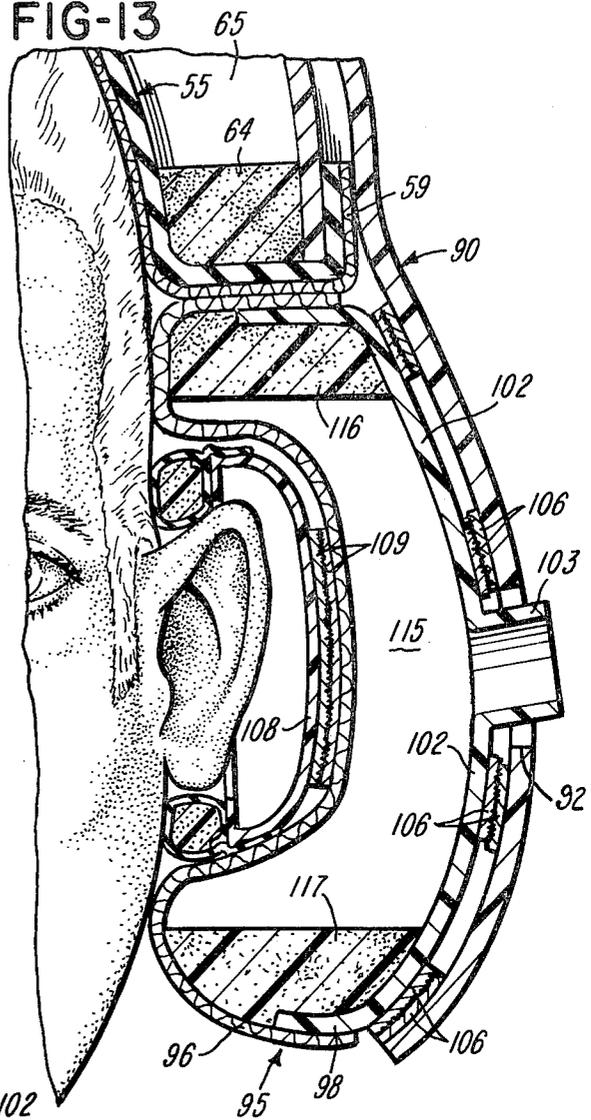


FIG-14

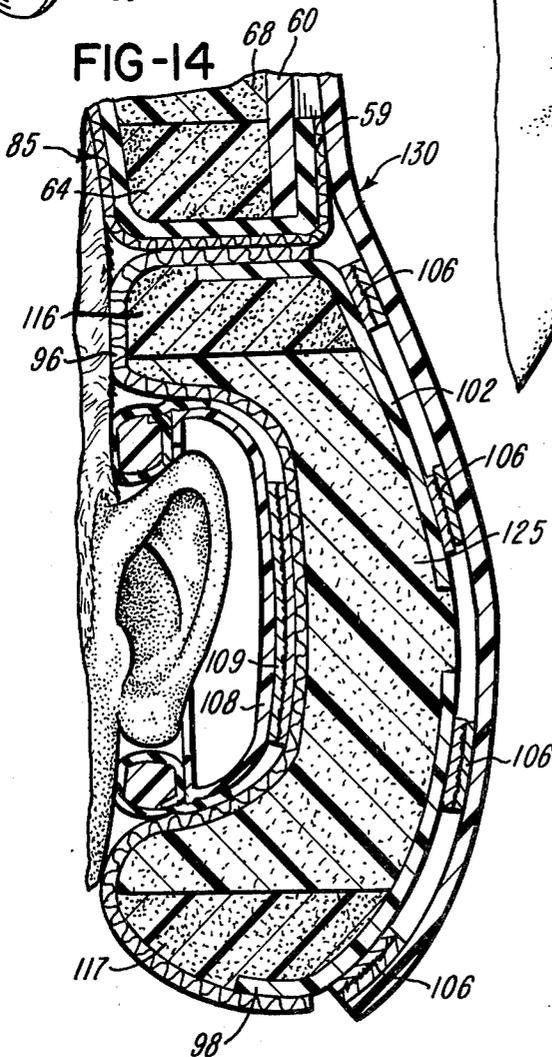

INTER-LINER FOR A SAFETY HELMET AND METHOD OF ASSEMBLY

RELATED APPLICATIONS

This application is a continuation-in-part of application Ser. No. 721,871 filed Sept. 9, 1976 now U.S. Pat. No. 4,044,399, which is a continuation-in-part of application Ser. No. 570,712, filed Apr. 23, 1975, now U.S. Pat. No. 3,992,721, which is a continuation-in-part of application Ser. No. 360,950, filed May 16, 1973, now U.S. Pat. No. 3,882,546, which is a continuation-in-part of Ser. No. 323,195, filed Jan. 12, 1973, now abandoned.

BACKGROUND OF THE INVENTION

This invention is in the field of safety helmets having form-fitting protective headgear liners and their fabrication. Protective headgear or safety helmets are well known and used in many fields of endeavor such as firefighting, construction work, police work, and sports as well as by aircraft crew members. For example, U.S. Pat. Nos. 2,901,750, 2,901,751, 2,908,943, 3,320,619 and 3,413,656 disclose safety helmets of various constructions.

In many instances, it is advantageous to have a liner which may be inserted between a hard outer protective shell and the individual wearer's head and which will fit snugly and conform exactly to the shape of the wearer's head. One such instance is in the case of an aircraft crew member who, in the course of his duty, is subjected to very large fluctuations in gravity pull. In the past, off the shelf type headgear or helmets worn by aircraft crew members have not had form-fitting liners and have tended to move from side to side or from back to front (or the reverse) when the wearer was subjected to fluctuations in gravitational pull. Such headgear movements have been known to cause injury to the wearer.

Methods have been devised for fabricating form-fitting headgear liners. These methods have required that a mold of the wearer's head be prepared before fabrication of the liner can be accomplished. The required mold-making and other complicated steps required in the prior art have caused the methods to be time consuming and expensive. Furthermore, liners prepared by the prior art methods have tended to be heavy and thus uncomfortable to the wearer.

SUMMARY OF THE INVENTION

The present invention is directed to a safety helmet which incorporates a lightweight, inexpensive and form-fitting protective headgear liner which can be quickly fabricated by anyone given a small amount of equipment. The method requires as equipment a cover or deformable headpiece for the wearer's head, such as a bathing cap commonly worn by female swimmers, a flexible dam or barrier which will fit tightly around the wearer's head just below the desired lower level of the form-fitting liner, to fill the space between the head and lower rim of a rigid outer shell. Also required is a forming agent or expandable plastics foam material from which forms the core of the liner. In one embodiment, the lower edge portion of the deformable headpiece is attached to the lower edge portion of the helmet shell, and spacers are used to position the shell relative to the headpiece before the space is filled with the foam material. In another embodiment the headpiece and shell assembly are positioned as a removable unit within a slightly larger outer shell by energy absorbing pads. In

still another embodiment, removable earpiece units are contour fitted to the wearer's head, and a modified outer helmet shell is used as a holder for fitting the removable headpiece and earpiece units.

Other features and advantages of the invention will be apparent from the following description, the accompanying drawings and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a view of the dam and attached headpiece of this invention and shows a rigid outer shell spaced above the dam and headpiece;

FIG. 2 is a section showing dam, headpiece, and outer shell placed on an individual wearer's head prior to a foaming operation;

FIG. 3 is a perspective view of a safety helmet constructed in accordance with another embodiment of the invention;

FIG. 4 is a vertical section of the helmet shown in FIG. 3 prior to receiving the expandable foam liner material;

FIG. 5 is a vertical section of the completed safety helmet shown in FIG. 3 and illustrating its contour fit to an individual's head;

FIG. 6 is a section of the safety helmet assembly as generally taken on lines 6-6 of FIG. 5;

FIG. 7 is an exploded perspective view of a safety helmet constructed in accordance with another embodiment of the invention;

FIG. 8 is a vertical section through the inner helmet shell and headpiece assembly shown in FIG. 7 prior to receiving the expandable foam material;

FIG. 9 is a section similar to FIG. 8, but taken after receiving the foam material, and illustrating its contour fit to an individual's head;

FIG. 10 is a side elevational view of the inner shell and headpiece assembly shown in FIG. 9 and showing its position within the outer helmet shell also shown in FIG. 7;

FIG. 11 is an enlarged fragmentary section taken through the top portion of the helmet assembly shown in FIG. 10;

FIG. 12 is an exploded perspective view of a fitting helmet shell and of contour fitted removable headpiece and earpiece liner units for an outer helmet shell;

FIG. 13 is a fragmentary section of the fitting helmet shown in FIG. 12 and illustrating the position of an earpiece unit prior to contour fitting to the wearer's head; and

FIG. 14 is a fragmentary section similar to FIG. 13 and illustrating an earpiece unit after being contour fitted and installed within an outer helmet shell.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIGS. 1 and 2, the head of the individual wearer is used as the mold for the individual's contour fitted protective headgear or safety helmet liner. A dam, which may be constructed of flexible foam rubber or an inflatable rubber bladder or any other deformable material which will allow the dam to fit snugly between the wearer's head and the lower rim of an outer shell, is placed on the wearer's head. A suitable dam 2 is shown in FIG. 1 of the drawing. The dam 2 shown by FIG. 1 is constructed with two tightly fitting ear flaps 3 which serve to protect the wearer's ears during the foaming operation described later. FIG. 1 also shows a rightly fitting soft rubber headpiece 1 over the top of the wear-

er's head. A bathing cap of the type commonly worn by female swimmers is perfectly suitable as a headpiece 1. The bathing cap should be glued, or attached in some manner, to the inner headband portion of the dam to prevent foaming agent from flowing through during the later described foaming operation.

FIG. 1 of the drawing also shows a dome-shaped outer shell 4 to be placed over the dam 2 of FIG. 1. The outer shell 4 should be the top portion of a protective headgear for which a form-fitting inner liner is desired. For example, if one wishes to prepare form-fitting inner liners for aircrew headgear, one needs simply to remove the portions which normally cover the ears from one headgear, drill one large opening 5 of about $\frac{3}{4}$ inch diameter in the top center of the crown and several small openings 6 of about $\frac{3}{16}$ inch diameter around the perimeter of the crown, and one has an outer portion of a mold which is suitable for the preparation of many form-fitting liners. FIG. 1 shows a brim 7 attached to the outer shell 4. The brim is simply to prevent any foaming material from running over on to the wearer during the foaming step. The large hole 5 is drilled for the purpose of allowing a foaming material to be poured in, and the small holes 6 are to allow sufficient air to escape during the foaming action, thus, allowing the foaming agent to fill the entire cavity between the wearer's head and the inside of the protective headgear outer shell.

FIG. 2 shows the dam 2 with ear flaps 3 and headpiece 1 placed on a wearer's head. FIG. 2 also shows the outer shell 4 placed over the dam 2. Points 8 and 9 and all points around the dam therebetween are of particular interest. The outer shell should fit snugly against dam 2 at points 8 and 9 and all points between 8 and 9 around the outer perimeter of the dam 2. The number 10 is used to designate an open space or dome-shaped cavity defined between the headpieces 1 and the inside of outer shell 4.

To fabricate a form-fitting liner, one simply places the apparatus shown by FIG. 1 together on the head of the wearer as shown in FIG. 2 and fills cavity 10 with a foaming material through large opening 5 and waits for the material to foam. When placing the apparatus on a wearer's head, care should be taken to smooth down the headpiece 1 and eliminate all air bubbles thereunder. Care should also be taken to adjust the apparatus in a comfortable position on the wearer's head because, once fabricated, the form-fitting liner will be fairly rigid and its shape will not be readily adjustable. Male member 12 and female member 13 of clips suitable for fastening the apparatus together are shown by FIG. 1. The handle 14 is simply to facilitate placing of the apparatus on the wearer's head.

There are many chemical agents or compounds available commercially which, when appropriately mixed, agitated or otherwise activated will react to form a rigid or semirigid foam substance. Any materials, compounds, liquids or combination thereof which, when appropriately activated, will create a foam to give the properties desired for the use intended is suitable. Certain of the compounds used in the plastics industry are particularly suited for this purpose. It is preferable that the foaming agent should foam without too great an exotherm. Temperatures above about 130° F. are uncomfortable to the wearer since the wearer has only a thin headpiece between his head and the foam while the foaming action is taking place.

If one wishes to cover the fabricated form-fitting liner with soft leather or some other material, after it has been fabricated, one may fabricate another head cover of the same thickness as the leather to be used and place this second head cover on the wearer's head under the headpiece 1 while the foaming operation is being carried out. This second head cover may be fabricated from an insulating material to protect the wearer's head from any excess heat that may be generated by the foaming action. If this is done, the permissible foaming action exotherm may be greatly increased. A second headpiece 11 is shown on the wearer's head in FIG. 2 of the drawing.

More than one large opening 5 may be drilled in the crown of the outer shell 4. The number of small openings 6 drilled in the upper crown of the outer shell will effect the density of the foam liner. Generally, the more holes, the less dense will be the finished foam liner. The number of small openings may be varied from 6 to 60 or more depending on the final density desired.

Before carrying out the foaming operation described above, all parts of the apparatus which will come into contact with the foam should be coated with a parting agent such as silicone rubber. This will facilitate removal of the foamed form-fitting liner from the head and outer shell.

It has been stated above that there are chemical agents commercially available which will produce suitable foams and that temperatures created around the wearer's head by the foaming action should not exceed about 130° F. Experimentation has shown that the formulation disclosed in the following example will produce an excellent final product. This formulation is not, to the best of the inventor's knowledge, available commercially.

A foaming material suitable for use in the practice of this invention may be prepared and used in the following manner. First, component I consisting of 190 grams of diphenylmethane diisocyanate and 21 grams of trichloromonofluoromethane is mixed in a first container. Second, component II consisting of 160 grams of a polyoxypropylene polyol having an average molecular weight of about 425, 2.4 grams of silicone glycol copolymer having an average molecular weight in the range of about 750 to 3000, 48 grams of trichloromonofluoromethane, and 0.52 gram of dibutyl tin diaostate is mixed in a second container. After mixing, component I and component II are poured together in a 1 to 7 ratio by weight and allowed to start a bubbling action. As soon as the bubbling action begins, a suitable amount of the mixed components is poured through large opening 5 of the apparatus which has been previously fitted together as shown by FIG. 2 of the drawing. The foaming formulation described herein will foam to give a form-fitting headgear liner which is very light and of excellent color and strength. The foaming action described herein produces a gas that is somewhat toxic. Thus, the foaming step should be carried out in a well ventilated area.

It should be emphasized here that the foaming agent disclosed herein is not the only foaming agent which may be used in practicing this invention. Any foaming agent may be used which foams to give the properties desired and which does not produce temperatures above that which can be tolerated by the individual wearer. Shielding may be utilized if a foaming agent with a high exotherm is used. It should also be emphasized that, although a headgear liner for a headgear

which will be worn by an aircrew member is used as the example in this specification, form-fitting headgear liners have applications in many other fields of endeavor.

Another embodiment of this invention should be pointed out. In all of the specification hereabove it has been assumed that the rigid outer shell was to be used over and over again as the outer portion of a mold for form-fitting inner liners. Now let us consider the case of an individual wearer who wishes to use his own headgear as the outer portion of a mold. This wearer could simply procure a dam, a bathing cap, a foaming agent, and his own headgear as the necessary materials for practicing this invention. He could then drill one or more openings in the top of his own headgear shell, remove any padding spacers, headband or other fitting devices which he had previously used, place a bathing cap, a dam and the headgear shell on his head as described above, and carry out the foaming step. The wearer would then have his own personal headgear shell fitted with a form-fitting liner inside of it. The wearer would never have to remove the liner from inside of the headgear.

Referring to FIGS. 3-6 which show another protective headgear or safety helmet constructed in accordance with the invention, a dome-shaped helmet shell 25 includes a top portion 26 and depending ear portions 27 which are integrally molded of a substantially rigid plastics material. A set of four openings or holes 29 are formed within the top portion 26, and a spacer pad 31 (FIG. 4) is attached to the inner surface of the helmet shell 25 adjacent the hole 29 by a suitable adhesive. Preferably, the spacer pad 31 is formed of a rigid expanded foam material such as polyurethane or the foam material referred to above. Another spacer pad in the form of an elongated band 32 is attached to the forward edge portion of the shell 25 adjacent the lower edge of the shell.

A deformable or stretchable cap-like headpiece 35 is positioned within the shell 25 and has a lower peripheral edge portion 37 which is attached to the lower peripheral edge portion of the shell 25 by a suitable adhesive. The headpiece 35 also includes depending ear portions 38 (FIG. 6) which are bonded by adhesive to the inner surfaces of the corresponding ear portions 27 of the helmet shell 25. The annular ear pieces commonly used, are not shown for purposes of simplification. Preferably, the headpiece 35 consists of a stretchable or elastic layer 39 of resilient rubber foam material, for example, such as the material manufactured and produced by Uniroyal, Inc. marketed under the trademark Ensolite. This material also includes a stretchable woven fabric 41 which is bonded or laminated to the layer 39 of foam rubber material.

The final step in constructing the safety helmet shown in FIG. 3, includes positioning the assembly of the helmet shell 25 and the headpiece 35 on the head of the individual who is to wear the helmet. The shell 25 is pressed downwardly causing the headpiece 35 to stretch into a tight-fitting conforming relation to the contour of the individual's head and until the headpiece abuts the spacer members or pads 31 and 32, as shown in FIG. 5. As expandable polyurethane foam material 42 or the foam material described above in connection with FIGS. 1 and 2, is poured into the dome shaped cavity 45 through one or more of the holes 29 so that after the material expands, the entire cavity 45 is filled with the foam material 42 as shown in FIGS. 5 and 6. The expansion of the foam material also assures that the

deformable or stretchable headpiece 35 is pressed firmly against the individual's head and thereby assures a perfect fit of the headpiece 35 to the contour of the head.

Referring to FIGS. 7-11 which show a safety helmet constructed in accordance with another embodiment of the invention, a deformable or stretchable headpiece 55 (FIG. 8) is constructed of the same material as described above in connection with the headpiece 35, including a stretchable woven fabric 56 which is laminated or bonded to a layer 57 of foam rubber material so that the headpiece 55 has a uniform thickness. The lower peripheral edge portion 59 of the cap-like headpiece 55 is attached by adhesive to the lower peripheral edge portion of a substantially rigid dome-shaped inner helmet shell 60 (FIG. 8) in the same manner as the peripheral edge portion of the headpiece 35 is attached to the peripheral edge portion of the helmet shell 25, referred to above in connection with FIG. 4. The shell 60 also includes a set of four openings or holes 62 similar to the helmet shell 25 and supports corresponding rigid foam spacer pads 63 and 64 in the same manner as the spacer pads 31 and 32 are supported by the inner surface of the helmet shell 25. Preferably, the inner helmet shell 60 is formed of a substantially rigid plastics material such as a thin layer of molded fiberglass.

The assembly of the headpiece 55 and inner helmet shell 60 is placed on an individual's head (FIG. 9) so that the deformable headpiece 55 stretches until it abuts the spacer pad 63 and 64. The dome-shaped cavity 65, defined between the headpiece 55 and shell 60, is then filled with an expandable foam material 68 in the same manner as mentioned above in connection with FIG. 5. After the foam material 68 sets and hardens, a pad 72 (FIG. 7) of high energy absorbing resilient foam material is attached by adhesive to the top surface of the inner shell 60, and a band 74 of the same material is attached by adhesive to the turned up lower peripheral edge portion 59 of the headpiece 55, as shown in FIG. 7.

The helmet liner assembly including the headpiece 55, shell 60 and resilient spacer pad 72 and band 74, is positioned within an outer helmet shell 80. Preferably, the outer shell 80 is molded of a rigid plastics material in the same manner as the helmet shell 25 discussed above in connection with FIGS. 3-6. The helmet liner assembly is secured within the helmet shell 80 by adhesive which attaches the resilient spacer pad 72 and band 74 to the inner surface of the shell 80.

Referring to FIGS. 12-14 which illustrate a further modification of a safety helmet liner assembly and the method of fitting the liner assembly to the head of a particular individual, a headpiece liner unit 85 is constructed substantially as shown in FIGS. 7 and 8, and the components of the liner unit are therefore identified with the same reference numbers as used in FIGS. 7 and 8. The headpiece liner unit 85 is placed within a holder or fitting shell 90 which is formed by modifying an outer helmet shell similar to the outer shell 80 shown in FIG. 7. The fitting shell 90 is provided with a large top center opening 91 to provide convenient access to the holes 62 within the inner shell 60 for filling the internal cavity 65 with an expandable substantially rigid foam material as described above. The fitting shell is also provided with a hole 92 within each depending earpiece portion.

The fitting shell 90 also supports a pair of earpiece liner units 95 which extend downwardly from the headpiece liner unit 85 within the earpiece portions of the

shell 90. Each of the earpiece liner units 95 includes a deformable or flexible inner sheet 96 which is preferably formed by shaping a piece of leather or synthetic "breathable" sheet material. The outer peripheral edge portion of the formed or stretched leather sheet 96 is cemented to the peripheral lip portion 98 of an earpiece base member 102 which is formed or molded of a fiberglass material or of a vacuum form thermoplastic sheet material.

The base member 102 of each earpiece liner unit 95 includes a tubular portion 103 which projects outwardly through a corresponding hole 92 formed within the fitting shell 90. The base member 102 of each earpiece liner unit 95 is releasably attached to the inner surface of the fitting shell 90 by mating pads or strips 106 of a mating hook and pile material sold under the trademark Velcro. An earcup 108 is releasably attached to the interliner sheet 106 of each earpiece liner unit 95 by mating pads 95 of Velcro material.

The inner flexible sheet 96 and connected base member 102 of each earpiece liner unit 95 define therebetween a cavity 115 which has an inlet defined by the tubular portion 103. A set of pads 116 and 117 of preformed resilient foam material are cemented within upper and lower portions of the cavity 115 to form spacers for maintaining the general shape of the inner leather sheet 96 prior to fitting.

After the headpiece liner unit 85 and the earpiece liner units 95 are inserted into the fitting shell 90, the assembly is positioned on the head of the individual for whom the liner units are to be custom fitted, as shown in FIG. 13. The dome-shaped cavity 65 within the headpiece liner unit 85 is then filled with an expandable plastics foam material, as described above, which expands and hardens to fill the entire cavity and to conform the headpiece 55 to the contour of the wearer's head. An expandable resilient plastics foam material 125 in the form of a liquid polyurethane is inserted into the cavity 115 of each of the earpiece liner units 95 through the corresponding tubular inlet portion 103. As the foam material expands, it presses the inner leather sheet 96 of each earpiece liner unit 95 against the corresponding side of the wearer's head with a uniform pressure so that each earpiece liner unit 95 also conforms to the individual's head.

The expanded foam 125 within each earpiece liner unit 95 remains resilient after the material sets so that the inner leather sheet 96 of each earpiece liner unit may be conveniently depressed to remove the assembly of the fitting shell 90, the filled headpiece liner unit 85 and the filled earpiece liner units 95 from the wearer's head. After the headpiece and the earpiece liner units are contour-fitted to the wearer's head, the units are removed from the fitting shell 90, and the tubular projecting portions 103 are cut from the earpiece liner units 95. The filled liner units 85 and 95 are then inserted into an outer safety helmet shell 130 which is substantially identical to the fitting shell 90 but without the top opening 91 and the earpiece openings 92. As indicated in FIG. 14, each of the earpiece units 95 is retained within the outer helmet shell 130 by pads 106 of Velcro material in the same manner as the units were temporarily retained within the fitting shell 90 during contour-fitting of the liner units.

From the drawings and the above description, it is apparent that a safety helmet constructed in accordance with the present invention provides desirable features and advantages. One primary feature is that the inven-

tion provides for conveniently and quickly producing an individualized safety helmet which significantly increases the safety for the wearer's head. This increased safety is caused by having an inner liner which conforms to the contour of the wearer's head and which significantly distributes an impact force more uniformly over an area of the head. The contoured liner also substantially eliminates shifting of the helmet on the wearer's head in addition to providing a high strength and light weight construction so that the helmet can be conveniently and comfortably worn for extended periods of time.

The embodiment shown in FIGS. 3-6 provides for efficiently producing the helmet for an individual's head. That is, the assembly of the rigid shell 25 and stretchable headpiece 35 are simply positioned on an individual's head and held downwardly while the cavity 45 is filled with an expandable plastics foam material. The embodiment shown in FIGS. 7-11 provides for significantly increasing the impact resistance and safety of the helmet by incorporating a rigid inner helmet shell 60 spaced within a rigid outer helmet shell 80. In addition, the resilient foam pad 72 and band 74 not only provide for absorbing energy produced by an impact on the outer shell 80 but also provide for accommodating outer helmet shells 80 of different sizes and configurations, simply by using resilient pads 72 and bands 74 of different thicknesses. The dual rigid shell construction is especially desirable for withstanding the blow of a pointed object. That is, if the pointed object has sufficient momentum to pierce the outer shell 80, the inner rigid shell 60 provides a secondary barrier for resisting further travel of the object.

As another important feature, the holder or fitting shell 90 illustrated in FIGS. 12 and 13 provides for conveniently and quickly fitting the headpiece liner unit 85 and the earpiece liner units 95 to the contour of an individual's head. Furthermore, the individualized headpiece liner unit 85 and earpiece liner units 95 may be conveniently removed from the fitting shell 90 and inserted into a corresponding outer helmet shell 130, as illustrated in FIG. 14. Each of the earpiece liner units 95 are not only contour-fitted to the sides of the wearer's head, but are also filled with a resilient expanded foam material which insures a positive and continuous contact of the corresponding earcup 108 with the skin surface of the wearer's head surrounding the ear. This positive contact and uniform pressure provide a comfortable enclosure for the ears and effectively block the passage of outside noise into the earcups from the surrounding environment.

While the forms of safety helmets herein described constitute preferred embodiments of the invention, it is to be understood that the invention is not limited to these precise forms of helmets, and that changes may be made therein without departing from the scope and spirit of the invention.

The invention having thus been described, the following is claimed:

1. A helmet assembly comprising a dome-shaped outer shell of substantially rigid material, a headpiece liner unit within said outer shell and including a dome-shaped inner shell of generally uniform thickness, a deformable cap-like headpiece positioned within said inner shell to define a dome-shaped cavity between said headpiece and said inner shell, said headpiece being effective to contact the wearer's head and to conform to the contour of the wearer's head over the entire area

covered by said headpiece, means for securing the lower edge portion of the headpiece to the corresponding lower edge portion of the inner shell, means for introducing an expandable foam material into the cavity of said headpiece liner unit, a pair of earpiece liner units disposed within said outer shell below said headpiece liner unit, each said earpiece liner unit including a deformable earpiece material connected to a base member to define a cavity therebetween, and means for introducing an expandable foam material into the cavity of each said earpiece liner unit.

2. A helmet assembly as defined in claim 1 wherein each said earpiece liner unit includes a resilient expanded foam material within the corresponding said cavity, and means for releasably securing each said earpiece liner unit to said outer helmet shell.

3. A helmet assembly as defined in claim 1 including means for releasably retaining said headpiece liner unit and each of said earpiece liner units within said outer shell.

4. A helmet assembly as defined in claim 3 wherein said outer shell comprises a fitting shell having means providing for introducing expandable plastics foam material into said cavity within said headpiece liner unit and said cavity within each said earpiece liner unit.

5. A helmet assembly as defined in claim 4 wherein said fitting shell includes a top portion and dependable side earpiece portions, and each said portion has a hole for introducing an expandable plastics foa material.

6. A helmet assembly as defined in claim 1 wherein said deformable earpiece material comprises a formed sheet of leather, said base member comprises a formed plastics material, and said leather sheet has a peripheral portion attached to an adjacent edge portion of said base member.

7. A helmet assembly as defined in claim 1 wherein each of said earpiece liner units includes at least one

piece of preformed resilient foam material within the corresponding said cavity for positioning said earpiece material relative to said base member.

8. A helmet assembly as defined in claim 1 wherein said deformable earpiece material of each said earpiece liner unit defines a recess, and an earcup is disposed within each said recess.

9. A helmet assembly comprising a dome-shaped outer shell of substantially rigid material and having a top portion and depending ear portions, a headpiece liner unit within said outer shell and including a dome-shaped inner shell of generally uniform thickness, a deformable cap-like headpiece positioned within said inner shell to define a dome-shaped cavity between said headpiece and said shell, said headpiece being effective to contact the wearer's head and to conform to the contour of the wearer's head over the entire area covered by said headpiece, means for securing the lower edge portion of the headpiece to the corresponding lower edge portion of the inner shell, a pair of earpiece liner units disposed within said ear portions of said outer shell below said headpiece liner unit, each said earpiece liner unit including means defining a cavity therein, and means defining openings within said top and ear portions of said outer shell for introducing an expandable foam material into each said cavity of said headpiece liner unit and said earpiece liner units.

10. A helmet assembly as defined in claim 9 including means for releasably securing said headpiece liner unit and each said earpiece liner unit within said outer helmet shell.

11. A helmet assembly as defined in claim 9 including a substantially rigid expanded plastics foam material within said cavity of said headpiece liner unit, and a relative resilient expanded plastics foam material within said cavity of each said earpiece liner unit.

* * * * *

40

45

50

55

60

65