



(22) Date de dépôt/Filing Date: 2005/06/22

(41) Mise à la disp. pub./Open to Public Insp.: 2005/12/28

(30) Priorité/Priority: 2004/06/28 (10/876,557) US

(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> G03G 9/08

(71) Demandeur/Applicant:  
XEROX CORPORATION, US

(72) Inventeurs/Inventors:  
MOFFAT, KAREN A., CA;  
SANDERS, DAVID J., CA;  
AGUR, ENNO E., CA;  
VANBESIEN, DARYL W., CA

(74) Agent: SIM & MCBURNEY

(54) Titre : TONER D'EMULSION-AGREGATION AYANT DES PROPRIETES DE BRILLANCE SUPERIEURES ET  
DISPOSITIF DE LIBERATION DE TONER

(54) Title: EMULSION AGGREGATION TONER HAVING GLOSS ENHANCEMENT AND TONER RELEASE

(57) **Abrégé/Abstract:**

A toner includes particles of a resin, an optional colorant, a first crystalline polymeric wax and a second crystalline polymeric wax, where the first crystalline polymeric wax is a crystalline polyethylene wax, the second crystalline polymeric wax is selected from aliphatic polar amide functionalized waxes, carboxylic acid-terminated polyethylene waxes, aliphatic waxes consisting of esters of hydroxylated unsaturated fatty acids, high acid waxes, and mixtures thereof, and the toner particles are prepared by an emulsion aggregation process.



ABSTRACT OF THE DISCLOSURE

A toner includes particles of a resin, an optional colorant, a first crystalline polymeric wax and a second crystalline polymeric wax, where the first crystalline polymeric wax is a crystalline polyethylene wax, the second crystalline polymeric wax is selected from aliphatic polar amide functionalized waxes, carboxylic acid-terminated polyethylene waxes, aliphatic waxes consisting of esters of hydroxylated unsaturated fatty acids, high acid waxes, and mixtures thereof, and the toner particles are prepared by an emulsion aggregation process.

## EMULSION AGGREGATION TONER HAVING GLOSS ENHANCEMENT AND TONER RELEASE

### BACKGROUND OF THE INVENTION

5 1. Field of Invention

This invention relates to toners and developers containing the toners for use in forming and developing images of good quality and gloss, and in particular to toners having novel combinations of wax components to provide the desired print quality and high gloss.

10

2. Description of Related Art

Emulsion aggregation toners are excellent toners to use in forming print and/or xerographic images in that the toners can be made to have uniform sizes and in that the toners are environmentally friendly. U.S. patents describing emulsion aggregation toners include, for example, U.S. Patents Nos. 5,370,963, 5,418,108, 5,290,654, 15 5,278,020, 5,308,734, 5,344,738, 5,403,693, 5,364,729, 5,346,797, 5,348,832, 5,405,728, 5,366,841, 5,496,676, 5,527,658, 5,585,215, 5,650,255, 5,650,256, 5,501,935, 5,723,253, 5,744,520, 5,763,133, 5,766,818, 5,747,215, 5,827,633, 5,853,944, 5,804,349, 5,840,462, and 5,869,215, the entire disclosures of which are 20 incorporated herein by reference.

Two main types of emulsion aggregation toners are known. First is an emulsion aggregation process that forms acrylate based, e.g., styrene acrylate, toner particles. See, for example, U.S. Patent No. 6,120,967, incorporated herein by reference in its entirety, as one example of such a process. Second is an emulsion 25 aggregation process that forms polyester, e.g., sodio sulfonated polyester. See, for example, U.S. Patent No. 5,916,725, incorporated herein by reference in its entirety, as one example of such a process.

Emulsion aggregation techniques typically involve the formation of an emulsion latex of the resin particles, which particles have a small size of from, for 30 example, about 5 to about 500 nanometers in diameter, by heating the resin, optionally with solvent if needed, in water, or by making a latex in water using an emulsion polymerization. A colorant dispersion, for example of a pigment dispersed in water,

optionally also with additional resin, is separately formed. The colorant dispersion is added to the emulsion latex mixture, and an aggregating agent or complexing agent is then added to form aggregated toner particles. The aggregated toner particles are heated to enable coalescence/fusing, thereby achieving aggregated, fused toner particles.

U.S. Patent No. 5,462,828 describes a toner composition that includes a styrene/n-butyl acrylate copolymer resin having a number average molecular weight of less than about 5,000, a weight average molecular weight of from about 10,000 to about 40,000 and a molecular weight distribution of greater than 6 that provides excellent gloss and high fix properties at a low fusing temperature.

What is still desired is a styrene acrylate type emulsion aggregation toner that can achieve excellent print quality, particularly gloss, for all colors.

#### SUMMARY OF THE INVENTION

The present invention comprises a toner having a combination of specified waxes that enable the toner to achieve the objects of the invention, mainly to achieve a toner exhibiting excellent gloss properties and excellent toner release.

In embodiments, the present invention provides a toner comprising particles of a resin, an optional colorant, and a combination of at least two crystalline polymeric waxes, wherein said toner particles are prepared by an emulsion aggregation process. The combination of crystalline polymeric waxes includes at least one linear polyethylene crystalline polymeric wax and at least one other crystalline polymeric wax selected from the group consisting of aliphatic polar amide functionalized waxes, carboxylic acid-terminated polyethylene waxes, aliphatic waxes consisting of esters of hydroxylated unsaturated fatty acids, and high acid waxes.

In embodiments, the present invention also provides methods for making such toners.

#### BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the present invention can be obtained by reference to the accompanying drawings wherein:

Figure 1 is a graph relating image gloss to fusing temperature of single wax containing toners described in Comparative Examples 1 to 5.

Figure 2 is a graph relating stripping force to fusing temperature of single wax containing toners described in Comparative Examples 1 to 5.

5 Figure 3a is a graph relating image gloss to fusing temperature of two-component wax containing toners described in Examples 1 to 5, conducted on Lustro Gloss Paper at 0.40 TMA.

10 Figure 3b is a graph relating image gloss to fusing temperature of two-component wax containing toners described in Examples 1 to 5, conducted on Lustro Gloss Paper at 1.05 TMA.

Figure 4 is a graph relating stripping force to fusing temperature of two-component wax containing toners described in Examples 1 to 5, conducted on S-Paper and 1.25 TMA.

15 DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

The toner of the invention is comprised of toner particles comprised of at least a latex emulsion polymer resin and a colorant dispersion. The toner particles preferably also include at least a wax dispersion, a coagulant and a colloidal silica.

20 Illustrative examples of specific latex for resin, polymer or polymers selected for the toner of the present invention include, for example, poly(styrene-alkyl acrylate), poly(styrene-1,3-diene), poly(styrene-alkyl methacrylate), poly(styrene-alkyl acrylate-acrylic acid), poly(styrene-1,3-diene-acrylic acid), poly(styrene-alkyl methacrylate-acrylic acid), poly(alkyl methacrylate-alkyl acrylate), poly(alkyl methacrylate-aryl acrylate), poly(aryl methacrylate-alkyl acrylate), poly(alkyl  
25 methacrylate-acrylic acid), poly(styrene-alkyl acrylate-acrylonitrile-acrylic acid), poly(styrene-1,3-diene-acrylonitrile-acrylic acid), poly(alkyl acrylate-acrylonitrile-acrylic acid), poly(styrene-butadiene), poly(methylstyrene-butadiene), poly(methyl methacrylate-butadiene), poly(ethyl methacrylate-butadiene), poly(propyl methacrylate-butadiene), poly(butyl methacrylate-butadiene), poly(methyl acrylate-  
30 butadiene), poly(ethyl acrylate-butadiene), poly(propyl acrylate-butadiene), poly(butyl acrylate-butadiene), poly(styrene-isoprene), poly(methylstyrene-isoprene), poly(methyl methacrylate-isoprene), poly(ethyl methacrylate-isoprene), poly(propyl

methacrylate-isoprene), poly(butyl methacrylate-isoprene), poly(methyl acrylate-isoprene), poly(ethyl acrylate-isoprene), poly(propyl acrylate-isoprene), and poly(butyl acrylate-isoprene); poly(styrene-propyl acrylate), poly(styrene-butyl acrylate), poly(styrene-butadiene-acrylic acid), poly(styrene-butadiene-methacrylic acid),  
5 poly(styrene-butadiene-acrylonitrile-acrylic acid), poly(styrene-butyl acrylate-acrylic acid), poly(styrene-butyl acrylate-methacrylic acid), poly(styrene-butyl acrylate-acrylonitrile), poly(styrene-butyl acrylate-acrylonitrile-acrylic acid), and other similar polymers.

As the latex emulsion polymer of the invention toner, preferably a styrene-alkyl acrylate is used. More preferably, the styrene-alkyl acrylate is a styrene/n-butyl acrylate copolymer resin, and most preferably, a styrene-butyl acrylate beta-carboxyethyl acrylate polymer.

The latex polymer is preferably present in an amount of from about 70 to about 95% by weight of the toner particles (i.e., toner particles exclusive of external  
15 additives) on a solids basis, preferably from about 75 to about 85% by weight of the toner.

The monomers used in making the selected polymer are not limited, and the monomers utilized may include any one or more of, for example, styrene, acrylates such as methacrylates, butylacrylates,  $\beta$ -carboxy ethyl acrylate ( $\beta$ -CEA), etc.,  
20 butadiene, isoprene, acrylic acid, methacrylic acid, itaconic acid, acrylonitrile, benzenes such as divinylbenzene, etc., and the like. Known chain transfer agents, for example dodecanethiol or carbon tetrabromide, can be utilized to control the molecular weight properties of the polymer. Any suitable method for forming the latex polymer from the monomers may be used without restriction.

25 Various suitable colorants can be employed in toners of the present invention, including suitable colored pigments, dyes, and mixtures thereof, including carbon black, such as REGAL 330 carbon black, acetylene black, lamp black, aniline black, Chrome Yellow, Zinc Yellow, SICOFAST Yellow, SUNBRITE Yellow, LUNA Yellow, NOVAPERM Yellow, Chrome Orange, BAYPLAST Orange, Cadmium Red,  
30 LITHOL Scarlet, HOSTAPERM Red, FANAL PINK, HOSTAPERM Pink, LUPRETON Pink, LITHOL Red, RHODAMINE Lake B, Brilliant Carmine, HELIOGEN Blue, HOSTAPERM Blue, NEOPAN Blue, PV Fast Blue, CINQUASSI

Green, HOSTAPERM Green, titanium dioxide, cobalt, nickel, iron powder, SICOPUR 4068 FF, and iron oxides such as MAPICO Black (Columbia) NP608 and NP604 (Northern Pigment), BAYFERROX 8610 (Bayer), M08699 (Mobay), TMB-100 (Magnox), mixtures thereof and the like.

5           The colorant, preferably carbon black, cyan, magenta and/or yellow colorant, is incorporated in an amount sufficient to impart the desired color to the toner. In general, pigment or dye is employed in an amount ranging from about 2% to about 35% by weight of the toner particles on a solids basis, preferably from about 5% to about 25% by weight and more preferably from about 5 to about 15% by weight.

10           Of course, as the colorants for each color are different, the amount of colorant present in each type of color toner typically is different. For example, in preferred embodiments of the present invention, a cyan toner may include about 8 to about 11% by weight of colorant (preferably Pigment Blue 15:3 from SUN), a magenta toner may include about 3 to about 15% by weight of colorant (preferably Pigment Red 122, 15   Pigment Red 185, Pigment Red 238, and/or mixtures thereof), a yellow toner may include about 3 to about 10% by weight of colorant (preferably Pigment Yellow 74), and a black toner may include about 3 to about 10% by weight of colorant (preferably carbon black).

          In addition to the latex polymer binder and the colorant, the toners of the 20   invention also contain a wax dispersion. The wax is added to the toner formulation in order to aid toner release from the fuser roll, particularly in low oil or oil-less fuser designs. For emulsion/aggregation (E/A) toners, for example styrene-acrylate E/A toners, it has been conventional to add linear polyethylene waxes such as the POLYWAX® line of waxes available from Baker Petrolite to the toner composition. 25   POLYWAX® 725 has been a particularly preferred wax for use with styrene-acrylate E/A toners.

          However, in order to provide improved toner compositions, such as exhibiting improved gloss or print properties, compositional improvements are required. The present inventors have discovered that the use of other wax materials, either alone or 30   in combination with conventional wax materials, provides these improved results.

          In embodiments of the present invention, a wax dispersion including a combination of two or more crystalline waxes provides the desired results of high

gloss and high print quality. By "crystalline polymeric waxes" it is meant that a wax material contains an ordered array of polymer chains within a polymer matrix which can be characterized by a crystalline melting point transition temperature,  $T_m$ . The crystalline melting temperature is the melting temperature of the crystalline domains  
5 of a polymer sample. This is in contrast to the glass transition temperature,  $T_g$ , which characterizes the temperature at which polymer chains begin to flow for the amorphous regions within a polymer. According to the invention, this combination of two or more crystalline polymeric waxes preferably includes a wax component (A) and a wax component (B), both of which are crystalline polymeric waxes.

10 For wax component (A), a conventional polyethylene wax is used. The wax component (A) is a crystalline polyethylene wax, preferably a linear polyethylene crystalline polymeric wax. Other crystalline polymeric polypolefin waxes, such as crystalline polypropylene polymeric wax, can also be used, although crystalline polymeric polyethylene wax is preferred in some embodiments. Examples of suitable  
15 crystalline polymeric polyethylene waxes include, but are not limited to, the POLYWAX® line of waxes available from Baker Petrolite. Other suitable crystalline polyethylene waxes are also made by and available from Baker Petrolite, as well as other manufacturers. For example, POLYWAX® 725 and/or POLYWAX® 850 are particularly preferred waxes for use as the wax component (A) of the present  
20 invention. POLYWAX® 725 and POLYWAX® 850 differ in the molecular weight of the polymer chains. This difference in chain length is also evident in the difference between the crystalline melting point temperatures of these two materials. Baker Pretrolite and other manufacturers also produce other polyethylene waxes of lower and higher molecular weight, which can also be used in the present invention.

25 Preferably, in embodiments of the present invention, the wax component (A) does not contain a modified polyethylene wax (e.g., a carboxylic acid-terminated polyethylene wax). Thus, in embodiments, the wax component (A) is substantially free or preferably completely free of any modified polyethylene wax, or at least of any crystalline polymeric polyethylene wax that is a carboxylic acid-terminated  
30 polyethylene wax.

For wax component (B), a different crystalline polymeric wax (other than a linear polyethylene wax) is used. Preferred crystalline polymeric waxes for wax

component (B) include one or more materials selected from the group of aliphatic polar amide functionalized waxes, carboxylic acid-terminated polyethylene waxes, aliphatic waxes consisting of esters of hydroxylated unsaturated fatty acids, high acid waxes, and mixtures thereof. By "high acid waxes" it is meant a wax material that has  
5 a high acid content.

Suitable examples of crystalline aliphatic polar amide functionalized waxes include, but are not limited to, stearamides, lauramides, palmitamides, behenamides, oleamides, erucamides, recinoleamides, mixtures thereof, and the like. Specific examples of suitable crystalline aliphatic polar amide functionalized waxes include,  
10 but are not limited to, stearyl stearamide, behenyl behenamide, stearyl behenamide, behenyl stearamide, oleyl oleamide, oleyl stearamide, stearyl oleamide, stearyl erucamide, oleyl palmitamide; methylol amide such as methylol stearamide or methylol behenamide, mixtures thereof, and the like. For example, a particularly suitable crystalline aliphatic polar amide functionalized wax is the stearyl stearamide  
15 wax KEMAMIDE® S-180, available from Witco, USA. Other types of nitrogen containing functional group waxes suitable for use in the present invention include amines, imides and quaternary amines, such as those available as JONCRYL® waxes from Johnson Diversey Inc.

Suitable examples of carboxylic acid-terminated polyethylene waxes include,  
20 but are not limited to, mixtures of carbon chains with the structure  $\text{CH}_3-(\text{CH}_2)_n-\text{COOH}$ , where there is a mixture of chain lengths,  $n$ , where the average chain length is preferably in the range of about 16 to about 50, and linear low molecular weight polyethylene, of similar average chain length. Suitable examples of such waxes include, but are not limited to, UNICID® 550 with  $n$  approximately equal to 40, and  
25 UNICID® 700 with  $n$  approximately equal to 50. For example, a particularly suitable crystalline carboxylic acid-terminated polyethylene wax is UNICID® 550, available from Baker Petrolite, (USA). UNICID® 550 consists of 80% carboxylic acid functionality with the remainder a linear, low molecular weight polyethylene of a similar chain length, and an acid value of 72 mg KOH/g and melting point of about  
30 101°C. Other suitable waxes have a structure  $\text{CH}_3-(\text{CH}_2)_n-\text{COOH}$ , such as hexadecanoic or palmitic acid with  $n=16$ , heptadecanoic or margaric or daturic acid with  $n=17$ , octadecanoic or stearic acid with  $n=18:0$ , eicosanoic or arachidic acid with

n=20, docosanoic or behenic acid with n=22, tetracosanoic or lignoceric acid with n=24, hexacosanoic or cerotic acid with n= 26, heptacosanoic or carboceric acid with n=27, octacosanoic or montanic acid with n=28, triacontanoic or melissic acid with n=30, dotriacontanoic or lacceroic acid with n=32, tritriacontanoic or ceromelissic or  
5 psyllic acid, with n=33, tetratriacontanoic or geddic acid with n=34, pentatriacontanoic or ceroplastic acid with n=35.

Suitable examples of crystalline aliphatic waxes consisting of esters of hydroxylated unsaturated fatty acids, are those having a carbon chain length of from about 8 or less to about 20 or more or about 30 or more. For the crystalline aliphatic  
10 waxes consisting of esters of hydroxylated unsaturated fatty acids, any suitable chain length can be employed, so long as the functionality remains present and effective. In one particular embodiment, for example, the crystalline aliphatic waxes consisting of esters of hydroxylated unsaturated fatty acids have a chain length of preferably from about 10 to about 16. Especially preferred in embodiments are those having a carbon  
15 chain length of approximately 12 units, such as from about 11 to about 13. Examples of such waxes include, but are not limited to, Carnauba wax and the like. For example, a particularly suitable crystalline aliphatic waxes consisting of esters of hydroxylated unsaturated fatty acids is RC-160 Carnauba wax, available from Toa Kasei, Japan.

20 Suitable examples of high acid waxes are acid waxes having a high acid content of, for example, greater than about 50% acid functionalized. Preferred high acid waxes are linear long chain aliphatic high acid waxes where a long chain is a chain with 16 or more CH<sub>2</sub> units. Linear, saturated, aliphatic waxes, preferably having an end-functionalized carboxylic acid, are particularly preferred. Also  
25 preferred are high acid waxes with acid content of greater than about 50 mg KOH/g. In embodiments, the high acid wax is preferably a montan wax, n-octacosanoic acid, CH<sub>3</sub>(CH<sub>2</sub>)<sub>26</sub>-COOH, about 100% acid functionalized. Examples of such suitable montan waxes include, but are not limited to, Licowax ® S, manufactured by Clariant, GmbH (Germany) with an acid value of 127 to 160 mg KOH/g, Licowax® SW with  
30 acid value of 115-135, Licowax® UL with an acid value of 100-115 mg KOH/g and Licowax® X101 with acid value 130-150. Other suitable high acid waxes include partly esterified montanic acid waxes, where some of the acid termination have been

esterified, such as Licowax® U with an acid value of 72-92 mg KOH/g. Such high acid waxes are preferred, because it has been found that they provide adequate charge stability to the toner composition, since most emulsion/aggregation toner compositions have a high acid content (due to their constituent resin materials) and thus a resultant negative charge.

To incorporate the wax into the toner, it is preferable for the wax to be in the form of an aqueous emulsion or dispersion of solid wax in water, where the solid wax particle size is usually in the range of from about 100 to about 500 nm.

The toners may contain from, for example, about 3 to about 15% by weight of the toner, on a dry basis, of the wax. Preferably, the toners contain from about 5 to about 11% by weight of the wax. In embodiments where the wax component is a combination of two or more crystalline polymeric waxes A and B, it is preferred that the conventional wax component (A), such as linear polyethylene wax, be present in a ratio of from about 10:1 to about 1:1 as compared to the second (or more) crystalline polymeric waxes component (B).

In addition, the toners of the invention may also optionally contain a coagulant and a flow agent such as colloidal silica. Suitable optional coagulants include any coagulant known or used in the art, including the well known coagulants polyaluminum chloride (PAC) and/or polyaluminum sulfosilicate (PASS). A preferred coagulant is polyaluminum chloride. The coagulant is present in the toner particles, exclusive of external additives and on a dry weight basis, in amounts of from 0 to about 3% by weight of the toner particles, preferably from about greater than 0 to about 2% by weight of the toner particles. The flow agent, if present, may be any colloidal silica such as SNOWTEX OL colloidal silica, SNOWTEX OS colloidal silica, and/or mixtures thereof. The colloidal silica is present in the toner particles, exclusive of external additives and on a dry weight basis, in amounts of from 0 to about 15% by weight of the toner particles, preferably from about greater than 0 to about 10% by weight of the toner particles.

The toner may also include additional known positive or negative charge additives in effective suitable amounts of, for example, from about 0.1 to about 5 weight percent of the toner, such as quaternary ammonium compounds inclusive of alkyl pyridinium halides, bisulfates, organic sulfate and sulfonate compositions such

as disclosed in U.S. Patent No. 4,338,390, cetyl pyridinium tetrafluoroborates, distearyl dimethyl ammonium methyl sulfate, aluminum salts or complexes, and the like.

Also, in preparing the toner by the emulsion aggregation procedure, one or  
5 more surfactants may be used in the process. Suitable surfactants include anionic, cationic and nonionic surfactants.

Anionic surfactants include sodium dodecylsulfate (SDS), sodium dodecyl benzene sulfonate, sodium dodecyl naphthalene sulfate, dialkyl benzenealkyl sulfates and sulfonates, abitic acid, and the NEOGEN brand of anionic surfactants. An  
10 example of a preferred anionic surfactant is NEOGEN RK available from Daiichi Kogyo Seiyaku Co. Ltd., or TAYCA POWER BN2060 from Tayca Corporation (Japan), which consists primarily of branched sodium dodecyl benzene sulphonate.

Examples of cationic surfactants include dialkyl benzene alkyl ammonium chloride, lauryl trimethyl ammonium chloride, alkylbenzyl methyl ammonium  
15 chloride, alkyl benzyl dimethyl ammonium bromide, benzalkonium chloride, cetyl pyridinium bromide, C<sub>12</sub>, C<sub>15</sub>, C<sub>17</sub> trimethyl ammonium bromides, halide salts of quaternized polyoxyethylalkylamines, dodecyl benzyl triethyl ammonium chloride, MIRAPOL and ALKAQUAT available from Alkaril Chemical Company, SANISOL (benzalkonium chloride), available from Kao Chemicals, and the like. An example of  
20 a preferred cationic surfactant is SANISOL B-50 available from Kao Corp., which consists primarily of benzyl dimethyl alkonium chloride.

Examples of nonionic surfactants include polyvinyl alcohol, polyacrylic acid, methalose, methyl cellulose, ethyl cellulose, propyl cellulose, hydroxy ethyl cellulose, carboxy methyl cellulose, polyoxyethylene cetyl ether, polyoxyethylene lauryl ether,  
25 polyoxyethylene octyl ether, polyoxyethylene octylphenyl ether, polyoxyethylene oleyl ether, polyoxyethylene sorbitan monolaurate, polyoxyethylene stearyl ether, polyoxyethylene nonylphenyl ether, dialkylphenoxy poly(ethyleneoxy) ethanol, available from Rhone-Poulenc Inc. as IGEPAL CA-210, IGEPAL CA-520, IGEPAL CA-720, IGEPAL CO-890, IGEPAL CO-720, IGEPAL CO-290, IGEPAL CA-210,  
30 ANTAROX 890 and ANTAROX 897. An example of a preferred nonionic surfactant is ANTAROX 897 available from Rhone-Poulenc Inc., which consists primarily of alkyl phenol ethoxylate.

Any suitable emulsion aggregation procedure may be used in forming the emulsion aggregation toner particles without restriction. These procedures typically include the basic process steps of at least aggregating an emulsion containing binder, one or more colorants, optionally one or more surfactants, optionally a wax emulsion, optionally a coagulant and one or more additional optional additives to form aggregates, subsequently coalescing or fusing the aggregates, and then recovering, optionally washing and optionally drying the obtained emulsion aggregation toner particles.

An example emulsion/aggregation/coalescing process preferably includes forming a mixture of latex binder, colorant dispersion, wax emulsion, optional coagulant and deionized water in a vessel. The mixture is then stirred using a homogenizer until homogenized and then transferred to a reactor where the homogenized mixture is heated to a temperature of, for example, about 50°C and held at such temperature for a period of time to permit aggregation of toner particles to the desired size. Once the desired size of aggregated toner particles is achieved, the pH of the mixture is adjusted in order to inhibit further toner aggregation. The toner particles are further heated to a temperature of, for example, about 90°C and the pH lowered in order to enable the particles to coalesce and spherodize. The heater is then turned off and the reactor mixture allowed to cool to room temperature, at which point the aggregated and coalesced toner particles are recovered and optionally washed and dried.

Most preferably, following coalescence and aggregation, the particles are wet sieved through an orifice of a desired size in order to remove particles of too large a size, washed and treated to a desired pH, and then dried to a moisture content of, for example, less than 1% by weight.

The toner particles of the invention are preferably made to have the following physical properties when no external additives are present on the toner particles.

The toner particles preferably have a surface area, as measured by the well known BET method, of about 1.3 to about 6.5 m<sup>2</sup>/g. More preferably, for cyan, yellow and black toner particles, the BET surface area is less than 2 m<sup>2</sup>/g, preferably from about 1.4 to about 1.8 m<sup>2</sup>/g, and for magenta toner, from about 1.4 to about 6.3 m<sup>2</sup>/g.

It is also desirable to control the toner particle size and limit the amount of both fine and coarse toner particles in the toner. In a preferred embodiment, the toner particles have a very narrow particle size distribution with a lower number ratio geometric standard deviation (GSD) of approximately 1.15 to approximately 1.30, more preferably approximately less than 1.25. The toner particles of the invention also preferably have a size such that the upper geometric standard deviation (GSD) by volume is in the range of from about 1.15 to about 1.30, preferably from about 1.18 to about 1.22, more preferably less than 1.25. These GSD values for the toner particles of the invention indicate that the toner particles are made to have a very narrow particle size distribution.

Shape factor is also an important control process parameter associated with the toner being able to achieve optimal machine performance. The toner particles of the invention preferably have a shape factor of about 105 to about 170, more preferably about 110 to about 160, SF1\*a. Scanning electron microscopy (SEM) is used to determine the shape factor analysis of the toners by SEM and image analysis (IA) is tested. The average particle shapes are quantified by employing the following shape factor (SF1\*a) formula:  $SF1*a = 100\pi d^2 / (4A)$ , where A is the area of the particle and d is its major axis. A perfectly circular or spherical particle has a shape factor of exactly 100. The shape factor SF1\*a increases as the shape becomes more irregular or elongated in shape with a higher surface area. In addition to measuring shape factor SF, another metric to measure particle circularity is being used on a regular bases. This is a faster method to quantify the particle shape. The instrument used is an FPIA-2100 manufactured by Sysmex. For a completely circular sphere the circularity would be 1.000. The toner particles of the invention preferably have circularity of about 0.920 to 0.990 and preferably from about 0.940 to about 0.975.

In addition to the foregoing, the toner particles of the present invention also have the following rheological and flow properties. First, the toner particles preferably have the following molecular weight values, each as determined by gel permeation chromatography (GPC) as known in the art. The binder of the toner particles preferably has a weight average molecular weight, Mw of from about 15,000 daltons to about 90,000 daltons.

Overall, the toner particles of the invention preferably have a weight average molecular weight (Mw) in the range of about 17,000 to about 60,000 daltons, a number average molecular weight (Mn) of about 9,000 to about 18,000 daltons, and a MWD of about 2.1 to about 10. MWD is a ratio of the Mw to Mn of the toner particles, and is a measure of the polydispersity, or width, of the polymer. For cyan and yellow toners, the toner particles preferably exhibit a weight average molecular weight (Mw) of about 22,000 to about 38,000 daltons, a number average molecular weight (Mn) of about 9,000 to about 13,000 daltons, and a MWD of about 2.2 to about 10. For black and magenta, the toner particles preferably exhibit a weight average molecular weight (Mw) of about 22,000 to about 38,000 daltons, a number average molecular weight (Mn) of about 9,000 to about 13,000 daltons, and a MWD of about 2.2 to about 10.

Further, the toners of the present invention preferably have a specified relationship between the molecular weight of the latex binder and the molecular weight of the toner particles obtained following the emulsion aggregation procedure. As understood in the art, the binder undergoes crosslinking during processing, and the extent of crosslinking can be controlled during the process. The relationship can best be seen with respect to the molecular peak values for the binder. Molecular peak is the value that represents the highest peak of the weight average molecular weight. In the present invention, the binder preferably has a molecular peak (Mp) in the range of from about 22,000 to about 30,000 daltons, preferably from about 22,500 to about 29,000 daltons. The toner particles prepared from such binder also exhibit a high molecular peak, for example of about 23,000 to about 32,000, preferably about 23,500 to about 31,500 daltons, indicating that the molecular peak is driven by the properties of the binder rather than another component such as the colorant.

Another property of the toners of the present invention is the cohesivity of the particles prior to inclusion of any external additives. The greater the cohesivity, the less the toner particles are able to flow. The cohesivity of the toner particles, prior to inclusion of any external additives, may be from, for example, about 55 to about 98% for all colors of the toner. Cohesivity was measured by placing a known mass of toner, two grams, on top of a set of three screens, for example with screen meshes of 53 microns, 45 microns, and 38 microns in order from top to bottom, and vibrating the

screens and toner for a fixed time at a fixed vibration amplitude, for example for 90 seconds at a 1 millimeter vibration amplitude. A device to perform this measurement is a Hosokawa Powders Tester, available from Micron Powders Systems. The toner cohesion value is related to the amount of toner remaining on each of the screens at the end of the time, and is calculated by the formula: % cohesion =  
5 50\*A+30\*B+10\*C, where A, B and C are respectively the weight of the toner remaining on the 53 microns, 45 microns, and 38 microns screens, respectively. A cohesion value of 100% corresponds to all of the toner remaining on the top screen at the end of the vibration step and a cohesion value of zero corresponds to all of the  
10 toner passing through all three screens, that is, no toner remaining on any of the three screens at the end of the vibration step. The higher the cohesion value, the lesser the flowability of the toner.

Finally, the toner particles preferably have a bulk density of from about 0.22 to about 0.34 g/cc and a compressibility of from about 33 to about 51.

15 The toner particles of the invention are preferably blended with external additives following formation. Any suitable surface additives may be used in the present invention. Most preferred in the present invention are one or more of SiO<sub>2</sub>, metal oxides such as, for example, TiO<sub>2</sub> and aluminum oxide, and a lubricating agent such as, for example, a metal salt of a fatty acid (e.g., zinc stearate (ZnSt), calcium  
20 stearate) or long chain alcohols such as UNILIN 700, as external surface additives. In general, silica is applied to the toner surface for toner flow, tribo enhancement, admix control, improved development and transfer stability and higher toner blocking temperature. TiO<sub>2</sub> is applied for improved relative humidity (RH) stability, tribo control and improved development and transfer stability. Zinc stearate is preferably  
25 also used as an external additive for the toners of the invention, the zinc stearate providing lubricating properties. Zinc stearate provides developer conductivity and tribo enhancement, both due to its lubricating nature. In addition, zinc stearate enables higher toner charge and charge stability by increasing the number of contacts between toner and carrier particles. Calcium stearate and magnesium stearate provide similar  
30 functions. Most preferred is a commercially available zinc stearate known as Zinc Stearate L, obtained from Ferro Corporation. The external surface additives can be used with or without a coating.

Most preferably, the toners contain from, for example, about 0.1 to about 5 weight percent titania, about 0.1 to about 8 weight percent silica and about 0.1 to about 4 weight percent zinc stearate.

The toner particles of the invention can optionally be formulated into a developer composition by mixing the toner particles with carrier particles. Illustrative examples of carrier particles that can be selected for mixing with the toner composition prepared in accordance with the present invention include those particles that are capable of triboelectrically obtaining a charge of opposite polarity to that of the toner particles. Accordingly, in one embodiment the carrier particles may be selected so as to be of a negative polarity in order that the toner particles that are positively charged will adhere to and surround the carrier particles. Illustrative examples of such carrier particles include iron, iron alloys, steel, nickel, iron ferrites, including ferrites that incorporate strontium, magnesium, manganese, copper, zinc, and the like, magnetites, and the like. Additionally, there can be selected as carrier particles nickel berry carriers as disclosed in U.S. Patent No. 3,847,604, the entire disclosure of which is totally incorporated herein by reference, comprised of nodular carrier beads of nickel, characterized by surfaces of reoccurring recesses and protrusions thereby providing particles with a relatively large external area. Other carriers are disclosed in U.S. Patents Nos. 4,937,166 and 4,935,326, the disclosures of which are totally incorporated herein by reference.

The selected carrier particles can be used with or without a coating, the coating generally being comprised of acrylic and methacrylic polymers, such as methyl methacrylate, acrylic and methacrylic copolymers with fluoropolymers or with monoalkyl or dialkylamines, fluoropolymers, polyolefins, polystyrenes, such as polyvinylidene fluoride resins, terpolymers of styrene, methyl methacrylate, and a silane, such as triethoxy silane, tetrafluoroethylenes, other known coatings and the like.

The carrier particles can be mixed with the toner particles in various suitable combinations. The toner concentration is usually about 2% to about 10% by weight of toner and about 90% to about 98% by weight of carrier. However, one skilled in the art will recognize that different toner and carrier percentages may be used to achieve a developer composition with desired characteristics.

Toners of the present invention can be used in known electrostatographic imaging methods. Thus for example, the toners or developers of the invention can be charged, e.g., triboelectrically, and applied to an oppositely charged latent image on an imaging member such as a photoreceptor or ionographic receiver. The resultant toner image can then be transferred, either directly or via an intermediate transport member, to a support such as paper or a transparency sheet. The toner image can then be fused to the support by application of heat and/or pressure, for example with a heated fuser roll.

It is envisioned that the toners of the present invention may be used in any suitable procedure for forming an image with a toner, including in applications other than xerographic applications.

Specific embodiments of the invention will now be described in detail. These Examples are intended to be illustrative, and the invention is not limited to the materials, conditions, or process parameters set forth in these embodiments. All parts and percentages are by weight unless otherwise indicated.

## EXAMPLES

### Comparative Example 1:

A conventional styrene/n-butyl acrylate emulsion/aggregation toner containing 9% by weight polyethylene wax (POLYWAX® 725) is prepared as follows.

Step 1: Preparation of Latex Emulsion A. A latex emulsion comprised of polymer particles generated from the semi-continuous emulsion polymerization of styrene, n-butyl acrylate and beta carboxy ethyl acrylate ( $\beta$ -CEA) is prepared as follows. This reaction formulation is prepared in a 2 liter Buchi reactor, which can be readily scaled-up to a 100 gallon scale or larger by adjusting the quantities of materials accordingly.

A surfactant solution consisting of 0.9 grams Dowfax 2A1 (anionic emulsifier) and 514 grams de-ionized water is prepared by mixing for 10 minutes in a stainless steel holding tank. The holding tank is then purged with nitrogen for 5 minutes before transferring into the reactor. The reactor is then continuously purged with nitrogen while being stirred at 300 RPM. The reactor is then heated up to 76°C at a controlled rate and held constant. In a separate container, 8.1 grams of ammonium persulfate

initiator is dissolved in 45 grams of de-ionized water. Also in a second separate container, the monomer emulsion is prepared in the following manner; 426.6 grams of styrene, 113.4 grams of n-butyl acrylate and 16.2 grams of  $\beta$ -CEA, 11.3 grams of 1-dodecanethiol, 1.89 grams of ADOD, 10.59 grams of Dowfax (anionic surfactant), and 257 grams of deionized water are mixed to form an emulsion. The ratio of styrene monomer to n-butyl acrylate monomer by weight is 79 to 21 percent. One percent of the above emulsion is then slowly fed into the reactor containing the aqueous surfactant phase at 76°C to form the "seeds" while being purged with nitrogen. The initiator solution is then slowly charged into the reactor and after 20 minutes the rest of the emulsion is continuously fed in using metering pumps. Once all the monomer emulsion is charged into the main reactor, the temperature is held at 76°C for an additional 2 hours to complete the reaction. Full cooling is then applied and the reactor temperature is reduced to 35°C. The product is collected into a holding tank after filtration through a 1 micron filter bag. After drying a portion of the latex the molecular properties are measured to be  $M_w = 24,751$ ,  $M_n = 8,245$  and the onset  $T_g$  is 51.46°C. The average particle size of the latex as measured by Disc Centrifuge is 203 nanometers and residual monomer as measured by GC as < 50 ppm for styrene and < 100 ppm for n-butyl acrylate. This latex is used to prepare emulsion/aggregation toner particles as described below.

Step 2: Preparation of toner particles from Latex Emulsion A containing 9% POLYWAX® 725. Into a 4 liter glass reactor equipped with an overhead stirrer and heating mantle is dispersed 639.9 grams of the above Latex Emulsion A having a 41.76 percent solids content, 135.53 grams of POLYWAX® 725 dispersion having a solids content of 30.63 percent, 92.6 grams of a Blue Pigment PB15:3 dispersion having a solids content of 26.49 percent into 1462.9 grams of water with high shear stirring by means of a polytron. To this mixture is added 54 grams of a coagulant solution consisting of 10 weight percent poly(aluminiumchloride), PAC and 90 wt. % 0.02M HNO<sub>3</sub> solution. The PAC solution is added drop-wise at low rpm and as the viscosity of the pigmented latex mixture increases the rpm of the polytron probe also increases to 5,000 rpm for a period of 2 minutes. This produces a flocculation or heterocoagulation of gelled particles consisting of nanometer sized latex particles, 9%

wax and 5% pigment for the core of the particles. The pigmented latex/wax slurry is heated at a controlled rate of 0.5 C/minute up to approximately 52°C and held at this temperature or slightly higher to grow the particles to approximately 5.0 microns. Once the average particle size of 5.0 microns is achieved, 308.9 grams of the Latex Emulsion A is then introduced into the reactor while stirring. After an additional 30 minutes to 1 hour the particle size measured is 5.7 microns with a GSD of 1.20. The pH of the resulting mixture is then adjusted from 2.0 to 7.0 with aqueous base solution of 4 percent sodium hydroxide and allowed to stir for an additional 15 minutes. Subsequently, the resulting mixture is heated to 93°C at 1.0°C per minute and the particle size measured is 5.98 microns with a GSD by volume of 1.22 and GSD by number of 1.22. The pH is then reduced to 5.5 using a 2.5 percent Nitric acid solution. The resultant mixture is then allowed to coalesce for 2 hrs at a temperature of 93°C. The morphology of the particles is smooth and “potato” shape. The final particle size after cooling but before washing is 5.98 microns with a GSD by volume of 1.21. The particles are washed 6 times, where the 1st wash is conducted at pH of 10 at 63°C, followed by 3 washes with deionized water at room temperature, one wash carried out at a pH of 4.0 at 40°C, and finally the last wash with deionized water at room temperature. The final average particle size of the dried particles is 5.77 microns with  $GSD_v = 1.21$  and  $GSD_n = 1.25$ . The glass transition temperature of this sample is measured by DSC and found to have  $T_g(\text{onset}) = 49.4^\circ\text{C}$ .

The particles are dried blended with a standard additive package consisting of RY50 from Nippon Aerosil, JMT2000 from Tayca, X-24 from Shin-Etsu, EA latex particles of 1-5 micron size, and Unilin wax particles from Baker-Petrolite to produce a free flowing toner. Then 805 grams of developer is prepared at 5% toner concentration by weight, using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is conditioned overnight in A-zone and C-zone. The developer is evaluated in a Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

The image gloss fusing results of the toner composition obtained on the Imari-MF FBNF fixture are provided in Figure 1 and compared to other single wax containing toners using the same Latex Emulsion A. This includes the toner

composition of Comparative Example 2 (9% KEMAMIDE® S-180 wax), the toner composition of Comparative Example 3 (9% RC-160 Carnauba wax), the toner composition of Comparative Example 4 (9% POLYWAX® 850), the toner composition of Comparative Example 5 (9% LICOWAX® S) and the toner  
5 composition of Comparative Example 6 (9% UNICID® 550 wax) instead on POLYWAX® 725. Provided in Figure 2 is the Stripping Force results for this set of 6 toners. The dashed line for Stripping force at 25 grams of force indicates the specification for an acceptable level of force. The desired level is to be below 25 grams of force (gf).

10

#### Comparative Example 2:

A conventional styrene/n-butyl acrylate emulsion/aggregation toner containing 9% KEMAMIDE® S-180 wax is prepared as follows.

The Latex Emulsion A is used to prepare this toner composition. The  
15 synthesis of this latex is provided in Comparative Example 1, Step 1. The aggregation/coalescence procedure used to prepare this toner is similar to that provided in Comparative Example 1, Step 2, except the POLYWAX® 725 aqueous dispersion is replaced with the equivalent weight percent of KEMAMIDE® S-180 wax also in the aqueous dispersion form. The final average particle size of the dried  
20 particles is 5.91 microns with  $GSD_v = 1.22$  and  $GSD_n = 1.22$ . The glass transition temperature of this sample is measured by DSC and found to have  $Tg(\text{onset}) = 45.8^\circ\text{C}$ .

The particles are dried blended with the above-described standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared  
25 using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

#### Comparative Example 3:

30 A conventional styrene/n-butyl acrylate emulsion/aggregation toner containing 9% RC-160 Carnauba Wax is prepared as follows.

The Latex Emulsion A is used to prepare this toner composition. The synthesis of this latex is provided in Comparative Example 1, Step 1. The aggregation/coalescence procedure used to prepare this toner is similar to that provided in Comparative Example 1, Step 2, except the POLYWAX® 725 aqueous dispersion is replaced with the equivalent weight percent of RC-160 Carnauba wax also in the aqueous dispersion form. The final average particle size of the dried particles is 6.06 microns with  $GSD_v = 1.20$  and  $GSD_n = 1.25$ . The glass transition temperature of this sample is measured by DSC and found to have  $Tg(\text{onset}) = 43.4^\circ\text{C}$ .

The particles are dried blended with the above-described standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

15

#### Comparative Example 4:

A conventional styrene/n-butyl acrylate emulsion/aggregation toner containing 9% by weight polyethylene wax (POLYWAX® 850) is prepared as follows.

The Latex Emulsion A is used to prepared this toner composition. The synthesis of this latex is provided in Comparative Example 1, Step 1. The aggregation/coalescence procedure used to prepare this toner is similar to that provided in Comparative Example 1, Step 2, except the POLYWAX® 725 aqueous dispersion is replaced with the equivalent weight percent of POLYWAX® 850 wax also in the aqueous dispersion form. The final average particle size of the dried particles is 6.21 microns with  $GSD_v = 1.21$  and  $GSD_n = 1.23$ . The glass transition temperature of this sample is measured by DSC and found to have  $Tg(\text{onset}) = 49.9^\circ\text{C}$ .

The particles are dried blended with a second standard additive package consisting of RY50 from Nippon Aerosil, JMT3103 from Tayca, X-24 from Shin-Etsu to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The

30

developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

Comparative Example 5:

5           A conventional styrene/n-butyl acrylate emulsion/aggregation toner containing 9% LICOWAX® S is prepared as follows.

          The Latex Emulsion A is used to prepared this toner composition. The synthesis of this latex is provided in Comparative Example 1, Step 1. The aggregation/coalescence procedure used to prepare this toner is similar to that  
10       provided in Comparative Example 1, Step 2, except the POLYWAX® 725 aqueous dispersion is replaced with the equivalent weight percent of LICOWAX® S also in the aqueous dispersion form. The final average particle size of the dried particles is 5.98 microns with  $GSD_v = 1.21$  and  $GSD_n = 1.37$ . The glass transition temperature of this sample is measured by DSC and found to have  $Tg(\text{onset}) = 43.7^\circ\text{C}$ .

15           The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

20

Comparative Example 6:

          A conventional styrene/n-butyl acrylate emulsion/aggregation toner containing 9% UNICID® 550 Wax is prepared as follows.

          The Latex Emulsion A is used to prepared this toner composition. The  
25       synthesis of this latex is provided in Comparative Example 1, Step 1. The aggregation/coalescence procedure used to prepare this toner is similar to that provided in Comparative Example 1, Step 2, except the POLYWAX® 725 aqueous dispersion is replaced with the equivalent weight percent of UNICID® 550 wax also in the aqueous dispersion form. The final average particle size of the dried particles is  
30       6.05 microns with  $GSD_v = 1.20$  and  $GSD_n = 1.22$ . The glass transition temperature of this sample is measured by DSC and found to have  $Tg(\text{onset}) = 45.6^\circ\text{C}$ .

The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip  
5 fuser (FBNF) system operating at a process speed of 104 mm/sec.

#### Discussion of Comparative Examples

Illustrated in Figure 1 is the fused image gloss of 6 toners (Comparative Examples 1-6) all containing different crystalline polymeric waxes at the same weight  
10 percent loading of the toner. The toner compositions of Comparative Examples 1 and 4 contain POLYWAX® 725 and POLYWAX® 850, respectively. The image gloss of the toner compositions of Comparative Examples 1 and 4 is significantly less than the other 4 toners containing gloss enhancement crystalline polymeric waxes LICOWAX® S, RC-160 Carnauba wax, KEMAMIDE® S180 and UNICID® 550.  
15 Demonstrated in Figure 2 is the evaluation of Stripping Force as a function of fusing temperature. Toners requiring a stripping force of greater than 25 grams of force generally do not meet current specifications. Only the toners containing POLYWAX® 725 or POLYWAX® 850 demonstrate good stripping force performance. The other high gloss toners containing the gloss enhancing waxes have  
20 very high stripping force performance and thus, do not meet the requirement for some fusing systems. Therefore, the present invention is the combination of the good stripping force performing waxes; either POLYWAX® 725 or POLYWAX® 850 with the one other crystalline polymeric wax, such as the four gloss enhancing waxes; KEMAMIDE® S180 or RC-160 Carnauba or LICOWAX® S or UNICID® 550.

25

#### Example 1:

A control styrene/n-butyl acrylate emulsion/aggregation toner containing 9% POLYWAX® 725 and Silica is prepared as follows.

Into a 4 liter glass reactor equipped with an overhead stirrer and heating  
30 mantle is dispersed 235.0 grams of Emulsion Latex B prepared in a similar manor to Emulsion Latex A described above having a 41.40 percent solids content, 53.98 grams of POLYWAX® 725 dispersion having a solids content of 30.76 percent, 57.7 grams

of a Blue Pigment PB15:3 dispersion having a solids content of 17.0 percent into 531.4 grams of water with high shear stirring by means of a polytron. To this mixture after stirring for 20 minutes is first added 17.14 grams of colloidal silica SNOWTEX OL and 25.71 grams of colloidal silica SNOWTEX OS blended with 10.80 grams of a  
5 coagulant solution consisting of 10 weight percent poly(aluminum chloride) (PAC) and 90 weight percent 0.02M HNO<sub>3</sub> solution. After the silica mixture is blended into the latex, wax and pigment mixture the remaining PAC solution is added drop-wise at low rpm consisting of 21.6 grams of a coagulant solution consisting of 10 weight percent poly(aluminum chloride) (PAC) and 90 wt. % 0.02M HNO<sub>3</sub> solution. As the  
10 viscosity of the pigmented latex mixture increases the rpm of the polytron probe also increases to 5,000 rpm for a period of 2 minutes. This produces a flocculation or heterocoagulation of gelled particles consisting of nanometer sized latex particles, 9% wax and 5% pigment for the core of the particles. The pigmented latex/wax slurry is heated at a controlled rate of 0.5 C/minute up to approximately 51°C and held at this  
15 temperature or slightly higher to grow the particles to approximately 5.0 microns. Once the average particle size of 5.0 microns is achieved, 124.1 grams of the Emulsion Latex B is then introduced into the reactor while stirring. After an additional 30 minutes to 1 hour the particle size measured is 6.38 microns with a GSD of 1.20. The pH of the resulting mixture is then adjusted from 2.0 to 6.5 with aqueous  
20 base solution of 4 percent sodium hydroxide and allowed to stir for an additional 15 minutes. Subsequently, the resulting mixture is heated to 96°C at 1.0°C per minute and the particle size measured is 7.19 microns with a GSD by volume of 1.22 and GSD by number of 1.27. The pH is then reduced to 6.3 using a 2.5 percent Nitric acid solution. The resultant mixture is then allowed to coalesce for 5 hrs at a temperature  
25 of 96°C. The morphology of the particles is smooth and "potato" shape. The final particle size after cooling but before washing is 6.64 microns with a GSD by volume of 1.20. The particles are washed 6 times, where the 1st wash is conducted at pH of 10 at 63°C, followed by 3 washes with deionized water at room temperature, one wash carried out at a pH of 4.0 at 40°C, and finally the last wash with deionized water  
30 at room temperature. The final average particle size of the dried particles is 6.64 microns with GSD<sub>v</sub> = 1.20 and GSD<sub>n</sub> = 1.24. The glass transition temperature of this

sample is measured by DSC and found to have  $T_g(\text{onset}) = 49.3^\circ\text{C}$ . The yield of dried particles is 157.2 grams and the measured circularity is 0.956.

The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

Example 2:

10 A styrene/n-butyl acrylate emulsion/aggregation toner containing 9% POLYWAX® 725 plus 3% LICOWAX® S and no silica is prepared as follows.

Into a 4 liter glass reactor equipped with an overhead stirrer and heating mantle is dispersed 243.8 grams of Emulsion Latex B having a 41.40 percent solids content, 53.98 grams of POLYWAX® 725 dispersion having a solids content of 30.76 percent, 28.48 grams of LICOWAX® S dispersion having a solids content of 18.96 percent, 57.7 grams of a Blue Pigment PB15:3 dispersion having a solids content of 17.00 percent into 549.0 grams of water with high shear stirring by means of a polytron. To this mixture is added 32.4 grams of a coagulant solution consisting of 10 weight percent poly(aluminiumchloride) (PAC) and 90 wt. % 0.02M HNO<sub>3</sub> solution.

20 The PAC solution is added drop-wise at low rpm and as the viscosity of the pigmented latex mixture increases the rpm of the polytron probe also increases to 5,000 rpm for a period of 2 minutes. This produces a flocculation or heterocoagulation of gelled particles consisting of nanometer sized latex particles, 12% wax and 5% pigment for the core of the particles. The pigmented latex/wax

25 slurry is heated at a controlled rate of 0.5°C/minute up to approximately 51°C and held at this temperature or slightly higher to grow the particles to approximately 5.0 microns. Once the average particle size of 5.0 microns is achieved, 124.1 grams of the Emulsion Latex B is then introduced into the reactor while stirring. After an additional 30 minutes to 1 hour the particle size measured is 5.51 microns with a GSD

30 of 1.20. The pH of the resulting mixture is then adjusted from 2.0 to 6.5 with aqueous base solution of 4 percent sodium hydroxide and allowed to stir for an additional 15 minutes. Subsequently, the resulting mixture is heated to 96°C at 1.0°C per minute

and the particle size measured is 5.97 microns with a GSD by volume of 1.21 and GSD by number of 1.24. The pH is then reduced to 6.3 using a 2.5 percent Nitric acid solution. The resultant mixture is then allowed to coalesce for 5 hrs at a temperature of 96°C. The morphology of the particles is smooth and "potato" shape. The final  
5 particle size after cooling but before washing is 5.97 microns with a GSD by volume of 1.21. The particles are washed 6 times, where the 1st wash is conducted at pH of 10 at 63°C, followed by 3 washes with deionized water at room temperature, one wash carried out at a pH of 4.0 at 40°C, and finally the last wash with deionized water at room temperature. The final average particle size of the dried particles is 5.89  
10 microns with  $GSD_v = 1.20$  and  $GSD_n = 1.24$ . The glass transition temperature of this sample is measured by DSC and found to have  $Tg(\text{onset}) = 48.5^\circ\text{C}$ . The yield of dried particles is 140.1 grams. The measured circularity of these particles is 0.974.

The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer are  
15 prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

### Example 3:

20 A styrene/n-butyl acrylate emulsion/aggregation toner containing 9% POLYWAX® 725 plus 6% LICOWAX® S and no silica is prepared as follows.

The procedure followed to prepare this toner is the same as Example 2 except the weight percent of the LICOWAX® S is increased from 3 percent to 6 percent, which results in a reduction of the core Emulsion Latex B of 3 percent. The final  
25 average particle size of the dried particles is 6.13 microns with  $GSD_v = 1.22$  and  $GSD_n = 1.25$ . The glass transition temperature of this sample is measured by DSC and found to have  $Tg(\text{onset}) = 44.74^\circ\text{C}$ . The yield of dried particles is 161.2 grams. The measured circularity of these particles is 0.945.

The particles are dried blended with the above-described second standard  
30 additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox

DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

Example 4:

5           A styrene/n-butyl acrylate emulsion/aggregation toner containing 9%  
POLYWAX® 725 plus 3% LICOWAX® S and colloidal silica is prepared as follows.  
Into a 4 liter glass reactor equipped with an overhead stirrer and heating  
mantle is dispersed 221.7 grams of Emulsion Latex B having a 41.40 percent solids  
content, 53.98 grams of POLYWAX® 725 dispersion having a solids content of 30.76  
10   percent, 28.48 grams of LICOWAX® S dispersion having a solids content of 18.96  
percent, 57.7 grams of a Blue Pigment PB15:3 dispersion having a solids content of  
17.0 percent into 526.8 grams of water with high shear stirring by means of a  
polytron. To this mixture after stirring for 20 minutes is first added 17.14 grams of  
colloidal silica SNOWTEX OL and 25.71 grams of colloidal silica SNOWTEX OS  
15   blended with 10.80 grams of a coagulant solution consisting of 10 weight percent  
poly(aluminum chloride) (PAC) and 90 weight percent 0.02M HNO<sub>3</sub> solution. After  
the silica mixture is blended into the latex, wax and pigment mixture the remaining  
PAC solution is added drop-wise at low rpm consisting of 21.6 grams of a coagulant  
solution consisting of 10 weight percent poly(aluminum chloride), PAC and 90 wt. %  
20   0.02M HNO<sub>3</sub> solution. As the viscosity of the pigmented latex mixture increases the  
rpm of the polytron probe also increases to 5,000 rpm for a period of 2 minutes. This  
produces a flocculation or heterocoagulation of gelled particles consisting of  
nanometer sized latex particles, 12% wax and 5% pigment for the core of the  
particles. The pigmented latex/wax slurry is heated at a controlled rate of  
25   0.5°C/minute up to approximately 51°C and held at this temperature or slightly higher  
to grow the particles to approximately 5.0 microns. Once the average particle size of  
5.0 microns is achieved, 124.1 grams of the Emulsion Latex B is then introduced into  
the reactor while stirring. After an additional 30 minutes to 1 hour the particle size  
measured is 5.81 microns with a GSD of 1.19. The pH of the resulting mixture is then  
30   adjusted from 2.0 to 6.5 with aqueous base solution of 4 percent sodium hydroxide  
and allowed to stir for an additional 15 minutes. Subsequently, the resulting mixture  
is heated to 96°C at 1.0°C per minute and the particle size measured is 6.30 microns

with a GSD by volume of 1.22 and GSD by number of 1.25. The pH is then reduced to 6.3 using a 2.5 percent Nitric acid solution. The resultant mixture is then allowed to coalesce for 5 hrs at a temperature of 96°C. The morphology of the particles is smooth and "potato" shape. The final particle size after cooling but before washing is 6.20 microns with a GSD by volume of 1.20. The particles are washed 6 times, where the 1st wash is conducted at pH of 10 at 63°C, followed by 3 washes with deionized water at room temperature, one wash carried out at a pH of 4.0 at 40°C, and finally the last wash with deionized water at room temperature. The final average particle size of the dried particles is 6.21 microns with  $GSD_v = 1.20$  and  $GSD_n = 1.24$ . The glass transition temperature of this sample is measured by DSC and found to have  $T_g(\text{onset}) = 45.97^\circ\text{C}$ . The yield of dried particles is 155.6 grams and the measured circularity was 0.940.

The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

#### Example 5:

A styrene/n-butyl acrylate emulsion/aggregation toner containing 9% POLYWAX® 725 plus 6% LICOWAX® S and colloidal silica is prepared as follows.

The procedure followed to prepare this toner is the same as Example 4 except the weight percent of the LICOWAX® S is increased from 3 percent to 6 percent, which results in a reduction of the core Emulsion Latex B of 3 percent. The final average particle size of the dried particles is 6.13 microns with  $GSD_v = 1.20$  and  $GSD_n = 1.28$ . The glass transition temperature of this sample is measured by DSC and found to have  $T_g(\text{onset}) = 40.47^\circ\text{C}$ . The yield of dried particles is 138.1 grams. The measured circularity of these particles is 0.951.

The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox

DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

#### Discussion of Examples 1-5

5 Illustrated in Figures 3a and 3b are the fused image gloss values of the 5 toners described in Examples 1 through 5 at a monolayer Total Mass per unit Area (TMA) (0.40 mg/cm<sup>2</sup>) and a Process Black TMA (1.05 mg/cm<sup>2</sup>), respectively, on Lustro Gloss Coated Paper. All toners are made from the same Emulsion Latex B, and all contain 9% by weight of POLYWAX® 725. The toner composition of Example 1 is  
10 the control toner made with 5% Silica and no additional gloss enhancing wax. The gloss at the FBNF run temperature of 160°C represents the typical gloss value achieved by this machine at the full color process speed of 104 mm/sec. For a monolayer (i.e. single color) image, this value is about 40gu, while for a Process Black TMA, it is still only about 45gu. It is desirable that the image gloss should be  
15 at least as high as the gloss of the paper substrate, which for Lustro Gloss paper is about 70 gu. The toner composition of Example 4 has the same formulation as Example 1, with the inclusion of 3% LICOWAX®-S. Its gloss value at 160°C is about 15gu higher than Example 1 at low TMA, and about 20gu higher than Example 1 at high TMA. Example 5 has the same formulation as Example 1 with the inclusion  
20 of 6% of LICOWAX® S. Its gloss value at 160°C is about 30gu higher than Example 1 at low TMA, and about 40gu higher than Example 1 at high TMA. This toner also achieves the target gloss level of  $\geq 70$ gu at 160°C at both low and high TMA.

25 Silica is included in the formulation of Example 1 to increase the gloss level over that of a similar toner made without silica. However, silica introduces considerable expense and complication into the process of making EA toner. Note that the gloss of Example 2 made with 3% LICOWAX® S, but no silica has almost the same, or slightly higher gloss than the control toner of Example 1. Therefore, the inclusion of 3% LICOWAX® S more than compensates for the reduction in gloss due  
30 to the removal of silica from the formulation. Moreover, the gloss of Example 3 with 6% LICOWAX® S and no silica is almost the same as Example 5 (6% LICOWAX®

S, with silica). Therefore, by using LICOWAX® S, it may be possible to reach the targeted high gloss levels, even without the use of silica in the formulation. Note also that none of the gloss curves terminate before the maximum FBNF temperature of 200°C, due to Hot Offset of the toner image, as was the case for the toner containing  
5 only 9% LICOWAX® S, and no POLYWAX® 725 wax (Comparative Example 5) as shown in Figure 1.

Illustrated in Figure 4 are the Stripping Force values for the same set of 5 toners described in Examples 1 through 5. The maximum Stripping Forces for all 5 toners are well below the specified maximum value of 25 gf. The Stripping Force  
10 values for all toners made with 9% POLYWAX® 725 wax with 3% or 6% LICOWAX® S, (with or without silica), are the same order of magnitude as that of the control toner, Example 1, made with only 9% POLYWAX® 725 and no LICOWAX® S. This is in contrast to the toner made with only 9% LICOWAX® S and no POLYWAX® 725 wax (Comparative Example 5, shown in Figure 2, which  
15 has a minimum Stripping Force that is more than 3X greater than the targeted maximum Stripping Force. Therefore, by combining a gloss enhancing wax, such as LICOWAX® S, with a wax that gives good release, such as POLYWAX® 725, in the same toner the present invention achieves the stated goal of reaching the target high gloss level, with no reduction in Hot Offset Temperature and no significant increase in  
20 Stripping Force.

#### Example 6:

A styrene/n-butyl acrylate emulsion/aggregation toner containing 9% POLYWAX® 725 Plus 3% RC-160 Carnauba Wax and no silica is prepared as  
25 follows.

Into a 4 liter glass reactor equipped with an overhead stirrer and heating mantle is dispersed 243.8 grams of Emulsion Latex B having a 41.40 percent solids content, 53.98 grams of POLYWAX® 725 dispersion having a solids content of 30.76 percent, 29.57 grams of RC-160 Carnauba wax dispersion having a solids content of  
30 18.26 percent, 57.7 grams of a Blue Pigment PB15:3 dispersion having a solids content of 17.00 percent into 549.0 grams of water with high shear stirring by means of a polytron. To this mixture is added 32.4 grams of a coagulant solution consisting

of 10 weight percent poly(aluminiumchloride) (PAC) and 90 wt. % 0.02M HNO<sub>3</sub> solution. The PAC solution is added drop-wise at low rpm and as the viscosity of the pigmented latex mixture increases the rpm of the polytron probe also increases to 5,000 rpm for a period of 2 minutes. This produces a flocculation or

5 heterocoagulation of gelled particles consisting of nanometer sized latex particles, 12% wax and 5% pigment for the core of the particles. The pigmented latex/wax slurry is heated at a controlled rate of 0.5°C/minute up to approximately 51°C and held at this temperature or slightly higher to grow the particles to approximately 5.0 microns. Once the average particle size of 5.0 microns is achieved, 124.1 grams of

10 Emulsion Latex B is then introduced into the reactor while stirring. After an additional 30 minutes to 1 hour the particle size measured is 6.85 microns with a GSD of 1.20. The pH of the resulting mixture is then adjusted from 2.0 to 6.5 with aqueous base solution of 4 percent sodium hydroxide and allowed to stir for an additional 15 minutes. Subsequently, the resulting mixture is heated to 96°C at 1.0°C per minute

15 and the particle size measured is 7.10 microns with a GSD by volume of 1.19 and GSD by number of 1.25. The pH is then reduced to 6.3 using a 2.5 percent Nitric acid solution. The resultant mixture is then allowed to coalesce for 5 hrs at a temperature of 96°C. The morphology of the particles is smooth and "potato" shape. The final particle size after cooling but before washing is 5.97 microns with a GSD by volume

20 of 1.21. The particles are washed 6 times, where the 1st wash is conducted at pH of 10 at 63°C, followed by 3 washes with deionized water at room temperature, one wash carried out at a pH of 4.0 at 40°C, and finally the last wash with deionized water at room temperature. The final average particle size of the dried particles is 7.00 microns with  $GSD_v = 1.19$  and  $GSD_n = 1.26$ . The glass transition temperature of this

25 sample is measured by DSC and found to have  $T_g(\text{onset}) = 46.36^\circ\text{C}$ . The yield of dried particles is 155.3 grams. The measured circularity of these particles is 0.939.

The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox

30 DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

Example 7:

5 A styrene/n-butyl acrylate emulsion/aggregation toner containing 9% POLYWAX® 725 Plus 6% RC-160 Carnauba Wax and no silica is prepared as follows.

The procedure followed to prepare this toner is the same as Example 6 except the weight percent of the RC-160 Carnauba wax is increased from 3 percent to 6 percent, which results in a reduction of the core Emulsion Latex B of 3 percent. The final average particle size of the dried particles is 5.89 microns with  $GSD_v = 1.19$  and  $GSD_n = 1.24$ . The glass transition temperature of this sample is measured by DSC and found to have  $Tg(\text{onset}) = 43.61^\circ\text{C}$ . The yield of dried particles is 137.8 grams. The measured circularity of these particles is 0.954.

15 The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

Example 8:

20 A styrene/n-butyl acrylate emulsion/aggregation toner containing 9% POLYWAX® 725 Plus 3% RC-160 Carnauba Wax and colloidal silica is prepared as follows.

Into a 4 liter glass reactor equipped with an overhead stirrer and heating mantle is dispersed 221.7 grams of Emulsion Latex B having a 41.40 percent solids content, 53.98 grams of POLYWAX® 725 dispersion having a solids content of 30.76 percent, 30.31 grams of RC-160 Carnauba wax dispersion having a solids content of 18.26 percent, 57.7 grams of a Blue Pigment PB15:3 dispersion having a solids content of 17.0 percent into 526.8 grams of water with high shear stirring by means of a polytron. To this mixture after stirring for 20 minutes is first added 17.14 grams of colloidal silica SNOWTEX OL and 25.71 grams of colloidal silica SNOWTEX OS blended with 10.80 grams of a coagulant solution consisting of 10 weight percent poly(aluminum chloride) (PAC) and 90 weight percent 0.02M HNO<sub>3</sub> solution. After

the silica mixture is blended into the latex, wax and pigment mixture the remaining PAC solution is added drop-wise at low rpm consisting of 21.6 grams of a coagulant solution consisting of 10 weight percent poly(aluminum chloride) (PAC) and 90 wt. % 0.02M HNO<sub>3</sub> solution. As the viscosity of the pigmented latex mixture increases the rpm of the polytron probe also increases to 5,000 rpm for a period of 2 minutes. This produces a flocculation or heterocoagulation of gelled particles consisting of nanometer sized latex particles, 12% wax and 5% pigment for the core of the particles. The pigmented latex/wax slurry is heated at a controlled rate of 0.5°C/minute up to approximately 51°C and held at this temperature or slightly higher to grow the particles to approximately 5.0 microns. Once the average particle size of 5.0 microns is achieved, 124.1 grams of the Emulsion Latex B is then introduced into the reactor while stirring. After an additional 30 minutes to 1 hour the particle size measured is 5.84 microns with a GSD of 1.18. The pH of the resulting mixture is then adjusted from 2.0 to 6.5 with aqueous base solution of 4 percent sodium hydroxide and allowed to stir for an additional 15 minutes. Subsequently, the resulting mixture is heated to 96°C at 1.0°C per minute and the particle size measured is 6.06 microns with a GSD by volume of 1.20 and GSD by number of 1.22. The pH is then reduced to 6.3 using a 2.5 percent Nitric acid solution. The resultant mixture is then allowed to coalesce for 5 hrs at a temperature of 96°C. The morphology of the particles is smooth and "potato" shape. The final particle size after cooling but before washing is 6.06 microns with a GSD by volume of 1.18. The particles are washed 6 times, where the 1st wash is conducted at pH of 10 at 63°C, followed by 3 washes with deionized water at room temperature, one wash carried out at a pH of 4.0 at 40°C, and finally the last wash with deionized water at room temperature. The final average particle size of the dried particles is 5.97 microns with  $GSD_v = 1.19$  and  $GSD_n = 1.23$ . The glass transition temperature of this sample is measured by DSC and found to have  $T_g(\text{onset}) = 45.96^\circ\text{C}$ . The yield of dried particles is 147.2 grams and the measured circularity is 0.958.

The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox

DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

Example 9:

5           A styrene/n-butyl acrylate emulsion/aggregation toner containing 9% POLYWAX® 725 Plus 6% RC-160 Carnauba Wax and colloidal silica is prepared as follows.

10           The procedure followed to prepare this toner is the same as Example 8 except the weight percent of the RC-160 Carnauba wax is increased from 3 percent to 6 percent, which results in a reduction of the core Emulsion Latex B of 3 percent. The final average particle size of the dried particles is 7.38 microns with  $GSD_v = 1.20$  and  $GSD_n = 1.36$ . The glass transition temperature of this sample is measured by DSC and found to have  $Tg(\text{onset}) = 45.08^\circ\text{C}$ . The yield of dried particles is 148.0 grams. The measured circularity of these particles is 0.930.

15           The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

20

Example 10:

          A styrene/n-butyl acrylate emulsion/aggregation toner containing 9% POLYWAX® 725 Plus 6% UNICID® 500 and colloidal silica is prepared as follows.

25           The procedure followed to prepare this toner is the same as Example 9 except the RC-160 Carnauba wax dispersion consisting of 18.26 percent solids content is replaced with UNICID® 550 wax dispersion consisting of 19.15 percent solids content. The final average particle size of the dried particles is 5.91 microns with  $GSD_v = 1.21$  and  $GSD_n = 1.27$ . The glass transition temperature of this sample is measured by DSC and found to have  $Tg(\text{onset}) = 46.00^\circ\text{C}$ . The yield of dried particles is 148.5 grams.

30

          The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer is

prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

5 Example 11:

A styrene/n-butyl acrylate emulsion/aggregation toner containing 9% POLYWAX® 725 Plus 6% KEMAMIDE® S180 and colloidal silica is prepared as follows.

10 The procedure followed to prepare this toner is the same as Example 9 except the RC-160 Carnauba wax dispersion consisting of 18.26 percent solids content is replaced with KEMAMIDE® S180 wax dispersion consisting of 19.15 percent solids content. The final average particle size of the dried particles is 8.00 microns with  $GSD_v = 1.21$  and  $GSD_n = 1.29$ . The yield of dried particles is 148.6 grams.

15 The particles are dried blended with the above-described second standard additive package to produce a free flowing toner. Then 805 grams of developer is prepared using 76.5 grams of this toner and 773.5 grams of 35 micron Xerox DocuColor 2240 carrier. The developer is evaluated in the Imari-MF free belt nip fuser (FBNF) system operating at a process speed of 104 mm/sec.

20 While this invention has been described in conjunction with various exemplary embodiments, it is to be understood that many alternatives, modifications and variations would be apparent to those skilled in the art. Accordingly, Applicants intend to embrace all such alternatives, modifications and variations that follow in the spirit and scope of this invention.

WHAT IS CLAIMED IS:

1. A toner comprising particles of a resin, an optional colorant, a first crystalline polymeric wax and a second crystalline polymeric wax,  
wherein the first crystalline polymeric wax is a crystalline polyethylene  
5 wax,  
wherein the second crystalline polymeric wax is selected from the group consisting of aliphatic polar amide functionalized waxes, carboxylic acid-terminated polyethylene waxes, aliphatic waxes consisting of esters of hydroxylated unsaturated fatty acids, high acid waxes, and mixtures thereof, and  
10 wherein said toner particles are prepared by an emulsion aggregation process.
2. A toner according to claim 1, wherein the first crystalline polymeric wax comprises a linear polyethylene crystalline wax.
3. A toner according to claim 1, wherein the second crystalline polymeric  
15 wax comprises an aliphatic polar amide functionalized wax.
4. A toner according to claim 3, wherein the second crystalline polymeric wax comprises a stearyl stearamide.
5. A toner according to claim 1, wherein the second crystalline polymeric wax comprises a carboxylic acid-terminated polyethylene wax.
- 20 6. A toner according to claim 5, wherein the second crystalline polymeric wax has at least an 50% carboxylic acid functionality.
7. A toner according to claim 1, wherein the second crystalline polymeric wax comprises an aliphatic wax consisting of esters of hydroxylated unsaturated fatty acids.
- 25 8. A toner according to claim 7, wherein the second crystalline polymeric wax has a carbon chain length of from about 8 to about 30 or higher.
9. A toner according to claim 7, wherein the second crystalline polymeric wax is a carnauba wax.
10. A toner according to claim 1, wherein the second crystalline polymeric  
30 wax comprises a high acid wax.
11. A toner according to claim 10, wherein the second crystalline polymeric wax is a montan wax.

12. A toner according to claim 10, wherein the second crystalline polymeric wax has an acid value of from about 127 to about 160 mg KOH/g.

13. A toner according to claim 1, wherein the second crystalline polymeric wax comprises a mixture of waxes.

5 14. A toner according to claim 1, wherein the emulsion aggregation process comprises:

shearing a first ionic surfactant with a wax emulsion comprising said first crystalline polymeric wax and said second crystalline polymeric wax, and a latex mixture comprising (a) a counterionic surfactant with a charge polarity of opposite  
10 sign to that of said first ionic surfactant, (b) a nonionic surfactant, (c) a resin, and (d) an optional colorant, thereby causing flocculation or heterocoagulation of formed particles of resin to form electrostatically bound aggregates;

heating the electrostatically bound aggregates to form aggregates of at least about 1 micron in average particle diameter.

15 15. A toner according to claim 1, wherein the emulsion aggregation process comprises:

preparing a colorant dispersion in a solvent, which dispersion comprises a colorant and a first ionic surfactant;

shearing the colorant dispersion with a wax emulsion comprising said  
20 first crystalline polymeric wax and said second crystalline polymeric wax, and a latex mixture comprising (a) a counterionic surfactant with a charge polarity of opposite sign to that of said first ionic surfactant, (b) a nonionic surfactant, and (c) a resin, thereby causing flocculation or heterocoagulation of formed particles of colorant and resin to form electrostatically bound aggregates; and

25 heating the electrostatically bound aggregates to form aggregates of at least about 1 micron in average particle diameter.

16. A toner according to claim 1, wherein the emulsion aggregation process comprises:

shearing an ionic surfactant with a wax emulsion comprising said first  
30 crystalline polymeric wax and said second crystalline polymeric wax, and a latex mixture comprising (a) a flocculating agent, (b) a nonionic surfactant, and (c) a resin,

thereby causing flocculation or heterocoagulation of formed particles of colorant and resin to form electrostatically bound aggregates;

heating the electrostatically bound aggregates to form aggregates of at least about 1 micron in average particle diameter.

5           17.    A toner according to claim 1, wherein the emulsion aggregation process comprises:

preparing a colorant dispersion in a solvent, which dispersion comprises a colorant and an ionic surfactant;

10           shearing the colorant dispersion with a wax dispersion comprising said first crystalline polymeric wax and said second crystalline polymeric wax, and a latex mixture comprising (a) a flocculating agent, (b) a nonionic surfactant, and (c) a resin, thereby causing flocculation or heterocoagulation of formed particles of colorant and resin to form electrostatically bound aggregates; and

15           heating the electrostatically bound aggregates to form aggregates of at least about 1 micron in average particle diameter.

          18.    A toner according to claim 1, wherein the emulsion aggregation process comprises:

preparing a colloidal solution comprising a resin, said first crystalline polymeric wax, said second crystalline polymeric wax and an optional colorant, and

20           adding to the colloidal solution an aqueous solution containing a coalescence agent comprising an ionic metal salt to form toner particles.

          19.    A toner according to claim 1, wherein the emulsion aggregation process comprises:

25           providing a resin latex dispersion of a resin in an aqueous ionic surfactant solution;

providing a pigment dispersion in water of a pigment dispersed in water, an optional dispersant, and an optional surfactant;

providing a wax dispersion comprising said first crystalline polymeric wax and said second crystalline polymeric wax;

30           blending the resin latex dispersion shear with the pigment dispersion, and the wax dispersion under high shear to form a resin-pigment-wax blend;

heating the sheared blend at temperatures below a glass transition temperature (Tg) of the resin while continuously stirring to form aggregate particles;

heating the aggregate particles at temperatures above the Tg of the resin followed by reduction of the pH to form coalesced particles of a toner

5 composition; and

optionally separating and drying the toner composition.

20. A method of making toner particles, comprising:

shearing a first ionic surfactant with a wax emulsion comprising a first crystalline polymeric wax and a second crystalline polymeric wax, and a latex mixture  
10 comprising (a) a counterionic surfactant with a charge polarity of opposite sign to that of said first ionic surfactant, (b) a nonionic surfactant, and (c) a resin, thereby causing flocculation or heterocoagulation of formed particles of resin to form electrostatically bound aggregates; and

heating the electrostatically bound aggregates to form aggregates of at  
15 least about 1 micron in average particle diameter,

wherein the first crystalline polymeric wax is a crystalline polyethylene wax, and

wherein the second crystalline polymeric wax is selected from the group consisting of aliphatic polar amide functionalized waxes, carboxylic acid-  
20 terminated polyethylene waxes, aliphatic waxes consisting of esters of hydroxylated unsaturated fatty acids, high acid waxes, and mixtures thereof.

21. The toner according to claim 15, further comprising colloidal silica.

22. The toner according to claim 16, further comprising colloidal silica.

23. The toner according to claim 17, further comprising colloidal silica.

25 24. The toner according to claim 18, further comprising colloidal silica.

25. The toner according to claim 19, further comprising colloidal silica.

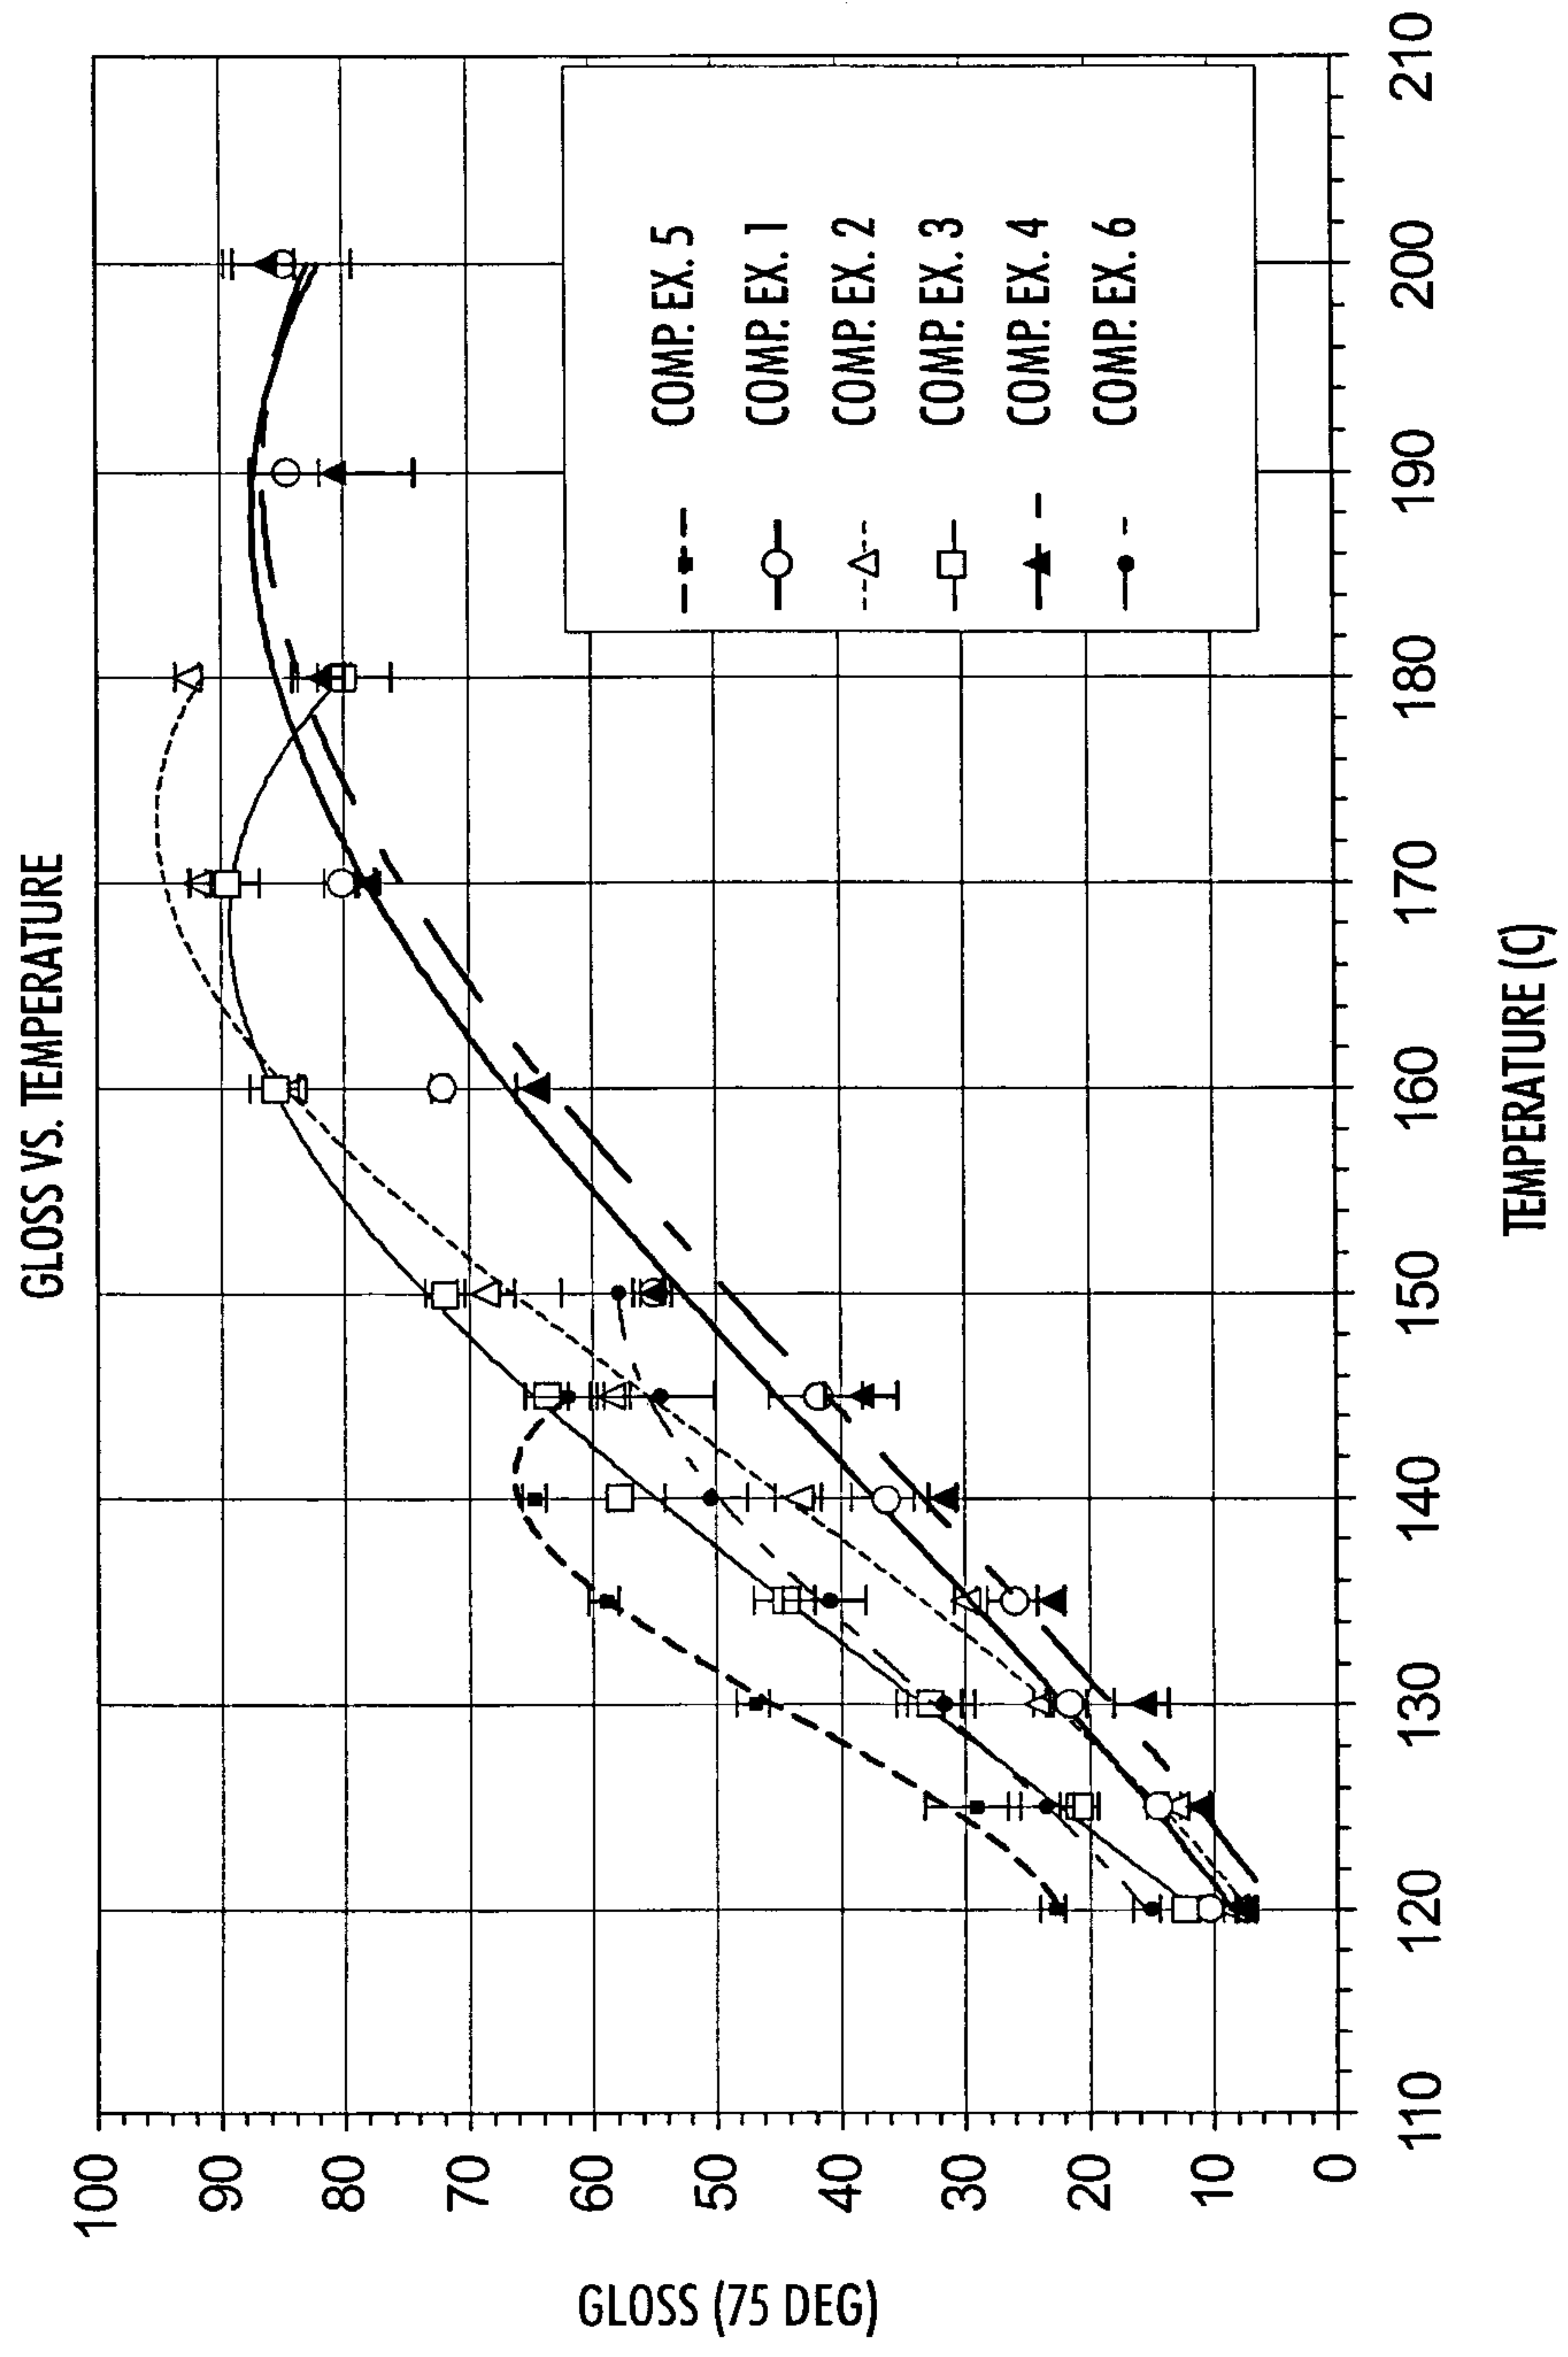


FIG. 1

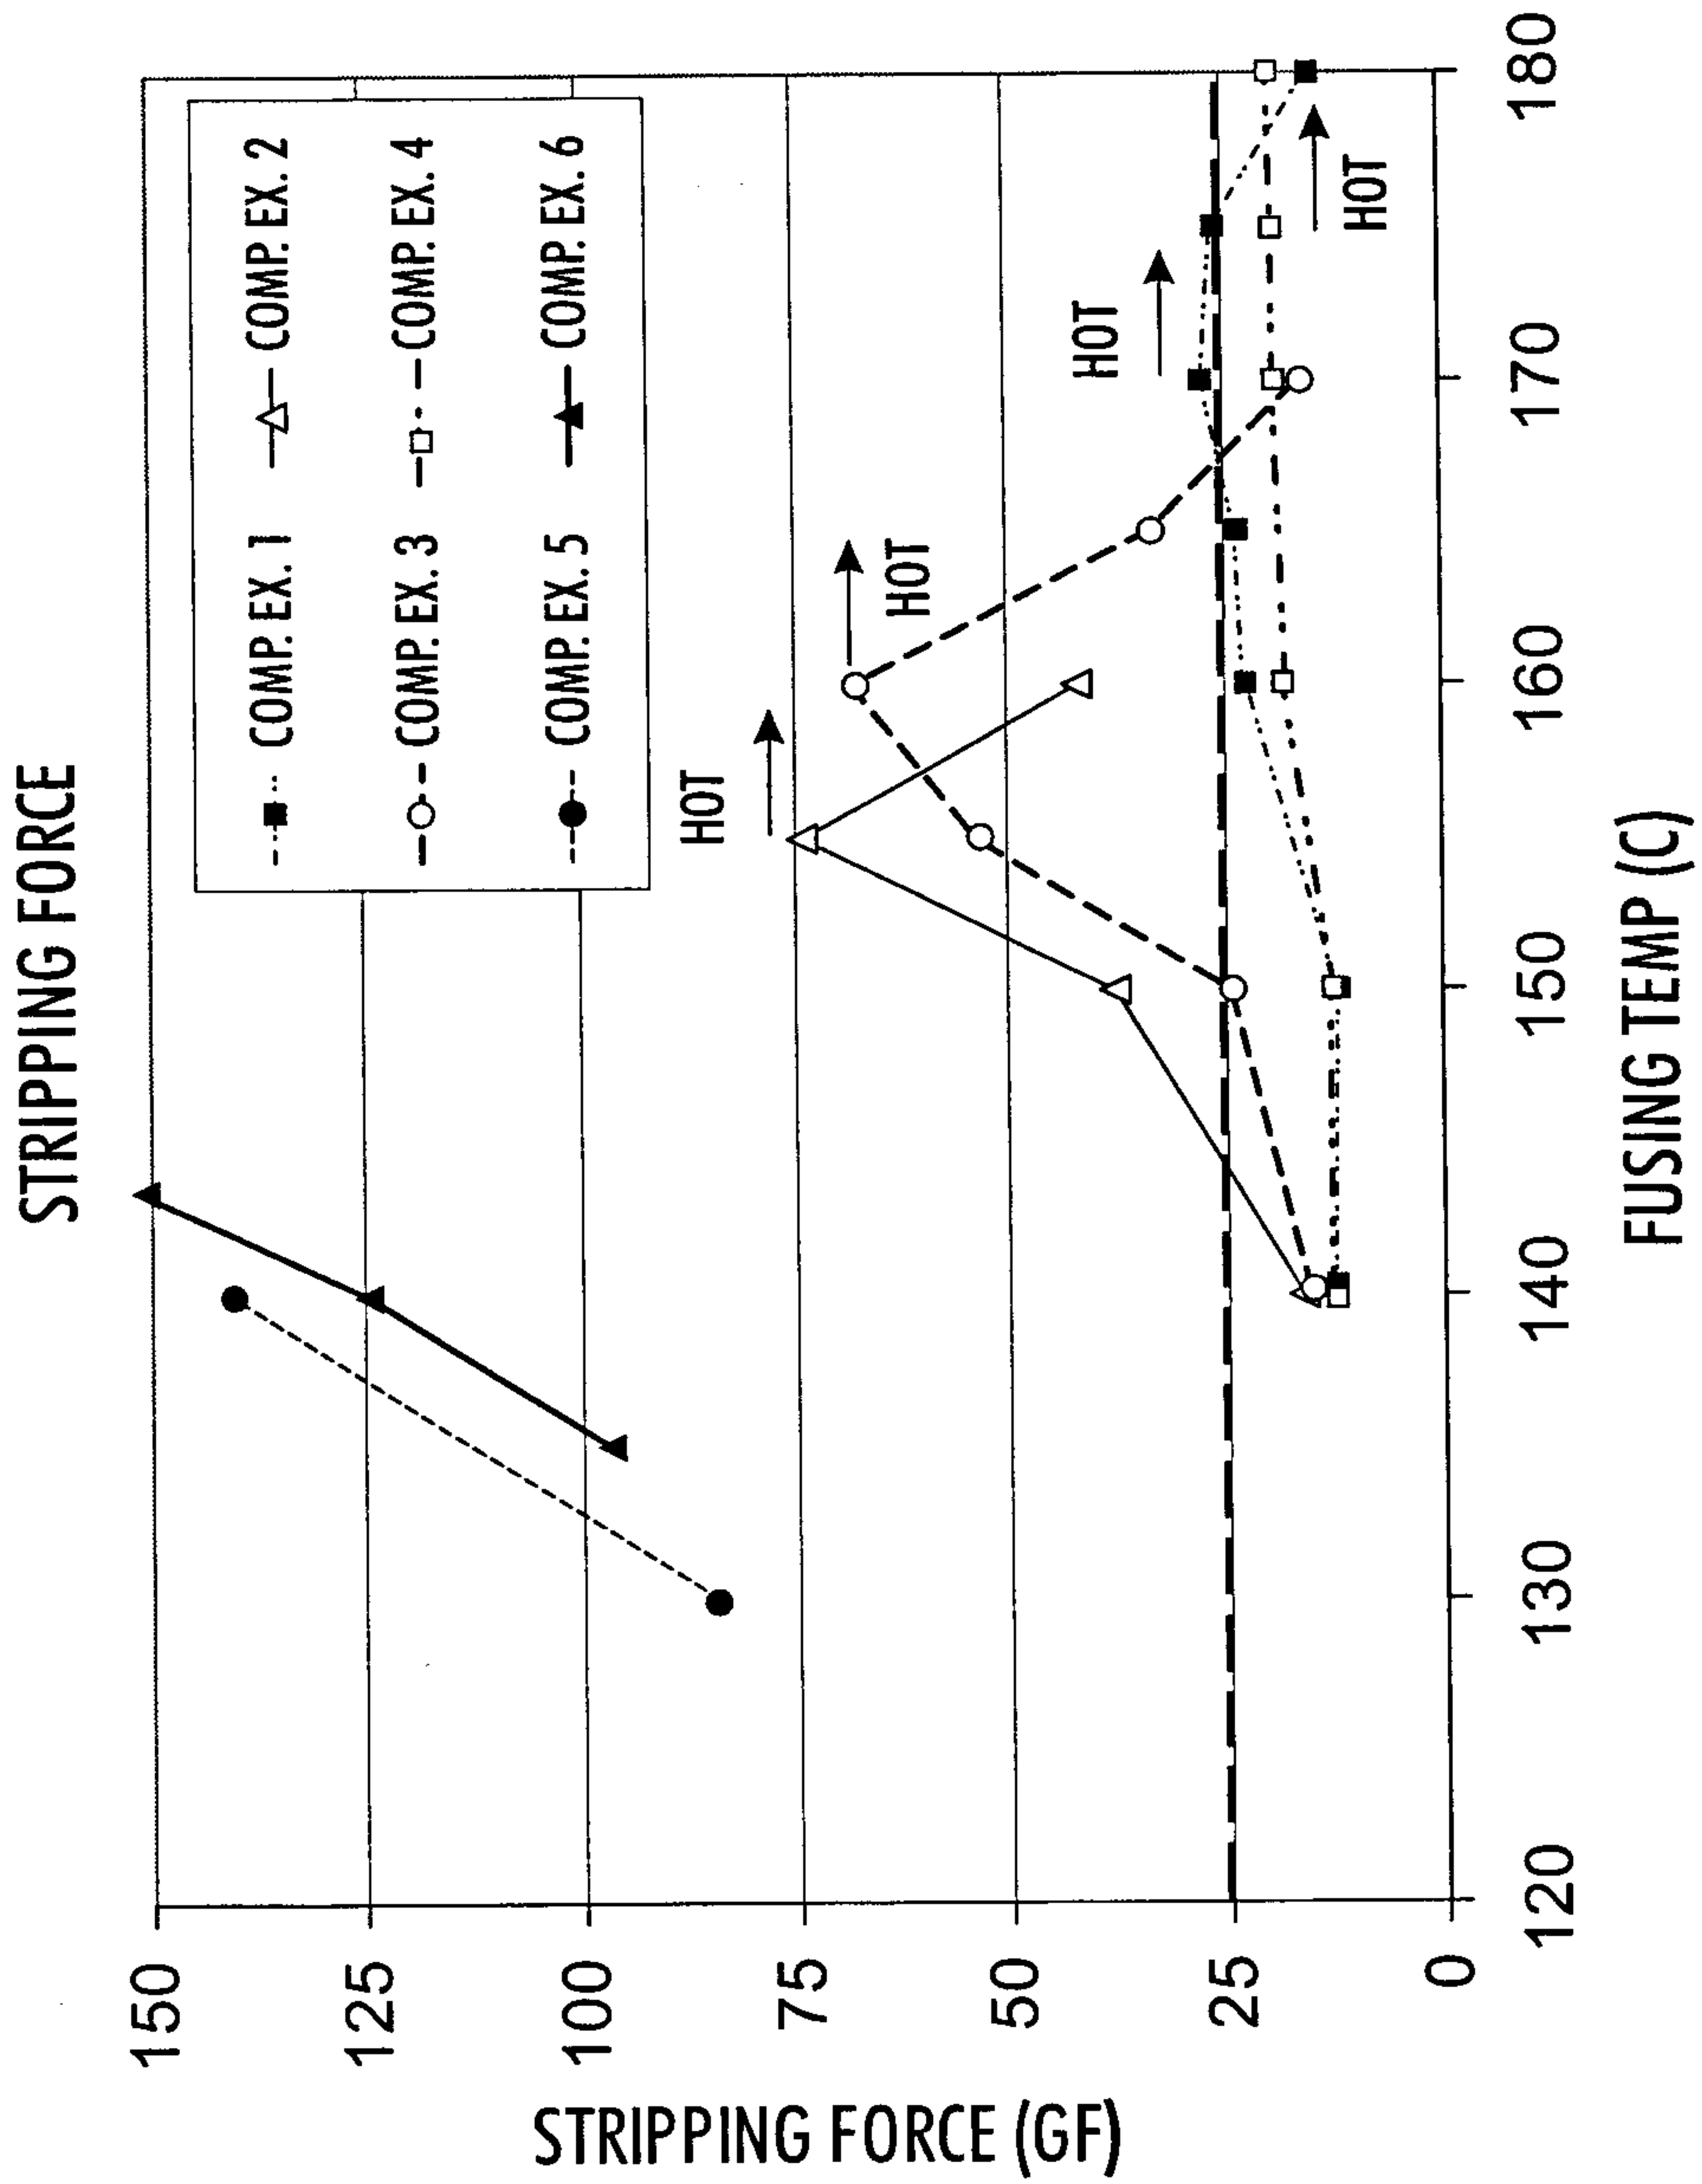


FIG. 2

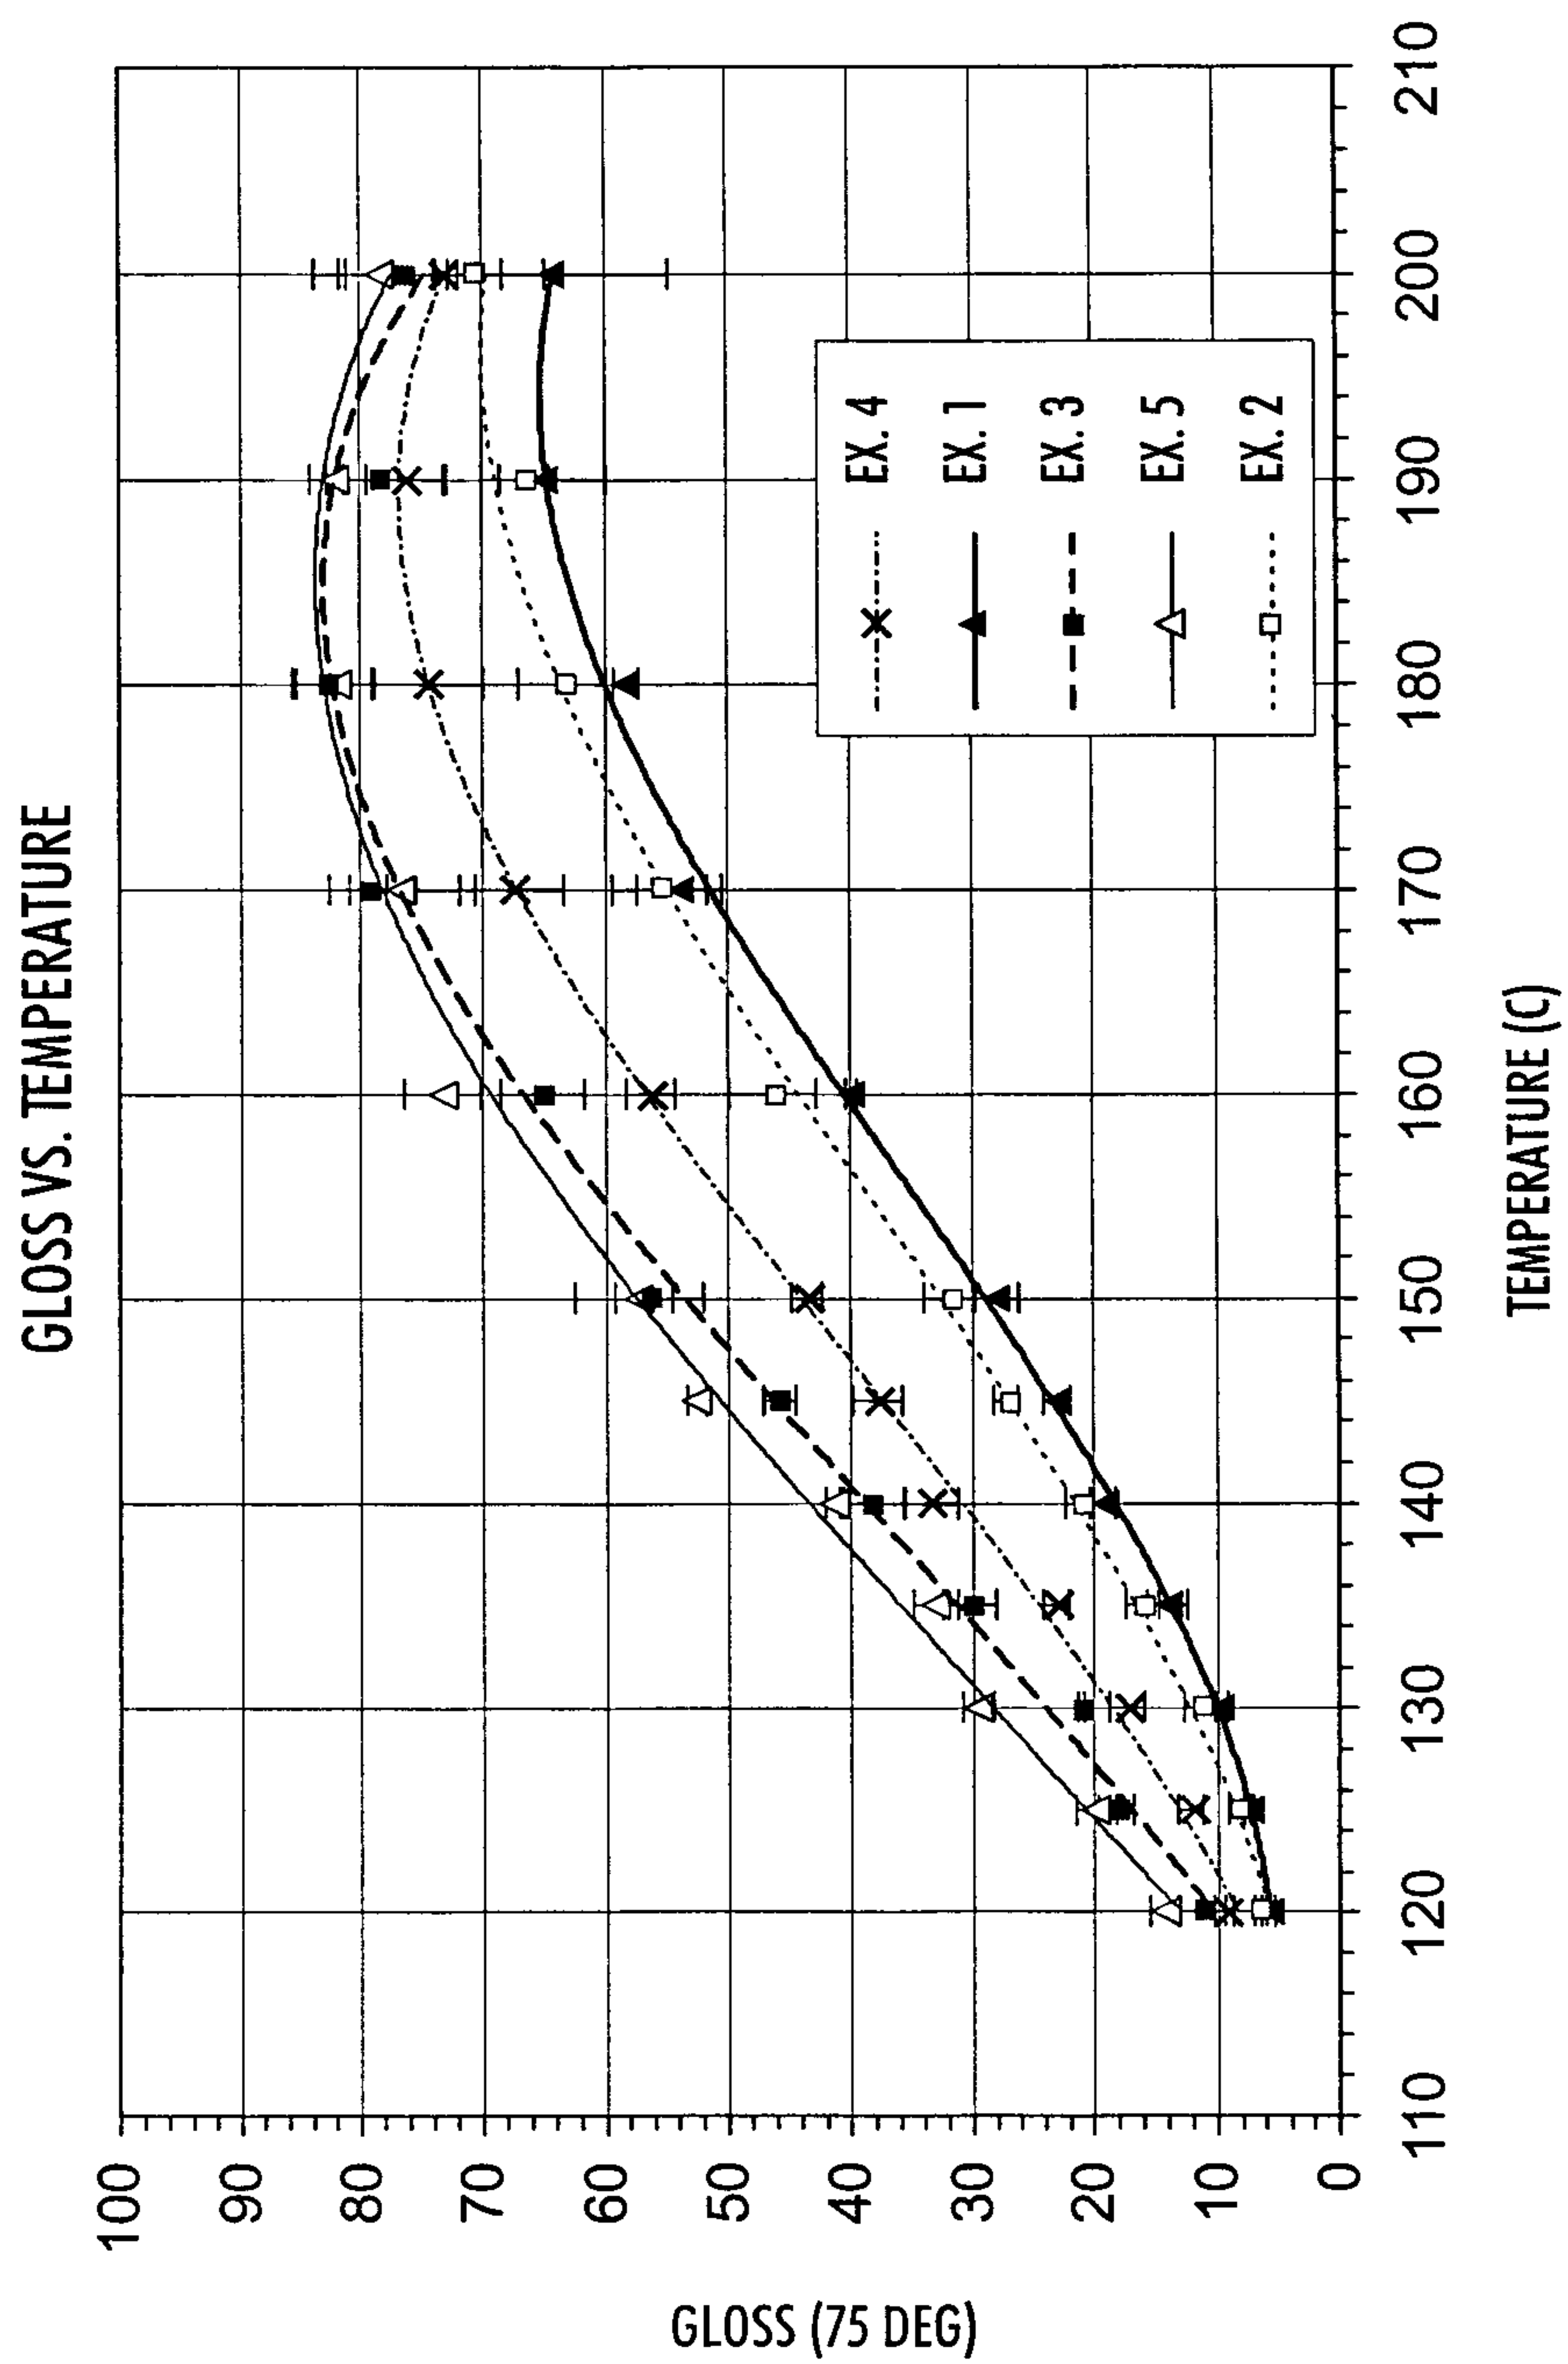


FIG. 3A

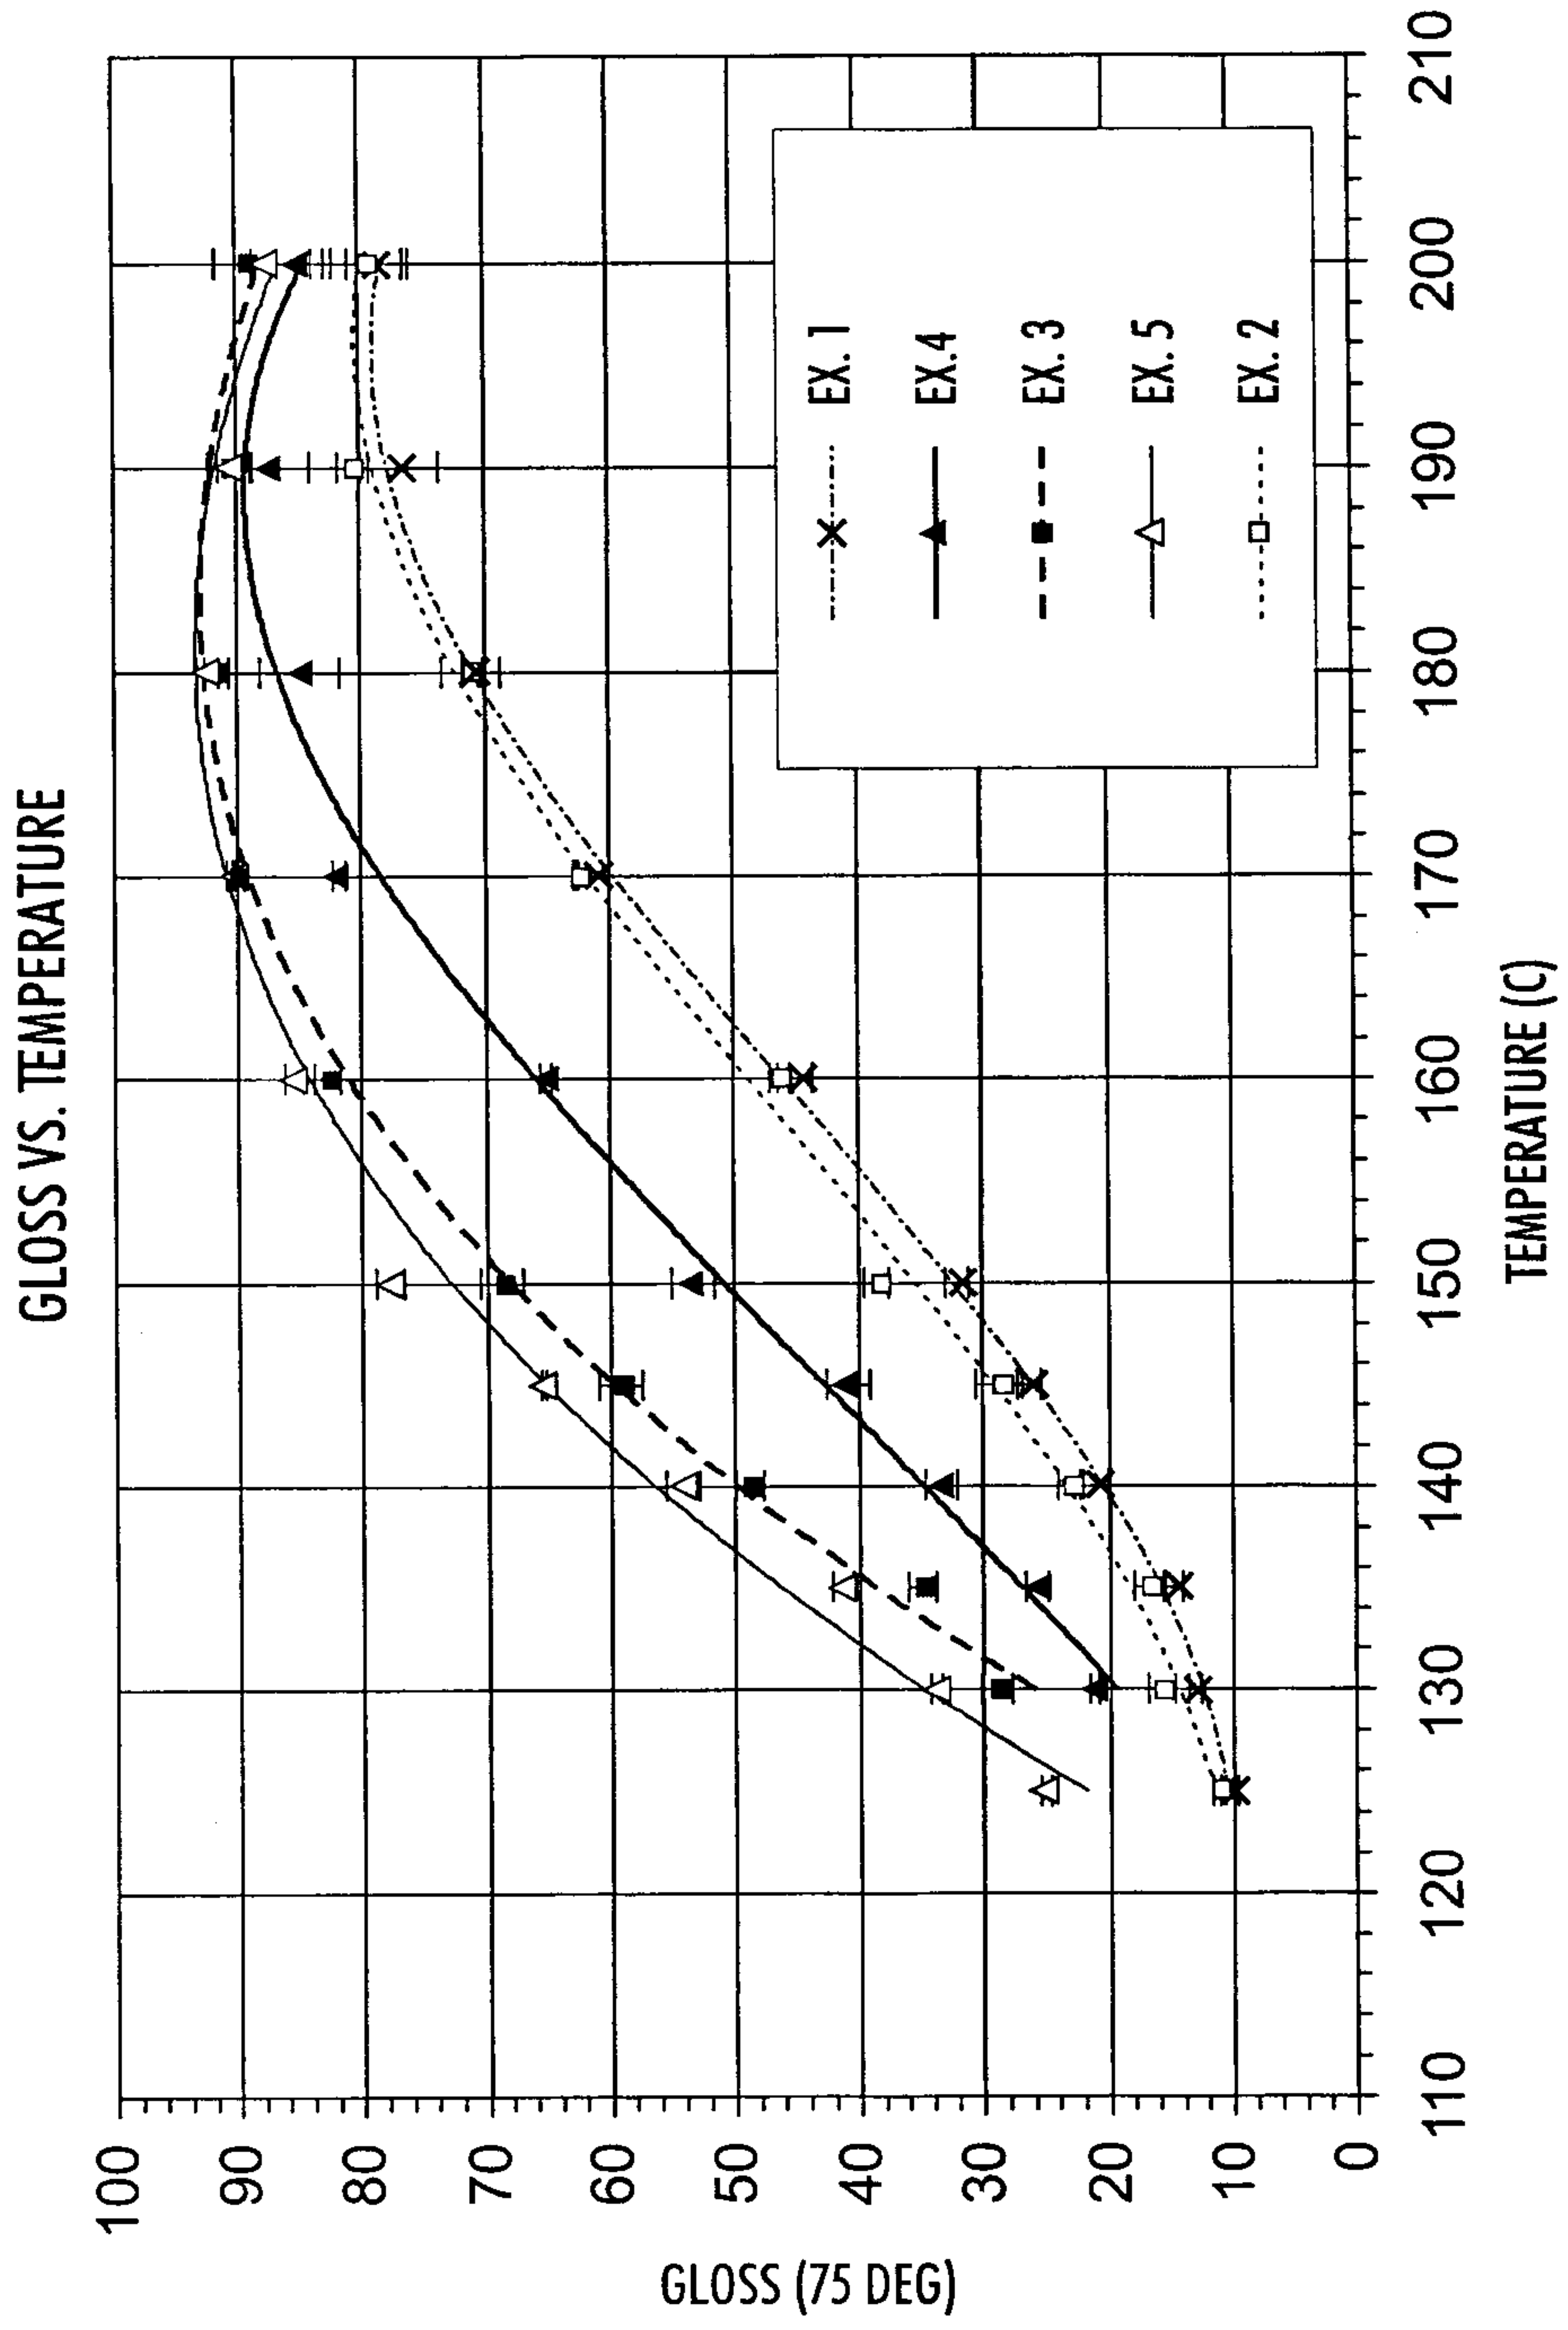


FIG. 3B

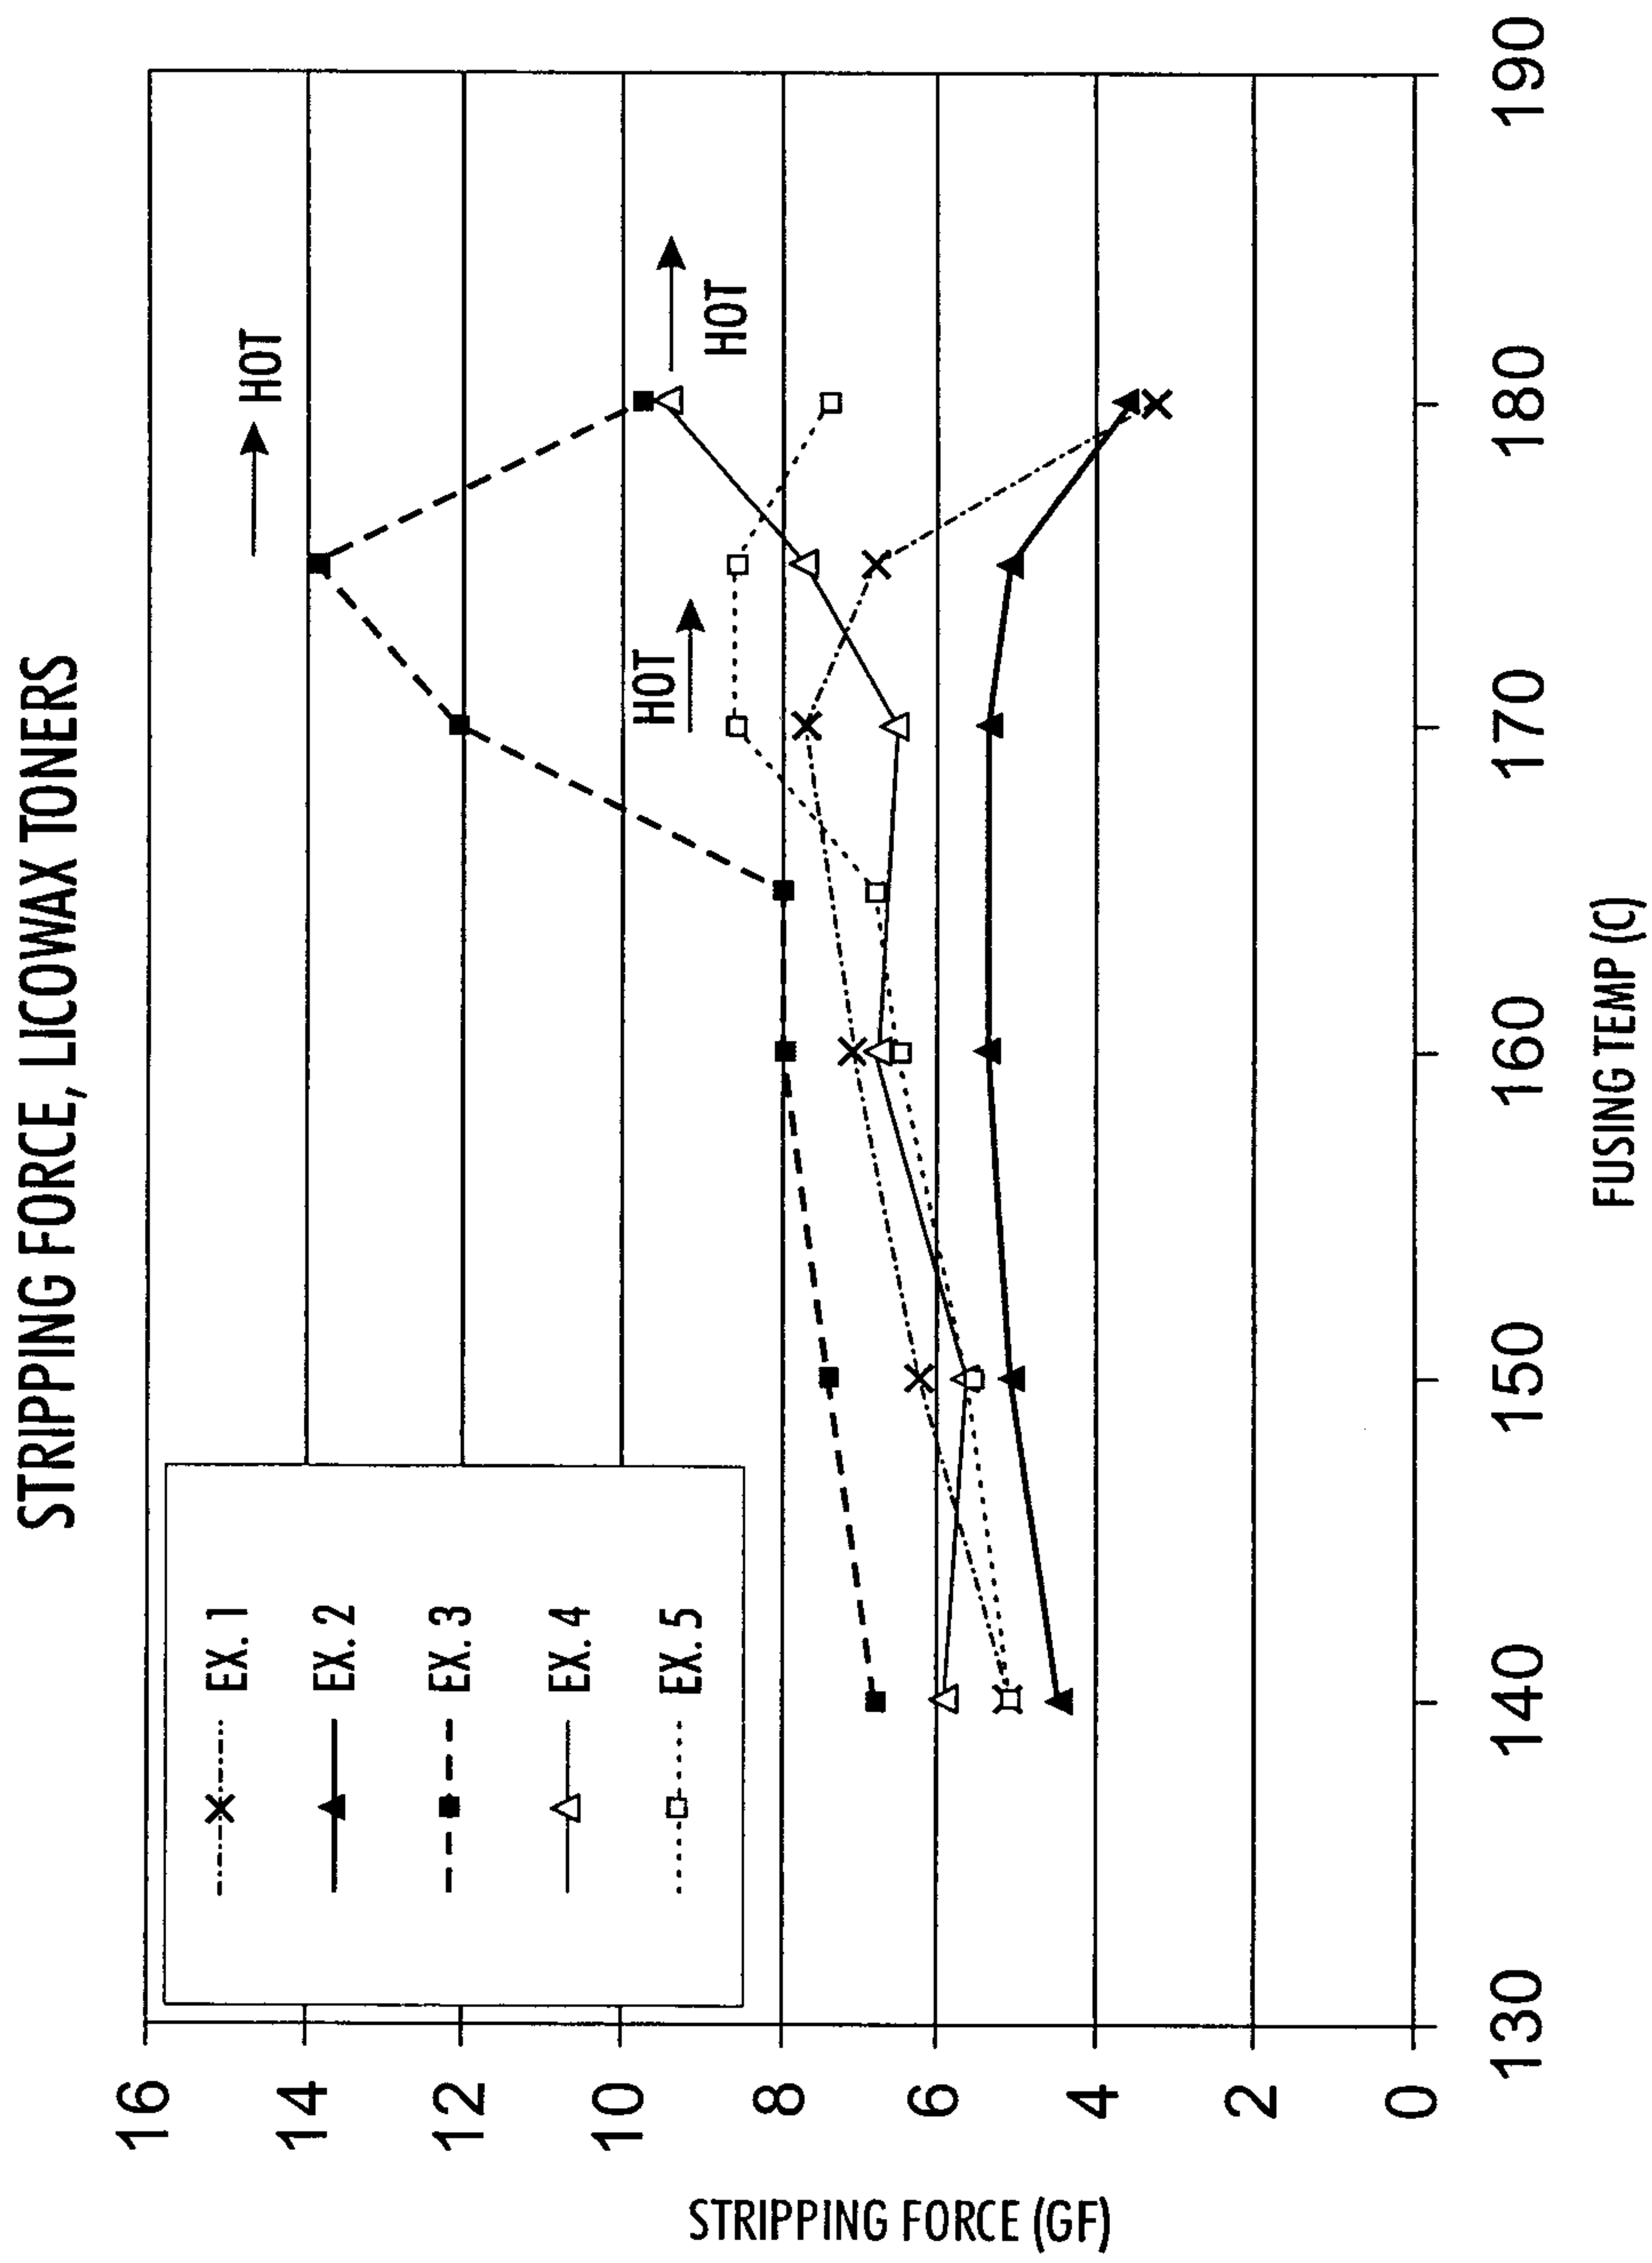


FIG. 4