



(86) Date de dépôt PCT/PCT Filing Date: 2017/05/09
 (87) Date publication PCT/PCT Publication Date: 2017/11/16
 (45) Date de délivrance/Issue Date: 2024/06/25
 (85) Entrée phase nationale/National Entry: 2018/11/05
 (86) N° demande PCT/PCT Application No.: EP 2017/061093
 (87) N° publication PCT/PCT Publication No.: 2017/194558
 (30) Priorité/Priority: 2016/05/09 (DE10 2016 108 538.3)


(51) Cl.Int./Int.Cl. *C09K 21/02* (2006.01),
E04B 1/94 (2006.01)

(72) Inventeurs/Inventors:
 OUTRAM, IAN, GB;
 JONES, SIMON, GB;
 TAYLOR, ANDREW, GB;
 GEYER, WALTER, DE;
 KOMMA, MARKUS, DE;
 PRONOLD, MICHAEL, DE

(73) Propriétaires/Owners:
 TREMCO ILLBRUCK LIMITED, GB;
 TREMCO ILLBRUCK GMBH, DE

(74) Agent: TORYS LLP

(54) Titre : MATERIAU POREUX IGNIFUGE IMPREGNE D'UN AGENT INTUMESCENT
 (54) Title: POROUS FIRE-STOPPING MATERIAL IMPREGNATED WITH INTUMESCENT AGENT

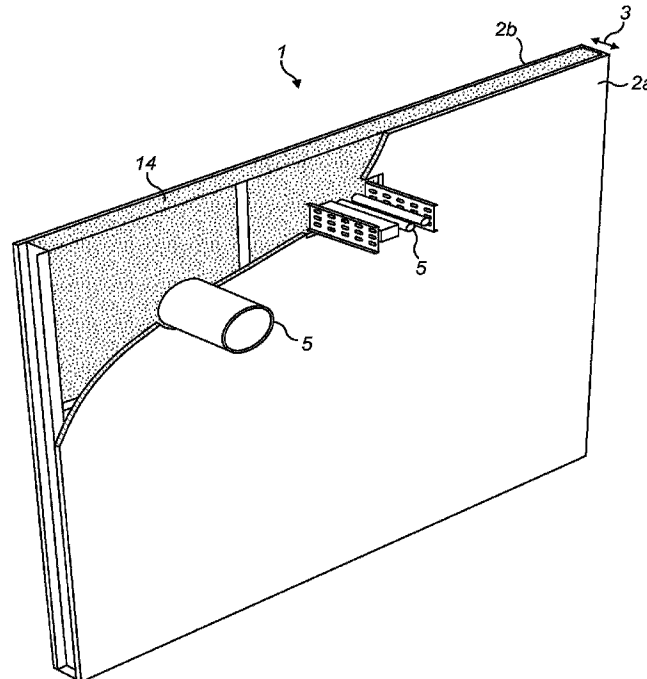

(57) Abrégé/Abstract:

A fire-stopping material for use in sandwich panels is provided, wherein the fire-stopping material comprises a resilient, porous material at least partially impregnated with an intumescent agent. A panel for an internal wall and an internal wall are also provided, comprising the fire-stopping material disposed between two substantially parallel boards, such as plaster boards. A method of providing a service penetration through an internal wall is also provided.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
16 November 2017 (16.11.2017)(10) International Publication Number
WO 2017/194558 A3

- (51) **International Patent Classification:**
C09K 21/02 (2006.01) *E04B 1/94* (2006.01)
- (21) **International Application Number:**
PCT/EP2017/061093
- (22) **International Filing Date:**
09 May 2017 (09.05.2017)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
10 2016 108 538.3
09 May 2016 (09.05.2016) DE
- (71) **Applicants:** **TREMCO ILLBRUCK LIMITED** [GB/GB]; Coupland Road, Hindley Green, Wigan Greater Manchester WN2 4HT (GB). **TREMCO ILLBRUCK PRODUKTION GMBH** [DE/DE]; Werner-Haep-Strasse 1, 92439 Bodenwöhr (DE). **FIRETHERM INTUMESCENT & INSULATION SUPPLIES LTD.** [GB/GB]; Unit F, Acorn Industrial Park, Crayford Road, Crayford DA1 4FT (GB).
- (72) **Inventors:** **OUTRAM, Ian**; Firetherm Intumescent & Insulation Supplies Ltd, Unit F, Acorn Industrial Park, Crayford Road, Crayford DA1 4FT (GB). **JONES, Simon**; tremco illbruck Limited, Torrington Avenue, Coventry Warwickshire CV4 9TJ (GB). **TAYLOR, Andrew**; tremco illbruck Limited, Coupland Road, Hindley Green, Wigan Greater Manchester WN2 4HT (GB). **GEYER, Walter**; Emmeramstraße 2, 92421 Schwandorf (DE). **KOMMA, Markus**; Anton-Paulus-Strasse 6, 93133 Burglengenfeld (DE). **PRONOLD, Michael**; Mitteraich 9, 92543 Guteneck (DE).
- (74) **Agent:** **CLARKE, Lionel Paul**; The Broadgate Tower, 20 Primrose Street, London GB EC2A 2ES (GB).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

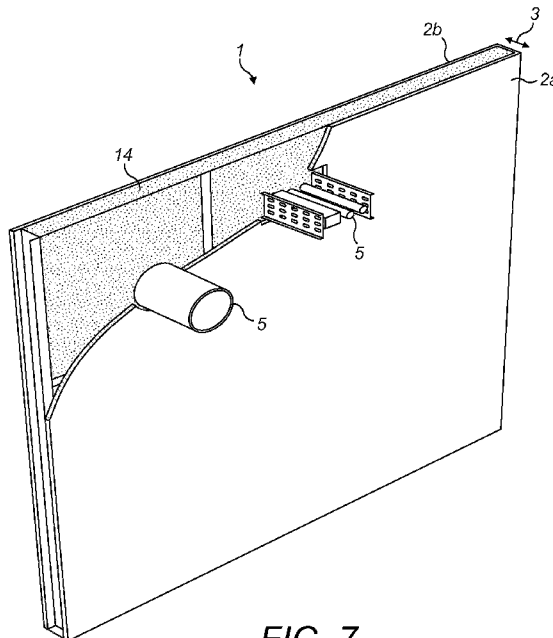
(54) **Title:** FIRE-STOPPING PRODUCT

FIG. 7

(57) **Abstract:** A fire-stopping material for use in sandwich panels is provided, wherein the fire-stopping material comprises a resilient, porous material at least partially impregnated with an intumescent agent. A panel for an internal wall and an internal wall are also provided, comprising the fire-stopping material disposed between two substantially parallel boards, such as plaster boards. A method of providing a service penetration through an internal wall is also provided.

[Continued on next page]

WO 2017/194558 A3

WO 2017/194558 A3 

HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

18 January 2018 (18.01.2018)

POROUS FIRE-STOPPING MATERIAL IMPREGNATED
WITH INTUMESCENT AGENT

FIELD OF THE INVENTION

- 5 The present invention relates to making good the fire-proofing of an interior dividing wall when provided with a penetration such as that made by a cable, conduit or pipe that passes through the wall.

BACKGROUND

10

Fire stopping in the context of the present invention is concerned with maintaining separate compartments in a structure in case of fire. The compartments should be sealed off from each other with respect to smoke, heat and flames, in order to give more time for the people in the areas not affected by
15 fire to escape the building before the fire spreads.

15

Fire stopping products are provided to seal gaps between compartments, both gaps between building elements (floors, walls, roofs) and gaps within building elements such as penetrations for conduits, pipes or cables, and the spaces
20 between doors and their frames.

20

Conventionally, there are two kinds of technologies. Passive technologies such as sealants, mastics and fire batts are permanently resistant to fire and are designed to resist fire conditions without change. Reactive technologies such as
25 intumescent tapes or pipe collars are designed to expand when heated in the same manner as intumescent coatings, and fill gaps which would normally be open in the non-fire situation.

25

The present invention is concerned with reactive technologies implemented in
30 dividing interior walls.

30

Dividing interior walls between fire compartments are often made from two sheets of plasterboard sandwiching a slab of fire proof insulation.

When service penetrations (for cables and pipes) are made in these types of wall, the installer has to drill through the plasterboard and insulation, remove the insulation material and fit some kind of complex fire-proofing solution, for example pipe collars, bands, batts and/or mastic. The particular type of fire-stopping to be fitted will depend upon the exact nature of the penetration, and a single job might require more than one type. The hole must be made fire and smoke proof, and where the penetration is combustible or melts in a fire, the solution chosen must also close the hole left when the penetration burns or melts during a fire.

10

Batts are incombustible boards made from mineral wool fibre coated with mastic as a smoke barrier. They are typically supplied in standard sizes then cut to suitable size and shape on site. Mastics and sealants may be intumescent or just fire-resistant without intumescence.

15

For more complex applications where intumescent closure is needed, mechanical solutions may be used. A cable sleeve, for example, is a steel shell lined with intumescent material. This is placed into a hole cut in the wall, and cables and/or pipes are fed through. Often, secondary sealing methods are used in conjunction so that the whole assembly is fire and smoke-proof.

20

Pre-shaped pillows are filled with a soft mixture of fibres and intumescent materials and simply stuffed around the penetrations. Pre-shaped blocks of foam may also be used.

25

Therefore there exists a need for a simplified fire-stopping product for internal walls that is easy to use with a variety of service penetrations, without the need for a number of different fire-proofing solutions to make good the fire-proofing of an internal wall when a service penetration is made.

30

SUMMARY

The invention provides a fire-stopping material for use in a sandwich panel for an internal wall, the fire-stopping material comprising a resilient, porous material at least partially impregnated with an intumescent agent.

In some embodiments, the fire-stopping material may be in the form of a strip with an elongate support.

Preferably, the resilient, porous material comprises a foam, a non-woven fabric and/or a fibrous body and is provided with an impregnating agent comprising the intumescent agent.

Preferably, the impregnating agent comprises at least one liquid medium and a binder for binding solid components of the impregnating agent to the foam material and wherein the intumescent agent comprises expandable graphite. The binder preferably helps the intumescent agent, such as graphite, to remain evenly dispersed within the pores of the resilient, porous material after it is impregnated into the resilient, porous material.

Preferably, the binder is an acrylic binder. Acrylic binders may be preferred because they exhibit good adhesion, water resistance and resistance to degradation.

Preferably, the impregnating agent comprises a phosphorus-containing compound.

Preferably, the phosphorus-containing compound is a phosphate, preferably a polyphosphate.

Preferably, the polyphosphate is ammonium polyphosphate.

Preferably, the impregnating agent comprises both a phosphorus-containing compound and graphite. Phosphates are known to have a synergistic effect with expandable graphite, producing a char that is less susceptible to erosion and

detachment from the substrate in fire conditions. Polyphosphates, in particular ammonium polyphosphate, are preferred.

5 Preferably, the resilient, porous material has a porosity of 10-100 pores per lineal inch (ppi), preferably 20-80 ppi.

10 The resilient, porous material is preferably produced from a foam material. In addition the resilient, porous material can also be made up of a plurality of materials such as for instance a foam material, a non-woven fabric and/or a fibrous material.

15 Preferably, the liquid medium is water or it contains water. In addition, however, the liquid medium may also be a liquid solvent or a mixture of water and a liquid solvent. The solvent may preferably be an organic solvent.

20 Preferably, the fibrous material is a body, in particular a planar body such as in particular, but not exclusively, mats and/or plates and/or strips. In this case these bodies can be made from a material which is selected from a group of materials containing mineral fibres, glass fibres, plastic fibres, natural fibres, combinations thereof or the like. If as the material a fleece is used, then this fleece comprises a material thickness, which is sufficiently large so that the fleece comprises a predefined resilience.

25 In this case it is conceivable that these bodies are made completely from these fibre materials, but it would also be conceivable that, in addition to the fibre materials, other substances are also present, such as in particular, but not exclusively, binders, aggregate materials and the like.

30 In a further preferred embodiment the fibrous material is at least partially resilient. Preferably the resilience of the material is such that, when given a predefined compression, especially a compression to 50% of the original thickness, it resets at least partially, preferably to at least 60% of the original thickness, preferably to at least 70% of the original thickness, preferably to at least 75% of the original thickness and very preferably to at least 80% of the

original thickness. These data refer especially to the not yet impregnated material.

In general the carrier is preferably resilient and/or elastic.

5

Preferably, the resilient, porous material is a reticulated foam material, preferably a reticulated PU soft foam. Where the resilient, porous material is a foam, preferably it has a porosity of 10-100 pores per lineal inch (ppi), preferably 20-80 ppi.

10

Preferably, the porous, flexible material comprises a foam, wherein the foam has a cell size between 2000 μm and 7000 μm , preferably between 3000 μm and 6000 μm and particularly preferably between 3400 μm and 5600 μm .

15

Preferably, the impregnating agent has a proportion of water of between 40 and 60 parts per hundred parts, and/or a proportion of binder of between 25 and 35 parts and/or a proportion of expandable graphite of between 15 and 25 parts.

20

Preferably, the liquid medium is water or contains water and/or the liquid medium contains solvent and in particular organic solvent.

The impregnating agent is preferably dried once impregnated into the porous, flexible material such that there is no significant liquid content remaining in the finished product, only traces may remain.

25

The invention also provides a panel for an internal building wall comprising two parallel boards defining a gap, wherein the gap is filled by insulation comprising a fire-stopping material, wherein the fire-stopping material comprises a resilient, porous material at least partially impregnated with an intumescent agent.

30

The invention also provides an internal building wall comprising two parallel boards defining a gap, wherein a fire-stopping material fills the gap, and wherein the fire-stopping material comprises a resilient, porous material impregnated with an intumescent agent.

Preferably in the panel or wall the insulation consists of the fire-stopping material. The fire-stopping material of the invention may obviate the need for an additional layer of fire-proof insulation. However, the fire-stopping material of the invention may also be used in conjunction with a slab of insulation between the two boards.

Preferably the intumescent agent includes at least one of: graphite, polyphosphate, melamine, pentaerythritol, titanium dioxide and exfoliated vermiculite. Any suitable intumescent agent may be used. In the event of a fire, the intumescent agent will swell and undergo a chemical and/or physical transformation to form a barrier that will block hot gases and flames for a period of time long enough to allow building occupants to escape to safety.

Preferably, the intumescent agent comprises graphite. When exposed to hot gases, graphite intumesces to form a char that blocks the spread of hot gases and flames for a period of time. Graphite is particularly preferred because it intumesces quickly and at relatively low temperatures.

Preferably, the intumescent agent comprises graphite and ammonium polyphosphate. Addition of ammonium polyphosphate (APP) may improve the resistance of the char to erosion by flames and detachment from the substrate under fire conditions.

Preferably, the resilient, porous material comprises an open-cell foam or a non-woven material. In either case, the resilient, porous material allows hot gases from a fire to contact the intumescent agent so that it may intumesce without delay in the event of a fire.

Preferably, the resilient, porous material comprises a polyurethane (PU) open-cell foam. Where the resilient, porous material is a PU open-cell foam, preferably it has a porosity of 10-100 pores per lineal inch (ppi), preferably 20-80 ppi.

Preferably, the weight ratio of the resilient, porous material to the intumescent agent is from 1:0.2 to 1:6, preferably from 1:1 to 1:3.

5 Preferably, at least one major face of the fire-stopping material comprises a smoke-impermeable coating. Whilst the fire-stopping material helps to prevent, for a period of time, the spread of a fire, the smoke-impermeable coating helps to prevent or reduce the dispersion of smoke through internal building walls. The smoke-impermeable coating may be any suitable smoke barrier, such as a mastic, a metal foil, or another impermeable material, preferably an acrylic
10 mastic.

Preferably, one or both of the boards is a plasterboard. Plasterboards are suitable for internal sandwich-type walls and wall panels.

15 A penetration can be made at any point in such a panel by simply cutting away the plasterboard, slitting the fire-stopping material and pushing the pipe or cable through. The smoke seal can then be reinstated by applying mastic to fill back to the plasterboard edges. The complex solutions to restoring smoke seals from the prior art are not necessary with the implementation of the present invention.
20

Accordingly, the invention also provides a method of providing a service penetration through an internal building wall comprising the steps:

- 25 - providing an internal building wall wherein at least a part of the wall comprises two boards and a fire-stopping material disposed between the boards, wherein the fire-stopping material comprises a resilient, porous material impregnated with an intumescent agent;
- cutting away the boards in the location of the service penetration thereby exposing the fire-stopping material;
- 30 - slitting the exposed fire-stopping material;
- pushing a service element through the fire-stopping material to cross from one side of the wall to the other;
- applying a mastic or other filler to fill back to the board edges.

This is an easy, universal solution. The installer only has to carry tools and mastic, rather than a selection of complex mechanical fire stopping products.

Embodiments of the invention will now be described in more detail with
5 reference to the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a typical fire-rated dividing interior wall;
10 Figure 2 shows a prior art solution to make a service penetration fire- and smoke-proof by using batts and mastic;
Figure 3 shows a prior art solution to make a service penetration fire- and smoke-proof by using batts and mastic;
Figure 4 shows a prior art solution to make a service penetration fire- and
15 smoke-proof by using sleeves and wraps;
Figure 5 shows a prior art solution to make a service penetration fire- and smoke-proof by using pillows;
Figure 6 shows an example of a wall panel according to the invention;
Figure 7 shows a fire-rated wall with penetrations made fire-proof according to
20 the invention.

DETAILED DESCRIPTION

Figure 1 shows a typical construction of an interior wall 1 of the sandwich panel
25 type, in this drawing specifically a steel stud wall. Two substantially parallel boards 2a, 2b defined a cavity 3, within which is disposed a slab of insulation 4. The insulation 4 is preferably fire-proof. The boards 2a, 2b may be, for example, gypsum, fibre cement, plasterboard, or any other suitable board type and may
30 be fire-rated in their own right. Also shown in Figure 1 are steel tubes 5, which act as a framework for the insulation and plaster boards, providing structural support. Shapes other than tubes; such as U-sections, H-sections or L-sections, are also possible and they may be perforated. . According to the present invention, the fire-stopping product may be provided either in addition to or in replacement of the insulation slab 4 within the cavity 3.

Frequently, it is necessary to make a penetration through an internal wall, for example to pass through a pipe, cable, or other service as required. The prior art provides various and often complex solutions to making good the fire-proofing of the internal wall, so that the service penetration does not facilitate the fast spreading of a fire. Figures 2 to 5 show examples of prior art solutions to restoring the fire barrier after installing a service penetration.

Figures 2 and 3 show a solution using batts and mastic. The area of the boards 2a, 2b surrounding the service penetration 5 is surrounded by batts 6 and the system is sealed using mastic 7. In Figure 3, the service penetration 5 is wrapped in a layer of combustible insulation 8. Batts are incombustible boards made from mineral wool fibre coated with mastic as smoke barrier. They are typically supplied in standard sizes then cut to suitable size and shape on site. Mastics and sealants may be intumescent or just fire-resistant without intumescence.

Figure 4 shows a complex prior art solution where intumescent closure is needed. A cable sleeve 11, e.g. a steel shell lined with intumescent material, is placed into a hole cut into the wall 1 through both boards 2a, 2b. Cables and/or pipes 5 are fed through the sleeve 11. The steel shell of the cable sleeve 11 means that the intumescent material within (from additional sealing means such as PVC tubes 9 that are filled inside with mastic and a piece 10 cut from a batt) can only expand inwards to fill the gaps around the service penetrations 5, rather than into the dry wall cavity 3. As is clear from this example, various components are required, which is inconvenient and costly.

Figure 5 shows an example of how restoring fire-proofing is relevant for floors as well as walls. Shown is a floor 12 provided with a combustible service penetration 5. Pillows 13 are packed around the service penetration 5. The pre-shaped pillows 13 are filled with a soft mixture of fibres and intumescent materials and simply stuffed around the penetrations 5. Pre-shaped blocks of foam may also be used, but these are typically not intumescent.

Figure 6 shows a wall panel according to the invention. A wall 1 comprises two plasterboards 2a, 2b positioned parallel to one another in a spaced apart relationship defining a cavity 3 in which a fire-stopping material 14 comprising a reticulated foam impregnated with an intumescent agent is provided. Figure 6 shows that a smoke barrier 15 underlies the board 2a.

When a service penetration is made through a wall according to the invention, it is much simpler to restore the fire-proofing when compared to prior art solutions. Figure 7 shows a wall 1 according to the invention in which service penetrations 5 pass through both boards 2a, 2b to reach from one side of the wall 1 to the other. The fire-stopping material 14 that is positioned within the gap 3 between the boards 2a, 2b is resilient and therefore, even when slit to allow through passage of a service penetration 5, it springs back as far as possible to its original shape and thus large holes are prevented. The fire-stopping material 14 can be seen to be in close contact with the service penetrations 5 in Figure 7. Only mastic (not shown) is required to restore the fire-proofing, and patching up of the smoke seal (not shown), if required.

EXAMPLES

20

This test was carried out according to the general principles of EN1366-4. A 1.5 m x 1.5 m x 1.5 m furnace was used, with heating to the ISO834 cellulosic fire curve.

25 In this test, one vertical wall of the furnace is replaced with the test specimen. The furnace is then heated, and thermocouples applied to the outer surface monitor the insulation properties.

The insulation failure time is the time taken for the outer surface of the sealed area to reach (ambient temperature + 140 °C), in this case 160 °C.

30 The integrity of the seal is monitored visually, looking for cracks and smoke leakage through the sealed area.

A single test piece with two holes for penetrations was prepared. The test piece was a 1500 mm x 1500 mm wall of 100 mm thick Thermalite shield (aerated concrete) blocks with two 200 mm x 200 mm holes in the centre.

5 In the first case, representing the invention, one hole was sealed with a vertical 100 mm thick slab of the fire-stopping material of the invention, entirely filling the 200 mm x 200 mm x 100 mm space. This was then penetrated by pushing through a 10 mm diameter copper pipe.

10 In particular, the fire-stopping material of the invention used in this test was a PU foam impregnated with intumescent graphite and an acrylic binder.

In the second case (System-ZZ), the space between a 10 mm diameter copper pipe and the edges of the second hole was sealed with a commercially-available
 15 2-component Polyurethane fire protection foam, System ZZ-Fire protection foam 2K NE, available from Zapp Zimmermann GmbH. This was dispensed from a cartridge and allowed to cure in the space, forming a seal.

	Insulation time	Integrity time
Invention	67 minutes	>120 minutes
System-ZZ	55 minutes	>120 minutes

20 This shows that the fire-stopping material of the invention is capable of being used as a commercial product with a rating of 60 minutes, and slightly outperformed the 2-component PU foam in this test.

CLAIMS

1. A method of providing a service penetration through an internal building wall comprising the steps:
 - 5 - providing an internal building wall wherein at least a part of the wall comprises two boards and a fire-stopping material disposed between the boards, wherein the fire-stopping material comprises a resilient, porous material impregnated with an intumescent agent;
 - cutting away the boards in the location of the service penetration thereby
10 exposing the fire-stopping material;
 - slitting the exposed fire-stopping material;
 - pushing a service element through the fire-stopping material to cross from one side of the wall to the other;
 - applying a mastic or other filler to fill back to the board edges.
15
2. The method according to claim 1, wherein the resilient, porous material comprises an open-cell foam or a non-woven material.
3. The method according to claim 2, wherein the resilient, porous material
20 comprises a polyurethane (PU) open-cell foam.
4. The method according to any one of claims 1 to 3, wherein the resilient, porous material is a reticulated foam material.
- 25 5. The method according to claim 4, wherein the resilient, porous material is a reticulated PU soft foam.
6. The method according to any one of claims 1 to 5, wherein the resilient, porous material has 10-100 pores per lineal inch (ppi).
30
7. The method according to claim 6, wherein the resilient, porous material has 20-80 ppi.

8. The method according to any one of claims 1 to 7, wherein the resilient, porous material comprises a foam, wherein the foam has a cell size between 2000 μm and 7000 μm .
- 5 9. The method according to claim 8, wherein the foam has a cell size between 3000 μm and 6000 μm .
- 10 10. The method according to claim 9, wherein the foam has a cell size between 3400 μm and 5600 μm .
11. The method according to any one of claims 1 to 10, wherein the weight ratio of the resilient, porous material to the intumescent agent is from 1:0.2 to 1:6.
12. The method of claim 11, wherein the weight ratio of the resilient, porous material to the intumescent agent is from 1:1 to 1:3.
- 15 13. A panel for an internal building wall comprising two parallel boards defining a gap, wherein the gap is filled by insulation comprising a fire-stopping material, wherein the fire-stopping material comprises a resilient, porous material at least partially impregnated with an intumescent agent, and wherein a service element is provided through the panel.
- 20 14. The panel according to claim 13, wherein the fire-stopping material is in the form of a strip with an elongate support.
- 25 15. The panel according to claim 13 or claim 14, wherein the resilient, porous material comprises a foam, a non-woven fabric and/or a fibrous body and is provided with an impregnating agent comprising the intumescent agent.
- 30 16. The panel according to claim 15, wherein the impregnating agent comprises at least one liquid medium and a binder for binding solid components of the impregnating agent to the foam material and wherein the intumescent agent comprises expandable graphite.

17. The panel according to claim 16, wherein the impregnating agent has a proportion of water of between 40 and 60 parts per hundred parts, and/or a proportion of binder of between 25 and 35 parts and/or a proportion of expandable graphite of between 15 and 25 parts.
- 5 18. The panel according to claim 16 or claim 17, wherein the liquid medium is water or contains water and/or the liquid medium contains solvent.
19. The panel according to claim 18, wherein the liquid medium is water or
10 contains water and/or the liquid medium contains organic solvent.
20. The panel according to any one of claims 16 to 19, wherein the binder is an acrylic binder.
- 15 21. The panel according to any one of claims 15 to 20, wherein the impregnating agent comprises a phosphorus-containing compound.
22. The panel according to claim 21, wherein the phosphorous-containing compound is a phosphate.
- 20 23. The panel according to claim 22, wherein the phosphorous-containing compound is a polyphosphate.
24. The panel according to claim 23, wherein the polyphosphate is ammonium
25 polyphosphate.
25. The panel according to any one of claims 13 to 24, wherein the resilient, porous material has a porosity of 10-100 pores per lineal inch (ppi).
- 30 26. The panel according to claim 25, wherein the resilient, porous material has a porosity of 20-80 ppi.
27. The panel according to any one of claims 13 to 26, wherein the resilient, porous material is a reticulated foam material.
- 35

28. The panel according to claim 27, wherein the resilient, porous material is a reticulated PU soft foam.
29. A panel according to claim 13, wherein the insulation consists of the fire-
5 stopping material.
30. A panel according to any one of claims 13 to 29, wherein the intumescent agent includes at least one of: graphite, polyphosphate, melamine, pentaerythritol, titanium dioxide and exfoliated vermiculite.
- 10 31. A panel according to any one of claims 13 to 30, wherein the intumescent agent comprises graphite.
32. A panel according to any one of claims 13 to 31, wherein the intumescent
15 agent comprises graphite and ammonium polyphosphate.
33. A panel according to any one claims 13 to 32, wherein the resilient, porous material comprises an open-cell foam or a non-woven material.
- 20 34. A panel according to any one of claims 13 to 33, wherein the resilient, porous material comprises a polyurethane (PU) open-cell foam.
35. A panel according to any one of claims 13 to 34, wherein the weight ratio of the resilient, porous material to the intumescent agent is from 1:0.2 to 1:6.
- 25 36. A panel according to claim 35, wherein the weight ratio of the resilient, porous material to the intumescent agent is from 1:1 to 1:3.
37. A panel according to any one of claims 13 to 36, wherein at least one major
30 face of the fire-stopping material comprises a smoke-impermeable coating.
38. A panel according to any one of claims 13 to 37, wherein one or both of the boards is a plasterboard.

39. An internal building wall comprising two parallel boards defining a gap, wherein a fire-stopping material fills the gap, and wherein the fire-stopping material comprises a resilient, porous material impregnated with an intumescent agent and wherein a service element is provided through the wall.

5

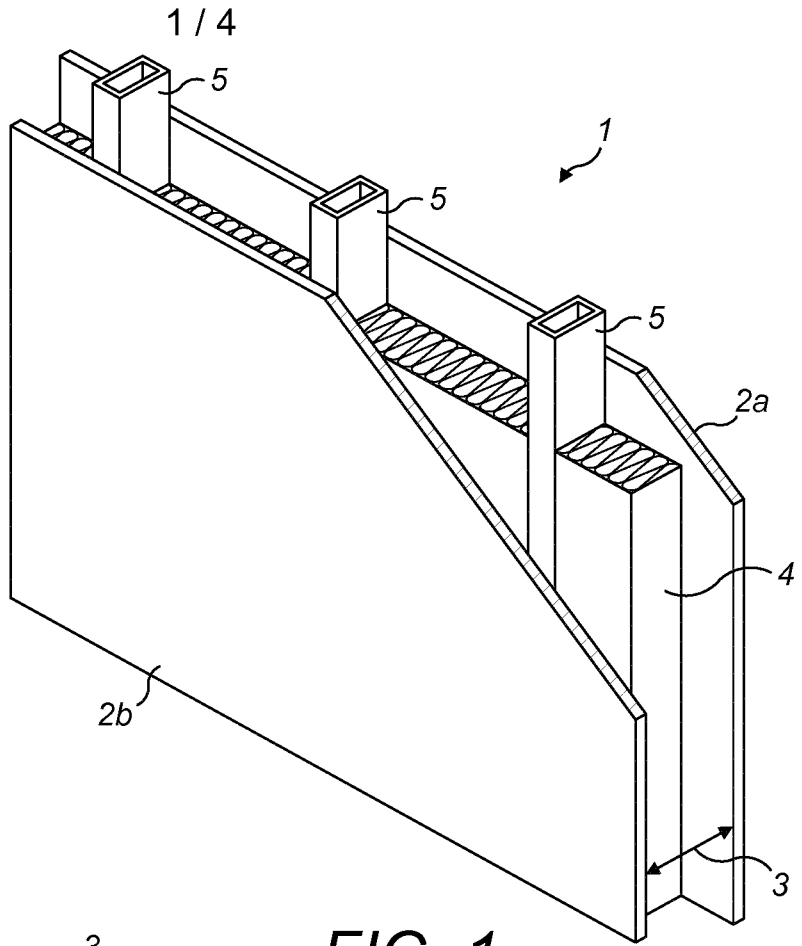


FIG. 1

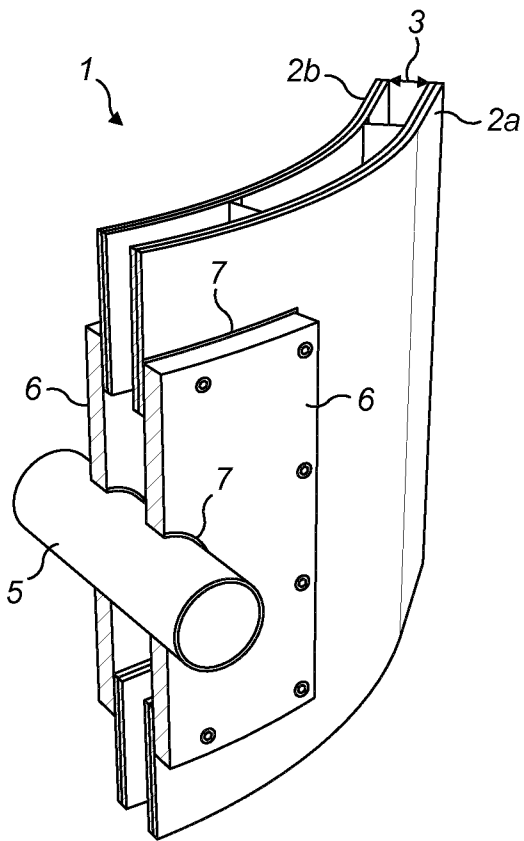


FIG. 2
Prior Art

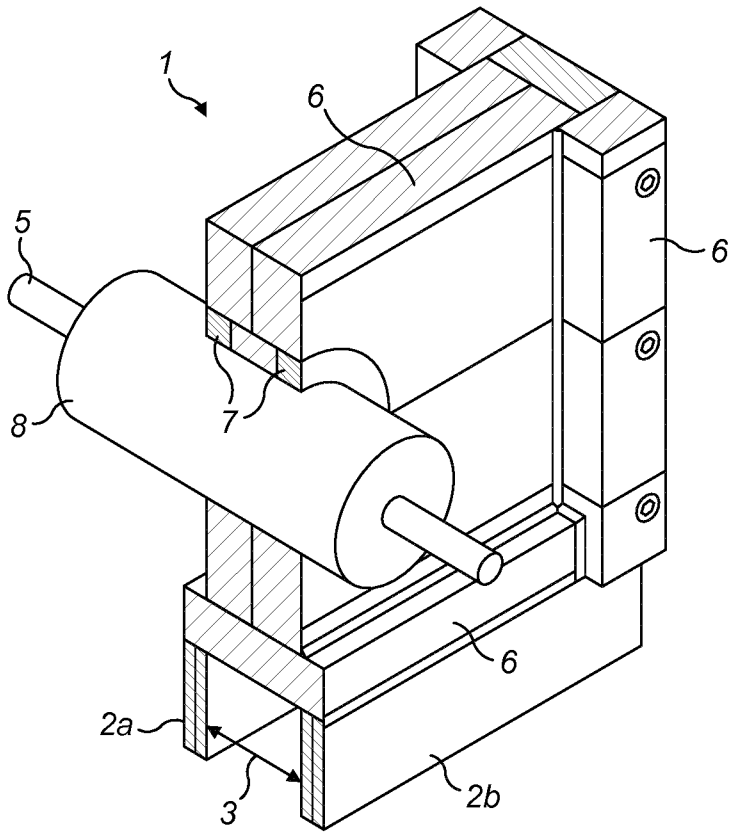


FIG. 3
Prior Art

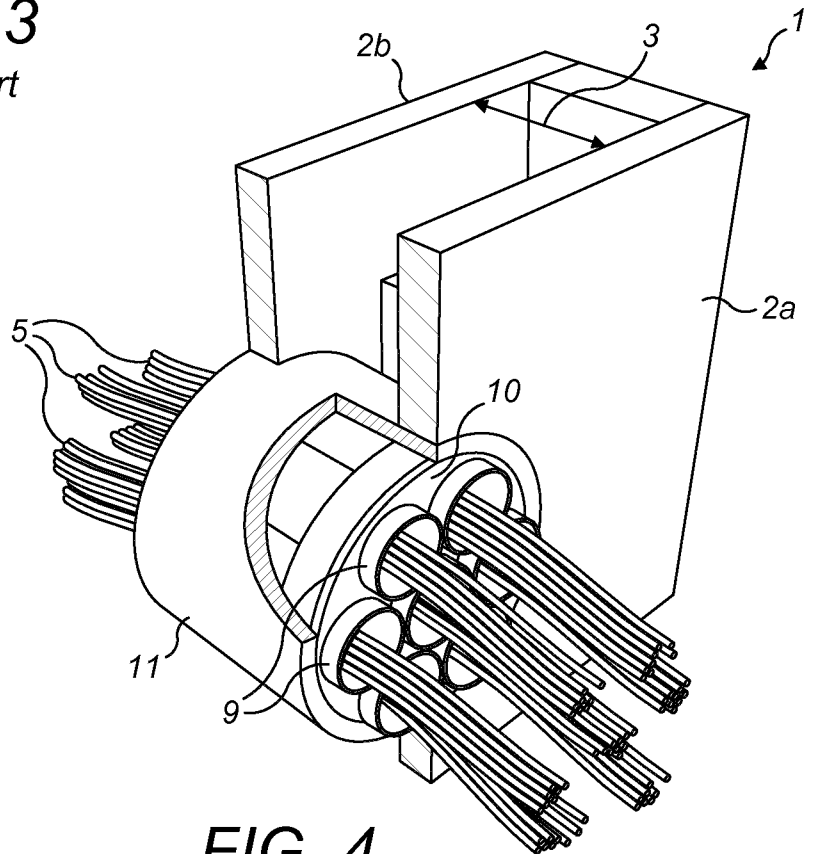


FIG. 4
Prior Art

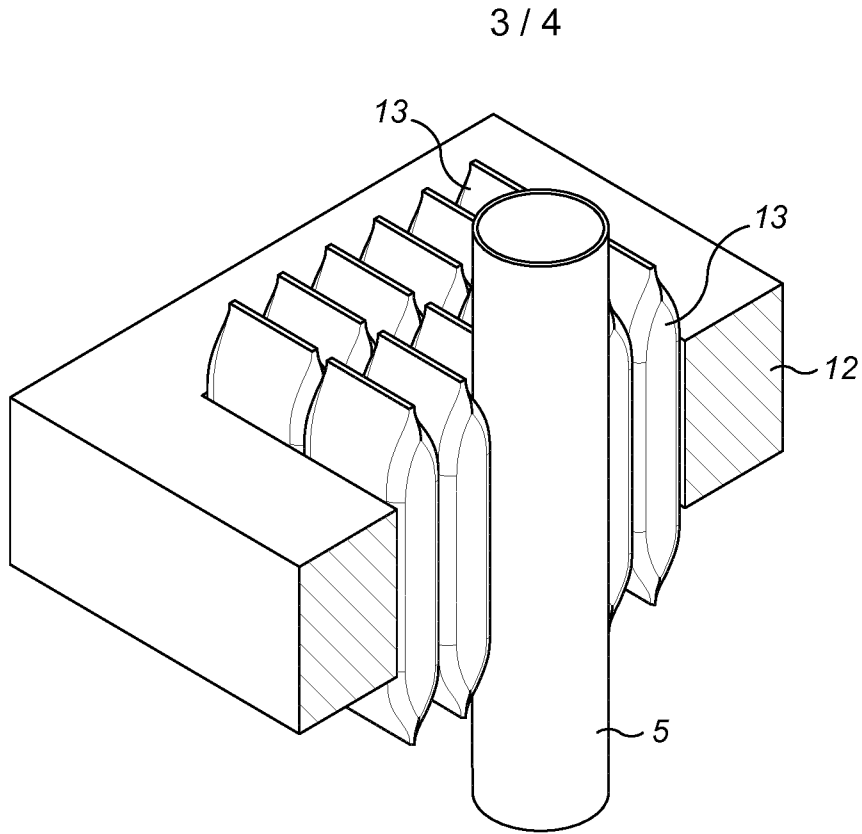


FIG. 5
Prior Art

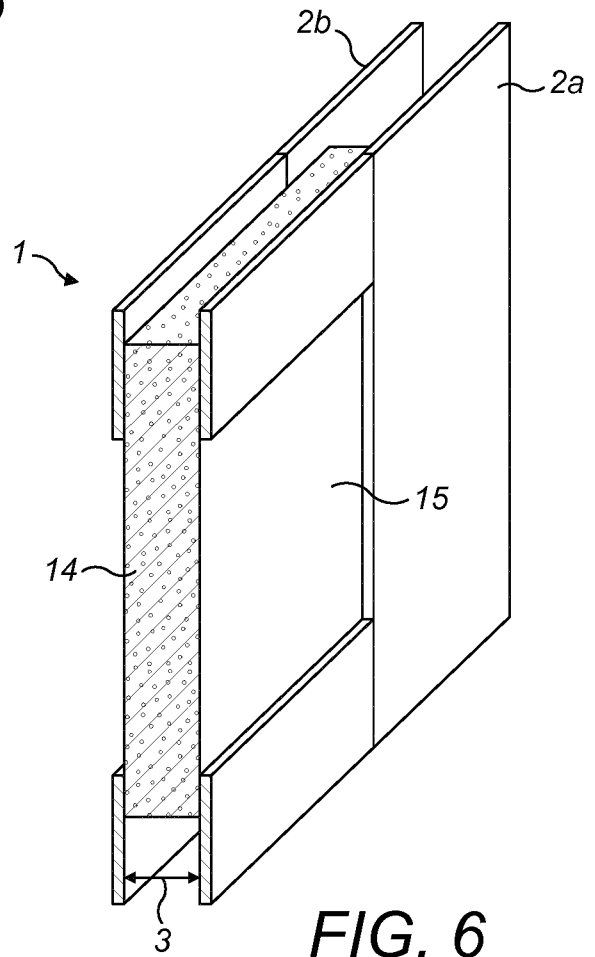


FIG. 6

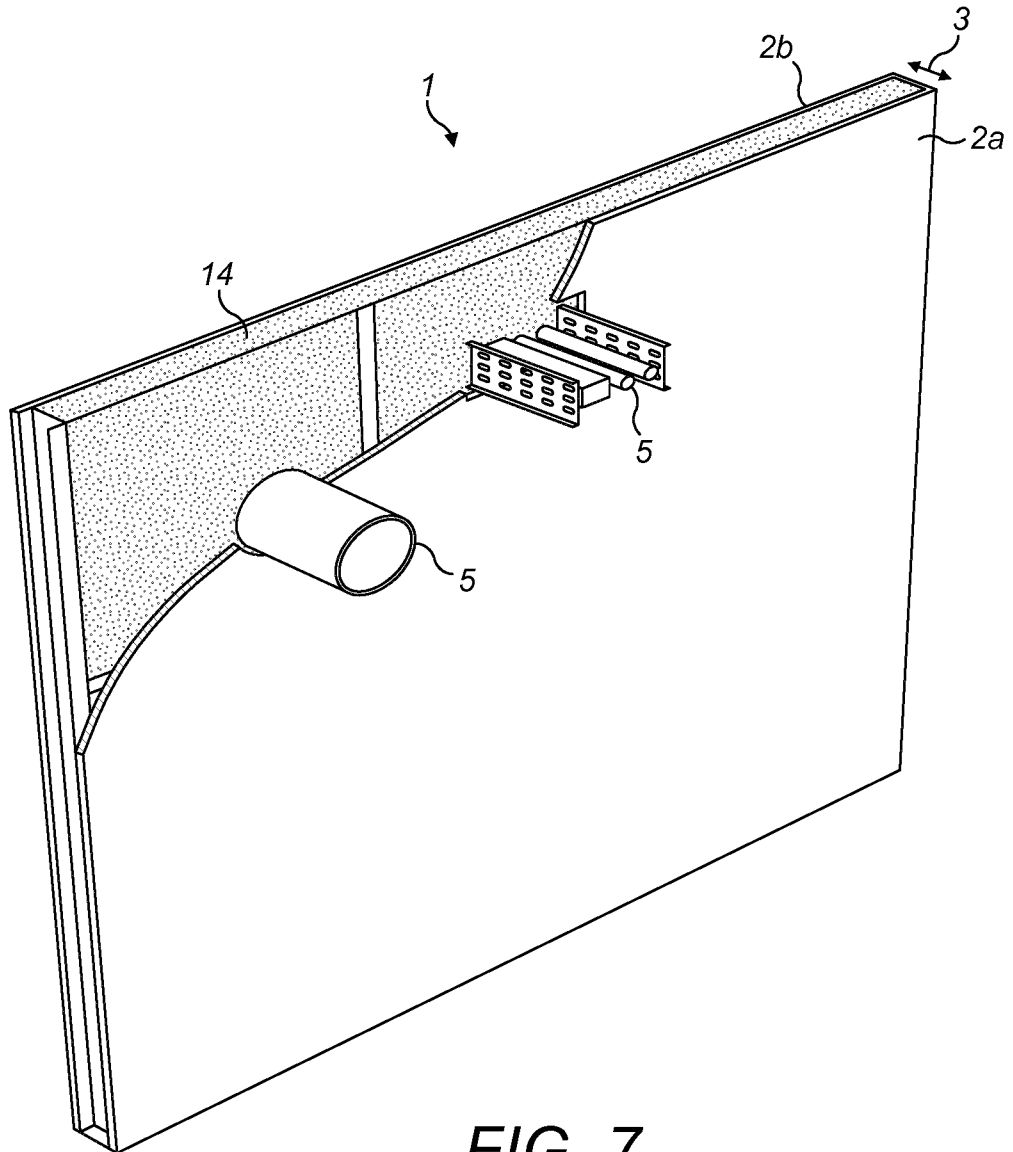


FIG. 7

